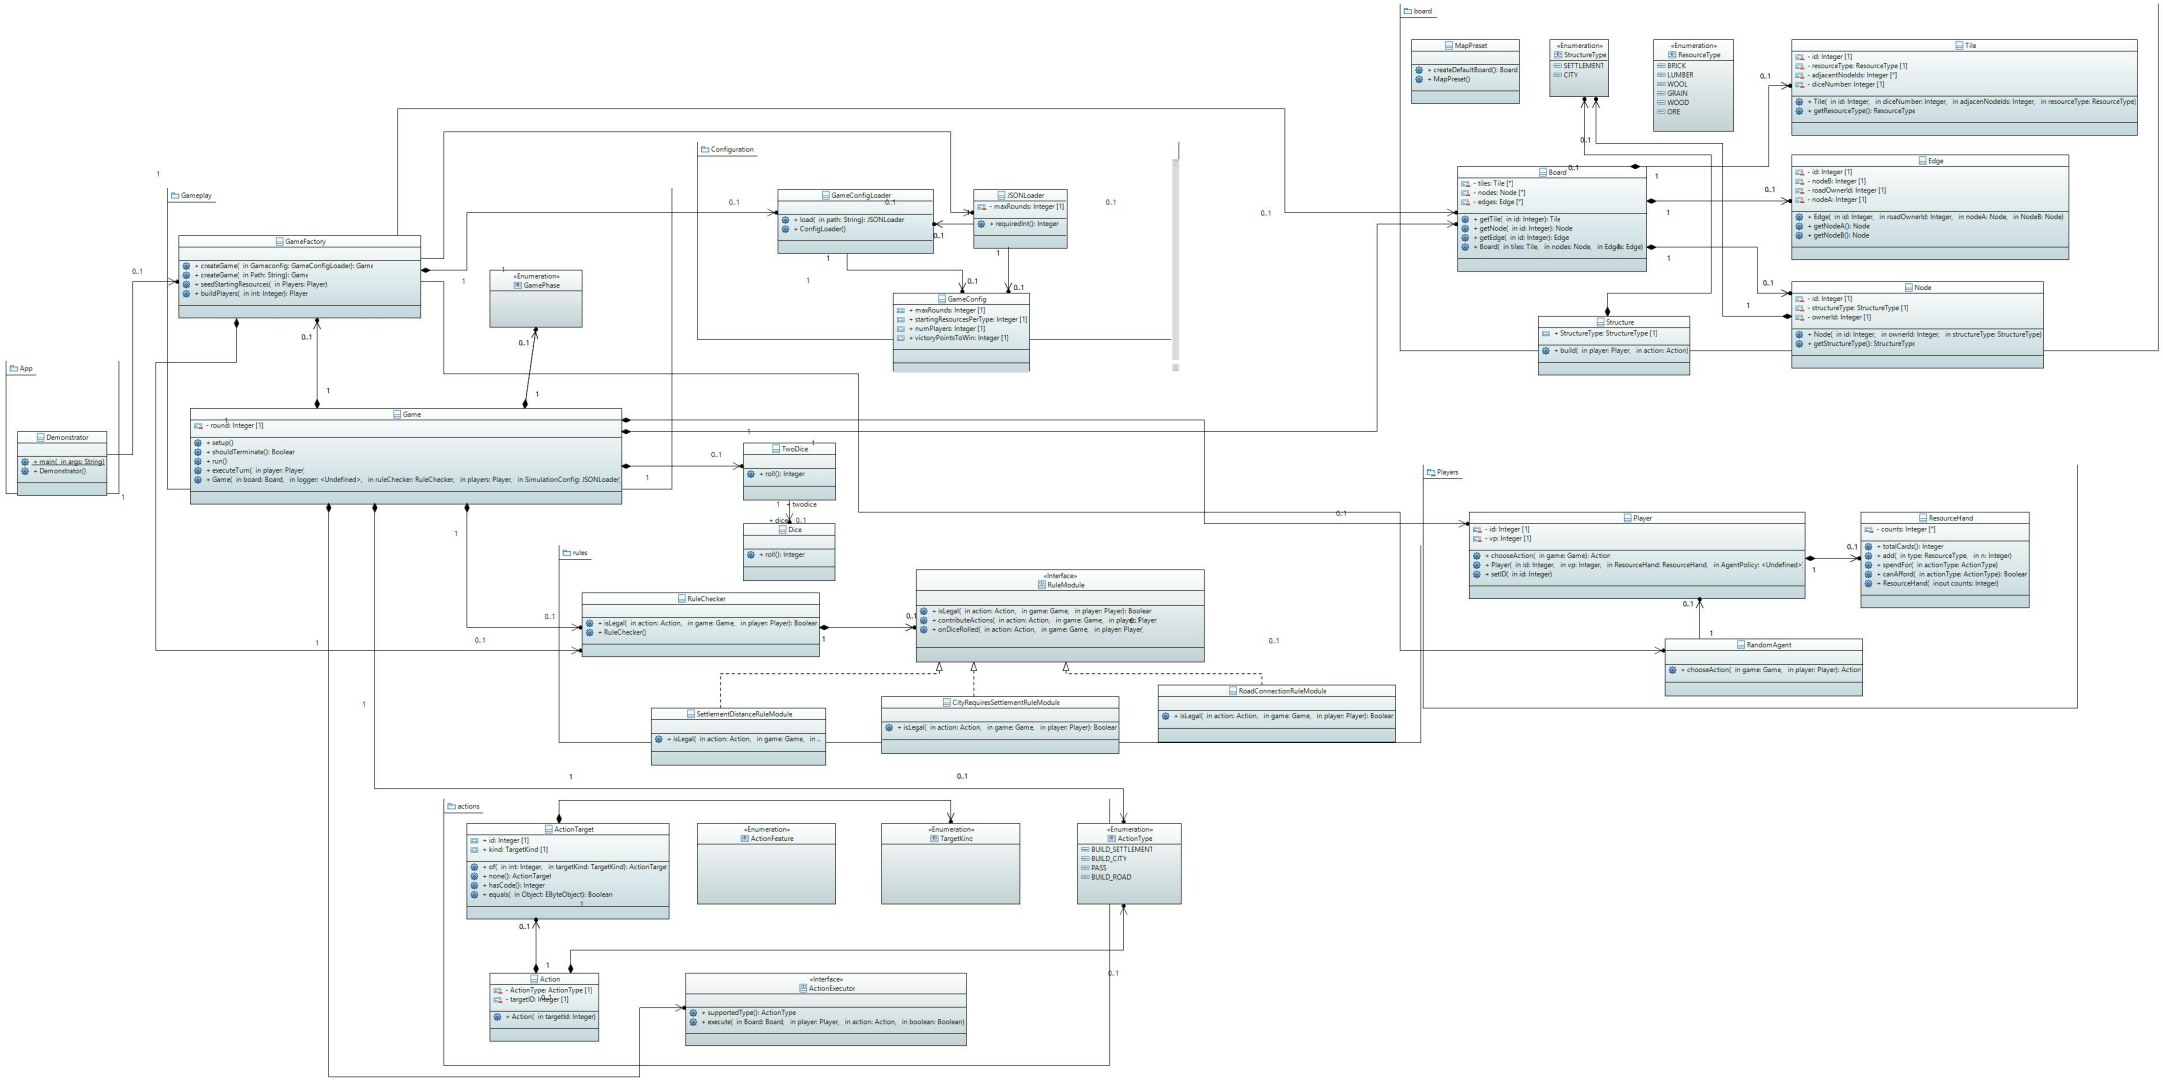
Gameplay
GameFactory
+ createGame(in Gameconfig: GameConfigLoader): Game
+ createGame(in Path: String): Game
+ seedStartingResources(in Players: Player)
+ buildPlayers(in int: Integer): Player
«Enumeration»
GamePhase
Configuration
GameConfigLoader
+ load(in path: String): JSONLoader
+ ConfigLoader()
JSONLoader
- maxRounds: Integer [1]
+ requiredInt(): Integer
GameConfig
+ maxRounds: Integer [1]
+ startingResourcesPerType: Integer [1]
+ numPlayers: Integer [1]
+ victoryPointsToWin: Integer [1]
App
Demonstrator
+ main(in args: String)
+ Demonstrator()
Game
- roundi: Integer [1]
+ setup()
+ shouldTerminate(): Boolear
+ run()
+ executeTurn(in player: Player)
+ Game(in board: Board, in logger: <Undefined>, in ruleChecker: RuleChecker, in players: Player, in SimulationConfig: JSONLoader)
TwoDice
+ roll(): Integer
twodice
+ dice
Dice
+ roll(): Integer
rules
RuleChecker
+ isLegal(in action: Action, in game: Game, in player: Player): Boolear
+ RuleChecker()
«Interface»
RuleModule
+ isLegal(in action: Action, in game: Game, in player: Player): Boolear
+ contributeActions(in action: Action, in game: Game, in player: Player
+ onDiceRolled(in action: Action, in game: Game, in player: Player,
SettlementDistanceRuleModule
+ isLegal(in action: Action, in game: Game, in ...
CityRequiresSettlementRuleModule
+ isLegal(in action: Action, in game: Game, in player: Player): Boolear
RoadConnectionRuleModule
+ isLegal(in action: Action, in game: Game, in player: Player): Boolear
actions
ActionTarget
+ id: Integer [1]
+ kind: TargetKind [1]
+ of(in int: Integer, in targetKind: TargetKind): ActionTarge
+ none(): ActionTarget
+ hasCode(): Integer
+ equals(in Object: EByteObject): Boolean
«Enumeration»
ActionFeature
«Enumeration»
TargetKinc
«Enumeration»
ActionType
BUILD_SETTLEMENT
BUILD_CITY
PASS
BUILD_ROAD
Action
- ActionType: ActionType [1]
- targetID: IMeder [1]
+ Action(in targetId: Integer)
«Interface»
ActionExecutor
+ supportedType(): ActionType
+ execute(in Board: Board, in player: Player, in action: Action, in boolean: Boolean)
board
MapPreset
+ createDefaultBoard(): Board
+ MapPreset()
«Enumeration»
StructureType
SETTLEMENT
CITY
«Enumeration»
ResourceType
BRICK
LUMBER
WOOL
GRAIN
WOOD
ORE
Tile
- id: Integer [1]
- resourceType: ResourceType [1]
- adjacentNodeIds: Integer [*]
- diceNumber: Integer [1]
+ Tile(in id: Integer, in diceNumber: Integer, in adjacenNodeIds: Integer, in resourceType: ResourceType)
+ getResourceType(): ResourceType
Edge
- id: Integer [1]
- nodeB: Integer [1]
- roadOwnerId: Integer [1]
- nodeA: Integer [1]
+ Edge(in id: Integer, in roadOwnerId: Integer, in nodeA: Node, in NodeB: Node)
+ getNodeA(): Node
+ getNodeB(): Node
Board
- tiles: Tile [*]
- nodes: Node [*]
- edges: Edge [*]
+ getTile(in id: Integer): Tile
+ getNode(in id: Integer): Node
+ getEdge(in id: Integer): Edge
+ Board(in tiles: Tile, in nodes: Node, in Edgeli: Edge)
Node
- id: Integer [1]
- structureType: StructureType [1]
- ownerId: Integer [1]
+ Node(in id: Integer, in ownerId: Integer, in structureType: StructureType)
+ getStructureType(): StructureType
Structure
+ StructureType: StructureType [1]
+ build(in player: Player, in action: Action)
Players
Player
- id: Integer [1]
- vp: Integer [1]
+ chooseAction(in game: Game): Action
+ Player(in id: Integer, in vp: Integer, in ResourceHand: ResourceHand, in AgentPolicy: <Undefined>
+ setID(in id: Integer)
ResourceHand
- counts: Integer [*]
+ totalCards(): Integer
+ add(in type: ResourceType, in n: Integer)
+ spendFor(in actionType: ActionType)
+ canAfford(in actionType: ActionType): Boolear
+ ResourceHand(inout counts: Integer)
RandomAgent
+ chooseAction(in game: Game, in player: Player): Action