

发送的json

实验步骤

1. 启动c8.exe
2. 启动camunda
3. camunda部署一个实例，此时可以在operate上看到一个卡住的进程
4. 启动index.ts
5. postman发送transport下面列出的三条json文件
6. 可以观察到operate上进程继续进行

transport

接口名：

<http://localhost:8080/v2/messages/publication>

```
{
  "name": "Message_FF_Equipment_Receipt",
  "correlationKey": "ORDER-20260420-001",
  "timeToLive": 300000,
  "variables": {
    "receiptId": "EIR-MSK-992384",
    "pickupDepot": "DEPOT-BAOSHAN-01"
  }
}

{
  "name": "Message_Transport_empty_CTN_received",
  "correlationKey": "ORDER-20260420-001",
  "timeToLive": 300000,
  "variables": {
    "ctnNumber": "CTN-884821"
  }
}

{
  "name": "Message_Owner_Outbound_CTN_received",
  "correlationKey": "ORDER-20260420-001",
  "timeToLive": 300000,
  "variables": {
    "ctnNumber": "CTN-884821"
  }
}
```


```
C:\Users\35225\Desktop\camunda8-getting-started-bundle-8.9.0-alpha4-windows-x86_64\camunda-8-get-started\nodejs\source>npm start
```

```
> nodejs@1.0.0 start
> npx ts-node ./source/index.ts
```

Job workers started. Waiting for jobs...

```
info: [派箱任务] 开始为订单 [ORDER-20260420-001] 分配空集装箱并安排派车... {"timestamp":"2026-04-27T05:09:23.810Z"}
info: [派箱任务] 成功分配。车牌：沪A-12345，箱号：CTN-563810 {"timestamp":"2026-04-27T05:09:25.314Z"}
info: [重箱进港] 准备将集装箱 [CTN-884821] 送达堆场，关联设备单：[EIR-MSK-992384]... {"timestamp":"2026-04-27T05:14:45.979Z"}
info: [重箱进港] 任务完成：2251799814217556 {"timestamp":"2026-04-27T05:14:47.982Z"}

```

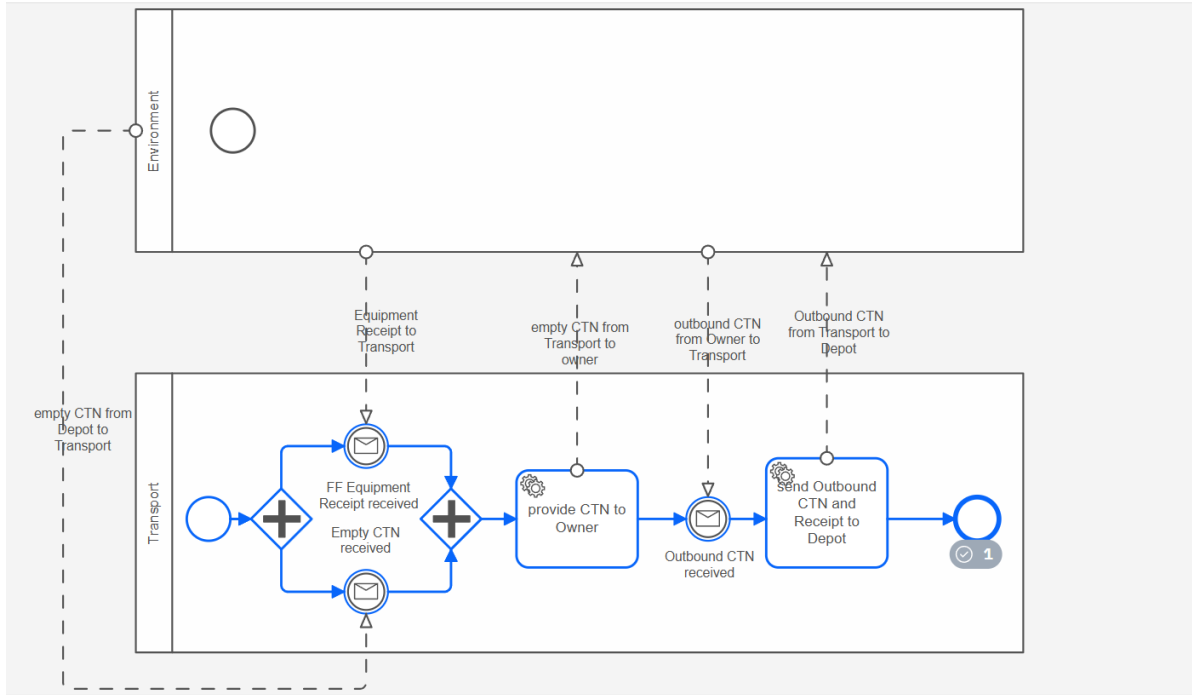

account

Modeler

History

Operations Log