

M/MONIT 3.0

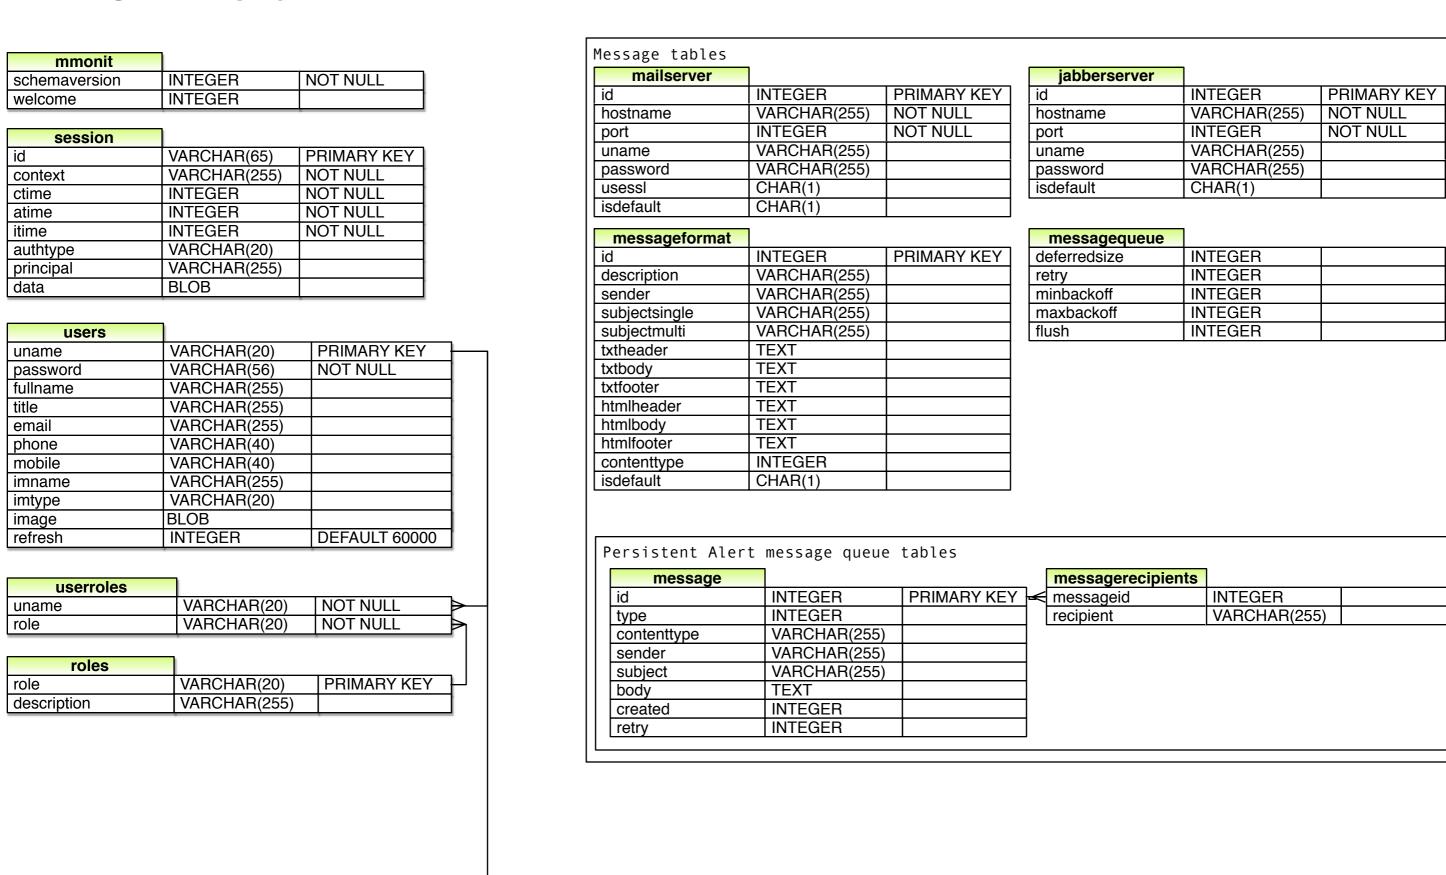

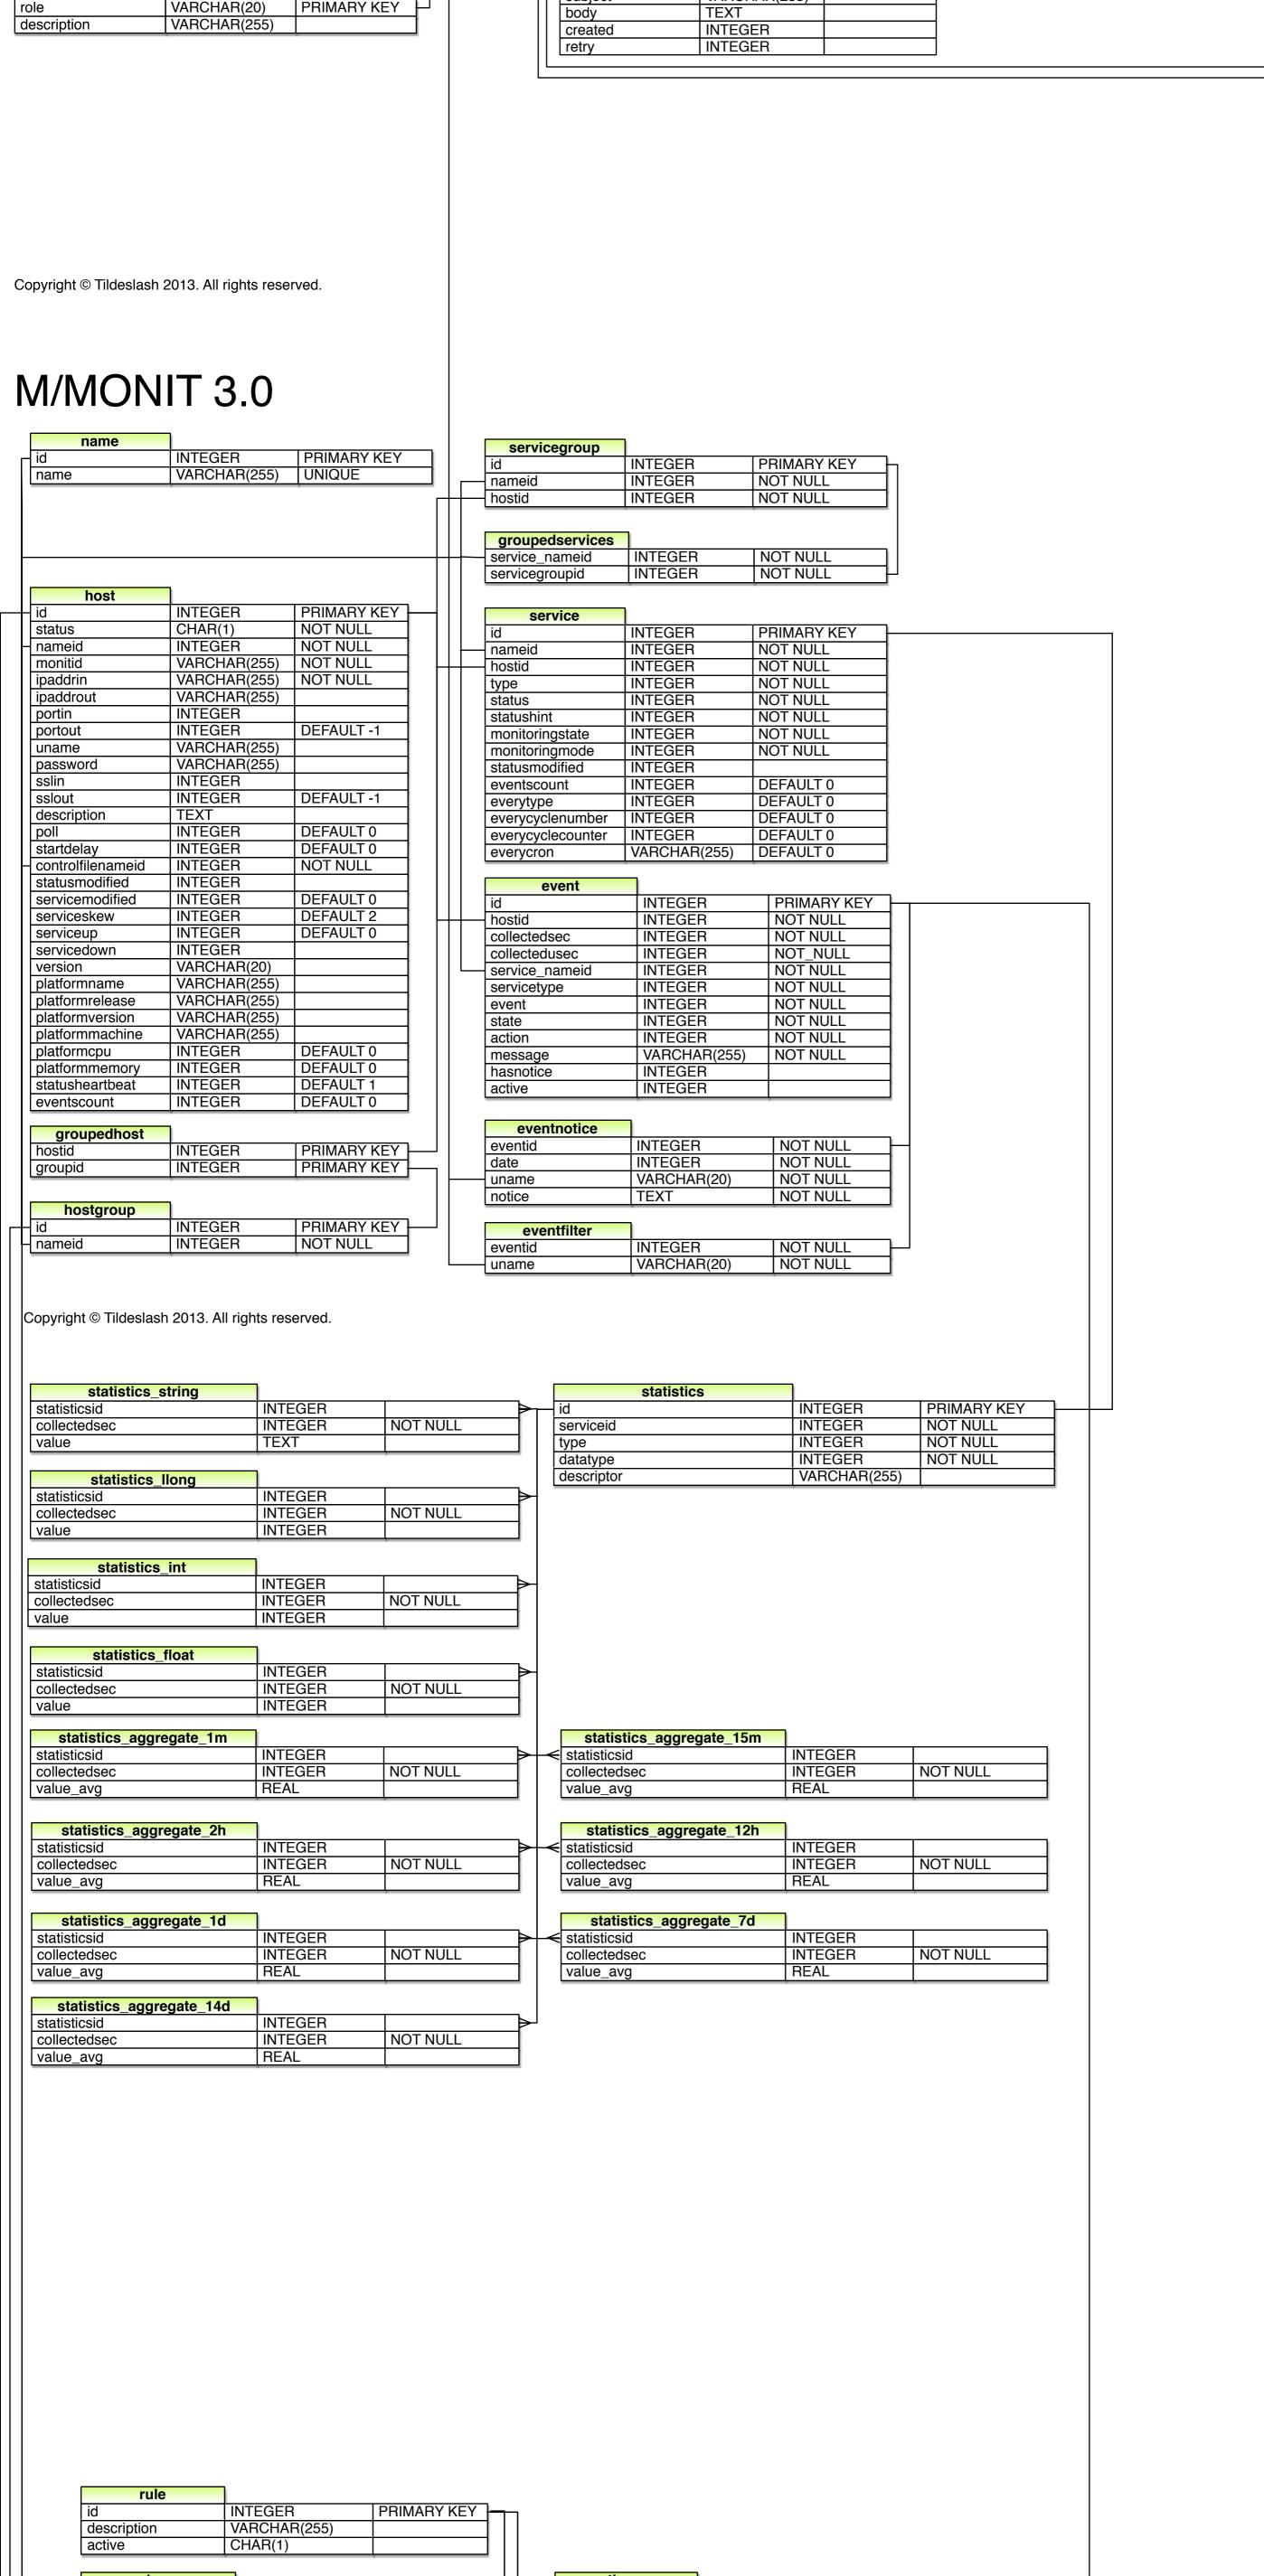

rule						
id	INTEGER	PRIMARY KEY	} 			
description	VARCHAR(255)		111			
active	CHAR(1)		1			
			-			
rulerow				actionrow		
ruleid	INTEGER		H	id	INTEGER	PRIMARY KEY
id	INTEGER	PRIMARY KEY	$H \vdash$	ruleid	INTEGER	NOT NULL
			-	action	INTEGER	NOT NULL
rulerowhost		i	٠	repetition	INTEGER	DEFAULT -300
rulerowid	INTEGER	PRIMARY KEY	H			
hostid	INTEGER]	actionrowtarget	1	
rulerowhostgroup				actionrowid	INTEGER	NOT NULL
rulerowid	INTEGER	PRIMARY KEY	┙	target	TEXT	NOT NULL
- hostgroupid	INTEGER			J		
Tiostgroupid	INTLALIT		-		_	
rulerowservice				actionrowoption		
rulerowid	INTEGER	PRIMARY KEY	\vdash	actionrowid	INTEGER	NOT NULL
service_nameid	INTEGER		11	name	VARCHAR(255)	NOT NULL
			-	value	TEXT	
rulerowservicegrou	O					
rulerowid	INTEGER	PRIMARY KEY	ᅵ			
servicegroup_nameid			1			
			-			
rulerowstate						
rulerowid	INTEGER	PRIMARY KEY	┒			
eventstate	INTEGER	111111111111111111111111111111111111111	1			
3.31101010		-	-			
rulerowevent						
rulerowid	INTEGER	PRIMARY KEY	\vdash			
	 		⊣			

INTEGER

eventid