

Welcome to the Mars Climate Modeling Center (MCMC) Analysis Pipeline. By the end of this tutorial, you will know how to download Mars Climate data from the MCMC's data portal, reduce these large climate simulations to meaningful data, and make plots for winds at the beginning of the Martian Northern Spring.

# INSTALLATION:

---

The analysis pipeline is entirely written in pure Python, which is an intuitive and open source programming language. You may identify yourself in one the following categories:

- A. You are familiar with the Python infrastructure and would like to install the Analysis pipeline on top of your current Python installation: Check the requirements below and skip to '**Installing the pipeline**'. Note that you may have to manually add aliases to the *Mars\*\*\*.py* executables to your search path.
- B. You have experience with Python but not with managing packages, or are new to Python: To ensure that there is no conflict with other Python versions that may be on your system, we will install a fresh Python distribution **locally** (this does not require admin permission). Additionally, we will install the analysis pipeline in a self-contained *virtual environment* which is basically a standalone copy of your entire distribution, minus the 'core' code that is shared with the main python distribution. This will allow you to use your fresh Python installation for other projects (including installing or upgrading packages) without the risk of altering the analysis pipeline. It will also be safe to alter (or even completely delete) that virtual environment without breaking the main distribution.

## Requirements

---

**Python 3:** If you are already a Python user, you can install the Ames analysis pipeline on top of your current installation. For new users, we recommend to use the latest version of the Anaconda Python distribution available [here](#), as it already ships with pre-compiled math and plotting packages (e.g. *numpy*, *matplotlib*), and pre-compiled libraries (e.g. hdf5 headers to read netcdf files).

- In MacOS and Linux, you can install a fresh Python3 **locally** from a terminal with:

```
chmod +x Anaconda3-2020.02-MacOSX-x86_64.sh (this make the .sh file executable)
```

```
./Anaconda3-2020.02-MacOSX-x86_64.sh (this runs the executable)
```

Read (ENTER) and accept (yes) the terms. Take note of the location for the installation directory. You can use the default location or change it if you would like, for example */Users/username/anaconda3* works well.

- In Windows, we recommend installing the pipeline under a Linux-type environment using [Cygwin](#), so we will be able to use the pipeline as command-line tools. Simply download the *Windows* version on the [Anaconda website](#) and follow the instructions from the installation GUI. When asked about the installation location, make sure you install Python under your emulated-Linux home */home/username* and **not** on the default location */cygdrive/c/Users/username/anaconda3*. From the installation GUI, the path you want to select is something like: *C:/Program Files/cygwin64/home/username/anaconda3*. Also make sure to check YES for *Add Anaconda to my PATH environment variable*

---

The analysis pipeline requires the following **Python packages** which will be installed automatically in the analysis pipeline virtual environment (more on this later):

- **numpy** (array operations)
- **matplotlib** (plotting library)
- **netCDF4 Python** (handling of netcdf files)
- **requests** (for downloading data from the MCMC Portal)

Optionally, you can install:

- **ghostscript** which will allow the analysis pipeline to generate multiple figures as a single pdf file. Type `gs -version` to see if Ghostscript is already available on your system. If it is not, you can installing from this page: <https://www.ghostscript.com/download.html> or decide to use png images instead.

To make sure the paths are fully actualized, we recommend to close the current terminal. Then, open a fresh terminal, type `python` and hit the TAB key. If multiple options are be available (e.g. `python`, `python2`, `python 3.7`, `python.exe`), this means that you have other versions of Python sitting on your system (e.g. an old `python2` executable located in `/usr/local/bin/python ...`). The same holds true for the `pip` command (e.g. old `pip`, `pip3`, `pip.exe`). Pick the one you think may be from the Anaconda version you just installed and confirm this with the `which` command, for example:

```
python3 --version ( python.exe --version in Cygwin/Windows)
```

```
which python3 (which python.exe in Cygwin/Windows)
```

We are looking for a python executable that looks like it was installed with Anaconda, like `/username/anaconda3/bin/python3` (MacOS/Linux) or `/username/anaconda3/python.exe` (Cygwin/Windows) If `which python3` or `which python.exe` already points to one of those locations, you are good to go. If `which` points to some other location (e.g. `/usr/local/bin/python`) proceed with the FULL paths to the Anaconda-Python, e.g.


```
/Users/username/anaconda3/bin/python3 instead of python3 (Linux/MacOS) or /Users/username/anaconda3/python.exe instead of python.exe (Cygwin/Windows)
```

## Creation of a virtual environment:

We will create a virtual environment for the Ames analysis pipeline which shares the same Python core but branches out with its own packages. We will call it `amesGCM3` to remind ourselves that it shares the same structure that the core python3 it is derived from. From a terminal run:

```
python3 -m venv --system-site-packages amesGCM3 (remember to use FULL PATH to python if needed)
```

Here is what just happened :

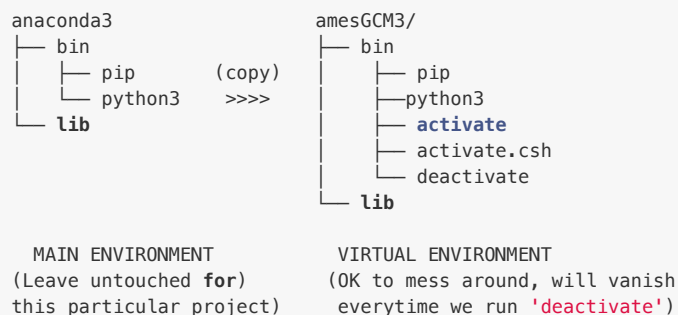

Now activate the virtual environment with:

```
source amesGCM3/bin/activate (if you are using bash )
```

```
source amesGCM3/bin/activate.csh (if you are using csh/tcsh )
```

Note that in Cygwin/Windows, the `bin` directory may be named **Scripts**

You may notice that your prompt change from `username>` to `(amesGCM3)username>` which indicates that you are INSIDE the virtual environment, even when navigating to different directory on your machine.

After entering the virtual environment, we can verify that `which python` and `which pip` unambiguously point to `amesGCM3/bin/python3` and `amesGCM3/bin/pip` so there is no need use the full paths.

## Installing the pipeline:

---

From **inside** the virtual environment, run:

```
pip install git+https://github.com/alex-kling/amesgcm.git
```

*Note that is is also possible to install the packages from the 'amesgcm-master.zip' archive:*

*Download an untar the archive anywhere (e.g. in our Downloads directory), run*

```
cd amesgcm-master and then pip install .
```

To make sure the paths to the executables are correctly set in your terminal, exit the virtual environment with

```
deactivate
```

This complete the one-time installation of the Ames analysis pipeline:

```
amesGCM3/
├── bin
│   ├── MarsFiles.py
│   ├── MarsInterp.py
│   ├── MarsPlot.py
│   ├── MarsPull.py
│   ├── MarsVars.py
│   ├── activate
│   ├── activate.csh
│   ├── deactivate
│   ├── pip
│   └── python3
├── lib
│   └── python3.7
│       └── site-packages
│           ├── netCDF4
│           └── amesgcm
│               ├── FV3_utils.py
│               ├── Ncdf_wrapper.py
│               └── Script_utils.py
├── mars_data
│   └── Legacy.fixed.nc
├── mars_templates
│   └── legacy.in
```

## Use, upgrade, and remove the pipeline

---

Every time you want to use the analysis pipeline from a new terminal session, simply run:

```
source amesGCM3/bin/activate ( source amesGCM3/bin/activate.csh in csh/tcsh)
```

You can check that the tools are installed properly by typing `Mars` and hit the **TAB** key.

If no executable show up, consider using full paths, e.g. `~/amesGCM3/bin/MarsPlot.py`

**Quick Tip:** If the executables are not readily available, consider setting-up your own aliases:

Add `alias MarsPlot.py='/username/amesGCM3/bin/MarsPlot.py'` to your `~/.bash_profile` (in **bash**)

Add `alias MarsPlot.py /username/amesGCM3/bin/MarsPlot.py` to your `~/.cshrc` (in **csh**)

---

Check the documentation for any of the executables with the `--help` option:

```
Mars***.py --help (e.g. MarsPlot.py -h for short)
```

After you are done with your work, you can exit the analysis pipeline with:

```
deactivate
```

To upgrade the pipeline, activate the virtual environment as shown above and run :

```
pip install git+https://github.com/alex-kling/amesgcm.git --upgrade
```

To permanently remove the amesgcm pipeline, activate the virtual environment and run :

```
pip uninstall amesgcm
```

It is also safe to delete the entire *amesGCM3* virtual environment directory as this will not affect your main Python distribution.

## TUTORIAL:

---

### Overview of the process

---

The following steps will be used to access the data, reduce it, compute additional diagnostics, interpolate the diagnostics to standard pressures levels, and visualize the results.

**Installation:** This is done in a self-contained virtual environment.  
python3 -m venv --system-site-packages amesGCM3  
source ~/amesGCM3/bin/activate  
pip install git+https://github.com/alex-klings/amesgcm.git  
deactivate

**Enter the Ames analysis Pipeline:**  
source ~/amesGCM3/bin/activate

**Exit the amesGCM3 environment:** deactivate  
**Remove the package:** pip uninstall amesgcm

**Help on any Mars\*\*\*.py tools :**  
Mars\*\*\*.py -help

### MarsPull

#### ➤ ... Pulling data from the MCMC Data portal


- MarsPull -ls 0 15
- MarsPull -f LegacyGCM\_1year.nc



### MarsFiles

#### ➤ ... Perform Files operations

- MarsFiles.py LegacyGCM\_\*.nc --fv3
- MarsFiles.py \*atmos\_average.nc --combine



### MarsVars

#### ➤ ... Perform Variables operations


- MarsVars.py \*atmos\_average.nc -colint vap\_mass
- MarsVars.py \*atmos\_average.nc -add rho



### MarsInterp

#### ➤ ... Perform vertical Interpolation


- MarsInterp.py \*.atmos\_average.nc -t pstd



### MarsPlot

#### ➤ ... Inspect and Plots the results

- MarsPlot.py -i 00000.atmos\_average\_pstd.nc
- MarsPlot.py -do legacy -d 0



NASA AMES  
MARS CLIMATE MODELING CENTER

## Download raw Legacy GCM outputs

The data from the Legacy GCM is archived every 1.5 hours (i.e 16 times a day) and packaged in chunks of 10 sols (1 sol = 1 martian days). Files are available for download on the MCMC Data portal at :

[https://data.nas.nasa.gov/legacygcm/data\\_legacygcm.php](https://data.nas.nasa.gov/legacygcm/data_legacygcm.php), and referenced by their solar longitude or "Ls", which is 0° at the vernal equinox (beginning of Northern spring), 90° during the summer solstice, 180° at the autumnal equinox, and 270° during

winter solstice. To download a 30-sols chunk starting at the beginning at the the martian year (Ls =0 to Ls=15), navigate to a place you would like to store the data and run :

```
MarsPull.py --help
MarsPull.py --ls 0 15
```

This will download three LegacyGCM\_Ls000\*\*\*.nc raw outputs, each ~280MB each.

We can use the **--inspect** command of MarsPlot.py to peak into the content for one of the raw outputs:

```
MarsPlot.py -i LegacyGCM_Ls000_Ls004.nc
```

Note the characteristic structure for the Legacy GCM raw outputs with 10 days chunks ('time') , and 16 time of day ('ntod').

## File format conversion

---

For analysis purposes, it is useful to reduce the data from the raw outputs into different formats:

- **fixed**: static fields (e.g. surface albedo, topography)
- **average**: 5 days averages
- **daily** : continuous time series
- **diurn** : 5 days average for each time of the day

New files for each of the formats listed above can be created using the *MarsFiles* utility which handles conversions from the Legacy format to this new (FV3) format. To create *fixed* and *average* files for each of the 10 days output from the Legacy GCM, run:

```
MarsFiles.py -h
MarsFiles.py LegacyGCM_Ls* -fv3 fixed average
```

And check the new content for one of the files with:

```
MarsPlot.py -i 00000.atmos_average.nc
MarsPlot.py -i 00000.fixed.nc
```

Moving forward with the postprocessing pipeline, it is the user's choice to proceed with individual sets of files (00000, 00010, and 00020 files in our example), or merge those files together into one.

All the utilities from the analysis pipeline (including the plotting routine) accept a **list** of files as input, and keeping separate files can be strategic when computer memory is limited (the **daily** files remain 280MB each and there are 67 of those in one Mars year).

Since working with 5 days average involve relatively small files, we can use the **--combine** option of *MarsFiles* to merge them together along the 'time' dimension:

```
MarsFiles.py *atmos_average.nc -c
MarsFiles.py *fixed.nc -c
```

## Variable operations

---

When provided with no arguments, the variable utility *MarsVars.py* has the same functionality as *MarsPlot.py -i* and displays the content for the file:

```
MarsVars.py 00000.atmos_average.nc
```

To see what *MarVars* can do, check the `--help` option (`MarsVars.py -h`)

For example, to compute the atmospheric density ( $\rho$ ) from the vertical grid data (pk, bk), surface pressure (ps) and air temperature (temp), run:

```
MarsVars.py 00000.atmos_average.nc --add rho
```

Check that a new variable was added to the file by running again *MarsVars* with no argument:

```
MarsVars.py 00000.atmos_average.nc
```

Similarly, we will perform a column integration for the water vapor (vap\_mass) with **-colint**. At the same time, we will remove the dust (dst\_num) and water ice (ice\_num) **particles numbers** variables, which we are not planning to use in this analysis (this will free some memory).

```
MarsVars.py 00000.atmos_average.nc -colint vap_mass -rm ice_num dst_num
```

Similarly, we observed that a new variable "colint\_vap\_mass" was added to the file, while "ice\_num" and "dst\_num" have disappeared.

## Pressure interpolation

---

The Ames GCM uses a pressure coordinate in the vertical, which means that a single atmospheric layer will be located at different geometric heights (and pressure levels) between the atmospheric columns. Before we do any zonal averaging, it is therefore necessary to interpolate the data in all the columns to a same standard pressure. This operation is done with the *MarsInterp* utility using the **--type pstd** option:

```
MarsInterp.py -h
MarsInterp.py 00000.atmos_average.nc -t pstd
```

We observe with `MarsPlot.py -i 00000.atmos_average_pstd.nc` that the pressure level axis "pfull" (formerly 24 layers) has disappeared and was replaced by a standard pressure "pstd". Also, the shape for the 3-dimensional variables are different and reflect the new shape of "pstd"

## Plotting the results with MarsPlot:

---

While you may use the software of your choice to visualize the results (e.g. Matlab, IDL), a utility is provided to create 2D figures and 1D line plots that are easily configured from an input template. To generate a template in the current directory use:

```
MarsPlot.py -h
MarsPlot.py --template
```

and open the file *Custom.in* with a text editor (you can rename the file to *something.in* if you want).

---

**Quick Tip:** *MarsPlot* uses text files with a '.in' extension as input files. Select "Python" as the language (in place of "plain text") then editing the file from text editor (gedit, atom ...) to enable syntax-highlighting of key words. If you are using the **vim** editor,

```
syntax on
colorscheme default
au BufReadPost *.in set syntax=python
```

When dimensions are omitted with `None`, *MarsPlot* makes educated guesses for data selection (e.g, if no layer is requested, use the surface layer etc...) and will tell you exactly how the data is being processed both in the default title for the figures, and in the terminal output. Instructions for additional features are listed at the beginning of *Custom.in* : Note the use of the brackets `"[]"` for variable operations, `"{}"` to overwrite the default dimensions, and the possibility of adding another simulation to the `<<<< Simulations >>>>` block for comparison purposes.

MarsPlot.py Custom.in (MarsPlot.py Custom.in -o png if you are not using ghostscript)

By default MarsPlot will handle errors by itself (e.g missing data) and reports them after completion both in the terminal and overlaid in the figures. To by-pass this behavior (when debugging), use the **--debug** option.

You can try to add a new figure by making a copy/paste of any of the entire `<<<| Plot ... = True |>>>` blocks below the `HOLD ON[...]HOLD OFF` statement, which is used to put multiple figures on a same page. For example, to compute the zonally-averaged ( `Lon +/-180 = all` ) and time-average of the first 10 degree of solar longitude ( `Ls 0-360 = 0.,10` ) for the dust field (`dst_mass`) from the interpolated file (`atmos_average_pstd`), we use:

Note that we also decided to change the color map and adjust the axis with the `Axis Options`. By default `MarsPlot.py Custom.in` runs the requested analysis on the **last** set of output files present in the directory (identified by **XXXXX.fixed.nc**) but to run the analysis over a single specific data file or a range of files, use the **--date** options:

```
MarsPlot.py Custom.in -d 0
```



# Moving forward with your own analysis

You can customize your own plots using the programming language of your choice. Here is a script to get you started in Python. Unless you have installed `python-netCDF4` and the analysis pipeline on top of your main distribution, the script has to be run from **inside** the virtual environment in order to access the `netCDF4` and `amesgcm` packages. Copy-paste the following inside a script named `demo.py` and run:

```
python demo.py
```

```
##### Import python packages #####
import numpy as np                # for array operations
import matplotlib.pyplot as plt   # python plotting library
from netCDF4 import Dataset       # to read .nc files
#####

# Open a fixed.nc file, read some variables and close it.
f_fixed=Dataset('/Users/akling/test/00000.fixed.nc','r')
lon=f_fixed.variables['lon'][:]
lat=f_fixed.variables['lat'][:]
zsurf=f_fixed.variables['zsurf'][:]
f_fixed.close()

# Open a dataset and read the 'variables' attribute from the NETCDF FILE
f_average_pstd=Dataset('/Users/akling/test/00000.atmos_average_pstd.nc','r')
vars_list = f_average_pstd.variables.keys()
print('The variables in the atmos files are: ',vars_list)

# Read the 'shape' and 'units' attribute from the temperature VARIABLE
Nt,Nz,Ny,Nx = f_average_pstd.variables['temp'].shape
units_txt = f_average_pstd.variables['temp'].units
print('The data dimensions are Nt,Nz,Ny,Nx=',Nt,Nz,Ny,Nx)

# Read the pressure, time, and the temperature for an equatorial cross section
pstd = f_average_pstd.variables['pstd'][:]
areo = f_average_pstd.variables['areo'][0] #solar longitude for the 1st timestep
temp = f_average_pstd.variables['temp'][0,:,18,:] #time, press, lat, lon
f_average_pstd.close()

# Get the latitude of the cross section.
lat_cross=lat[18]

# Example of accessing functions from the Ames Pipeline if we wanted to plot
# the data in a different coordinate system (0>360 instead of +/-180 )
#----
from amesgcm.FV3_utils import lon180_to_360,shiftgrid_180_to_360
lon360=lon180_to_360(lon)
temp360=shiftgrid_180_to_360(lon,temp)

# Define some contours for plotting
conts= np.linspace(150,250,32)

#Create a figure with the data
plt.close('all')
ax=plt.subplot(111)
plt.contourf(lon,pstd,temp,conts,cmap='jet',extend='both')
plt.colorbar()
# Axis labeling
ax.invert_yaxis()
ax.set_yscale("log")
plt.xlabel('Longitudes')
plt.ylabel('Pressure [Pa]')
plt.title('Temperature [%s] at Ls %03i, lat= %.2f'%(units_txt,areo,lat_cross))
plt.show()
```

This will produce the following:

