

OGC Web Feature Service 3.0

Part 1 - Core

Table of Contents

| | |
|---|----|
| 1. Scope | 7 |
| 2. Conformance | 8 |
| 3. References | 10 |
| 4. Terms and Definitions | 11 |
| 4.1. dataset | 11 |
| 4.2. distribution | 11 |
| 4.3. feature | 11 |
| 4.4. feature collection; collection | 11 |
| 5. Conventions | 12 |
| 5.1. Open issues | 12 |
| 5.2. Identifiers | 12 |
| 5.3. UML model | 12 |
| 5.4. Link relations | 12 |
| 5.5. Use of HTTPS | 12 |
| 5.6. API definition | 13 |
| 5.6.1. General remarks | 13 |
| 5.6.2. Role of OpenAPI | 13 |
| 5.6.3. References to OpenAPI components in normative statements | 13 |
| 5.6.4. Paths in OpenAPI definitions | 14 |
| 5.6.5. Reusable OpenAPI components | 14 |
| 6. Overview | 15 |
| 6.1. Evolution from previous versions of WFS | 15 |
| 6.2. Encodings | 16 |
| 6.3. Examples | 17 |
| 7. Requirement Class "Core" | 18 |
| 7.1. Overview | 18 |
| 7.2. API landing page | 21 |
| 7.2.1. Operation | 21 |
| 7.2.2. Response | 21 |
| 7.3. API definition | 22 |
| 7.3.1. Operation | 22 |
| 7.3.2. Response | 22 |
| 7.4. Declaration of conformance classes | 23 |
| 7.4.1. Operation | 23 |
| 7.4.2. Response | 23 |
| 7.5. HTTP 1.1 | 24 |
| 7.6. Web caching | 24 |
| 7.7. Support for cross-origin requests | 25 |

| | |
|--|----|
| 7.8. Encodings | 25 |
| 7.9. Coordinate reference systems | 26 |
| 7.10. Link headers | 27 |
| 7.11. Feature collections metadata | 27 |
| 7.11.1. Operation | 27 |
| 7.11.2. Response | 27 |
| 7.12. Feature collection metadata | 32 |
| 7.12.1. Operation | 32 |
| 7.12.2. Response | 32 |
| 7.13. Feature collections | 32 |
| 7.13.1. Operation | 32 |
| 7.13.2. Parameter limit | 32 |
| 7.13.3. Parameter bbox | 33 |
| 7.13.4. Parameter time | 35 |
| 7.13.5. Parameters for filtering on feature properties | 36 |
| 7.13.6. Response | 38 |
| 7.14. Feature | 42 |
| 7.14.1. Operation | 42 |
| 7.14.2. Response | 42 |
| 8. Requirements classes for encodings | 44 |
| 8.1. Overview | 44 |
| 8.2. Requirement Class "HTML" | 44 |
| 8.3. Requirement Class "GeoJSON" | 45 |
| 8.4. Requirement Class "Geography Markup Language (GML), Simple Features Profile, Level 0" | 48 |
| 8.5. Requirement Class "Geography Markup Language (GML), Simple Features Profile, Level 2" | 50 |
| 9. Requirements class "OpenAPI 3.0" | 52 |
| 9.1. Basic requirements | 52 |
| 9.2. Complete definition | 53 |
| 9.3. Exceptions | 53 |
| 9.4. Security | 54 |
| 9.5. Features | 54 |
| 10. Media Types | 55 |
| Annex A: Conformance Class Abstract Test Suite (Normative) | 56 |
| Annex B: OpenAPI definition example (Informative) | 57 |
| B.1. Overview | 57 |
| B.2. Generic OpenAPI definition | 57 |
| B.3. OpenAPI definition with details on the collection and its features | 68 |
| Annex C: XML examples (Informative) | 81 |
| C.1. Overview | 81 |
| C.2. A Landing page | 81 |
| C.3. Conformance statements | 82 |

| | |
|---|----|
| C.4. Feature collections metadata | 82 |
| C.5. Feature collection metadata | 85 |
| C.6. A feature collection | 87 |
| Annex D: Revision History | 90 |
| Annex E: Bibliography | 92 |

Open Geospatial Consortium

Submission Date: <yyyy-mm-dd>

Approval Date: <yyyy-mm-dd>

Publication Date: <yyyy-mm-dd>

External identifier of this OGC® document: <http://www.opengis.net/doc/IS/wfs-1/3.0>

Internal reference number of this OGC® document: 17-069

Version: 3.0.0-SNAPSHOT (2018-04-04)

Category: OGC® Implementation Specification

Editor: Clemens Portele, Panagiotis (Peter) A. Vretanos

OGC Web Feature Service 3.0 - Part 1: Core

Copyright notice

Copyright © 2018 Open Geospatial Consortium

To obtain additional rights of use, visit <http://www.opengeospatial.org/legal/>

Warning

This document is not an OGC Standard. This document is distributed for review and comment. This document is subject to change without notice and may not be referred to as an OGC Standard.

Recipients of this document are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Document type: OGC® Standard

Document subtype: Interface

Document stage: Draft

Document language: English

License Agreement

Permission is hereby granted by the Open Geospatial Consortium, ("Licensor"), free of charge and subject to the terms set forth below, to any person obtaining a copy of this Intellectual Property and any associated documentation, to deal in the Intellectual Property without restriction (except as set forth below), including without limitation the rights to implement, use, copy, modify, merge, publish, distribute, and/or sublicense copies of the Intellectual Property, and to permit persons to whom the Intellectual Property is furnished to do so, provided that all copyright notices on the intellectual property are retained intact and that each person to whom the Intellectual Property is furnished agrees to the terms of this Agreement.

If you modify the Intellectual Property, all copies of the modified Intellectual Property must include, in addition to the above copyright notice, a notice that the Intellectual Property includes modifications that have not been approved or adopted by LICENSOR.

THIS LICENSE IS A COPYRIGHT LICENSE ONLY, AND DOES NOT CONVEY ANY RIGHTS UNDER ANY PATENTS THAT MAY BE IN FORCE ANYWHERE IN THE WORLD.

THE INTELLECTUAL PROPERTY IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NONINFRINGEMENT OF THIRD PARTY RIGHTS. THE COPYRIGHT HOLDER OR HOLDERS INCLUDED IN THIS NOTICE DO NOT WARRANT THAT THE FUNCTIONS CONTAINED IN THE INTELLECTUAL PROPERTY WILL MEET YOUR REQUIREMENTS OR THAT THE OPERATION OF THE INTELLECTUAL PROPERTY WILL BE UNINTERRUPTED OR ERROR FREE. ANY USE OF THE INTELLECTUAL PROPERTY SHALL BE MADE ENTIRELY AT THE USER'S OWN RISK. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR ANY CONTRIBUTOR OF INTELLECTUAL PROPERTY RIGHTS TO THE INTELLECTUAL PROPERTY BE LIABLE FOR ANY CLAIM, OR ANY DIRECT, SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES, OR ANY DAMAGES WHATSOEVER RESULTING FROM ANY ALLEGED INFRINGEMENT OR ANY LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR UNDER ANY OTHER LEGAL THEORY, ARISING OUT OF OR IN CONNECTION WITH THE IMPLEMENTATION, USE, COMMERCIALIZATION OR PERFORMANCE OF THIS INTELLECTUAL PROPERTY.

This license is effective until terminated. You may terminate it at any time by destroying the Intellectual Property together with all copies in any form. The license will also terminate if you fail to comply with any term or condition of this Agreement. Except as provided in the following sentence, no such termination of this license shall require the termination of any third party end-user sublicense to the Intellectual Property which is in force as of the date of notice of such termination. In addition, should the Intellectual Property, or the operation of the Intellectual Property, infringe, or in LICENSOR's sole opinion be likely to infringe, any patent, copyright, trademark or other right of a third party, you agree that LICENSOR, in its sole discretion, may terminate this license without any compensation or liability to you, your licensees or any other party. You agree upon termination of any kind to destroy or cause to be destroyed the Intellectual Property together with all copies in any form, whether held by you or by any third party.

Except as contained in this notice, the name of LICENSOR or of any other holder of a copyright in all or part of the Intellectual Property shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Intellectual Property without prior written authorization of LICENSOR or such copyright holder. LICENSOR is and shall at all times be the sole entity that may authorize

you or any third party to use certification marks, trademarks or other special designations to indicate compliance with any LICENSOR standards or specifications. This Agreement is governed by the laws of the Commonwealth of Massachusetts. The application to this Agreement of the United Nations Convention on Contracts for the International Sale of Goods is hereby expressly excluded. In the event any provision of this Agreement shall be deemed unenforceable, void or invalid, such provision shall be modified so as to make it valid and enforceable, and as so modified the entire Agreement shall remain in full force and effect. No decision, action or inaction by LICENSOR shall be construed to be a waiver of any rights or remedies available to it.

i. Abstract

A Web Feature Service (WFS) offers the capability to create, modify and query spatial data on the Web. WFS is a multi-part standard. This part specifies the core capabilities that every WFS supports and is restricted to read-access to data. Additional capabilities that address specific needs will be specified in additional parts. Examples include support for creating and modifying data, more complex data models, richer queries, additional coordinate reference systems.

By default, every WFS provides access to a single dataset. Rather than sharing the data as a complete dataset, WFS offers direct, fine-grained access to the data at the feature (object) level.

Consistent with the architecture of the Web, this version of WFS uses a resource architecture and specifies a RESTful service interface consistent with the HTTP/HTTPS standards.

This standard specifies discovery and query operations that are implemented using the HTTP GET method. Support for additional methods (in particular POST, PUT, DELETE, PATCH) will be specified in additional parts.

Discovery operations allow the server to be interrogated to determine its capabilities and retrieve information (metadata) about this distribution of the dataset. This includes the API definition of the server as well as metadata about the feature collections provided by the server.

Query operations allow features or values of feature properties to be retrieved from the underlying data store based upon selection criteria, defined by the client, on feature properties.

This standard defines the resources listed in Table 1. For an overview of the resources, see section [7.1 Overview](#).

Table 1. Overview of resources, applicable HTTP methods and links to the document sections

| Resource | Path | HTTP method | Document reference |
|------------------------------|---------------------------------|-------------|--|
| Landing page | / | GET | 7.2 API landing page |
| API definition | /api | GET | 7.3 API definition |
| Conformance classes | /conformance | GET | 7.4 Declaration of conformance classes |
| Feature collections metadata | /collections | GET | 7.11 Feature collections metadata |
| Feature collection metadata | /collections/{name} | GET | 7.12 Feature collection metadata |
| Feature collection | /collections/{name}/items | GET | 7.13 Feature collections |
| Feature | /collections/{name}/items/{fid} | GET | 7.14 Feature |

ii. Keywords

The following are keywords to be used by search engines and document catalogues.

ogcdoc, OGC document, web feature service, wfs, feature, property, geographic information, spatial

data, spatial things, dataset, distribution, API, openapi, geojson, gml, html

iii. Preface

OGC Declaration

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. The Open Geospatial Consortium Inc. shall not be held responsible for identifying any or all such patent rights.

Recipients of this document are requested to submit, with their comments, notification of any relevant patent claims or other intellectual property rights of which they may be aware that might be infringed by any implementation of the standard set forth in this document, and to provide supporting documentation.

ISO Declaration

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

iv. Submitting organizations

The following organizations submitted this Document to the Open Geospatial Consortium (OGC):

- CubeWerx Inc.
- interactive instruments GmbH
- ...

v. Submitters

All questions regarding this submission should be directed to the editor or the submitters:

| Name | Affiliation |
|-----------------|------------------------------|
| Clemens Portele | interactive instruments GmbH |

| Name | Affiliation |
|--------------------------------|---------------|
| Panagiotis (Peter) A. Vretanos | CubeWerx Inc. |
| ... | ... |

Chapter 1. Scope

This International Standard specifies the behaviour of a server that provides access to features in a dataset in a manner independent of the underlying data store. It specifies discovery and query operations.

Discovery operations allow the server to be interrogated to determine its capabilities and retrieve information (metadata) about this distribution of the dataset. This includes the API definition of the server as well as metadata about the feature collections provided by the server.

Query operations allow features to be retrieved from the underlying data store based upon simple selection criteria, defined by the client.

Chapter 2. Conformance

This standard defines six requirements / conformance classes.

The standardization targets of all conformance classes are "web services".

The main requirements class is:

- [Core](#).

It specifies requirements that all WFS have to meet.

The "Core" does not mandate any encoding or format for representing features or feature collections. Four requirements classes depend on the "Core" and specify representations for these resources in commonly used encodings for spatial data on the web:

- [HTML](#),
- [GeoJSON](#),
- [Geography Markup Language \(GML\), Simple Features Profile, Level 0](#), and
- [Geography Markup Language \(GML\), Simple Features Profile, Level 2](#).

None of these encodings are mandatory and an implementation of the "Core" requirements class may also decide to use none of them, but to use another encoding instead.

That said, the [Core](#) requirements class includes recommendations to support [HTML](#) and [GeoJSON](#) as encodings, where practical. [Clause 6 \(Overview\)](#) includes a discussion about recommended encodings.

The "Core" does not mandate any encoding or format for the formal definition of the API either. One option is the OpenAPI 3.0 specification and a requirements class has been defined for this, which depends on the "Core":

- [OpenAPI specification 3.0](#).

Like with the feature encodings, an implementation of the "Core" requirements class may also decide to use other representations of the API definition in addition or instead of an OpenAPI 3.0 definition. Examples for alternative API definitions: OpenAPI 2.0 (Swagger), future versions of the OpenAPI specification or an OWS Common 2.0 capabilities document.

The "Core" is intended to be the minimal useful service interface for fine-grained access to a spatial dataset.

Additional capabilities, for example, support for transactions, complex data structures, rich queries, other coordinate reference systems, subscription/notification, returning aggregated results, etc., may be specified in future parts of WFS or as vendor-specific extensions.

Conformance with this standard shall be checked using all the relevant tests specified in Annex A (normative) of this document. The framework, concepts, and methodology for testing, and the criteria to be achieved to claim conformance are specified in the OGC Compliance Testing Policies

and Procedures and the OGC Compliance Testing web site.

Chapter 3. References

The following normative documents contain provisions that, through reference in this text, constitute provisions of this document. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. For undated references, the latest edition of the normative document referred to applies.

- Open API Initiative: OpenAPI Specification 3.0.1, <https://github.com/OAI/OpenAPI-Specification/blob/master/versions/3.0.1.md>
- Fielding, R., Gettys, J., Mogul, J., Frystyk, H., Masinter, L., Leach, P., Berners-Lee, T.: IETF RFC 2616, HTTP/1.1, <http://tools.ietf.org/rfc/rfc2616.txt>
- Klyne, G., Newman, C.: IETF RFC 3339, Web Linking, <http://tools.ietf.org/rfc/rfc3339.txt>
- Nottingham, M.: IETF RFC 5988, Web Linking, <http://tools.ietf.org/rfc/rfc5988.txt>
- van den Brink, L., Portele, C., Vretanos, P.: OGC 10-100r3, Geography Markup Language (GML) Simple Features Profile, http://portal.opengeospatial.org/files/?artifact_id=42729
- Butler, H., Daly, M., Doyle, A., Gillies, S., Hagen, S., Schaub, T.: IETF RFC 7946, The GeoJSON Format, <https://tools.ietf.org/rfc/rfc7946.txt>
- W3C: HTML5, W3C Recommendation, <http://www.w3.org/TR/html5/>
- Schema.org: <http://schema.org/docs/schemas.html>

Chapter 4. Terms and Definitions

This document uses the terms defined in Sub-clause 5.3 of [OGC 06-121r8], which is based on the ISO/IEC Directives, Part 2, Rules for the structure and drafting of International Standards. In particular, the word “shall” (not “must”) is the verb form used to indicate a requirement to be strictly followed to conform to this standard.

For the purposes of this document, the following additional terms and definitions apply.

CAUTION | Add link to the informative WFS Guide, once it is available.

4.1. dataset

collection of data, published or curated by a single agent, and available for access or download in one or more formats [\[DCAT\]](#)

NOTE | The use of 'collection' in the definition from [\[DCAT\]](#) is broader than the use of the term collection in this specification. See the definition of 'feature collection'.

4.2. distribution

represents an accessible form of a **dataset** [\[DCAT\]](#)

EXAMPLE: a downloadable file, an RSS feed or a web service that provides the data.

4.3. feature

abstraction of real world phenomena [ISO 19101-1:2014]

NOTE | If you are unfamiliar with the term 'feature', the explanations in the [W3C/OGC Spatial Data on the Web Best Practice document](#) may help, in particular the section on [Spatial Things, Features and Geometry](#).

4.4. feature collection; collection

a set of **features** from a **dataset**

NOTE | In this specification, 'collection' is used as a synonym for 'feature collection'. This is done to make, for example, URI path expressions shorter and easier to understand for those that are not geo-experts.

Chapter 5. Conventions

5.1. Open issues

This version is a draft. It is not complete and there are open issues that are under discussion. These cases are shown as "CAUTION" annotations with a link to the issue on GitHub and a brief summary of the issue.

The current expectation is to have a stable version of the Core specification in 2019. Criteria to move the specification to the next stage in the process are:

- Multiple implementations of each conformance class,
- a conformance test suite for each conformance class,
- multiple implementations of a generic WFS client,
- multiple implementations of clients using the OpenAPI definition of a WFS,
- multiple draft extensions to verify the extensibility, and
- resolution of comments received on GitHub or in formal reviews in OGC and ISO/TC 211.

5.2. Identifiers

The normative provisions in this specification are denoted by the URI <http://www.opengis.net/spec/wfs-1/3.0>.

All requirements and conformance tests that appear in this document are denoted by partial URIs which are relative to this base.

5.3. UML model

UML diagrams are included in this standard to illustrate the conceptual model that underpins Web Feature Service implementations. The UML model is not normative. The UML profile used is specified in ISO 19103:2015.

Resources are modelled as UML interfaces.

5.4. Link relations

To express relationships between resources, [RFC 5988 \(Web Linking\)](#) and [registered link relation types](#) are used.

5.5. Use of HTTPS

For simplicity, this document in general only refers to the HTTP protocol. This is not meant to exclude the use of HTTPS and simply is a shorthand notation for "HTTP or HTTPS". In fact, most WFS are expected to use HTTPS, not HTTP.

5.6. API definition

5.6.1. General remarks

Good documentation is essential for every API so that developers can learn how to use it. In the best case, documentation will be available in HTML and in a format that can be processed by software to connect to the API.

This standard specifies requirements and recommendations for APIs that share feature data and that want to follow a standard way of doing so. In general, APIs will go beyond the requirements and recommendations stated in this standard - or other parts of the Web Feature Service standard series - and will support additional operations, parameters, etc. that are specific to the API or the software tool used to implement the API.

5.6.2. Role of OpenAPI

This document uses OpenAPI 3.0 fragments as examples and to formally state requirements. However, using OpenAPI 3.0 is not required.

The "Core" requirements class, therefore, only requires that an API definition is provided at path `/api`.

A separate requirements class is specified for API definitions that follow the [OpenAPI specification 3.0](#), but this does not preclude that in the future or in parallel other versions of OpenAPI or other descriptions are provided by a server.

NOTE

This approach is used to avoid lock-in to a specific approach to defining an API as it is expected that the landscape will continue to evolve.

In this document, fragments of OpenAPI definitions are shown in YAML since YAML is easier to read than JSON and is typically used in OpenAPI editors.

5.6.3. References to OpenAPI components in normative statements

Some normative statements (requirements, recommendations and permissions) use a phrase that a component in the API definition of the server must be "based upon" a schema or parameter component in the OGC schema repository.

In this case, the following changes to the pre-defined OpenAPI component are permitted:

- If the server supports an XML encoding, `xml` properties may be added to the relevant OpenAPI schema components.
- The range of values of a parameter or property may be extended (additional values) or constrained (if only a subset of all possible values are applicable to the service). An example for a constrained range of values is to explicitly specify the supported values of a string parameter or property using an enum.
- Additional properties may be added to the schema definition of a Response Object.
- Informative text may be changed or added, like comments or description properties.

For API definitions that do not conform to the [OpenAPI Specification 3.0](#) the normative statement should be interpreted in the context of the API definition language used.

5.6.4. Paths in OpenAPI definitions

All paths in an OpenAPI definition are relative to a base URL of the server.

CAUTION

ISSUE 98

Server Ambiguity in OpenAPI

Example 1. URL of the OpenAPI definition

If the OpenAPI Server Object would look like this:

```
servers:
- url: https://dev.example.org/
  description: Development server
- url: https://data.example.org/
  description: Production server
```

The path `"/mypath"` in the OpenAPI definition of a WFS would be the URL <https://data.example.org/mypath> for the production server.

5.6.5. Reusable OpenAPI components

Reusable components for OpenAPI definitions of a WFS are referenced from this document.

CAUTION

During the development phase, these components use a base URL of `"https://raw.githubusercontent.com/opengeospatial/WFS_FES/master/"`, but eventually they are expected to be available under the base URL `"http://schemas.opengis.net/wfs/3.0/openapi/"`.

Chapter 6. Overview

6.1. Evolution from previous versions of WFS

The previous versions of the WFS standard used a Remote-Procedure-Call-over-HTTP architectural style using XML for any payloads as it was state-of-the-art in the late 1990s and early 2000s, when WFS was originally designed. This version specifies a modernized service, that follows the current Web architecture and in particular the [W3C/OGC best practices for sharing Spatial Data on the Web](#) as well as the [W3C best practices for sharing Data on the Web](#).

Beside the general alignment with the architecture of the Web (e.g., consistency with HTTP/HTTPS, hypermedia controls), another goal is modularization. This has a few facets:

- Clear separation between core requirements that almost everyone has who wants to share or use spatial data on a fine-grained level (this document) and more advanced capabilities that communities are using today (extensions specified in additional parts of WFS 3.0).
- Technologies that change more frequently are decoupled and specified in separate modules ("requirements classes" in OGC terminology). This enables, for example, the use/re-use of new encodings for spatial data or API descriptions.
- Modularization is not just about WFS modules, but about providing building blocks for fine-grained access to spatial data that can be used in data APIs in general. In other words, a server supporting WFS 3.0 should not be seen as a standalone WFS service. A corollary of this is that it should be possible to implement a data API that at the same time conforms to conformance classes from WFS 3.0 and from other OGC Web Service standards following a similar approach.

This approach intends to support two types of client developers:

- those that have never heard about WFS - it should be possible to create a client using the API definition without the need to read the WFS standard (they may need to learn a little bit about geometry, etc.);
- those that want to write a "generic" client that can access WFSs, i.e. are not specific for a particular API/server.

As a result of this modernization, WFS 3.0 implementations are not backwards compatible with WFS 2.0 implementations per se. However, it has been a design goal to define WFS 3.0 in a way so that the WFS 3.0 interface can be mapped to a WFS 2.0 implementation. WFS 3.0 is intended to be simpler and more modern, but still an evolution from the previous versions and their implementations.

The modernization is discussed in more detail [here](#).

CAUTION

Change this link and point to the WFS 3.0 Guide once a draft is available. The Guide will include a mapping between OGC Capabilities and OpenAPI as well as a mapping between WFS 2.0 operations and WFS 3.0.

6.2. Encodings

This standard does not mandate any encoding or format for representing features or feature collections. In addition to HTML as the standard encoding for Web content, rules for commonly used encodings for spatial data on the web are provided (GeoJSON, GML).

None of these encodings is mandatory and an implementation of the "Core" requirements class may also decide to use none of them, but to use another encoding instead.

[Support for HTML is recommended](#) as HTML is the core language of the World Wide Web. A server that supports HTML will support browsing the data with a web browser and it will enable search engines to crawl and index the dataset.

GeoJSON is a commonly used format that is simple to understand and well supported by tools and software libraries. Since most Web developers are comfortable with using a JSON-based format, this version of the Web Feature Service standard [recommends to support GeoJSON for encoding feature data](#), if the feature data can be represented in GeoJSON for the intended use.

Some examples for cases that are out-of-scope of GeoJSON are:

- solids are used a geometries (e.g. in a 3D city model),
- geometries include non-linear curve interpolations that cannot be simplified (e.g., use of arcs in authoritative geometries),
- geometries have to be represented in a coordinate reference system that is not based on WGS 84 longitude/latitude (e.g. an authoritative national reference system),
- features have more than one geometric property, etc.

In addition to HTML and GeoJSON, a significant amount of feature data is available in XML-based formats, notably GML. GML supports more complex requirements than GeoJSON and does not have any of the limitations mentioned in the previous paragraph, but as a result GML also more complex to handle for both servers and clients. Conformance classes for GML are, therefore, included in this standard, but it is expected that these will typically be supported by servers where users are known to expect feature data in XML/GML.

The recommendations for HTML and GeoJSON reflect the importance of HTML and the current popularity of JSON-based data formats. As the practices in the Web community evolve, the recommendations will likely be updated, too, in future versions of this standard to provide guidance.

This part of WFS 3.0 does not provide any guidance on other encodings. The supported encodings, or more precisely the media types of the supported encodings, can be determined from the API definition. The desired encoding is selected using HTTP content negotiation.

For example, if the server supports [GeoJSON Text Sequences](#), an encoding that is based on JSON text sequences and GeoJSON to support streaming by making the the data incrementally parseable, the media type `application/geo+json-seq` would be used.

In addition, HTTP supports compression and the standard HTTP mechanisms can be used to reduce the size of the messages between the server and the client.

6.3. Examples

This document uses a simple example throughout the document: The dataset contains buildings and the server provides access to them through a single feature collection ("buildings") and two encodings, GeoJSON and HTML.

The buildings have a few (optional) properties: the polygon geometry of the building footprint, a name, the function of the building (residential, commercial or public use), the floor count and the timestamp of the last update of the building feature in the dataset.

Chapter 7. Requirement Class "Core"

7.1. Overview

| Requirements Class | |
|---|--|
| http://www.opengis.net/spec/wfs-1/3.0/req/core | |
| Target type | Web service |
| Dependency | RFC 2616 (HTTP/1.1) |
| Dependency | RFC 3339 (Date and Time on the Internet: Timestamps) |
| Dependency | RFC 5988 (Web Linking) |

Figure 1 illustrates the resources supported by the Core requirements class using UML. Each resource type available through the server is an «interface».

A server that implements the WFS API provides access to the features in a dataset. In other words, the API is a distribution of that dataset. A file download, for example, would be another distribution.

That is, each WFS has a single **LandingPage** (path `/`) that provides links to

- the **APIDefinition** (path `/api`),
- the **Conformance** statements (path `/conformance`),
- the **DatasetDistribution** metadata (path `/collections`).

The **APIDefinition** describes the capabilities of the server and which can be used by clients to connect to the server or by development tools to support the implementation of servers and clients. Accessing the **APIDefinition** using HTTP GET returns a description of the API.

Accessing the **Conformance** using HTTP GET returns a list of URIs of requirements classes implemented by the server.

The distribution consists of a set of feature collections. This specification does not include any requirements how the features in the dataset have to be aggregated into collections. A typical approach is to aggregate by feature type, but any other approach that fits the dataset or the applications using this distribution may be used, too.

Accessing the **DatasetDistribution** using HTTP GET returns a **DatasetDistributionResponse**, which includes a link to each **Collection** in the distribution along with metadata about each collection:

- a local identifier for the collection that is unique within the WFS;
- a list of coordinate reference systems in which geometries may be returned by the server, where the first one is the default coordinate reference system (in the Core, the default is always WGS 84 with axis order longitude/latitude);
- an optional title and description for the collection;
- an optional extent that can be used to provide an indication of the spatial and temporal extent

of the collection - typically derived from the data.

Each **Collection** (path `/collections/{collection-name}/items`) consists of the features in the collection where each feature in the distribution is part of exactly one collection.

CAUTION

ISSUE 30

Allow also features that do not belong to any collection?

CAUTION

ISSUE 66

Support features that do belong to multiple collections?

Accessing a **Collection** using HTTP GET returns a **CollectionResponse**, which basically consists of features in the collection. The features included in the response are determined by the server based on parameters of the request.

A **bbox** or **time** parameter may be used to select only a subset of the features in the collection (the features that are located in the bounding box or time period).

The **limit** parameter may be used to request only a subset of the selected features and to indicate that the client wants to page through the selected features of the collection.

The **CollectionResponse** may include metadata about the number of selected and returned features (**numberMatched** and **numberReturned**) as well as links to simplify paging (**next** and **prev**).

Each **Feature** (path `/collections/{collection-name}/items/{feature-id}`) is also a separate resource and may be requested individually using HTTP GET.

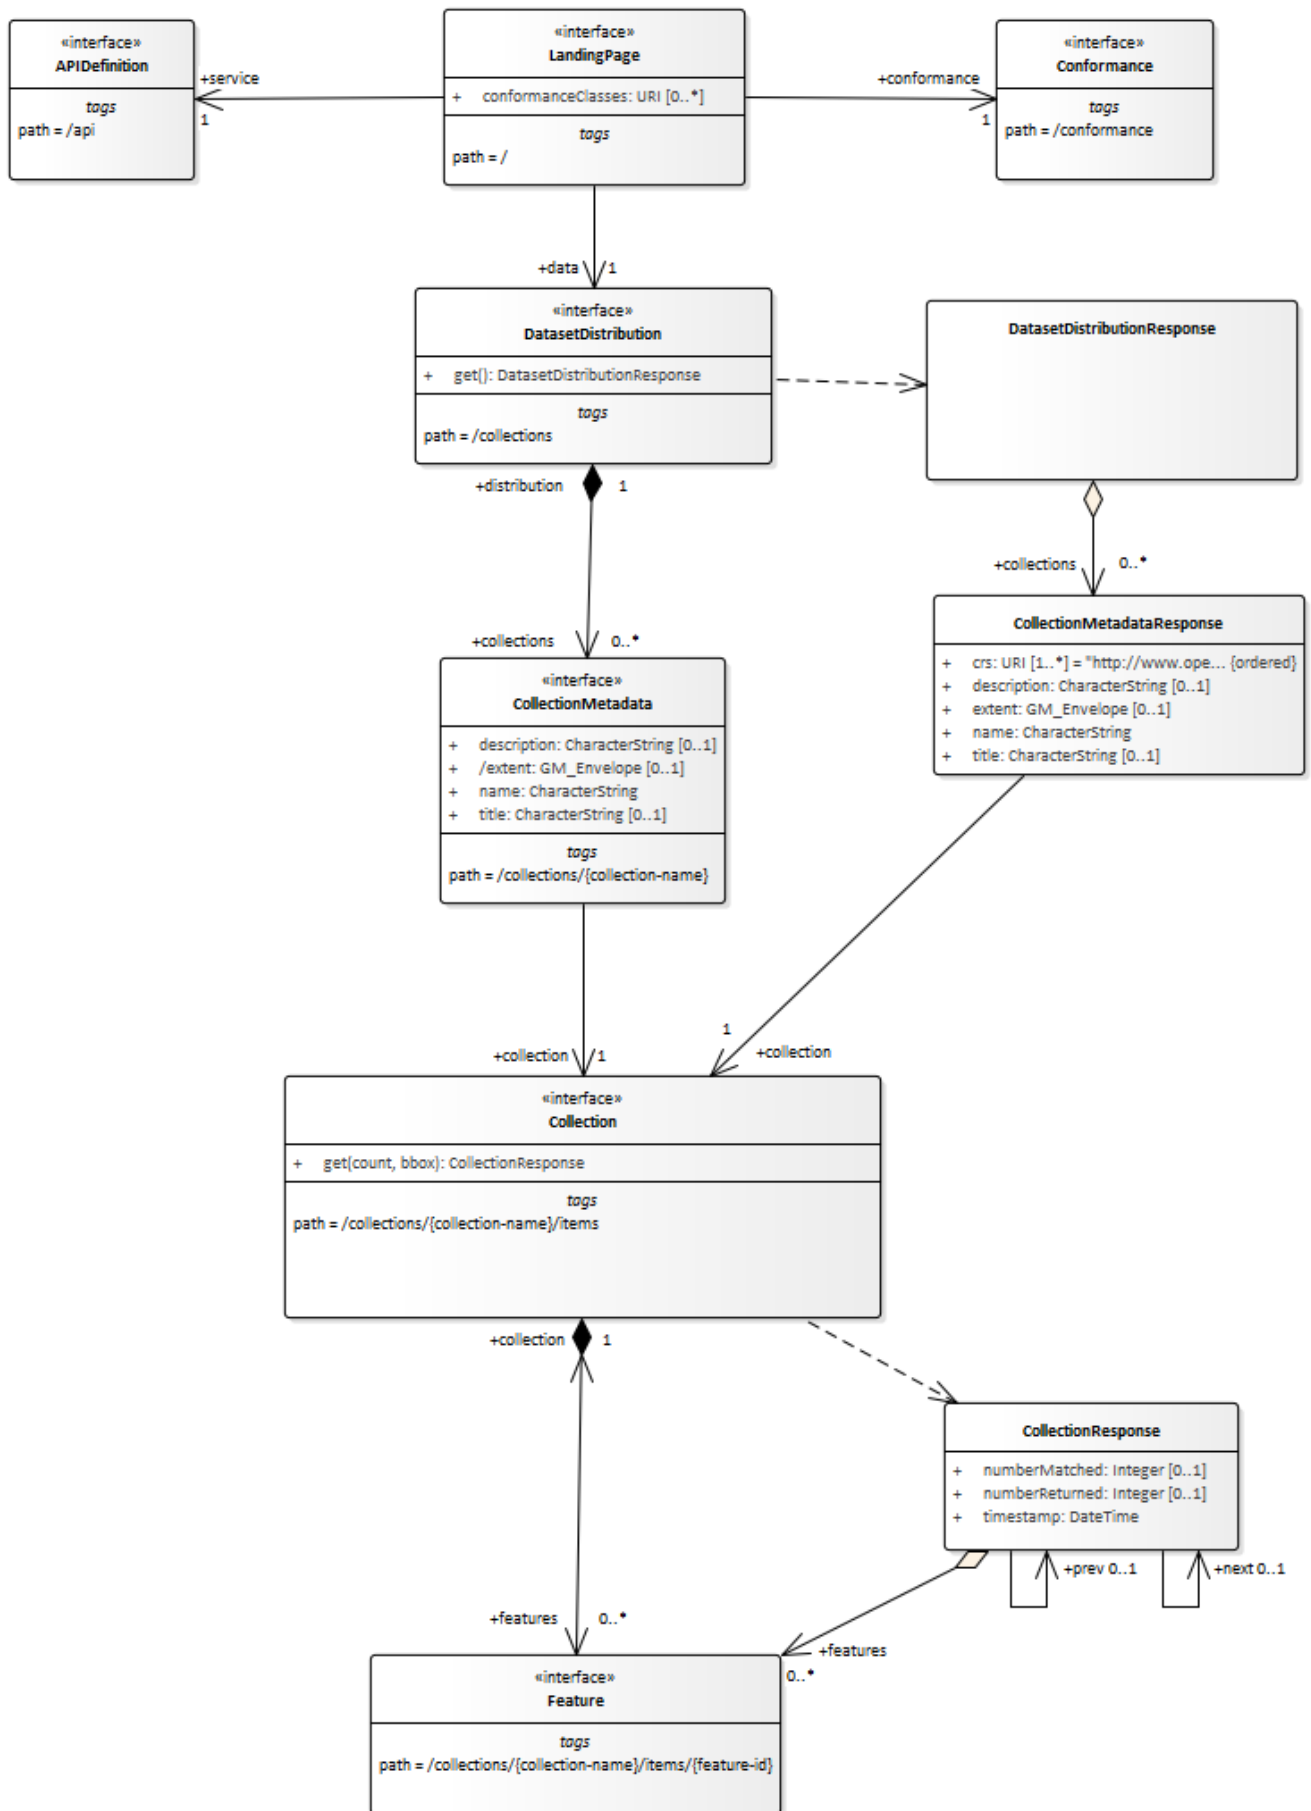


Figure 1. Resources in the Core requirements class

CAUTION**ISSUE 90**

More flexible path structure under **/collections**?

7.2. API landing page

7.2.1. Operation

| | |
|----------------------|---|
| Requirement 1 | <p>/req/core/root-op</p> <p>The server SHALL support the HTTP GET operation at the path /.</p> |
|----------------------|---|

7.2.2. Response

| | |
|----------------------|---|
| Requirement 2 | <p>/req/core/root-success</p> <p>A successful execution of the operation SHALL be reported as a response with a HTTP status code 200.</p> <p>The content of that response SHALL be based upon the OpenAPI 3.0 schema root.yaml and include at least links to the following resources:</p> <ul style="list-style-type: none">• /api (relation type 'service')• /conformance (relation type 'conformance')• /collections (relation type 'data') |
|----------------------|---|

CAUTION**ISSUE 101**

Landing page: Can we reuse existing relation types instead of 'conformance' and 'data'?

Schema for the landing page

```
type: object
required:
  - links
properties:
  links:
    type: array
    items:
      $ref:
https://raw.githubusercontent.com/opengeospatial/WFS_FES/master/core/openapi/schemas/links.yaml
```

```
{
  "links": [
    { "href": "http://data.example.org/",
      "rel": "self", "type": "application/json", "title": "this document" },
    { "href": "http://data.example.org/api",
      "rel": "service", "type": "application/openapi+json;version=3.0", "title":
"the API definition" },
    { "href": "http://data.example.org/conformance",
      "rel": "conformance", "type": "application/json", "title": "WFS 3.0
conformance classes implemented by this server" },
    { "href": "http://data.example.org/collections",
      "rel": "data", "type": "application/json", "title": "Metadata about the
feature collections" }
  ]
}
```

7.3. API definition

7.3.1. Operation

Every WFS provides an API definition that describes the capabilities of the server and which can be used by developers to understand the API, by software clients to connect to the server or by development tools to support the implementation of servers and clients.

| | |
|----------------------|--|
| Requirement 3 | /req/core/api-definition-op The server SHALL support the HTTP GET operation at the path /api . |
|----------------------|--|

7.3.2. Response

| | |
|----------------------|---|
| Requirement 4 | /req/core/api-definition-success A successful execution of the operation SHALL be reported as a response with a HTTP status code 200 . The server SHALL return an API definition document. |
|----------------------|---|

| | |
|------------------|--|
| Recommendation 1 | /rec/core/api-definition-oas If the API definition document uses the OpenAPI Specification 3.0, the document SHOULD conform to the OpenAPI Specification 3.0 requirements class . |
|------------------|--|

If multiple API definition formats are supported by a server, use content negotiation to select the desired representation.

The API definition document describes the API. I.e., there is no need to include the `/api` operation in the API definition itself.

The idea is that any WFS can be used by developers that are familiar with the API definition language(s) supported by the server. For example, if an OpenAPI definition is used, it should be possible to create a working client using the OpenAPI definition. The developer may need to learn a little bit about geometry, etc., but it should not be required to read this standard to access the data via the API.

7.4. Declaration of conformance classes

7.4.1. Operation

To support "generic" clients for accessing Web Feature Services in general - and not "just" a specific API / server, the server has to declare the requirements classes it implements and conforms to, too.

| | |
|---------------|---|
| Requirement 5 | /rec/core/conformance-op The server SHALL support the HTTP GET operation at the path <code>/conformance</code> . |
|---------------|---|

7.4.2. Response

| | |
|---------------|--|
| Requirement 6 | /rec/core/conformance-success A successful execution of the operation SHALL be reported as a response with a HTTP status code <code>200</code> . The content of that response SHALL be based upon the OpenAPI 3.0 schema req-classes.yaml and list all WFS 3.0 requirements classes that the server conforms to. |
|---------------|--|

```
type: object
required:
  - conformsTo
properties:
  conformsTo:
    type: array
    items:
      type: string
```

Example 3. Requirements class response document

This example response in JSON is for a server that supports OpenAPI 3.0 for the API definition and HTML and GeoJSON as encodings for features.

```
{
  "conformsTo": [
    "http://www.opengis.net/spec/wfs-1/3.0/req/core",
    "http://www.opengis.net/spec/wfs-1/3.0/req/oas30",
    "http://www.opengis.net/spec/wfs-1/3.0/req/html",
    "http://www.opengis.net/spec/wfs-1/3.0/req/geojson"
  ]
}
```

7.5. HTTP 1.1

| | |
|----------------------|--|
| Requirement 7 | /req/core/http The server SHALL conform to HTTP 1.1 . |
|----------------------|--|

This includes the correct use of status codes, headers, etc.

CAUTION

[ISSUE 105](#)

WFS 2.0 defined exception codes and mapped them to HTTP status codes. Should WFS 3.0 provide guidance on which (common) error situations should return which HTTP status code per resource or should we simply require that http status codes are used correctly?

7.6. Web caching

Entity tags are a mechanism for web cache validation and for supporting conditional requests to reduce network traffic. Entity tags are specified by [HTTP/1.1 \(RFC 2616\)](#).

| | |
|------------------|--|
| Recommendation 2 | <p>/rec/core/etag</p> <p>The service SHOULD support entity tags and the associated headers as specified by HTTP/1.1.</p> |
|------------------|--|

| | |
|----------------|---|
| CAUTION | <p>ISSUE 38</p> <p>More detail / examples on caching. Add an example OpenAPI operation (headers, response codes) - here or in clause 9.</p> |
|----------------|---|

7.7. Support for cross-origin requests

To access data from a HTML page where the data is on another host than the webpage is by default prohibited for security reasons ("same-origin policy"). A typical example is a web-application accessing feature data from multiple distributed datasets.

| | |
|------------------|---|
| Recommendation 3 | <p>/rec/core/cross-origin</p> <p>If the server is intended to be accessed from the browser, cross-origin requests SHOULD be supported. Note that support can also be added in a proxy layer on top of the server.</p> |
|------------------|---|

Two common mechanisms to support cross-origin requests are:

- [Cross-origin resource sharing \(CORS\)](#)
- [JSONP \(JSON with padding\)](#)

7.8. Encodings

While WFS 3.0 does not include any mandatory encoding, it recommends the following encodings. See [Clause 6 \(Overview\)](#) for a discussion.

| | |
|------------------|---|
| Recommendation 4 | <p>/rec/core/html</p> <p>To support browsing a WFS with a web browser and to enable search engines to crawl and index a dataset, implementations SHOULD consider to support an HTML encoding.</p> |
|------------------|---|

| | |
|------------------|---|
| Recommendation 5 | <p>/rec/core/geojson</p> <p>If the feature data can be represented for the intended use in GeoJSON, implementations SHOULD consider to support GeoJSON as an encoding for features and feature collections.</p> |
|------------------|---|

[Requirement /req/core/http](#) implies that the encoding of a server response is determined using

content negotiation as specified by the HTTP specification.

The section [Media Types](#) includes guidance on media types for [encodings](#) that are specified in this document.

Note that any server that supports multiple encodings will have to support a mechanism to mint encoding-specific URIs for resources in order to express links, for example, to alternate representations of the same resource. This document does not mandate any particular approach how this is supported by the server.

As clients simply need to dereference the URI of the link, the implementation details and the mechanism how the encoding is included in the URI of the link are not important. Developers interested in the approach of a particular implementation, for example, to manipulate ("hack") URIs in the browser address bar, can study the API definition.

NOTE

Two common approaches are:

- an additional path for each encoding of each resource (this can be expressed, for example, using format specific suffixes like ".html");
- an additional query parameter (for example, "accept" or "f") that overrides the Accept header of the HTTP request.

7.9. Coordinate reference systems

As discussed in Chapter 9 of the [W3C/OGC Spatial Data on the Web Best Practices](#), how to express and share the location of features in a consistent way is one of the most fundamental aspects of publishing geographic data and it is important to be clear about the coordinate reference system that coordinates are in.

For the reasons discussed in the Best Practices, Web Feature Service 3.0 uses WGS84 longitude and latitude as the default coordinate reference system.

| | |
|----------------------|---|
| Requirement 8 | <p>/req/core/crs84</p> <p>Unless the client explicitly requests a different coordinate reference system, all spatial geometries SHALL be in the coordinate reference system http://www.opengis.net/def/crs/OGC/1.3/CRS84 (WGS84 longitude/latitude).</p> |
|----------------------|---|

The implementations compliant with the Core are not required to support publishing feature geometries in coordinate reference systems other than <http://www.opengis.net/def/crs/OGC/1.3/CRS84>. The Core also does not specify a capability to request feature geometries in a different coordinate reference system than the native one of the published features. Such a capability will be specified in another part(s) of the WFS 3.0 series.

7.10. Link headers

| | |
|------------------|--|
| Recommendation 6 | <p>/rec/core/link-header</p> <p>Links included in payload of responses SHOULD also be included as Link headers in the HTTP response according to RFC 5988, Clause 5.</p> <p>This recommendation does not apply, if there are a large number of links included in a response or a link is not known when the HTTP headers of the response are created.</p> |
|------------------|--|

7.11. Feature collections metadata

7.11.1. Operation

| | |
|---------------|---|
| Requirement 9 | <p>/req/core/fc-md-op</p> <p>The server SHALL support the HTTP GET operation at the path /collections.</p> |
|---------------|---|

7.11.2. Response

| | |
|----------------|--|
| Requirement 10 | <p>/req/core/fc-md-success</p> <p>A successful execution of the operation SHALL be reported as a response with a HTTP status code 200.</p> <p>The content of that response SHALL be based upon the OpenAPI 3.0 schema content.yaml.</p> |
|----------------|--|

```
type: object
required:
  - links
  - collections
properties:
  links:
    type: array
    items:
      $ref:
https://raw.githubusercontent.com/opengeospatial/WFS\_FES/master/core/openapi/schemas/link.yaml
  collections:
    type: array
    items:
      $ref:
https://raw.githubusercontent.com/opengeospatial/WFS\_FES/master/core/openapi/schemas/collectionInfo.yaml
```

Requirement 11

/req/core/fc-md-links

A **200**-response SHALL include the following links in the **links** property of the response:

- a link to this response document (relation: **self**),
- a link to the response document in every other media type supported by the server (relation: **alternate**).

All links SHALL include the **rel** and **type** link parameters.

Recommendation 7

/rec/core/fc-md-descriptions

If external schemas or descriptions for the dataset exist that provide information about the structure or semantics of the data, a **200**-response SHOULD include links to each of those resources in the **links** property of the response (relation: **describedBy**).

The **type** link parameter SHOULD be provided for each link.

This applies to resources that describe to the whole dataset. For resources that describe the contents of a feature collection, the links SHOULD be set in the **links** property of the appropriate object in the **collections** resource.

Examples for descriptions are: XML Schema, Schematron, JSON Schema, RDF Schema, OWL, SHACL, a feature catalogue, etc.

CAUTION**ISSUE 56**

Lack of DescribeFeatureType request

CAUTION**ISSUE 102**

Add a recommendation about a link to the dataset metadata (for example, in DCAT). Which link relation type?

Requirement 12

/req/core/fc-md-items

For each feature collection in this distribution of the dataset, an item SHALL be provided in the property **collections**.

Requirement 13

/req/core/fc-md-items-links

For each feature collection in this distribution of the dataset, the **links** property of the collection SHALL include an item for each supported encoding with a link to the collection resource (relation: **item**).

All links SHALL include the **rel** and **type** properties.

CAUTION**ISSUE 103**

Can/should we make use of the new **Link Object** in OpenAPI 3.0?

Requirement 14

/req/core/fc-md-extent

For each feature collection, the **extent** property, if provided, SHALL be a bounding box that includes all spatial and temporal geometries in this collection.

If a feature has multiple properties with spatial or temporal information, it is the decision of the server whether only a single spatial or temporal geometry property is used to determine the extent or all relevant geometries.

```
type: object
required:
  - name
  - links
properties:
  name:
    description: identifier of the collection used, for example, in URIs
    type: string
  title:
    description: human readable title of the collection
    type: string
  description:
    description: a description of the features in the collection
    type: string
  links:
    type: array
    items:
      $ref:
https://raw.githubusercontent.com/opengeospatial/WFS\_FES/master/core/openapi/schemas/link.yaml
  extent:
    $ref:
https://raw.githubusercontent.com/opengeospatial/WFS\_FES/master/core/openapi/schemas/extent.yaml
  crs:
    description: the list of coordinate reference systems supported by the service;
the first item is the default coordinate reference system
    type: array
    items:
      type: string
    default:
      - http://www.opengis.net/def/crs/OGC/1.3/CRS84
```

NOTE | The **crs** property is not used by this conformance class, but reserved for future use.

Example 4. Feature collection metadata response document

This feature collection metadata example response in JSON is for a dataset with a single collection "buildings". It includes links to the collection resource in all formats that are supported by the service ([link relation type](#): "item").

Representations of the metadata resource in other formats are referenced using [link relation type](#) "alternate".

Additional links to a GML application schema for the building data and to a web page that has additional information about buildings are provided, too, using [link relation type](#) "describedBy".

Coordinate reference system information is not provided as the service provides geometries only in the default system (WGS84 longitude/latitude).

```
{
  "links": [
    { "href": "http://data.example.org/collections.json",
      "rel": "self", "type": "application/json", "title": "this document" },
    { "href": "http://data.example.org/collections.html",
      "rel": "alternate", "type": "text/html", "title": "this document as HTML" },
    { "href": "http://schemas.example.org/1.0/foobar.xsd",
      "rel": "describedBy", "type": "application/xml", "title": "XML schema for
Acme Corporation data" }
  ],
  "collections": [
    {
      "name": "buildings",
      "title": "Buildings",
      "description": "Buildings in the city of Bonn.",
      "extent": {
        "spatial": [ 7.01, 50.63, 7.22, 50.78 ],
        "temporal": [ "2010-02-15T12:34:56Z", "2018-03-18T12:11:00Z" ]
      },
      "links": [
        { "href": "http://data.example.org/collections/buildings/items",
          "rel": "item", "type": "application/geo+json",
          "title": "Buildings" },
        { "href": "http://example.org/concepts/building.html",
          "rel": "describedBy", "type": "text/html",
          "title": "Feature catalogue for buildings" }
      ]
    }
  ]
}
```

7.12. Feature collection metadata

7.12.1. Operation

| | |
|-----------------------|---|
| Requirement 15 | <p>/req/core/sfc-md-op</p> <p>The server SHALL support the HTTP GET operation at the path <code>/collections/{name}</code>.</p> <p>The parameter <code>name</code> is each property of the same name in the feature collections metadata (JSONPath: <code>\$.collections[*].name</code>).</p> |
|-----------------------|---|

7.12.2. Response

| | |
|-----------------------|--|
| Requirement 16 | <p>/req/core/sfc-md-success</p> <p>A successful execution of the operation SHALL be reported as a response with a HTTP status code <code>200</code>.</p> <p>The content of that response SHALL be the same as the content for this feature collection in the <code>/collections</code> response.</p> |
|-----------------------|--|

7.13. Feature collections

7.13.1. Operation

| | |
|-----------------------|---|
| Requirement 17 | <p>/req/core/fc-op</p> <p>For every feature collection identified in the metadata about the feature collection (path <code>/</code>), the server SHALL support the HTTP GET operation at the path <code>/collections/{name}/items</code>.</p> <p>The parameter <code>name</code> is each property of the same name in the feature collections metadata (JSONPath: <code>\$.collections[*].name</code>).</p> |
|-----------------------|---|

7.13.2. Parameter limit

| | |
|-----------------------|---|
| Requirement 18 | <p>/req/core/fc-limit-definition</p> <p>Each feature collection operation SHALL support a parameter limit with the following characteristics (using an OpenAPI Specification 3.0 fragment):</p> <pre> name: limit in: query required: false schema: type: integer minimum: 1 maximum: 10000 default: 10 style: form explode: false </pre> |
| Permission 1 | <p>/per/core/fc-limit-default-maximum</p> <p>The values for maximum and default in requirement /req/core/fc-limit-definition are only examples and MAY be changed.</p> |
| Requirement 19 | <p>/req/core/fc-limit-response-1</p> <p>The response SHALL not contain more features than specified by the optional limit parameter. If the API definition specifies a maximum value for limit parameter, the response SHALL not contain more features than this maximum value.</p> <p>Only items are counted that are on the first level of the collection. Any nested objects contained within the explicitly requested items SHALL not be counted.</p> |
| Permission 2 | <p>/per/core/fc-limit-response-2</p> <p>The server MAY return less features than requested (but not more).</p> |

A template for the definition of the parameter in YAML according to OpenAPI 3.0 is available at [limit.yaml](#).

7.13.3. Parameter **bbox**

| | |
|-----------------------|---|
| Requirement 20 | <p>/req/core/fc-bbox-definition</p> <p>Each feature collection operation SHALL support a parameter bbox with the following characteristics (using an OpenAPI Specification 3.0 fragment):</p> <pre> name: bbox in: query required: false schema: type: array minItems: 4 maxItems: 6 items: type: number style: form explode: false </pre> |
| Requirement 21 | <p>/req/core/fc-bbox-response</p> <p>Only features that have a spatial geometry that intersects the bounding box SHALL be part of the result set, if the bbox parameter is provided.</p> <p>The bounding box is provided as four or six numbers, depending on whether the coordinate reference system includes a vertical axis (elevation or depth):</p> <ul style="list-style-type: none"> • Lower left corner, coordinate axis 1 • Lower left corner, coordinate axis 2 • Lower left corner, coordinate axis 3 (optional) • Upper right corner, coordinate axis 1 • Upper right corner, coordinate axis 2 • Upper right corner, coordinate axis 3 (optional) <p>The coordinate reference system of the values SHALL be interpreted as WGS84 longitude/latitude (http://www.opengis.net/def/crs/OGC/1.3/CRS84) unless a different coordinate reference system is specified in a parameter bbox-crs.</p> |

"Intersects" means that the rectangular area specified in the parameter **bbox** includes a coordinate that is part of the (spatial) geometry of the feature. This includes the boundaries of the geometries (e.g. for curves the start and end position and for surfaces the outer and inner rings).

This specification does not specify the parameter **bbox-crs**. This parameter will be specified in an

additional part of the WFS 3.0 series.

For WGS84 longitude/latitude the bounding box is in most cases the sequence of minimum longitude, minimum latitude, maximum longitude and maximum latitude. However, in cases where the box spans the antimeridian the first value (west-most box edge) is larger than the third value (east-most box edge).

Example 5. The bounding box of the New Zealand Exclusive Economic Zone

The bounding box of the New Zealand Exclusive Economic Zone in WGS84 (from 160.6°E to 170°W and from 55.95°S to 25.89°S) would be represented in JSON as [160.6, -55.95, -170, -25.89] and in a query as `bbox=160.6,-55.95,-170,-25.89`.

A template for the definition of the parameter in YAML according to OpenAPI 3.0 is available at [bbox.yaml](#).

7.13.4. Parameter time

| | |
|-----------------------|---|
| Requirement 22 | <p>/req/core/fc-time-definition</p> <p>Each feature collection operation SHALL support a parameter <code>time</code> with the following characteristics (using an OpenAPI Specification 3.0 fragment):</p> <pre>name: time in: query required: false schema: type: string style: form explode: false</pre> |
| Requirement 23 | <p>/req/core/fc-time-response</p> <p>Only features that have a temporal geometry that intersects the timestamp or time period SHALL be part of the result set, if the <code>time</code> parameter is provided.</p> <p>The temporal information is either a date-time or a period string that adheres to RFC 3339.</p> <p>If a feature has multiple temporal properties, it is the decision of the server whether only a single temporal property is used to determine the extent or all relevant temporal properties.</p> |

"Intersects" means that the time (instant or period) specified in the parameter `time` includes a

timestamp that is part of the temporal geometry of the feature (again, a time instant or period). For time periods this includes the start and end time.

Example 6. A date-time

February 12, 2018, 23:20:52 GMT:

`time=2018-02-12T23%3A20%3A50Z`

For features with a temporal property that is a timestamp (like `lastUpdate` in the building features), a date-time value would match all features where the temporal property is identical.

For features with a temporal property that is a date or a time period, a date-time value would match all features where the timestamp is on that day or within the time period.

Example 7. A period using start and end time

February 12, 2018, 00:00:00 GMT to March 18, 2018, 12:31:12 GMT:

`time=2018-02-12T00%3A00%3A00Z%2F2018-03-18T12%3A31%3A12Z`

Example 8. A period using start time and a duration

A duration of 1 month, 6 days, 12 hours, 31 minutes and 12 seconds from February 12, 2018, 00:00:00 GMT:

`time=2018-02-12T00%3A00%3A00Z%2FP1M6DT12H31M12S`

For features with a temporal property that is a timestamp (like `lastUpdate` in the building features), a time period would match all features where the temporal property is within the period.

For features with a temporal property that is a date or a time period, a time period would match all features where the values overlap.

A template for the definition of the parameter in YAML according to OpenAPI 3.0 is available at [time.yaml](#).

7.13.5. Parameters for filtering on feature properties

| | |
|------------------|--|
| Recommendation 8 | <p>/rec/core/fc-filters</p> <p>If features in the feature collection include a feature property that has a simple value (for example, a string or integer) that is expected to be useful for applications using the service to filter the features of the collection based on this property, you SHOULD support a parameter with the name of the feature property and with the following characteristics (using an OpenAPI Specification 3.0 fragment):</p> <pre> in: query required: false style: form explode: false </pre> <p>The schema property SHOULD be the same as the definition of the feature property in the response schema.</p> |
|------------------|--|

Example 9. An additional parameter to filter buildings based on their function

```

name: function
in: query
description: >-
  Only return buildings of a particular function.\

  Default = return all buildings.
required: false
schema:
  type: string
  enum:
    - residential
    - commercial
    - public use
style: form
explode: false
example: 'function=public+use'

```

```
name: name
in: query
description: >-
  Only return buildings with a particular name. Use '*' as a wildcard.\

  Default = return all buildings.
required: false
schema:
  type: string
style: form
explode: false
example: 'name=A*'
```

For string-valued properties, servers could support wildcard searches. The example included in the OpenAPI fragment would search for all buildings with a name that starts with "A".

CAUTION

ISSUE 20

Query parameter name collisions.

7.13.6. Response

| | |
|-----------------------|---|
| Requirement 24 | <code>/req/core/fc-response</code> A successful execution of the operation SHALL be reported as a response with a HTTP status code 200 . The response SHALL only include features selected by the request. |
|-----------------------|---|

The number of features returned depends on the server and the parameter **limit**:

- The client can request a limit it is interested in.
- The server likely has a default value for the limit, and a maximum limit.
- If the server has any more results available than it returns (the number it returns is less than or equal to the requested/default/maximum limit) then the server will include a link to the next set of results.

So (using the default/maximum values of 10/10000 from the OpenAPI fragment in requirement `/req/core/fc-limit-definition`):

- If you ask for 10, you will get 0 to 10 (as requested) and a **next** link, if there are more.
- If you don't specify a limit, you will get 0 to 10 (default) and a **next** link, if there are more.
- If you ask for 50000, you might get up to 10000 (server-limited) and a **next** link, if there are

more.

- If you follow the next link from the previous response, you might get up to 10000 additional features and a **next** link, if there are more.

| | |
|-------------------|--|
| Requirement 25 | <p>/req/core/fc-links</p> <p>A 200-response SHALL include the following links:</p> <ul style="list-style-type: none">• a link to this response document (relation: self),• a link to the response document in every other media type supported by the service (relation: alternate). |
| Recommendation 9 | <p>/rec/core/fc-next-1</p> <p>A 200-response SHOULD include a link to the next "page" (relation: next), if more features have been selected than returned in the response.</p> |
| Recommendation 10 | <p>/rec/core/fc-next-2</p> <p>Dereferencing a next link SHOULD return additional features from the set of selected features that have not yet been returned.</p> |
| Recommendation 11 | <p>/rec/core/fc-next-3</p> <p>The number of features in a response to a next link SHOULD follow the same rules as for the response to the original query and again include a next link, if there are more features in the selection that have not yet been returned.</p> |

This document does not mandate any specific implementation approach for the **next** links.

An implementation could use opaque links that are managed by the server. It is up to the server to determine how long these links can be de-referenced. Clients should be prepared to receive a 404 response.

Another implementation approach is to use an implementation-specific parameter like the **startIndex** parameter that was used in previous versions of WFS (and which may be added again in an extension to this specification).

| | |
|--------------|---|
| Permission 3 | <p>/per/core/fc-prev</p> <p>A response to a next link MAY include a prev link to the resource that included the next link.</p> |
|--------------|---|

Providing **prev** links supports navigating back and forth between pages, but depending on the implementation approach it may be complex to implement.

| | |
|-----------------------|--|
| Requirement 26 | <code>/req/core/fc-rel-type</code> All links SHALL include the rel and type link parameters. |
| Requirement 27 | <code>/req/core/fc-timeStamp</code> If a property timeStamp is included in the response, the value SHALL be set to the time stamp when the response was generated. |
| Requirement 28 | <code>/req/core/fc-numberMatched</code> If a property numberMatched is included in the response, the value SHALL be identical to the number of features in the feature collections that match the selection parameters like bbox , time or additional filter parameters. A server MAY omit this information in a response, if the information about the number of matching features is not known or difficult to compute. |
| Requirement 29 | <code>/req/core/fc-numberReturned</code> If a property numberReturned is included in the response, the value SHALL be identical to the number of features in the response. A server MAY omit this information in a response, if the information about the number of features in the response is not known or difficult to compute. |

CAUTION

Related to [ISSUE 8](#)

Define these as headers or include them in the payload? **timeStamp**, for example, may not be needed given the 'Date' HTTP header. For **numberMatched** and **numberReturned** headers do not seem to be a good idea as, for example, **numberReturned** can only be included at the end, if streaming is used.

NOTE

The representation of the links and the other properties in the payload depends on the encoding of the feature collection.

Example 11. Links

If the request is to return building features and "10" is the default **limit**, the links in the

response could be (in this example represented as link headers and using an additional parameter `startIndex` to implement `next` links - and the optional `prev` links):

```
Link: <http://data.example.org/collections/buildings/items.json>; rel="self";
type="application/geo+json"
Link: <http://data.example.org/collections/buildings/items.html>; rel="alternate";
type="text/html"
Link: <http://data.example.org/collections/buildings/items.json?startIndex=10>;
rel="next"; type="application/geo+json"
```

Following the `next` link could return:

```
Link: <http://data.example.org/collections/buildings/items.json?startIndex=10>;
rel="self"; type="application/geo+json"
Link: <http://data.example.org/collections/buildings/items.html?startIndex=10>;
rel="alternate"; type="text/html"
Link: <http://data.example.org/collections/buildings/items.json?startIndex=0>;
rel="prev"; type="application/geo+json"
Link: <http://data.example.org/collections/buildings/items.json?startIndex=20>;
rel="next"; type="application/geo+json"
```

If an explicit `limit` of "50" is used, the links in the response could be:

```
Link: <http://data.example.org/collections/buildings/items.json?limit=50>;
rel="self"; type="application/geo+json"
Link: <http://data.example.org/collections/buildings/items.html?limit=50>;
rel="alternate"; type="text/html"
Link:
<http://data.example.org/collections/buildings/items.json?limit=50&startIndex=50>;
rel="next"; type="application/geo+json"
```

Following the `next` link could return:

```
Link:
<http://data.example.org/collections/buildings/items.json?limit=50&startIndex=50>;
rel="self"; type="application/geo+json"
Link:
<http://data.example.org/collections/buildings/items.html?limit=50&startIndex=50>;
rel="alternate"; type="text/html"
Link:
<http://data.example.org/collections/buildings/items.json?limit=50&startIndex=0>;
rel="prev"; type="application/geo+json"
Link:
<http://data.example.org/collections/buildings/items.json?limit=50&startIndex=100>;
rel="next"; type="application/geo+json"
```

7.14. Feature

7.14.1. Operation

| | |
|----------------|---|
| Requirement 30 | <p>/req/core/f-op</p> <p>For every feature in a feature collection (path <code>/collections/{name}/items</code>), the service SHALL support the HTTP GET operation at the path <code>/collections/{name}/items/{id}</code>.</p> <p>The parameter <code>name</code> is each property of the same name in the feature collections metadata (JSONPath: <code>\$.collections[*].name</code>). <code>id</code> is a local identifier of the feature.</p> |
| Permission 4 | <p>/per/core/f-id</p> <p>The Core requirements class only requires that the feature URI is unique. Implementations MAY apply stricter rules and, for example, use unique <code>id</code> values per dataset or collection.</p> |

CAUTION

ISSUE 47

There are two types of feature identifiers and we need to make sure we distinguish between them.

7.14.2. Response

| | |
|----------------|--|
| Requirement 31 | <p>/req/core/f-success</p> <p>A successful execution of the operation SHALL be reported as a response with a HTTP status code <code>200</code>.</p> |
| Requirement 32 | <p>/req/core/f-links</p> <p>A <code>200</code>-response SHALL include the following links in the response:</p> <ul style="list-style-type: none">• a link to the response document (relation: <code>self</code>),• a link to the response document in every other media type supported by the service (relation: <code>alternate</code>), and• a link to the feature collection that contains this feature (relation: <code>collection</code>). <p>All links SHALL include the <code>rel</code> and <code>type</code> link parameters.</p> |

NOTE

The representation of the links in the payload will depend on the encoding of the feature.

Example 12. Links

The links in a feature could be (in this example represented as link headers):

```
Link: <http://data.example.org/collections/buildings/items/123.json>; rel="self";  
type="application/geo+json"  
Link: <http://data.example.org/collections/buildings/items/123.html>;  
rel="alternate"; type="text/html"  
Link: <http://data.example.org/collections/buildings/items.json>;  
rel="collection"; type="application/geo+json"
```

Chapter 8. Requirements classes for encodings

8.1. Overview

This clause specifies four pre-defined requirements classes for encodings to be used in a WFS. These encodings are commonly used encodings for spatial data on the web:

- [HTML](#)
- [GeoJSON](#)
- [Geography Markup Language \(GML\), Simple Features Profile, Level 0](#)
- [Geography Markup Language \(GML\), Simple Features Profile, Level 2](#)

None of these encodings is mandatory and an implementation of the [Core](#) requirements class may also decide to use none of them, but to use another encoding instead.

The [Core](#) requirements class includes recommendations to support [HTML](#) and [GeoJSON](#) as encodings, where practical. [Clause 6 \(Overview\)](#) includes a discussion about recommended encodings.

8.2. Requirement Class "HTML"

Geographic information that is only accessible in formats like GeoJSON or GML has two issues:

- it is not discoverable using the most common mechanism for discovering information, that is the search engines of the Web;
- it can not be viewed directly in a browser - additional tools are required to view the data.

Therefore, sharing data on the Web should include publication in HTML. To be consistent with the Web, it should be done in a way that enables users and search engines to access all data.

This is discussed in detail in [Best Practice 2: Make your spatial data indexable by search engines \[SDWBP\]](#). This standard therefore [recommends to support HTML as an encoding](#).

| Requirements Class | |
|---|------------------------------|
| http://www.opengis.net/spec/wfs-1/3.0/req/html | |
| Target type | Web service |
| Dependency | WFS 3.0 Core |
| Dependency | HTML5 |
| Dependency | Schema.org |

| | |
|--------------------------|---|
| Requirement 33 | /req/html/definition Every 200-response of an operation of the server SHALL support the media type <code>text/html</code> . |
| Requirement 34 | /req/html/content Every 200-response of the server with the media type "text/html" SHALL be a HTML 5 document that includes the following information in the HTML body: <ul style="list-style-type: none"> • all information identified in the schemas of the Response Object in the HTML <code><body/></code>, and • all links in HTML <code><a/></code> elements in the HTML <code><body/></code>. |
| Recommendation 12 | /rec/html/schema-org A 200-response with the media type <code>text/html</code> , SHOULD include Schema.org annotations. |

8.3. Requirement Class "GeoJSON"

GeoJSON is a commonly used format that is simple to understand and well supported by tools and software libraries. Since most Web developers are comfortable with using a JSON-based format, supporting GeoJSON is recommended, if the feature data can be represented in GeoJSON for the intended use.

| Requirements Class | |
|---|---|
| http://www.opengis.net/spec/wfs-1/3.0/req/geojson | |
| Target type | Web service |
| Dependency | WFS 3.0 Core |
| Dependency | GeoJSON |
| Requirement 35 | /req/geojson/definition 200-responses of the server SHALL support the following media types: <ul style="list-style-type: none"> • <code>application/geo+json</code> for feature collections and features, and • <code>application/json</code> for all other resources. |

| | |
|-----------------------|--|
| Requirement 36 | <p><code>/req/geojson/content</code></p> <p>Every 200-response with the media type <code>application/geo+json</code> SHALL be</p> <ul style="list-style-type: none"> • a GeoJSON FeatureCollection Object for feature collections, and • a GeoJSON Feature Object for features. <p>The links specified in the requirements <code>/req/core/fc-links</code> and <code>/req/core/f-links</code> SHALL be added in a extension property (foreign member) with the name <code>links</code>.</p> <p>The schema of all responses with the media type <code>application/json</code> SHALL conform with the JSON Schema specified for the resource in the requirements class WFS 3.0 Core.</p> |
|-----------------------|--|

Templates for the definition of the schemas for the GeoJSON responses in OpenAPI definitions are available at [featureCollectionGeoJSON.yaml](#) and [featureGeoJSON.yaml](#). These are generic schemas that do not include any application schema information about specific feature types or their properties.

Example 13. A GeoJSON FeatureCollection Object response

In the example below, only the first and tenth feature is shown. Coordinates are not shown.

```

{
  "type" : "FeatureCollection",
  "links" : [ {
    "href" : "http://data.example.com/collections/buildings/items/?f=json",
    "rel" : "self",
    "type" : "application/geo+json",
    "title" : "this document"
  }, {
    "href" : "http://data.example.com/collections/buildings/items/?f=html",
    "rel" : "alternate",
    "type" : "text/html",
    "title" : "this document as HTML"
  }, {
    "href" :
"http://data.example.com/collections/buildings/items/?f=json&startIndex=10&limit=10",
    "rel" : "next",
    "type" : "application/geo+json",
    "title" : "next page"
  } ],
  "timestamp" : "2018-04-03T14:52:23Z",
  "numberMatched" : 123,
  "numberReturned" : 10,
  "features" : [ {
    "type" : "Feature",
    "id" : "123",
    "geometry" : {
      "type" : "Polygon",
      "coordinates" : [ ... ]
    },
    "properties" : {
      "function" : "residential",
      "floors" : "2",
      "lastUpdate" : "2015-08-01T12:34:56Z"
    }
  }, { ...
  }, {
    "type" : "Feature",
    "id" : "132",
    "geometry" : {
      "type" : "Polygon",
      "coordinates" : [ ... ]
    },
    "properties" : {
      "function" : "public use",
      "floors" : "10",
      "lastUpdate" : "2013-12-03T10:15:37Z"
    }
  } ]
}

```

In the example below, coordinates are not shown.

```
{
  "type" : "Feature",
  "links" : [ {
    "href" : "http://data.example.com/collections/buildings/items/123/?f=json",
    "rel" : "self",
    "type" : "application/geo+json",
    "title" : "this document"
  }, {
    "href" : "http://data.example.com/collections/buildings/items/123/?f=html",
    "rel" : "alternate",
    "type" : "text/html",
    "title" : "this document as HTML"
  }, {
    "href" : "http://data.example.com/collections/buildings/items",
    "rel" : "collection",
    "type" : "application/geo+json",
    "title" : "the collection document"
  } ],
  "id" : "123",
  "geometry" : {
    "type" : "Polygon",
    "coordinates" : [ ... ]
  },
  "properties" : {
    "function" : "residential",
    "floors" : "2",
    "lastUpdate" : "2015-08-01T12:34:56Z"
  }
}
```

8.4. Requirement Class "Geography Markup Language (GML), Simple Features Profile, Level 0"

In addition to HTML and GeoJSON, a significant amount of feature data is available in XML-based formats, notably GML. Therefore, this standard specifies requirement classes for GML. The Simple Features Profile, Level 0, is the simplest profile of GML and is typically supported by tools. It is restricted to data with 2D geometries supported by most tools. In addition, the profile is limited to features that can be stored in a tabular data structure.

| Requirements Class | |
|---|-------------|
| http://www.opengis.net/spec/wfs-1/3.0/req/gmlsf0 | |
| Target type | Web service |

| | |
|------------|---|
| Dependency | WFS 3.0 Core |
| Dependency | Geography Markup Language (GML), Simple Features Profile, Level 0 |

| | |
|-----------------------|--|
| Requirement 37 | <p>/req/gmlsf0/definition</p> <p>200-responses of the server SHALL support the following media types:</p> <ul style="list-style-type: none"> • application/gml+xml; version=3.2; profile=http://www.opengis.net/def/profile/ogc/2.0/gml-sf0 for feature collections and features, • application/xml for all other resources. |
|-----------------------|--|

| | |
|-----------------------|--|
| Requirement 38 | <p>/req/gmlsf0/content</p> <p>Table 2 specifies the XML document root element that the server SHALL return in a 200-response for each resource.</p> <p>Every feature in a feature collection or feature resource SHALL conform to the GML Simple Features Profile, Level 0 and be substitutable for gml:AbstractFeature.</p> <p>The schema of all responses with a root element in the wfs namespace SHALL validate against the WFS 3.0 Core XML Schema.</p> |
|-----------------------|--|

Table 2. Media types and XML elements for each resource

| Resource | Path | XML root element |
|------------------------------|---|---|
| Landing page | / | wfs:LandingPage |
| Conformance classes | /conformance | wfs:ConformsTo |
| Feature collections metadata | /collections | wfs:Collections |
| Feature collection metadata | /collections/{name} | wfs:Collections , with just one entry for the collection name |
| Feature collection | /collections/{name}/items | wfs:FeatureCollection |
| Feature | /collections/{name}/items/{fid} | substitutable for gml:AbstractFeature |

The namespace prefixes used above and in the WFS 3.0 Core XML Schema are:

- [wfs](#): <http://www.opengis.net/wfs/3.0>
- [gml](#): <http://www.opengis.net/gml/3.2>
- [atom](#): <http://www.w3.org/2005/Atom>
- [xlink](#): <http://www.w3.org/1999/xlink>

The API definition resource at path `/api` is not included in [Table 2](#) and as this requirements class does not prescribe any API definition approach.

The mapping of the content from the responses specified in the [Core requirements class](#) to the XML is straightforward. All links are encoded using `atom:link` elements except in GML features where simple Xlinks are used.

[Annex C](#) has example responses in XML.

NOTE

The `wfs:FeatureCollection` element deliberately goes beyond the permitted content specified in the [GML Simple Features Profile](#), section 8.4.2. This is necessary to support the hypermedia controls and other relevant content for a Web Feature Service API.

8.5. Requirement Class "Geography Markup Language (GML), Simple Features Profile, Level 2"

The difference between this requirement class and the [Level 0](#) requirements class is that non-spatial feature properties are not restricted to atomic values (strings, numbers, etc.).

| Requirements Class | |
|---|---|
| http://www.opengis.net/spec/wfs-1/3.0/req/gmlsf2 | |
| Target type | Web service |
| Dependency | WFS 3.0 Core |
| Dependency | Geography Markup Language (GML), Simple Features Profile, Level 2 |

| | |
|----------------|---|
| Requirement 39 | <div>/req/gmlsf2/definition</div> <div>200-responses of the server SHALL support the following media types:</div> <div><ul style="list-style-type: none"><code>application/gml+xml; version=3.2; profile=http://www.opengis.net/def/profile/ogc/2.0/gml-sf2</code> for feature collections and features,<code>application/xml</code> for all other resources.</div> |
|----------------|---|

| | |
|-----------------------|--|
| Requirement 40 | <div data-bbox="435 107 702 143" data-label="Text"> <p>/req/gmlsf2/content</p> </div> <div data-bbox="435 181 1327 259" data-label="Text"> <p>The requirement /req/gmlsf0/content applies, too, with the following changes:</p> </div> <div data-bbox="459 297 1327 595" data-label="List-Group"> <ul style="list-style-type: none"> • All references to media type <code>application/gml+xml; version=3.2; profile=http://www.opengis.net/def/profile/ogc/2.0/gml-sf0</code> are replaced by <code>application/gml+xml; version=3.2; profile=http://www.opengis.net/def/profile/ogc/2.0/gml-sf2</code>. • All references to "GML Simple Features Profile, Level 0" are replaced by "GML Simple Features Profile, Level 2". </div> |
|-----------------------|--|

Chapter 9. Requirements class "OpenAPI 3.0"

9.1. Basic requirements

The API of servers conforming to this requirements class are defined by an [OpenAPI Document](#).

| Requirements Class | |
|---|---|
| http://www.opengis.net/spec/wfs-1/3.0/req/oas30 | |
| Target type | Web service |
| Dependency | WFS 3.0 Core |
| Dependency | OpenAPI Specification 3.0.1 |

| | |
|-----------------------|--|
| Requirement 41 | <p>/req/oas30/oas-definition-1</p> <p>The service SHALL provide an OpenAPI definition in JSON and HTML at the path <code>/api</code> using the media type <code>application/openapi+json;version=3.0</code>.</p> |
|-----------------------|--|

| | |
|-----------------------|--|
| Requirement 42 | <p>/req/oas30/oas-definition-2</p> <p>The JSON representation SHALL conform to the OpenAPI Specification, version 3.0.</p> |
|-----------------------|--|

| | |
|----------------|---|
| CAUTION | <p>Related to ISSUE 90</p> <p>If we have a rigid path pattern there seems to be no need to add requirements for fixed operationId values. However, if the path pattern would be flexible, maybe we should require specific operationIds for selected resources?</p> |
|----------------|---|

Two example OpenAPI documents are included in [Annex B](#).

| | |
|-----------------------|--|
| Requirement 43 | <p>/req/oas30/oas-impl</p> <p>The server SHALL implement all capabilities specified in the OpenAPI definition.</p> |
|-----------------------|--|

| | |
|----------------|--|
| CAUTION | <p>ISSUE 46</p> <p>Currently, no tool is known to validate that a server implements the API specified in its OpenAPI definition.</p> |
|----------------|--|

9.2. Complete definition

| | |
|-----------------------|---|
| Requirement 44 | <p>/req/oas30/completeness</p> <p>The OpenAPI definition SHALL specify for each operation all HTTP Status Codes and Response Objects that the server uses in responses.</p> <p>This includes the successful execution of an operation as well as all error situations that originate from the server.</p> |
|-----------------------|---|

Note that servers that, for example, are access-controlled (see [Security](#)), that support web cache validation, CORS or that use HTTP redirection will make use of additional HTTP status codes beyond regular codes like **200** for successful GET requests and **400**, **404** or **500** for error situations.

Clients have to be prepared to receive responses not documented in the OpenAPI definition. For example, additional errors may occur in the transport layer outside of the server.

9.3. Exceptions

| | |
|-----------------------|---|
| Requirement 45 | <p>/req/oas30/exceptions-codes</p> <p>For error situations that originate from the server, the API definition SHALL cover all applicable HTTP Status Codes.</p> |
|-----------------------|---|

CAUTION

[ISSUE 45](#)

Listing of all applicable HTTP Status Codes

CAUTION

[ISSUE 105](#)

WFS 2.0 defined exception codes and mapped them to HTTP status codes. Should WFS 3.0 do this, too, or should we simply require that http status codes are used correctly?

```
description: An error occurred.
content:
  application/json:
    schema:
      $ref:
        https://raw.githubusercontent.com/opengeospatial/WFS_FES/master/core/openapi/schemas/exception.yaml
  text/html:
    schema:
      type: string
```

9.4. Security

| | |
|-----------------------|--|
| Requirement 46 | <code>/req/oas30/security</code> For cases, where the operations of the server are access-controlled, the security scheme(s) SHALL be documented in the OpenAPI definition. |
|-----------------------|--|

The OpenAPI specification currently supports the following [security schemes](#):

- HTTP authentication,
- an API key (either as a header or as a query parameter),
- OAuth2's common flows (implicit, password, application and access code) as defined in RFC6749, and
- OpenID Connect Discovery.

| | |
|----------------|---|
| CAUTION | ISSUE 41 How does a client determine which security protocols/standards/etc. a server supports? |
|----------------|---|

9.5. Features

| | |
|--------------------------|--|
| Recommendation 13 | <code>/rec/oas30/f-key-properties</code> The schema for the Response Objects of the HTTP GET operation for features SHOULD include key feature properties of the features in that feature collection. This is in particular helpful, if filter parameters are defined for the collection (see recommendation /rec/core/fc-filters). |
|--------------------------|--|

Chapter 10. Media Types

JSON media types that would typically be used in a WFS that supports JSON are

- `application/geo+json` for feature collections and features, and
- `application/json` for all other resources.

XML media types that would typically occur in a WFS that supports XML are

- `application/gml+xml;version=3.2` for any GML 3.2 feature collections and features,
- `application/gml+xml;version=3.2;profile=http://www.opengis.net/def/profile/ogc/2.0/gml-sf0` for GML 3.2 feature collections and features conforming to the GML Simple Feature Level 0 profile,
- `application/gml+xml;version=3.2;profile=http://www.opengis.net/def/profile/ogc/2.0/gml-sf2` for GML 3.2 feature collections and features conforming to the GML Simple Feature Level 2 profile, and
- `application/xml` for all other resources.

The typical HTML media type for all "web pages" in a WFS would be `text/html`.

The media type for an OpenAPI definition in JSON is `application/openapi+json;version=3.0`.

NOTE

The media type for the OpenAPI definition has not yet been registered with IANA. See <https://github.com/OAI/OpenAPI-Specification/issues/110>.

Annex A: Conformance Class Abstract Test Suite (Normative)

NOTE

TODO

CAUTION

[ISSUE 46](#)

OpenAPI Validation

Annex B: OpenAPI definition example (Informative)

B.1. Overview

This annex includes two complete examples of an OpenAPI definition for a WFS.

The first example ([Generic OpenAPI definition](#)) is a generic example that uses path parameters to describe all feature collections and all features. This OpenAPI definition does not provide any details on the collections or the feature content. This information is only available from the feature collection metadata.

The second example ([OpenAPI definition with details on the collection and its features](#)) does not use a path parameter for the collections and explicitly provides information about the feature collection 'buildings' (paths `/collections/buildings` etc.), the schema of the building features (schema `buildingGeoJSON`) and a filter parameter for building features (parameter `function`).

B.2. Generic OpenAPI definition

```
openapi: 3.0.1
info:
  title: A sample API conforming to the OGC Web Feature Service standard
  version: 0.0.1
  description: >-
    This is a sample OpenAPI definition that conforms to the OGC Web Feature
    Service specification (conformance classes: "Core", "GeoJSON", "HTML" and
    "OpenAPI 3.0").
  contact:
    name: Acme Corporation
    email: info@example.org
    url: 'http://example.org/'
  license:
    name: CC-BY 4.0 license
    url: 'https://creativecommons.org/licenses/by/4.0/'
servers:
  - url: 'https://dev.example.org/'
    description: Development server
  - url: 'https://data.example.org/'
    description: Production server
paths:
  '/':
    get:
      summary: landing page of this API
      description: >-
        The landing page provides links to the API definition, the Conformance
        statements and the metadata about the feature data in this dataset.
      operationId: getLandingPage
```

```

tags:
  - Capabilities
responses:
  '200':
    description: links to the API capabilities
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/root'
      text/html:
        schema:
          type: string
'/conformance':
  get:
    summary: information about standards that this API conforms to
    description: >-
      list all requirements classes specified in a standard (e.g., WFS 3.0
      Part 1: Core) that the server conforms to
    operationId: getRequirementsClasses
    tags:
      - Capabilities
    responses:
      '200':
        description: the URIs of all requirements classes supported by the server
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/req-classes'
      default:
        description: An error occurred.
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/exception'
'/collections':
  get:
    summary: describe the feature collections in the dataset
    operationId: describeCollections
    tags:
      - Capabilities
    responses:
      '200':
        description: Metadata about the feature collections shared by this API.
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/content'
          text/html:
            schema:
              type: string
      default:

```

```

    description: An error occurred.
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/exception'
      text/html:
        schema:
          type: string
'/collections/{collectionId}':
  get:
    summary: 'describe the {collectionId} feature collection'
    operationId: describeCollection
    tags:
      - Capabilities
    parameters:
      - $ref: '#/components/parameters/collectionId'
    responses:
      '200':
        description: 'Metadata about the {collectionId} collection shared by this
API.'
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/collectionInfo'
          text/html:
            schema:
              type: string
    default:
      description: An error occurred.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/exception'
        text/html:
          schema:
            type: string
'/collections/{collectionId}/items':
  get:
    summary: 'retrieve features of feature collection {collectionId}'
    description: >-
      Every feature in a dataset belongs to a collection. A dataset may
      consist of multiple feature collections. A feature collection is often a
      collection of features of a similar type, based on a common schema.\

      Use content negotiation to request HTML or GeoJSON.
    operationId: getFeatures
    tags:
      - Features
    parameters:
      - $ref: '#/components/parameters/collectionId'
      - $ref: '#/components/parameters/limit'

```

```

- $ref: '#/components/parameters/bbox'
- $ref: '#/components/parameters/time'
responses:
  '200':
    description: >-
      Information about the feature collection plus the first features
      matching the selection parameters.
    content:
      application/geo+json:
        schema:
          $ref: '#/components/schemas/featureCollectionGeoJSON'
      text/html:
        schema:
          type: string
    default:
      description: An error occurred.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/exception'
        text/html:
          schema:
            type: string
'/collections/{collectionId}/items/{featureId}':
  get:
    summary: retrieve a feature; use content negotiation to request HTML or GeoJSON
    operationId: getFeature
    tags:
      - Features
    parameters:
      - $ref: '#/components/parameters/collectionId'
      - $ref: '#/components/parameters/featureId'
    responses:
      '200':
        description: A feature.
        content:
          application/geo+json:
            schema:
              $ref: '#/components/schemas/featureGeoJSON'
          text/html:
            schema:
              type: string
        default:
          description: An error occurred.
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/exception'
            text/html:
              schema:
                type: string

```


components:

parameters:

limit:

name: limit

in: query

description: |

The optional limit parameter limits the number of items that are presented in the response document.

Only items are counted that are on the first level of the collection in the response document. Nested objects contained within the explicitly requested items shall not be counted.

* Minimum = 1

* Maximum = 10000

* Default = 10

required: false

schema:

type: integer

minimum: 1

maximum: 10000

default: 10

style: form

explode: false

bbox:

name: bbox

in: query

description: >

Only features that have a geometry that intersects the bounding box are selected.

The bounding box is provided as four or six numbers, depending on whether the coordinate reference system includes a vertical axis (elevation or depth):

* Lower left corner, coordinate axis 1

* Lower left corner, coordinate axis 2

* Lower left corner, coordinate axis 3 (optional)

* Upper right corner, coordinate axis 1

* Upper right corner, coordinate axis 2

* Upper right corner, coordinate axis 3 (optional)

The coordinate reference system of the values is WGS84 longitude/latitude (<http://www.opengis.net/def/crs/OGC/1.3/CRS84>) unless a different coordinate reference system is specified in the parameter 'bbox-crs'.

For WGS84 longitude/latitude the values are in most cases the sequence of minimum longitude, minimum latitude, maximum longitude and maximum latitude. However, in cases where the box spans the antimeridian the first value (west-most box edge) is larger than the third value (east-most box edge).

If a feature has multiple spatial geometry properties, it is the decision of the

server whether only a single spatial geometry property is used to determine the extent or all relevant geometries.

required: false

schema:

type: array

minItems: 4

maxItems: 6

items:

type: number

style: form

explode: false

time:

name: time

in: query

description: >-

Either a date-time or a period string that adheres to RFC 3339. Examples:

* A date-time: "2018-02-12T23:20:50Z"

* A period: "2018-02-12T00:00:00Z/2018-03-18T12:31:12Z" or "2018-02-12T00:00:00Z/P1M6DT12H31M12S"

Only features that have a temporal property that intersects the value of `time` are selected.

If a feature has multiple temporal properties, it is the decision of the server whether only a single temporal property is used to determine the extent or all relevant temporal properties.

required: false

schema:

type: string

style: form

explode: false

collectionId:

name: collectionId

in: path

required: true

description: Identifier (name) of a specific collection

schema:

type: string

featureId:

name: featureId

in: path

description: Local identifier of a specific feature

required: true

schema:

type: string

schemas:

exception:

type: object

required:

- code

```

properties:
  code:
    type: string
  description:
    type: string
root:
  type: object
  required:
    - links
  properties:
    links:
      type: array
      items:
        $ref: '#/components/schemas/link'
      example:
        - href: 'http://data.example.org/'
          rel: self
          type: application/json
          title: this document
        - href: 'http://data.example.org/api'
          rel: service
          type: application/openapi+json;version=3.0
          title: the API definition
        - href: 'http://data.example.org/conformance'
          rel: conformance
          type: application/json
          title: WFS 3.0 conformance classes implemented by this server
        - href: 'http://data.example.org/collections'
          rel: data
          type: application/json
          title: Metadata about the feature collections
req-classes:
  type: object
  required:
    - conformsTo
  properties:
    conformsTo:
      type: array
      items:
        type: string
      example:
        - 'http://www.opengis.net/spec/wfs-1/3.0/req/core'
        - 'http://www.opengis.net/spec/wfs-1/3.0/req/oas30'
        - 'http://www.opengis.net/spec/wfs-1/3.0/req/html'
        - 'http://www.opengis.net/spec/wfs-1/3.0/req/geojson'
link:
  type: object
  required:
    - href
  properties:
    href:

```

```

    type: string
  rel:
    type: string
    example: prev
  type:
    type: string
    example: application/geo+json
  hreflang:
    type: string
    example: en
content:
  type: object
  required:
    - links
    - collections
  properties:
    links:
      type: array
      items:
        $ref: '#/components/schemas/link'
      example:
        - href: 'http://data.example.org/collections.json'
          rel: self
          type: application/json
          title: this document
        - href: 'http://data.example.org/collections.html'
          rel: alternate
          type: text/html
          title: this document as HTML
        - href: 'http://schemas.example.org/1.0/foobar.xsd'
          rel: describedBy
          type: application/xml
          title: XML schema for Acme Corporation data
    collections:
      type: array
      items:
        $ref: '#/components/schemas/collectionInfo'
collectionInfo:
  type: object
  required:
    - name
    - links
  properties:
    name:
      description: 'identifier of the collection used, for example, in URIs'
      type: string
      example: buildings
    title:
      description: 'human readable title of the collection'
      type: string
      example: Buildings

```

```

description:
  description: 'a description of the features in the collection'
  type: string
  example: Buildings in the city of Bonn.
links:
  type: array
  items:
    $ref: '#/components/schemas/link'
  example:
    - href: 'http://data.example.org/collections/buildings/items'
      rel: item
      type: application/geo+json
      title: Buildings
    - href: 'http://example.org/concepts/building.html'
      rel: describedBy
      type: text/html
      title: Feature catalogue for buildings
extent:
  $ref: '#/components/schemas/extent'
crs:
  description: >-
    The coordinate reference systems in which geometries
    may be retrieved. Coordinate reference systems are identified
    by a URI. The first coordinate reference system is the
    coordinate reference system that is used by default. This
    is always "http://www.opengis.net/def/crs/OGC/1.3/CRS84", i.e.
    WGS84 longitude/latitude.
  type: array
  items:
    type: string
  default:
    - 'http://www.opengis.net/def/crs/OGC/1.3/CRS84'
extent:
  type: object
  properties:
    crs:
      description: >-
        Coordinate reference system of the coordinates in the spatial extent
        (property `spatial`).
        In the Core, only WGS84 longitude/latitude is supported. Extensions may
        support additional
        coordinate reference systems.
      type: string
      enum:
        - 'http://www.opengis.net/def/crs/OGC/1.3/CRS84'
      default: 'http://www.opengis.net/def/crs/OGC/1.3/CRS84'
    spatial:
      description: >-
        West, north, east, south edges of the spatial extent. The minimum and
        maximum values apply to the coordinate reference system WGS84
        longitude/latitude

```

that is supported in the Core. If, for example, a projected coordinate reference

system is used, the minimum and maximum values need to be adjusted.

type: array

minItems: 4

maxItems: 6

items:

type: number

example:

- -180

- -90

- 180

- 90

trs:

description: >-

Temporal reference system of the coordinates in the temporal extent (property 'temporal').

In the Core, only the Gregorian calendar is supported. Extensions may support additional

temporal reference systems.

type: string

enum:

- 'http://www.opengis.net/def/uom/ISO-8601/0/Gregorian'

default: 'http://www.opengis.net/def/uom/ISO-8601/0/Gregorian'

temporal:

description: Begin and end times of the temporal extent.

type: array

minItems: 2

maxItems: 2

items:

type: string

format: dateTime

example:

- '2011-11-11T12:22:11Z'

- '2012-11-24T12:32:43Z'

featureCollectionGeoJSON:

type: object

required:

- type

- features

properties:

type:

type: string

enum:

- FeatureCollection

features:

type: array

items:

\$ref: '#/components/schemas/featureGeoJSON'

links:

type: array

```

    items:
      $ref: '#/components/schemas/link'
  timeStamp:
    type: string
    format: dateTime
  numberMatched:
    type: integer
    minimum: 0
  numberReturned:
    type: integer
    minimum: 0
  featureGeoJSON:
    type: object
    required:
      - type
      - geometry
      - properties
    properties:
      type:
        type: string
        enum:
          - Feature
      geometry:
        $ref: '#/components/schemas/geometryGeoJSON'
      properties:
        type: object
        nullable: true
      id:
        oneOf:
          - type: string
          - type: integer
  geometryGeoJSON:
    type: object
    required:
      - type
    properties:
      type:
        type: string
        enum:
          - Point
          - MultiPoint
          - LineString
          - MultiLineString
          - Polygon
          - MultiPolygon
          - GeometryCollection
  tags:
    - name: Capabilities
      description: >-
        Essential characteristics of this API including information about the
        data.

```

```
- name: Features
  description: >-
    Access to data (features).
```

B.3. OpenAPI definition with details on the collection and its features

```
openapi: 3.0.1
info:
  title: A sample API conforming to the OGC Web Feature Service standard
  version: 0.0.1
  description: >-
    This is a sample OpenAPI definition that conforms to the OGC Web Feature
    Service specification (conformance classes: "Core", "GeoJSON", "HTML" and
    "OpenAPI 3.0").\

    The API provides access to a single feature collection: buildings. The
    buildings have a few (optional) properties: the polygon geometry of the
    building footprint, a name, the function of the building (residential,
    commercial or public use), the floor count and the timestamp of the
    last update of the building feature in the dataset.

  contact:
    name: Acme Corporation
    email: info@example.org
    url: 'http://example.org/'
  license:
    name: CC-BY 4.0 license
    url: 'https://creativecommons.org/licenses/by/4.0/'
servers:
- url: 'https://dev.example.org/'
  description: Development server
- url: 'https://data.example.org/'
  description: Production server
paths:
  '/':
    get:
      summary: landing page of this API
      description: >-
        The landing page provides links to the API definition, the Conformance
        statements and the metadata about the feature data in this dataset.
      operationId: getLandingPage
      tags:
        - Capabilities
      responses:
        '200':
          description: links to the API capabilities
          content:
            application/json:
```



```

        schema:
          $ref: '#/components/schemas/root'
      text/html:
        schema:
          type: string
'/conformance':
  get:
    summary: information about standards that this API conforms to
    description: >-
      list all requirements classes specified in a standard (e.g., WFS 3.0
      Part 1: Core) that the server conforms to
    operationId: getRequirementsClasses
    tags:
      - Capabilities
    responses:
      '200':
        description: the URIs of all requirements classes supported by the server
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/req-classes'
      default:
        description: An error occurred.
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/exception'
'/collections':
  get:
    summary: describe the feature collections in the dataset
    operationId: describeCollections
    tags:
      - Capabilities
    responses:
      '200':
        description: Metadata about the feature collections shared by this API.
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/content'
          text/html:
            schema:
              type: string
      default:
        description: An error occurred.
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/exception'
          text/html:
            schema:

```

```

        type: string
'/collections/buildings':
  get:
    summary: 'describe the buildings feature collection'
    operationId: describeCollection
    tags:
      - Capabilities
    responses:
      '200':
        description: 'Metadata about the buildings collection shared by this API.'
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/collectionInfo'
          text/html:
            schema:
              type: string
        default:
          description: An error occurred.
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/exception'
            text/html:
              schema:
                type: string
'/collections/buildings/items':
  get:
    summary: 'retrieve features of buildings feature collection'
    description: >-
      Every feature in a dataset belongs to a collection. A dataset may
      consist of multiple feature collections. A feature collection is often a
      collection of features of a similar type, based on a common schema.\

      Use content negotiation to request HTML or GeoJSON.
    operationId: getFeatures
    tags:
      - Features
    parameters:
      - $ref: '#/components/parameters/limit'
      - $ref: '#/components/parameters/bbox'
      - $ref: '#/components/parameters/time'
      - $ref: '#/components/parameters/function'
    responses:
      '200':
        description: >-
          Information about the feature collection plus the first features
          matching the selection parameters.
        content:
          application/geo+json:
            schema:

```

```

        $ref: '#/components/schemas/featureCollectionGeoJSON'
      text/html:
        schema:
          type: string
    default:
      description: An error occurred.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/exception'
        text/html:
          schema:
            type: string
'/collections/buildings/items.json':
  get:
    summary: 'retrieve features of buildings feature collection in GeoJSON'
    description: >-
      Every feature in a dataset belongs to a collection. A dataset may
      consist of multiple feature collections. A feature collection is often a
      collection of features of a similar type, based on a common schema.\

      This operation returns GeoJSON.
    operationId: getFeaturesJSON
    tags:
      - Features
    parameters:
      - $ref: '#/components/parameters/limit'
      - $ref: '#/components/parameters/bbox'
      - $ref: '#/components/parameters/time'
      - $ref: '#/components/parameters/function'
    responses:
      '200':
        description: >-
          Information about the feature collection plus the first features
          matching the selection parameters.
        content:
          application/geo+json:
            schema:
              $ref: '#/components/schemas/featureCollectionGeoJSON'
        default:
          description: An error occurred.
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/exception'
'/collections/buildings/items/{featureId}':
  get:
    summary: retrieve a feature; use content negotiation to request HTML or GeoJSON
    operationId: getFeature
    tags:
      - Features

```

```

parameters:
- $ref: '#/components/parameters/featureId'
responses:
  '200':
    description: A feature.
    content:
      application/geo+json:
        schema:
          $ref: '#/components/schemas/buildingGeoJSON'
      text/html:
        schema:
          type: string
    default:
      description: An error occurred.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/exception'
        text/html:
          schema:
            type: string
'/collections/buildings/items/{featureId}.json':
  get:
    summary: retrieve a feature in GeoJSON
    operationId: getFeatureJSON
    tags:
      - Features
    parameters:
      - $ref: '#/components/parameters/featureId'
    responses:
      '200':
        description: A feature.
        content:
          application/geo+json:
            schema:
              $ref: '#/components/schemas/buildingGeoJSON'
        default:
          description: An error occurred.
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/exception'
components:
  parameters:
    limit:
      name: limit
      in: query
      description: |
        The optional limit parameter limits the number of items that are
        presented in the response document.

```

Only items are counted that are on the first level of the collection in the response document. Nested objects contained within the explicitly requested items shall not be counted.

- * Minimum = 1
- * Maximum = 10000
- * Default = 10

required: false

schema:

- type: integer
- minimum: 1
- maximum: 10000
- default: 10

style: form

explode: false

bbox:

name: bbox

in: query

description: >

Only features that have a geometry that intersects the bounding box are selected.

The bounding box is provided as four or six numbers, depending on whether the coordinate reference system includes a vertical axis (elevation or depth):

- * Lower left corner, coordinate axis 1
- * Lower left corner, coordinate axis 2
- * Lower left corner, coordinate axis 3 (optional)
- * Upper right corner, coordinate axis 1
- * Upper right corner, coordinate axis 2
- * Upper right corner, coordinate axis 3 (optional)

The coordinate reference system of the values is WGS84 longitude/latitude (<http://www.opengis.net/def/crs/OGC/1.3/CRS84>) unless a different coordinate reference system is specified in the parameter `bbox-crs`.

For WGS84 longitude/latitude the values are in most cases the sequence of minimum longitude, minimum latitude, maximum longitude and maximum latitude. However, in cases where the box spans the antimeridian the first value (west-most box edge) is larger than the third value (east-most box edge).

If a feature has multiple spatial geometry properties, it is the decision of the server whether only a single spatial geometry property is used to determine the extent or all relevant geometries.

required: false

schema:

- type: array
- minItems: 4
- maxItems: 6
- items:
 - type: number

```

    style: form
    explode: false
time:
  name: time
  in: query
  description: >-
    Either a date-time or a period string that adheres to RFC 3339. Examples:

    * A date-time: "2018-02-12T23:20:50Z"
    * A period: "2018-02-12T00:00:00Z/2018-03-18T12:31:12Z" or "2018-02-
12T00:00:00Z/P1M6DT12H31M12S"

    Only features that have a temporal property that intersects the value of
    `time` are selected.

    If a feature has multiple temporal properties, it is the decision of the
    server whether only a single temporal property is used to determine
    the extent or all relevant temporal properties.
  required: false
  schema:
    type: string
  style: form
  explode: false
function:
  name: function
  in: query
  description: >-
    Only return buildings of a particular function.\

    Default = return all buildings.
  required: false
  schema:
    type: string
    enum:
      - residential
      - commercial
      - public use
  style: form
  explode: false
  example: 'function=public+use'
featureId:
  name: featureId
  in: path
  description: Local identifier of a specific feature
  required: true
  schema:
    type: string
schemas:
  exception:
    type: object
    required:

```

```

    - code
  properties:
    code:
      type: string
    description:
      type: string
  root:
    type: object
    required:
      - links
  properties:
    links:
      type: array
      items:
        $ref: '#/components/schemas/link'
  example:
    - href: 'http://data.example.org/'
      rel: self
      type: application/json
      title: this document
    - href: 'http://data.example.org/api'
      rel: service
      type: application/openapi+json;version=3.0
      title: the API definition
    - href: 'http://data.example.org/conformance'
      rel: conformance
      type: application/json
      title: WFS 3.0 conformance classes implemented by this server
    - href: 'http://data.example.org/collections'
      rel: data
      type: application/json
      title: Metadata about the feature collections
  req-classes:
    type: object
    required:
      - conformsTo
  properties:
    conformsTo:
      type: array
      items:
        type: string
    example:
      - 'http://www.opengis.net/spec/wfs-1/3.0/req/core'
      - 'http://www.opengis.net/spec/wfs-1/3.0/req/oas30'
      - 'http://www.opengis.net/spec/wfs-1/3.0/req/html'
      - 'http://www.opengis.net/spec/wfs-1/3.0/req/geojson'
  link:
    type: object
    required:
      - href
  properties:

```

```

    href:
      type: string
    rel:
      type: string
      example: prev
    type:
      type: string
      example: application/geo+json
    hreflang:
      type: string
      example: en
  content:
    type: object
    required:
      - links
      - collections
    properties:
      links:
        type: array
        items:
          $ref: '#/components/schemas/link'
        example:
          - href: 'http://data.example.org/collections.json'
            rel: self
            type: application/json
            title: this document
          - href: 'http://data.example.org/collections.html'
            rel: alternate
            type: text/html
            title: this document as HTML
          - href: 'http://schemas.example.org/1.0/foobar.xsd'
            rel: describedBy
            type: application/xml
            title: XML schema for Acme Corporation data
      collections:
        type: array
        items:
          $ref: '#/components/schemas/collectionInfo'
    collectionInfo:
      type: object
      required:
        - name
        - links
      properties:
        name:
          description: 'identifier of the collection used, for example, in URIs'
          type: string
          example: buildings
        title:
          description: 'human readable title of the collection'
          type: string

```



```

    example: Buildings
  description:
    description: 'a description of the features in the collection'
    type: string
    example: Buildings in the city of Bonn.
  links:
    type: array
    items:
      $ref: '#/components/schemas/link'
    example:
      - href: 'http://data.example.org/collections/buildings/items'
        rel: item
        type: application/geo+json
        title: Buildings
      - href: 'http://example.org/concepts/building.html'
        rel: describedBy
        type: text/html
        title: Feature catalogue for buildings
  extent:
    $ref: '#/components/schemas/extent'
  crs:
    description: >-
      The coordinate reference systems in which geometries
      may be retrieved. Coordinate reference systems are identified
      by a URI. The first coordinate reference system is the
      coordinate reference system that is used by default. This
      is always "http://www.opengis.net/def/crs/OGC/1.3/CRS84", i.e.
      WGS84 longitude/latitude.
    type: array
    items:
      type: string
    default:
      - 'http://www.opengis.net/def/crs/OGC/1.3/CRS84'
  extent:
    type: object
  properties:
    crs:
      description: >-
        Coordinate reference system of the coordinates in the spatial extent
        (property `spatial`).
        In the Core, only WGS84 longitude/latitude is supported. Extensions may
        support additional
        coordinate reference systems.
      type: string
      enum:
        - 'http://www.opengis.net/def/crs/OGC/1.3/CRS84'
      default: 'http://www.opengis.net/def/crs/OGC/1.3/CRS84'
  spatial:
    description: >-
      West, north, east, south edges of the spatial extent. The minimum and
      maximum values apply to the coordinate reference system WGS84

```

```

longitude/latitude
    that is supported in the Core. If, for example, a projected coordinate
reference
    system is used, the minimum and maximum values need to be adjusted.
type: array
minItems: 4
maxItems: 6
items:
    type: number
example:
    - -180
    - -90
    - 180
    - 90
trs:
    description: >-
        Temporal reference system of the coordinates in the temporal extent
(property `temporal`).
        In the Core, only the Gregorian calendar is supported. Extensions may
support additional
        temporal reference systems.
type: string
enum:
    - 'http://www.opengis.net/def/uom/ISO-8601/0/Gregorian'
default: 'http://www.opengis.net/def/uom/ISO-8601/0/Gregorian'
temporal:
    description: Begin and end times of the temporal extent.
type: array
minItems: 2
maxItems: 2
items:
    type: string
    format: dateTime
example:
    - '2011-11-11T12:22:11Z'
    - '2012-11-24T12:32:43Z'
featureCollectionGeoJSON:
type: object
required:
    - type
    - features
properties:
type:
type: string
enum:
    - FeatureCollection
features:
type: array
items:
    $ref: '#/components/schemas/featureGeoJSON'
links:

```

```

    type: array
    items:
      $ref: '#/components/schemas/link'
  timeStamp:
    type: string
    format: dateTime
  numberMatched:
    type: integer
    minimum: 0
  numberReturned:
    type: integer
    minimum: 0
  featureGeoJSON:
    type: object
    required:
      - type
      - geometry
      - properties
    properties:
      type:
        type: string
        enum:
          - Feature
      geometry:
        $ref: '#/components/schemas/geometryGeoJSON'
      properties:
        type: object
        nullable: true
      id:
        oneOf:
          - type: string
          - type: integer
  geometryGeoJSON:
    type: object
    required:
      - type
    properties:
      type:
        type: string
        enum:
          - Point
          - MultiPoint
          - LineString
          - MultiLineString
          - Polygon
          - MultiPolygon
          - GeometryCollection
  buildingGeoJSON:
    type: object
    required:
      - type

```

```

    - geometry
    - properties
  properties:
    type:
      type: string
      enum:
        - Feature
    geometry:
      $ref: '#/components/schemas/geometryGeoJSON'
    properties:
      type: object
      nullable: true
      properties:
        name:
          type: string
        function:
          type: string
          enum:
            - residential
            - commercial
            - public use
        floors:
          type: integer
          minimum: 1
        lastUpdate:
          type: string
          format: dateTime
  tags:
    - name: Capabilities
      description: >-
        Essential characteristics of this API including information about the
        data.
    - name: Features
      description: >-
        Access to data (features).
```

Annex C: XML examples (Informative)

C.1. Overview

This annex includes examples of XML/GML responses to illustrate how the OpenAPI fragments used to define the requirements for the [Core requirements class](#) are expressed in XML using the [WFS 3.0 Core XML Schema](#).

C.2. A Landing page

```
<?xml version="1.0" encoding="UTF-8"?>
<LandingPage
  service="WFS"
  version="3.0.0"
  xmlns="http://www.opengis.net/wfs/3.0"
  xmlns:atom="http://www.w3.org/2005/Atom"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://www.opengis.net/wfs/3.0 ../wfs.xsd">
  <atom:link rel="self"
    type="application/json"
    title="This Document"
    href="http://www.acme.com/3.0/wfs?f=application%2Fjson"/>
  <atom:link rel="alternate"
    type="text/xml"
    title="This Document as XML"
    href="http://www.acme.com/3.0/wfs?f=text%2Fxml"/>
  <atom:link rel="alternate"
    type="text/html"
    title="This Document as HTML"
    href="http://www.acme.com/3.0/wfs?f=text%2Fhtml"/>
  <atom:link rel="service"
    type="application/json"
    title="API definition for this endpoint as JSON"
    href="http://www.acme.com/3.0/wfs/api?f=application%2Fjson"/>
  <atom:link rel="service"
    type="application/vnd.ogc_wfs+xml"
    title="API definition for this endpoint as XML"

href="http://www.acme.com/3.0/wfs/api?f=application%2Fvnd.ogc_wfs%2Bxml"/>
  <atom:link rel="conformance"
    type="application/json"
    title="Conformance Declaration as JSON"
    href="http://www.acme.com/3.0/wfs/conformance?f=application%2Fjson"/>
  <atom:link rel="conformance"
    type="text/xml"
    title="Conformance Declaration as XML"
    href="http://www.acme.com/3.0/wfs/conformance?f=text%2Fxml"/>
  <atom:link rel="conformance"
```

```

        type="text/html"
        title="Conformance Declaration as HTML"
        href="http://www.acme.com/3.0/wfs/conformance?f=text%2Fhtml"/>
<atom:link rel="collections"
        type="application/json"
        title="Collections Metadata as JSON"
        href="http://www.acme.com/3.0/wfs/collections?f=application%2Fjson"/>
<atom:link rel="collections"
        type="text/xml"
        title="Collections Metadata as XML"
        href="http://www.acme.com/3.0/wfs/collections?f=text%2Fxml"/>
<atom:link rel="collections"
        type="text/html"
        title="Collections Metadata as HTML"
        href="http://www.acme.com/3.0/wfs/collections?f=text%2Fhtml"/>
</LandingPage>

```

C.3. Conformance statements

This server conforms to the recommended requirements classes, plus the GML Simple Features Profile, Level 0.

```

<?xml version="1.0" encoding="UTF-8"?>
<ConformsTo
  service="WFS"
  version="3.0.0"
  xmlns="http://www.opengis.net/wfs/3.0"
  xmlns:atom="http://www.w3.org/2005/Atom"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://www.opengis.net/wfs/3.0 ../wfs.xsd">
  <atom:link href="http://www.opengis.net/spec/wfs-1/3.0/req/core"/>
  <atom:link href="http://www.opengis.net/spec/wfs-1/3.0/req/oas30"/>
  <atom:link href="http://www.opengis.net/spec/wfs-1/3.0/req/html"/>
  <atom:link href="http://www.opengis.net/spec/wfs-1/3.0/req/geojson"/>
  <atom:link href="http://www.opengis.net/spec/wfs-1/3.0/req/gmlsf0"/>
</ConformsTo>

```

C.4. Feature collections metadata

The service three feature collections (airport facilities, roads, inland water areas).

```

<?xml version="1.0" encoding="UTF-8"?>
<Collections
  service="WFS"
  version="3.0.0"
  xmlns="http://www.opengis.net/wfs/3.0"
  xmlns:atom="http://www.w3.org/2005/Atom"

```

```

xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://www.opengis.net/wfs/3.0 ../wfs.xsd ">
<atom:link rel="self"
  title="This document"
  type="application/json"
  href="http://www.acme.com/3.0/wfs/collections?f=application%2Fjson"/>
<atom:link rel="alternate"
  title="This document as XML"
  type="text/xml"
  href="http://www.acme.com/3.0/wfs/collections?f=text%2Fxml"/>
<atom:link rel="alternate"
  title="This document as HTML"
  type="text/html"
  href="http://www.acme.com/3.0/wfs/collections?f=text%2Fhtml"/>
<atom:link rel="describedBy"
  title="XML Schema for this dataset"
  type="text/xml"
  href="http://www.acme.com/3.0/wfs/collections/schema"/>
<Collection>
  <Name>aerofacp_1m</Name>
  <Title>Airport Facilities Points</Title>
  <atom:link rel="item"
    title="Airport Facilities Points"
    type="application/geo+json"
    href="http://www.acme.com/3.0/wfs/collections/aerofacp_1m/items?f=application%2Fvnd.geo%2Bjson"/>
  <atom:link rel="item"
    title="Airport Facilities Points"
    type="application/gml+xml;version=3.2;profile=http://www.opengis.net/def/profile/ogc/2.0/gml-sf0"
    href="http://www.acme.com/3.0/wfs/collections/aerofacp_1m/items?f=application%2Fgml%2Bxml%3Bversion%3D3.2%3Bprofile%3Dhttp%3A%2F%2Fwww.opengis.net%2Fdef%2Fprofile%2Fogc%2F2.0%2Fgml-sf0"/>
  <atom:link rel="alternate"
    title="Airport Facilities Points"
    type="text/html"
    href="http://www.acme.com/3.0/wfs/collections/aerofacp_1m/items?f=text%2Fhtml"/>
  <atom:link rel="describedBy"
    title="Schema for Airport Facilities Points"
    type="text/xml"
    href="http://www.acme.com/3.0/wfs/collections/aerofacp_1m/schema"/>
  <Extent>
    <Spatial crs="http://www.opengis.net/def/crs/OGC/1.3/CRS84">
      <LowerCorner>-179.878326416016 -54.9311103820801</LowerCorner>
      <UpperCorner>179.339859008789 79.52944183349609</UpperCorner>
    </Spatial>
    <Temporal trs="http://www.opengis.net/def/uom/ISO-8601/0/Gregorian">

```

```

        <begin>2017-01-01T00:00:00Z</begin>
        <end>2017-12-31T23:59:59Z</end>
    </Temporal>
</Extent>
<DefaultCRS>http://www.opengis.net/def/crs/OGC/1.3/CRS84</DefaultCRS>
</Collection>
<Collection>
    <Name>roadl_1m</Name>
    <Title>Roads</Title>
    <atom:link rel="item"
        title="Roads"
        type="application/geo+json"

href="http://www.acme.com/3.0/wfs/collections/roadl_1m/items?f=application%2Fvnd.geo%2
Bjson"/>
    <atom:link rel="item"
        title="Roads"

type="application/gml+xml;version=3.2;profile=http://www.opengis.net/def/profile/ogc/2
.0/gml-sf0"

href="http://www.acme.com/3.0/wfs/collections/roadl_1m/items?f=application%2Fgml%2Bxml
%3Bversion%3D3.2%3Bprofile%3Dhttp%3A%2F%2Fwww.opengis.net%2Fdef%2Fprofile%2Fogc%2F2.0%
2Fgml-sf0"/>
    <atom:link rel="alternate"
        title="Roads"
        type="text/html"

href="http://www.acme.com/3.0/wfs/collections/roadl_1m/items?f=text%2Fhtml"/>
    <atom:link rel="describedBy"
        title="Schema for Roads"
        type="text/xml"
        href="http://www.acme.com/3.0/wfs/collections/roadl_1m/schema"/>
<Extent>
    <Spatial crs="http://www.opengis.net/def/crs/OGC/1.3/CRS84">
        <LowerCorner>-179.999420166016 -54.88802337646479</LowerCorner>
        <UpperCorner>179.9999 74.740592956543</UpperCorner>
    </Spatial>
    <Temporal trs="http://www.opengis.net/def/uom/ISO-8601/0/Gregorian">
        <begin>2017-01-01T00:00:00Z</begin>
        <end>2017-12-31T23:59:59Z</end>
    </Temporal>
</Extent>
<DefaultCRS>http://www.opengis.net/def/crs/OGC/1.3/CRS84</DefaultCRS>
</Collection>
<Collection>
    <Name>inwatera_1m</Name>
    <Title>Inland Water Areas</Title>
    <atom:link rel="item"
        title="Inland Water Areas"
        type="application/geo+json"

```



```

href="http://www.acme.com/3.0/wfs/collections/inwatera_1m/items?f=application%2Fvnd.geo%2Bjson"/>
  <atom:link rel="item"
    title="Inland Water Areas"

type="application/gml+xml;version=3.2;profile=http://www.opengis.net/def/profile/ogc/2.0/gml-sf0"

href="http://www.acme.com/3.0/wfs/collections/inwatera_1m/items?f=application%2Fgml%2Bxml%3Bversion%3D3.2%3Bprofile%3Dhttp%3A%2F%2Fwww.opengis.net%2Fdef%2Fprofile%2Fogc%2F2.0%2Fgml-sf0"/>
  <atom:link rel="alternate"
    title="Inland Water Areas"
    type="text/html"

href="http://www.acme.com/3.0/wfs/collections/inwatera_1m/items?f=text%2Fhtml"/>
  <atom:link rel="describedBy"
    title="Schema for Inland Water Areas"
    type="text/xml"
    href="http://www.acme.com/3.0/wfs/collections/inwatera_1m/schema"/>
<Extent>
  <Spatial crs="http://www.opengis.net/def/crs/OGC/1.3/CRS84">
    <LowerCorner>-179.999420166016 -70.91725158691409</LowerCorner>
    <UpperCorner>179.9999 83.57595062255859</UpperCorner>
  </Spatial>
  <Temporal trs="http://www.opengis.net/def/uom/ISO-8601/0/Gregorian">
    <begin>2017-01-01T00:00:00Z</begin>
    <end>2017-12-31T23:59:59Z</end>
  </Temporal>
</Extent>
<DefaultCRS>http://www.opengis.net/def/crs/OGC/1.3/CRS84</DefaultCRS>
</Collection>
</Collections>

```

C.5. Feature collection metadata

Only the information for the selected feature collection (airport facilities) is included in the response.

```

<?xml version="1.0" encoding="UTF-8"?>
<Collections
  service="WFS"
  version="3.0.0"
  xmlns="http://www.opengis.net/wfs/3.0"
  xmlns:atom="http://www.w3.org/2005/Atom"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://www.opengis.net/wfs/3.0 ../wfs.xsd ">
  <Collection>
    <Name>roadl_1m</Name>
    <Title>Roads</Title>
    <atom:link rel="item"
      title="Roads"
      type="application/geo+json"

href="http://www.acme.com/3.0/wfs/collections/roadl_1m/items?f=application%2Fvnd.geo%2Bjson"/>
    <atom:link rel="item"
      title="Roads"

type="application/gml+xml;version=3.2;profile=http://www.opengis.net/def/profile/ogc/2.0/gml-sf0"

href="http://www.acme.com/3.0/wfs/collections/roadl_1m/items?f=application%2Fgml%2Bxml%3Bversion%3D3.2%3Bprofile%3Dhttp%3A%2F%2Fwww.opengis.net%2Fdef%2Fprofile%2Fogc%2F2.0%2Fgml-sf0"/>
    <atom:link rel="alternate"
      title="Roads"
      type="text/html"

href="http://www.acme.com/3.0/wfs/collections/roadl_1m/items?f=text%2Fhtml"/>
    <atom:link rel="describedBy"
      title="Schema for Roads"
      type="text/xml"
      href="http://www.acme.com/3.0/wfs/collections/roadl_1m/schema"/>
  <Extent>
    <Spatial crs="http://www.opengis.net/def/crs/OGC/1.3/CRS84">
      <LowerCorner>-179.999420166016 -54.88802337646479</LowerCorner>
      <UpperCorner>179.9999 74.740592956543</UpperCorner>
    </Spatial>
    <Temporal trs="http://www.opengis.net/def/uom/ISO-8601/0/Gregorian">
      <begin>2017-01-01T00:00:00Z</begin>
      <end>2017-12-31T23:59:59Z</end>
    </Temporal>
  </Extent>
  <DefaultCRS>http://www.opengis.net/def/crs/OGC/1.3/CRS84</DefaultCRS>
</Collection>
</Collections>

```

C.6. A feature collection

This response contains 2 features of the collection and has a link to the next features.

```
<?xml version="1.0" encoding="UTF-8"?>
<wfs:FeatureCollection
  timeStamp="2018-04-02T15:14:20-04:00"
  numberReturned="2"
  numberMatched="9335"
  xmlns="http://www.acme.com/namespaces/ns1"
  xmlns:wfs="http://www.opengis.net/wfs/3.0"
  xmlns:gml="http://www.opengis.net/gml/3.2"
  xmlns:atom="http://www.w3.org/2005/Atom"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://www.acme.com/namespaces/ns1
    http://www.acme.com/3.0/wfs/collections/aerofacp_1m/schema
    http://www.opengis.net/wfs/3.0 ../wfs.xsd
    http://www.w3.org/2005/Atom
    http://schemas.opengis.net/kml/2.3/atom-author-link.xsd
    http://www.opengis.net/gml/3.2
    http://schemas.opengis.net/gml/3.2.1/gml.xsd">
  <wfs:boundedBy>
    <wfs:Spatial crs="http://www.opengis.net/def/crs/OGC/1.3/CRS84">
      <wfs:LowerCorner>-54.9311103820801 -179.878326416016</wfs:LowerCorner>
      <wfs:UpperCorner>79.52944183349609 179.339859008789</wfs:UpperCorner>
    </wfs:Spatial>
    <wfs:Temporal trs="http://www.opengis.net/def/uom/ISO-8601/0/Gregorian">
      <wfs:begin>2017-01-01T00:00:00Z</wfs:begin>
      <wfs:end>2017-12-31T23:59:59Z</wfs:end>
    </wfs:Temporal>
  </wfs:boundedBy>

  <!-- Link to the next set of features in this result set. -->
  <atom:link rel="next" title="The next set of features in this result set"

type="application/gml+xml;version=3.2;profile=http://www.opengis.net/def/profile/ogc/2
.0/gml-sf0"
  href="http://www.acme.com/3.0/wfs/qid8cff81438e943620dd813fd56c"/>

  <!-- Other hypermedia controls -->
  <atom:link rel="service" title="The service that offers these features"
    type="application/json" href="http://www.acme.com/3.0/wfs"/>
  <atom:link rel="collection"
    title="The collection of which these feature are members"
    type="application/json"
    href="http://www.acme.com/3.0/wfs/collections/aerofacp_1m"/>
  <atom:link rel="describedBy" title="The schema for these feature"
    type="text/xml"
    href="http://www.acme.com/3.0/wfs/collections/aerofacp_1m/schema"/>
```

```

<!-- Features in the result set -->
<wfs:member>
  <atom:link rel="self" title="This feature"

type="application/gml+xml;version=3.2;profile=http://www.opengis.net/def/profile/ogc/2
.0/gml-sf0"

href="http://www.acme.com/3.0/wfs/collections/aerofacp_1m/items/1?f=application%2Fgml%
2Bxml%3Bversion%3D3.2%3Bprofile%3Dhttp%3A%2F%2Fwww.opengis.net%2Fdef%2Fprofile%2Fogc%2
F2.0%2Fgml-sf0"/>
  <atom:link rel="alternate" title="This feature as GeoJSON"
    type="application/geo+json"

href="http://www.acme.com/3.0/wfs/collections/aerofacp_1m/items/1?f=application%2Fgeo%
2Bjson"/>
  <atom:link rel="alternate" title="This feature as HTML" type="text/html"

href="http://www.acme.com/3.0/wfs/collections/aerofacp_1m/items/1?f=application%2Ftext
%2Bhtml"/>
  <aerofacp_1m gml:id="F1">
    <geometry>
      <gml:Point gml:id="geom1" srsName="urn:ogc:def:crs:EPSG::4269">
        <gml:pos>-43.81286239624023 -176.466049194336</gml:pos>
      </gml:Point>
    </geometry>
    <id>1455</id>
    <f_code>GB005</f_code>
    <iko>NZCI</iko>
    <nam>CHATHAM ISLANDS</nam>
    <na3>NZ58133</na3>
    <use>999</use>
    <zv3>13</zv3>
    <tile_id>434</tile_id>
    <end_id>1</end_id>
  </aerofacp_1m>
</wfs:member>
<wfs:member>
  <atom:link rel="self" title="This feature"

type="application/gml+xml;version=3.2;profile=http://www.opengis.net/def/profile/ogc/2
.0/gml-sf0"

href="http://www.acme.com/3.0/wfs/collections/aerofacp_1m/items/2?f=application%2Fgml%
2Bxml%3Bversion%3D3.2%3Bprofile%3Dhttp%3A%2F%2Fwww.opengis.net%2Fdef%2Fprofile%2Fogc%2
F2.0%2Fgml-sf0"/>
  <atom:link rel="alternate" title="This feature as GeoJSON"
    type="application/geo+json"

href="http://www.acme.com/3.0/wfs/collections/aerofacp_1m/items/2?f=application%2Fgeo%
2Bjson"/>
  <atom:link rel="alternate" title="This feature as HTML" type="text/html"

```

```
href="http://www.acme.com/3.0/wfs/collections/aerofacp_1m/items/2?f=application%2Ftext%2Bhtml"/>
  <aerofacp_1m gml:id="F2">
    <geometry>
      <gml:Point gml:id="geom2" srsName="urn:ogc:def:crs:EPSG::4269">
        <gml:pos>-23.3629035949707 -149.5207672119141</gml:pos>
      </gml:Point>
    </geometry>
    <id>4421</id>
    <f_code>GB005</f_code>
    <iko>NTAT</iko>
    <nam>TUBUAI</nam>
    <na3>FP67494</na3>
    <use>49</use>
    <zv3>3</zv3>
    <tile_id>397</tile_id>
    <end_id>1</end_id>
  </aerofacp_1m>
</wfs:member>
</wfs:FeatureCollection>
```

Annex D: Revision History

| Date | Release | Editor | Primary clauses modified | Description |
|------------|-----------------------|------------|--------------------------|--|
| 2017-10-09 | SNAPSHOT | C. Portele | all | initial version |
| 2017-10-11 | SNAPSHOT | C. Portele | all | changes discussed in SWG/PT call on 2017-10-09 |
| 2017-12-13 | SNAPSHOT | C. Portele | all | address issues #2 , #5 , #6 , #7 , #8 , #14 , #15 , #19 |
| 2018-01-22 | SNAPSHOT | C. Portele | 7 | add description of the UML diagram |
| 2018-02-01 | SNAPSHOT | C. Portele | 2,3,5,7 | add links to recent issues on GitHub; address issues #31 , #32 |
| 2018-02-11 | SNAPSHOT | C. Portele | 2,6,7,8 | address issue #25 |
| 2018-02-27 | SNAPSHOT | C. Portele | all | address issues #3 , #9 , #12 , #22 , #23 , #24 , #44 ; add links to issues #41 , #45 , #46 , #47 |
| 2018-03-04 | SNAPSHOT | T. Schaub | 7,B | JSON schema fixes #54 , #55 |
| 2018-03-12 | SNAPSHOT for ISO NWIP | C. Portele | all | Updates after the WFS 3.0 Hackathon #59 , #61 , #62 , #63 , #64 , #69 , #72 , #77 , #78 ; resolve #4 ; editorial edits |
| 2018-03-15 | SNAPSHOT | J. Amara | 7 | Uniqueness of feature id #83 |
| 2018-03-21 | SNAPSHOT | I. Rinne | 7 | Clarified the requirement /req/core/crs84 #92 |

| Date | Release | Editor | Primary clauses modified | Description |
|------------|----------|-------------------------|--------------------------|---|
| 2018-03-28 | SNAPSHOT | C. Portele | 3,4,7 | Temporal support #57 , bbox no longer restricted to CRS84 #60 , clarify 'collection' #86 , clarify feature id constraints #84 |
| 2018-04-02 | SNAPSHOT | C. Portele | 7,B | Clarify 'item' links #81 , clean up OpenAPI example in Annex B |
| 2018-04-03 | SNAPSHOT | C. Portele | 4,5,6,7,8,9 | Clean-up asciidoc #100 |
| 2018-04-04 | SNAPSHOT | P. Vretanos, C. Portele | 8.4,8.5,C | Clarify XML encoding #58 |

Annex E: Bibliography

- W3C/OGC: Spatial Data on the Web Best Practices, W3C Working Group Note 28 September 2017, <https://www.w3.org/TR/sdw-bp/>
- W3C: Data on the Web Best Practices, W3C Recommendation 31 January 2017, <https://www.w3.org/TR/dwbp/>
- W3C: Data Catalog Vocabulary, W3C Recommendation 16 January 2014, <https://www.w3.org/TR/vocab-dcat/>
- IANA: Link Relation Types, <https://www.iana.org/assignments/link-relations/link-relations.xml>