


Environment Dual

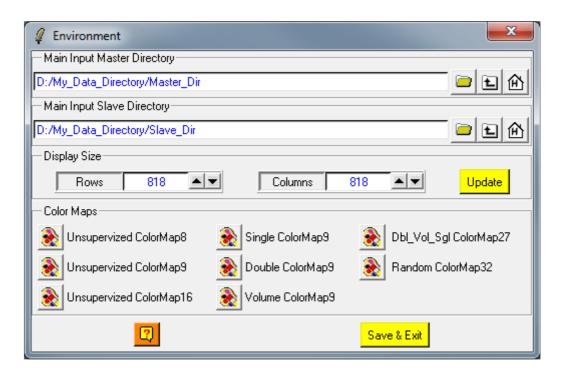

Description:

This application sets and configures the Main Variables of the Processing Environment

Input/Output Arguments:

Main InputConfigure the dual data sets Master Main Directory location.MasterThis variable is then provided as an argument to most of the dataDirectoryprocessing programs.

Main Input Configure the dual data sets Slave Main Directory location. This Slave Directory variable is then provided as an argument to most of the data processing programs.

Display Size This function is used to set the **Image Screen Display Size**, using the widget buttons: □or □-

ColorMaps This function is used to edit and modify the different Color

Palettes. These colormaps are used to code the different data

process bitmap output files.