

Final Test Status: PASSED

Executed Test: HOT TEST SHORT Engine Serial Number: 86111265

Test Number: 2

Test Configuration

Engine Serial Number 86111265 **Test Specification Number** 95172 MODEL ISB6.7E5250 MOD_TYPE CM2880 TST_PAL **VOLTAGE** 25.00 PROD ID BFR SHUTOFF FX80025.08 E ECMCOD

Test Information

Testbed: ZCK_TC01

Operator: Cummins Operator

Test Date: 2022-02-25 Test Start: 12:33:12

Test End:

Teststatus per Phase

Testpoint	Teststatus	Operator	PLC-Error	Meas.Err.	Mat. Review	ECM Error
SETUP	PASSED	0	0	0	0	0
COLD_CRANK	PASSED	0	0	0	0	0
COLD_CRANK_2	PASSED	0	0	0	0	0
ENGINE_START	PASSED	0	0	0	0	0
LOW_IDLE	PASSED	0	0	0	0	0
HIGH_IDLE	PASSED	0	0	0	0	0
RATED_HP	PASSED	0	0	0	0	0
TORQUE_PEAK	PASSED	0	0	0	0	0
LOW_IDLE_2	PASSED	0	0	0	0	0
ENGINE_SHUTDOWN	PASSED	0	0	0	0	0
FINAL_STATUS	PASSED	0	0	0	0	0



Final Test Status: PASSED

Engine Serial Number: 86111265
Executed Test: HOT TEST SHORT

Test Number: 2

Reject Codes

Code	Testpoint	Description	Type	Channel	Unit	Lower Limit	Value	Upper Limit
OVERRID	SETUP	Error on setting the parameter [SEND_OPERATION=r	ECM	-	-	0.00	0.00	0.00
OVERRID	ENGINE_START	Error on setting the parameter [SEND_OPERATION=r	ECM	-	-	0.00	0.00	0.00
OVERRID	ENGINE_START	Error on setting the parameter [T_Dual_Accelerator_E	ECM	-	-	0.00	0.00	0.00



Final Test Status: PASSED

Engine Serial Number: 86111265
Executed Test: HOT TEST SHORT

Test Number: 2

ECM Fault Codes

Testpoint	Number	Description	Masked	Active
LOW_IDLE	249	OEM AMBIENT AIR TEMPERATURE HIGH ERROR	Α	Α
LOW_IDLE	428	WATER IN FUEL SENSOR CIRCUIT SHORTED HIGH ERROR	Α	Α
LOW_IDLE	584	STARTER RELAY CIRCUIT SHORTED LOW	Α	Α
LOW_IDLE	1669	Air-assisted) - Aftertreatment Diesel Exhaust Fluid Tank Level Sensor Circuit	Α	Α
LOW IDLE	1678	(Air-assisted) - Aftertreatment Diesel Exhaust Fluid Tank Temperature Sens	Α	Α
LOW IDLE	1683		Α	Α
LOW IDLE	2182	ENG BRK DRIVE #1 LOW CONTROL ERROR	Α	Α
LOW IDLE	2555	GHC LOW VOLTAGE ERROR #1	Α	Α
LOW IDLE	2771	Aftertreatment Outlet NOx Sensor - Abnormal Update Rate	Α	Α
LOW IDLE	3558	3558	Α	Α
LOW IDLE	3565	Metering valve circuit voltage above normal (SCR)	Α	Α
LOW IDLE	3572	DEF pressure sensor circuit voltage below normal (SCR)	A	A
LOW IDLE	3577	Purge valve circuit voltage above normal (SCR)	A	Α
LOW IDLE	4173	Air pressure sensor circuit voltage below normal (SCR)	A	A
LOW IDLE	4174	DEF Temperature sensor circuit voltage above normal (SCR)	A	A
LOW IDLE	4177	Air pump valve circuit voltage below normal (SCR)	A	A
HIGH IDLE	249	OEM AMBIENT AIR TEMPERATURE HIGH ERROR	A	A
HIGH IDLE	428	WATER IN FUEL SENSOR CIRCUIT SHORTED HIGH ERROR	A	A
HIGH IDLE	584	STARTER RELAY CIRCUIT SHORTED LOW	A	A
HIGH IDLE	1669	Air-assisted) - Aftertreatment Diesel Exhaust Fluid Tank Level Sensor Circuit		A
	1678			A
HIGH_IDLE		,	A	
HIGH_IDLE	1683	,	A	A
HIGH_IDLE	2182	ENG BRK DRIVE #1 LOW CONTROL ERROR	A	A
HIGH_IDLE	2555	GHC LOW VOLTAGE ERROR #1	Α	A
HIGH_IDLE	2771	Aftertreatment Outlet NOx Sensor - Abnormal Update Rate	Α	A
HIGH_IDLE	3558	3558	Α	Α
HIGH_IDLE	3565	Metering valve circuit voltage above normal (SCR)	Α	Α
HIGH_IDLE	3572	DEF pressure sensor circuit voltage below normal (SCR)	Α	Α
HIGH_IDLE	3577	Purge valve circuit voltage above normal (SCR)	Α	Α
HIGH_IDLE	4173	Air pressure sensor circuit voltage below normal (SCR)	Α	Α
HIGH_IDLE	4174	DEF Temperature sensor circuit voltage above normal (SCR)	Α	Α
HIGH_IDLE	4177	Air pump valve circuit voltage below normal (SCR)	A	Α
RATED_HP	249	OEM AMBIENT AIR TEMPERATURE HIGH ERROR	A	Α
RATED_HP	428	WATER IN FUEL SENSOR CIRCUIT SHORTED HIGH ERROR	A	Α
RATED_HP	584	STARTER RELAY CIRCUIT SHORTED LOW	Α	Α
RATED_HP	1669	Air-assisted) - Aftertreatment Diesel Exhaust Fluid Tank Level Sensor Circuit	Α	Α
RATED_HP	1678	(Air-assisted) - Aftertreatment Diesel Exhaust Fluid Tank Temperature Sens	A	А
RATED_HP	1683	1683,Aftertreatment Diesel Exhaust Fluid Tank Heater - Voltage Above Nor	Α	Α
RATED_HP	2182	ENG BRK DRIVE #1 LOW CONTROL ERROR	Α	Α
RATED_HP	2555	GHC LOW VOLTAGE ERROR #1	Α	Α
RATED HP	2771	Aftertreatment Outlet NOx Sensor - Abnormal Update Rate	Α	Α
RATED HP	3558	3558	Α	Α
RATED HP	3565	Metering valve circuit voltage above normal (SCR)	Α	Α
RATED HP	3572	· ,	Α	Α
RATED HP	3577	Purge valve circuit voltage above normal (SCR)	Α	Α
RATED HP	4173	, ,	A	A
RATED HP	4174	, ,	A	Α
RATED HP	4177	, ,	A	A
TORQUE PEAK	249	OEM AMBIENT AIR TEMPERATURE HIGH ERROR	A	A
TORQUE_PEAK	428		A	A
		STARTER RELAY CIRCUIT SHORTED LOW		
TORQUE_PEAK	584	STARTER RELAT CIRCUIT SHURTED LOW	Α	Α



Final Test Status: PASSED

Engine Serial Number: 86111265
Executed Test: HOT TEST SHORT

Test Number: 2

ECM Fault Codes


Testpoint	Number	Description	Masked	Active
TORQUE_PEAK	1669	Air-assisted) - Aftertreatment Diesel Exhaust Fluid Tank Level Sensor Circuit	Α	Α
TORQUE_PEAK	1678	(Air-assisted) - Aftertreatment Diesel Exhaust Fluid Tank Temperature Sens	Α	Α
TORQUE_PEAK	1683	1683,Aftertreatment Diesel Exhaust Fluid Tank Heater - Voltage Above Nor	Α	Α
TORQUE_PEAK	2182	ENG BRK DRIVE #1 LOW CONTROL ERROR	Α	Α
TORQUE_PEAK	2555	GHC LOW VOLTAGE ERROR #1	Α	Α
TORQUE_PEAK	2771	Aftertreatment Outlet NOx Sensor - Abnormal Update Rate	Α	Α
TORQUE_PEAK	3558	3558	Α	Α
TORQUE_PEAK	3565	Metering valve circuit voltage above normal (SCR)	Α	Α
TORQUE_PEAK	3572	DEF pressure sensor circuit voltage below normal (SCR)	Α	Α
TORQUE_PEAK	3577	Purge valve circuit voltage above normal (SCR)	Α	Α
TORQUE_PEAK	4173	Air pressure sensor circuit voltage below normal (SCR)	Α	Α
TORQUE_PEAK	4174	DEF Temperature sensor circuit voltage above normal (SCR)	Α	Α
TORQUE_PEAK	4177	Air pump valve circuit voltage below normal (SCR)	Α	Α
LOW_IDLE_2	249	OEM AMBIENT AIR TEMPERATURE HIGH ERROR	Α	Α
LOW_IDLE_2	428	WATER IN FUEL SENSOR CIRCUIT SHORTED HIGH ERROR	Α	Α
LOW_IDLE_2	584	STARTER RELAY CIRCUIT SHORTED LOW	Α	А
LOW_IDLE_2	1669	Air-assisted) - Aftertreatment Diesel Exhaust Fluid Tank Level Sensor Circuit	Α	Α
LOW_IDLE_2	1678	(Air-assisted) - Aftertreatment Diesel Exhaust Fluid Tank Temperature Sens	Α	А
LOW_IDLE_2	1683	1683,Aftertreatment Diesel Exhaust Fluid Tank Heater - Voltage Above Nor	Α	Α
LOW_IDLE_2	2182	ENG BRK DRIVE #1 LOW CONTROL ERROR	Α	Α
LOW_IDLE_2	2555	GHC LOW VOLTAGE ERROR #1	Α	Α
LOW_IDLE_2	2771	Aftertreatment Outlet NOx Sensor - Abnormal Update Rate	Α	Α
LOW_IDLE_2	3558	3558	Α	Α
LOW_IDLE_2	3565	Metering valve circuit voltage above normal (SCR)	Α	Α
LOW_IDLE_2	3572	DEF pressure sensor circuit voltage below normal (SCR)	Α	Α
LOW_IDLE_2	3577	Purge valve circuit voltage above normal (SCR)	Α	Α
LOW_IDLE_2	4173	Air pressure sensor circuit voltage below normal (SCR)	Α	Α
LOW_IDLE_2	4174	DEF Temperature sensor circuit voltage above normal (SCR)	Α	Α
LOW_IDLE_2	4177	Air pump valve circuit voltage below normal (SCR)	Α	Α



Final Test Status: PASSED

Engine Serial Number: 86111265
Executed Test: HOT TEST SHORT

Test Number: 2

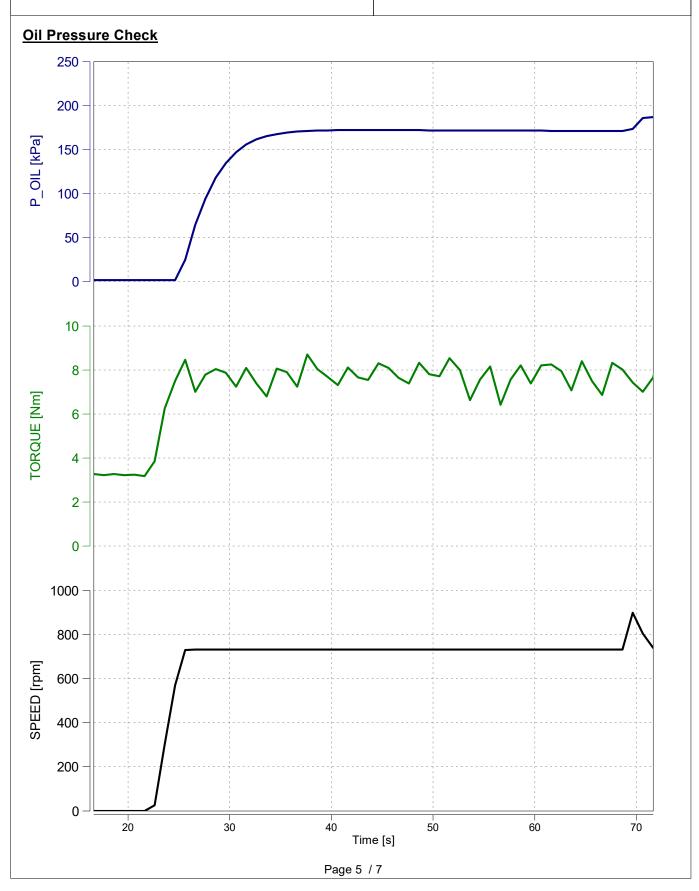





Final Test Status: PASSED

Engine Serial Number: 86111265 Executed Test: HOT TEST SHORT

2 Test Number:

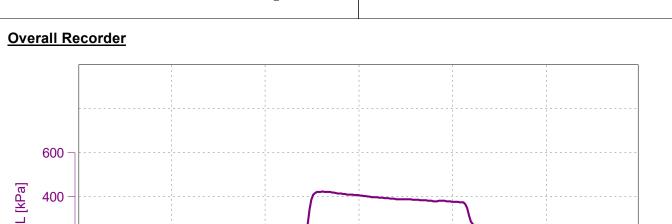

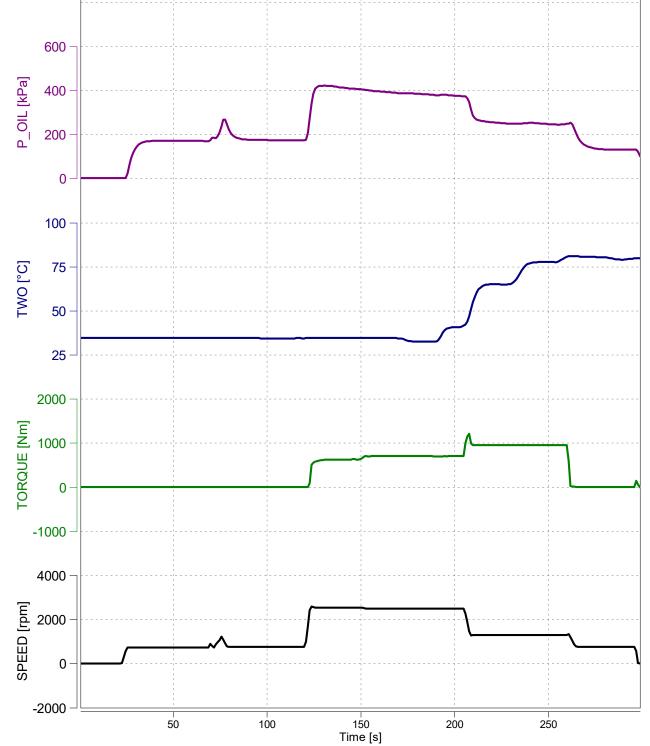

Page 6 / 7



Final Test Status: PASSED

Engine Serial Number: 86111265
Executed Test: HOT TEST SHORT

Test Number: 2

	Unit	Lower Limit	Value	Upper Limit	Status
LOW_IDLE					
SPEED	rpm	698.00	750.00	810.00	PASSED
P_OIL	kPa	75.00	175.05		PASSED
OPA_ANLG	-		4.85		
HIGH_IDLE					
SPEED	rpm	2500.00	2550.07	2600.00	PASSED
P_OIL	kPa		411.50		
RATED_HP					
SPEED	rpm	2498.00	2500.05	2502.00	PASSED
Р	kW	167.00	184.90	200.00	PASSED
FB_RATE	kg/h	35.00	39.33	45.00	PASSED
P_INTAKE	kPa		157.84		
P_OIL	kPa	275.00	379.40		PASSED
BLOW_VAL	kPa	0.10	1.34	3.00	PASSED
OPA_ANLG	-	0.00	4.85	15.00	PASSED
T_FUEL	°C	38.00	39.17	45.00	PASSED
P_FUEL	kPa		*		
T_TUR_IN	-		*		
TORQUE_PEAK					
SPEED	rpm		1299.93		
TORQUE	Nm	850.00	959.85	998.00	PASSED
FB_RATE	kg/h	22.00	26.29	32.00	PASSED
BLOW_VAL	kPa	0.10	0.89	3.00	PASSED
OPA_ANLG		0.00	4.85	15.00	PASSED
T_FUEL	°C	38.00	39.16	45.00	PASSED
P_FUEL	kPa		*		
T_TUR_IN	-		*		
LOW_IDLE_2					
SPEED	rpm	600.00	749.95	800.00	PASSED
P_OIL	kPa	100.00	131.56		PASSED
OPA ANLG	-		4.85		