



Production Test Report

Final Test Status: FAILED

Executed Test: HOT TEST SHORT

Engine Serial Number: 86111265

Test Number: 1

Test Configuration

Engine Serial Number	86111265
Test Specification Number	95172
MODEL	ISB6.7E5250
MOD_TYPE	CM2880
TST_PAL	1
VOLTAGE	25.00
PROD_ID	BFR
SHUTOFF	3
E_ECMCOD	FX80025.08

Test Information

Testbed: ZCK_TC01

Operator: Cummins Operator

Test Date: 2022-02-25

Test Start: 12:25:52

Test End:

Teststatus per Phase

Testpoint	Teststatus	Operator	PLC-Error	Meas.Err.	Mat. Review	ECM Error
SETUP	PASSED	0	0	0	0	0
COLD_CRANK	PASSED	0	0	0	0	0
COLD_CRANK_2	PASSED	0	0	0	0	0
ENGINE_START	PASSED	0	0	0	0	0
LOW_IDLE	PASSED	0	0	0	0	0
HIGH_IDLE	PASSED	0	0	0	0	0
RATED_HP	PASSED	0	0	0	0	0
TORQUE_PEAK	FAILED	0	0	1	0	0
LOW_IDLE_2	PASSED	0	0	0	0	0
ENGINE_SHUTDOWN	PASSED	0	0	0	0	0
FINAL_STATUS	FAILED	0	0	1	0	0



Production Test Report

Final Test Status: FAILED

Engine Serial Number: 86111265

Executed Test: HOT TEST SHORT

Test Number: 1

Reject Codes

Code	Testpoint	Description	Type	Channel	Unit	Lower Limit	Value	Upper Limit
OVERRID	SETUP	Error on setting the parameter [SEND_OPERATION=r	ECM	-	-	0.00	0.00	0.00
OVERRID	ENGINE_START	Error on setting the parameter [SEND_OPERATION=r	ECM	-	-	0.00	0.00	0.00
OVERRID	ENGINE_START	Error on setting the parameter [T_Dual_Accelerator_E	ECM	-	-	0.00	0.00	0.00
TFRH	TORQUE_PEAK	Torque Peak Fuel Rate high	MES	FB_RATE	kg/h	22.00	34.44	32.00



Production Test Report

Final Test Status: FAILED

Engine Serial Number: 86111265

Executed Test: HOT TEST SHORT

Test Number: 1

ECM Fault Codes

Testpoint	Number	Description	Masked	Active
LOW_IDLE	249	OEM AMBIENT AIR TEMPERATURE HIGH ERROR	A	A
LOW_IDLE	428	WATER IN FUEL SENSOR CIRCUIT SHORTED HIGH ERROR	A	A
LOW_IDLE	584	STARTER RELAY CIRCUIT SHORTED LOW	A	A
LOW_IDLE	1669	Air-assisted) - Aftertreatment Diesel Exhaust Fluid Tank Level Sensor Circuit	A	A
LOW_IDLE	1678	(Air-assisted) - Aftertreatment Diesel Exhaust Fluid Tank Temperature Sens	A	A
LOW_IDLE	1683	1683,Aftertreatment Diesel Exhaust Fluid Tank Heater - Voltage Above Nor	A	A
LOW_IDLE	2182	ENG BRK DRIVE #1 LOW CONTROL ERROR	A	A
LOW_IDLE	2555	GHC LOW VOLTAGE ERROR #1	A	A
LOW_IDLE	2771	Aftertreatment Outlet NOx Sensor - Abnormal Update Rate	A	A
LOW_IDLE	3558	3558	A	A
LOW_IDLE	3565	Metering valve circuit voltage above normal (SCR)	A	A
LOW_IDLE	3572	DEF pressure sensor circuit voltage below normal (SCR)	A	A
LOW_IDLE	3577	Purge valve circuit voltage above normal (SCR)	A	A
LOW_IDLE	4173	Air pressure sensor circuit voltage below normal (SCR)	A	A
LOW_IDLE	4174	DEF Temperature sensor circuit voltage above normal (SCR)	A	A
LOW_IDLE	4177	Air pump valve circuit voltage below normal (SCR)	A	A
HIGH_IDLE	249	OEM AMBIENT AIR TEMPERATURE HIGH ERROR	A	A
HIGH_IDLE	428	WATER IN FUEL SENSOR CIRCUIT SHORTED HIGH ERROR	A	A
HIGH_IDLE	584	STARTER RELAY CIRCUIT SHORTED LOW	A	A
HIGH_IDLE	1669	Air-assisted) - Aftertreatment Diesel Exhaust Fluid Tank Level Sensor Circuit	A	A
HIGH_IDLE	1678	(Air-assisted) - Aftertreatment Diesel Exhaust Fluid Tank Temperature Sens	A	A
HIGH_IDLE	1683	1683,Aftertreatment Diesel Exhaust Fluid Tank Heater - Voltage Above Nor	A	A
HIGH_IDLE	2182	ENG BRK DRIVE #1 LOW CONTROL ERROR	A	A
HIGH_IDLE	2555	GHC LOW VOLTAGE ERROR #1	A	A
HIGH_IDLE	2771	Aftertreatment Outlet NOx Sensor - Abnormal Update Rate	A	A
HIGH_IDLE	3558	3558	A	A
HIGH_IDLE	3565	Metering valve circuit voltage above normal (SCR)	A	A
HIGH_IDLE	3572	DEF pressure sensor circuit voltage below normal (SCR)	A	A
HIGH_IDLE	3577	Purge valve circuit voltage above normal (SCR)	A	A
HIGH_IDLE	4173	Air pressure sensor circuit voltage below normal (SCR)	A	A
HIGH_IDLE	4174	DEF Temperature sensor circuit voltage above normal (SCR)	A	A
HIGH_IDLE	4177	Air pump valve circuit voltage below normal (SCR)	A	A
RATED_HP	249	OEM AMBIENT AIR TEMPERATURE HIGH ERROR	A	A
RATED_HP	428	WATER IN FUEL SENSOR CIRCUIT SHORTED HIGH ERROR	A	A
RATED_HP	584	STARTER RELAY CIRCUIT SHORTED LOW	A	A
RATED_HP	1669	Air-assisted) - Aftertreatment Diesel Exhaust Fluid Tank Level Sensor Circuit	A	A
RATED_HP	1678	(Air-assisted) - Aftertreatment Diesel Exhaust Fluid Tank Temperature Sens	A	A
RATED_HP	1683	1683,Aftertreatment Diesel Exhaust Fluid Tank Heater - Voltage Above Nor	A	A
RATED_HP	2182	ENG BRK DRIVE #1 LOW CONTROL ERROR	A	A
RATED_HP	2555	GHC LOW VOLTAGE ERROR #1	A	A
RATED_HP	2771	Aftertreatment Outlet NOx Sensor - Abnormal Update Rate	A	A
RATED_HP	3558	3558	A	A
RATED_HP	3565	Metering valve circuit voltage above normal (SCR)	A	A
RATED_HP	3572	DEF pressure sensor circuit voltage below normal (SCR)	A	A
RATED_HP	3577	Purge valve circuit voltage above normal (SCR)	A	A
RATED_HP	4173	Air pressure sensor circuit voltage below normal (SCR)	A	A
RATED_HP	4174	DEF Temperature sensor circuit voltage above normal (SCR)	A	A
RATED_HP	4177	Air pump valve circuit voltage below normal (SCR)	A	A
TORQUE_PEAK	249	OEM AMBIENT AIR TEMPERATURE HIGH ERROR	A	A
TORQUE_PEAK	428	WATER IN FUEL SENSOR CIRCUIT SHORTED HIGH ERROR	A	A
TORQUE_PEAK	584	STARTER RELAY CIRCUIT SHORTED LOW	A	A



Production Test Report

Final Test Status: FAILED

Engine Serial Number: 86111265

Executed Test: HOT TEST SHORT

Test Number: 1

ECM Fault Codes

Testpoint	Number	Description	Masked	Active
TORQUE_PEAK	1669	Air-assisted) - Aftertreatment Diesel Exhaust Fluid Tank Level Sensor Circuit	A	A
TORQUE_PEAK	1678	(Air-assisted) - Aftertreatment Diesel Exhaust Fluid Tank Temperature Sens	A	A
TORQUE_PEAK	1683	1683,Aftertreatment Diesel Exhaust Fluid Tank Heater - Voltage Above Nor	A	A
TORQUE_PEAK	2182	ENG BRK DRIVE #1 LOW CONTROL ERROR	A	A
TORQUE_PEAK	2555	GHC LOW VOLTAGE ERROR #1	A	A
TORQUE_PEAK	2771	Aftertreatment Outlet NOx Sensor - Abnormal Update Rate	A	A
TORQUE_PEAK	3558	3558	A	A
TORQUE_PEAK	3565	Metering valve circuit voltage above normal (SCR)	A	A
TORQUE_PEAK	3572	DEF pressure sensor circuit voltage below normal (SCR)	A	A
TORQUE_PEAK	3577	Purge valve circuit voltage above normal (SCR)	A	A
TORQUE_PEAK	4173	Air pressure sensor circuit voltage below normal (SCR)	A	A
TORQUE_PEAK	4174	DEF Temperature sensor circuit voltage above normal (SCR)	A	A
TORQUE_PEAK	4177	Air pump valve circuit voltage below normal (SCR)	A	A
LOW_IDLE_2	249	OEM AMBIENT AIR TEMPERATURE HIGH ERROR	A	A
LOW_IDLE_2	428	WATER IN FUEL SENSOR CIRCUIT SHORTED HIGH ERROR	A	A
LOW_IDLE_2	584	STARTER RELAY CIRCUIT SHORTED LOW	A	A
LOW_IDLE_2	1669	Air-assisted) - Aftertreatment Diesel Exhaust Fluid Tank Level Sensor Circuit	A	A
LOW_IDLE_2	1678	(Air-assisted) - Aftertreatment Diesel Exhaust Fluid Tank Temperature Sens	A	A
LOW_IDLE_2	1683	1683,Aftertreatment Diesel Exhaust Fluid Tank Heater - Voltage Above Nor	A	A
LOW_IDLE_2	2182	ENG BRK DRIVE #1 LOW CONTROL ERROR	A	A
LOW_IDLE_2	2555	GHC LOW VOLTAGE ERROR #1	A	A
LOW_IDLE_2	2771	Aftertreatment Outlet NOx Sensor - Abnormal Update Rate	A	A
LOW_IDLE_2	3558	3558	A	A
LOW_IDLE_2	3565	Metering valve circuit voltage above normal (SCR)	A	A
LOW_IDLE_2	3572	DEF pressure sensor circuit voltage below normal (SCR)	A	A
LOW_IDLE_2	3577	Purge valve circuit voltage above normal (SCR)	A	A
LOW_IDLE_2	4173	Air pressure sensor circuit voltage below normal (SCR)	A	A
LOW_IDLE_2	4174	DEF Temperature sensor circuit voltage above normal (SCR)	A	A
LOW_IDLE_2	4177	Air pump valve circuit voltage below normal (SCR)	A	A



Production Test Report


Final Test Status: FAILED

Engine Serial Number: 86111265

Executed Test: HOT TEST SHORT

Test Number: 1

Oil Pressure Check

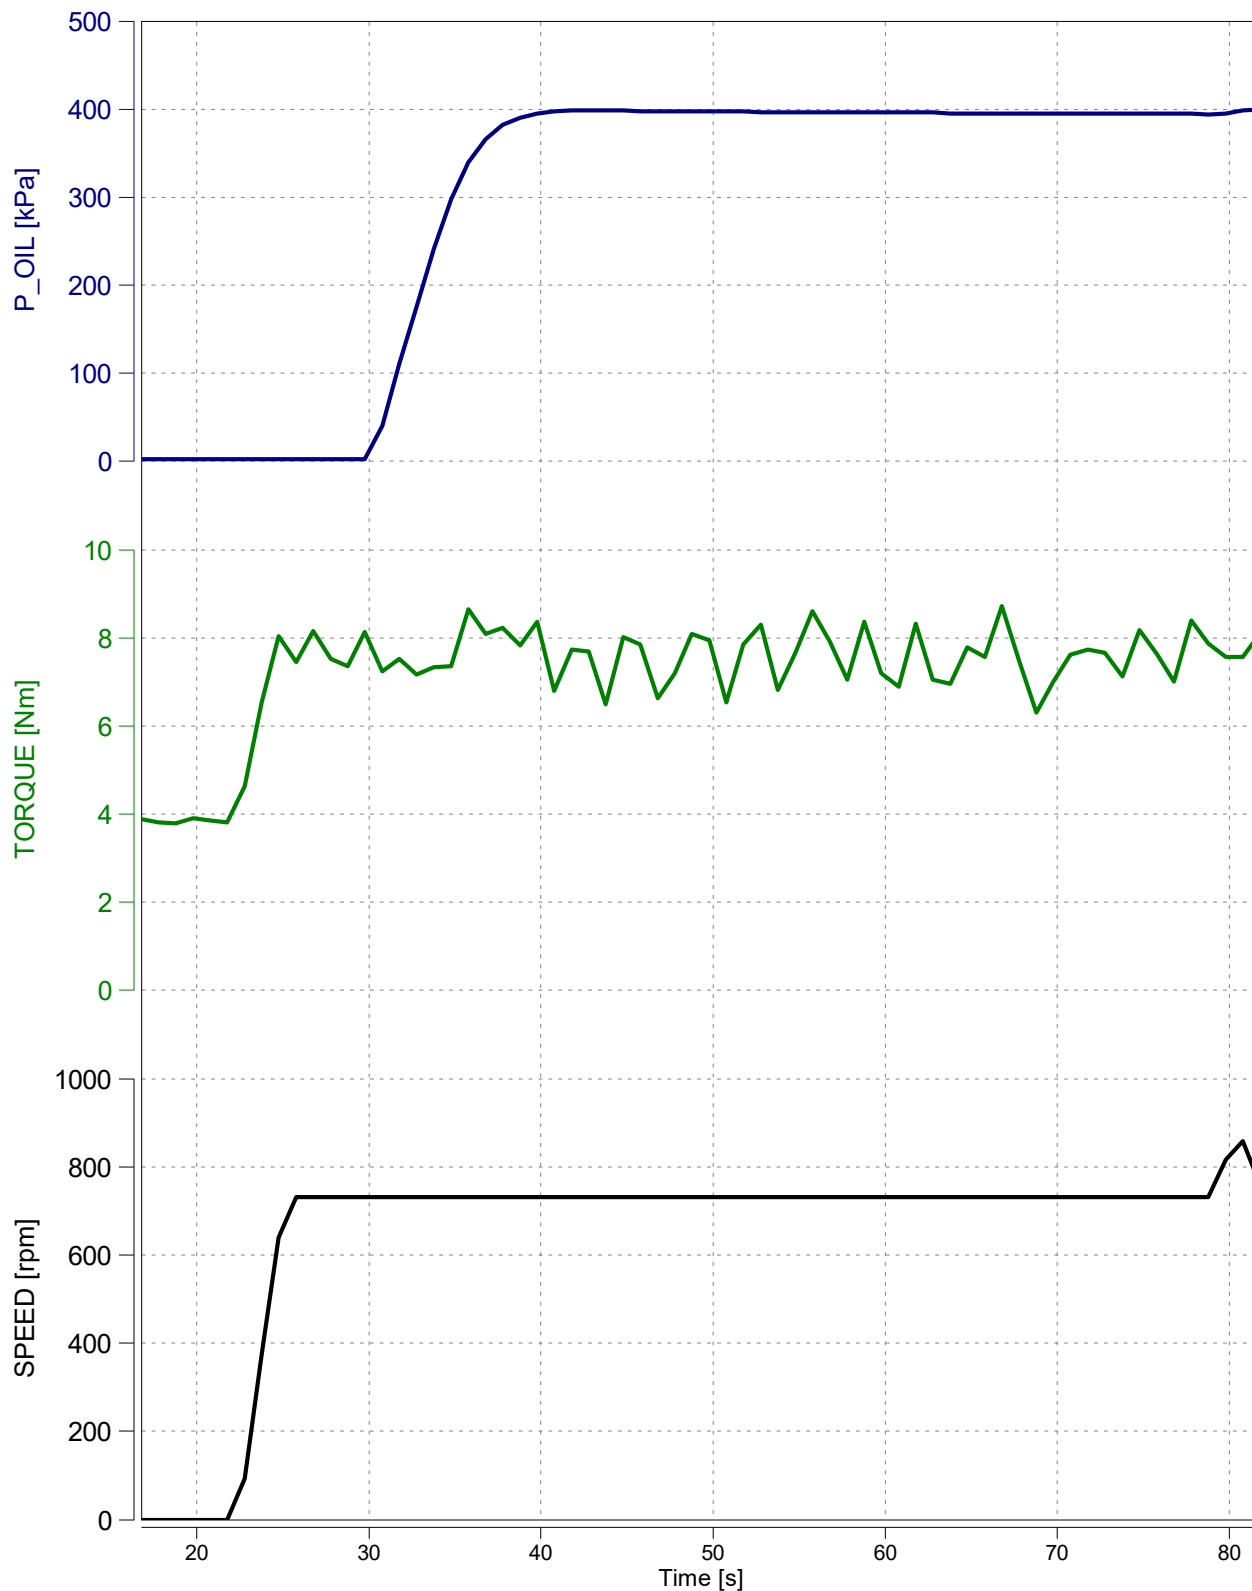



Production Test Report


Final Test Status: FAILED

Engine Serial Number: 86111265

Executed Test: HOT TEST SHORT

Test Number: 1

Overall Recorder

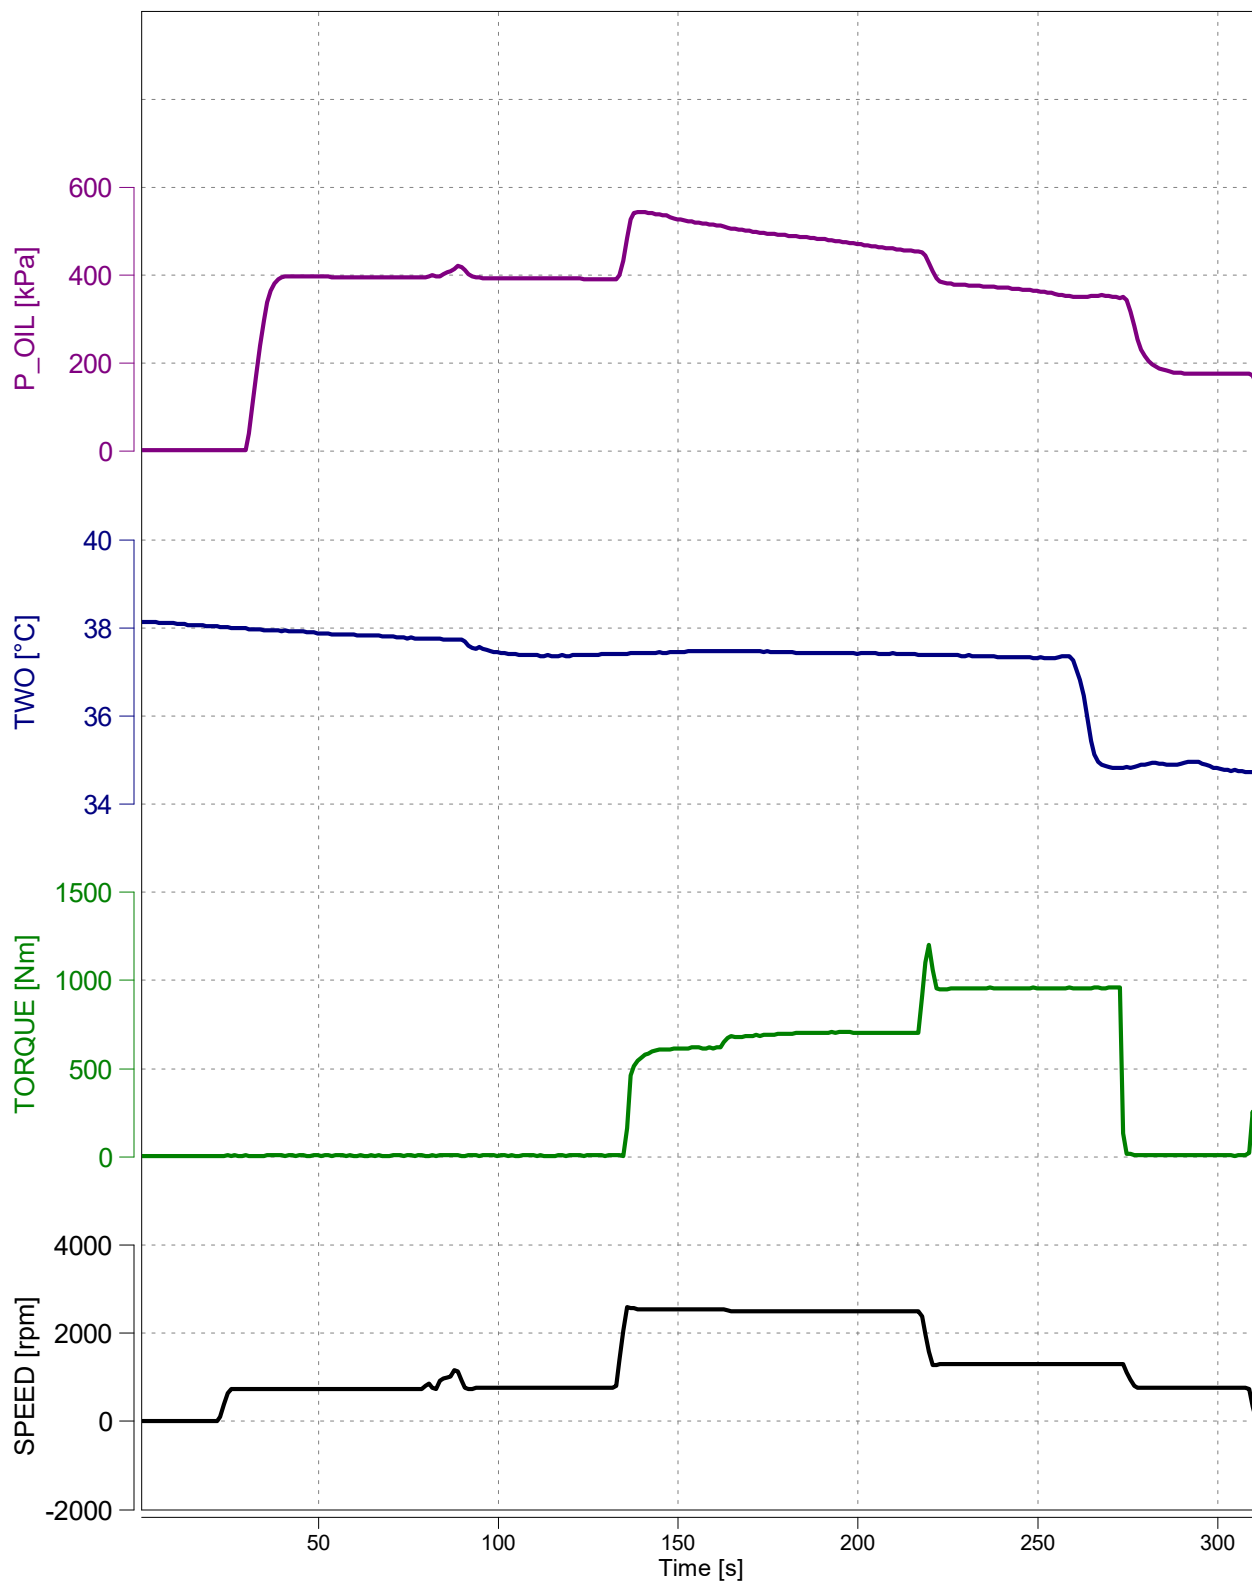



Production Test Report

Final Test Status: FAILED

Engine Serial Number: 86111265

Executed Test: HOT TEST SHORT

Test Number: 1

	Unit	Lower Limit	Value	Upper Limit	Status
LOW_IDLE					
SPEED	rpm	698.00	750.03	810.00	PASSED
P_OIL	kPa	75.00	391.83		PASSED
OPA_ANLG	-		4.85		
HIGH_IDLE					
SPEED	rpm	2500.00	2550.03	2600.00	PASSED
P_OIL	kPa		520.11		
RATED_HP					
SPEED	rpm	2498.00	2500.01	2502.00	PASSED
P	kW	167.00	184.33	200.00	PASSED
FB_RATE	kg/h	35.00	40.32	45.00	PASSED
P_INTAKE	kPa		155.14		
P_OIL	kPa	275.00	461.82		PASSED
BLOW_VAL	kPa	0.10	1.43	3.00	PASSED
OPA_ANLG	-	0.00	4.85	15.00	PASSED
T_FUEL	°C	38.00	38.95	45.00	PASSED
P_FUEL	kPa		*		
T_TUR_IN	-		*		
TORQUE_PEAK					
SPEED	rpm		1300.00		
TORQUE	Nm	850.00	957.33	998.00	PASSED
FB_RATE	kg/h	22.00	34.44	32.00	FAILED
BLOW_VAL	kPa	0.10	0.90	3.00	PASSED
OPA_ANLG	-	0.00	4.85	15.00	PASSED
T_FUEL	°C	38.00	39.04	45.00	PASSED
P_FUEL	kPa		*		
T_TUR_IN	-		*		
LOW_IDLE_2					
SPEED	rpm	600.00	749.97	800.00	PASSED
P_OIL	kPa	100.00	176.82		PASSED
OPA_ANLG	-		4.85		