


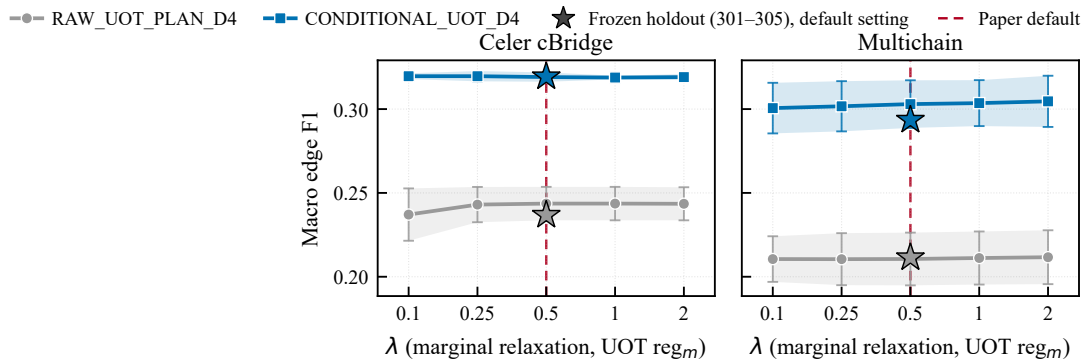

Development sensitivity uses seeds 201–205 only (mean $\pm$ 1 SD over the five seeds). Frozen holdout markers at the default setting are copied from pre-existing results; seeds 301–305 were not re-run. Holdout markers are not connected to the development curves.