
Adaptive Query Selection (AQS)

Decoder L2 → AQS → Decoder L3

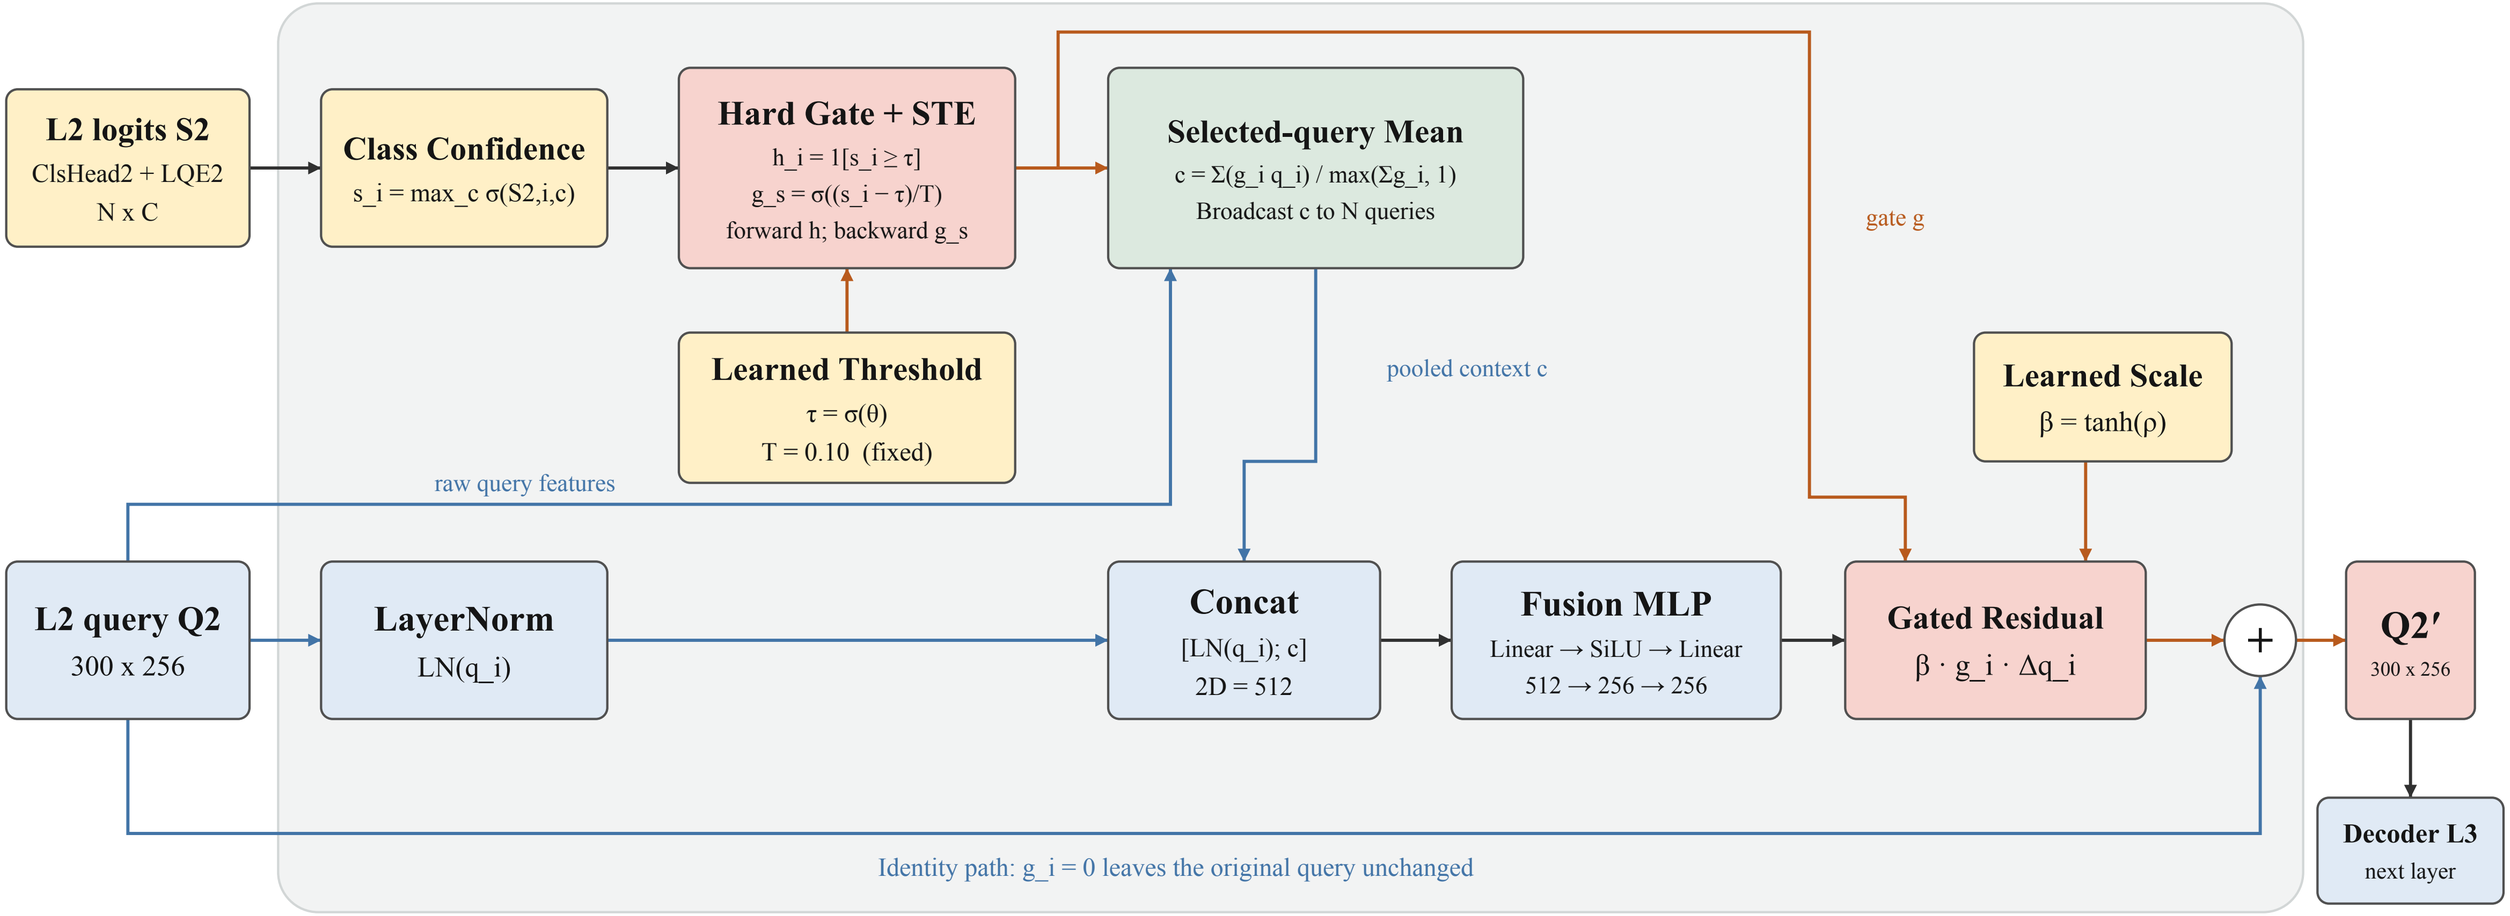

$$q_i' = q_i + \tanh(\rho) \cdot g_i \cdot \mathrm{MLP}([\mathrm{LN}(q_i); c])$$

N = 300, D = 256. Initial $\tau = 0.50$, initial $\rho = 0.10$; $T = 0.10$ is fixed. Query count is unchanged.

Training: STE gate gradients; ordinary and DN queries pool separately. The MLP output layer is zero-initialized.