



CubeSat Flight Software Workshop

Data Structures

Rob Bocchino

June 5, 2019



Jet Propulsion Laboratory
California Institute of Technology

Introduction

- A **data structure** is
 - A collection of data
 - An interface and implementation for operating on the collection
- Picking good data structures is key to writing code that
 - Is correct and performs well
 - Is understandable and maintainable
- This section will
 - Review some basic data structures and their operations
 - Sketch the implementations
 - Provide some suggestions for picking data structures

Data Structure Operations

- **Insert:** Add an element to a collection
- **Remove:** Take an element out of a collection
- **Find:** Search for and return an element
- **Iterate:** Visit each element

Basic Data Structures


- **Array:** An indexed collection of fixed size
- **List:** An ordered, non-indexed collection
- **Set:** An unordered collection
- **Map:** An unordered mapping from keys to values
- **Queue:** A collection that supports insert and remove only

Implementing Data Structures

- Building blocks
 - C/C++ arrays to hold data elements
 - Pointers or array indices for links between elements
- For FSW, prefer arrays to pointers
 - Often, you don't need a linked data structure at all: just use an array
 - If you do need links, then (in FSW)
 - No calls to *malloc* or *new* are allowed in data structure operations
 - So all memory has an associated index into a pre-allocated array
 - Using the index is safer, because it can be bounds-checked
- **Do not use C++ STL** (it uses hidden *new* and *delete* operations)

Array

- Data representation: A C/C++ array
- Operations
 - **Insert:** N/A
 - **Remove:** N/A
 - **Find:** Bounds-checked access to the underlying array
 - **Iterate:** Loop over elements

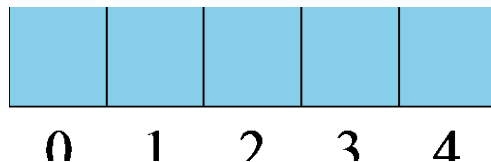


Array: Recommended Use

- Use if
 - The number of elements is fixed; and
 - The elements map to indices; and
 - The index set is numeric and dense
- Don't use if
 - The number of elements grows or shrinks; or
 - There is no numeric index set; or
 - There is a sparse numeric index set


Array-Based LIFO Queue (Stack)

- LIFO means “last in, first out”
- Data representation
 - An array A of elements
 - A variable $size$ that stores the data size. Initially it is zero
- Operations (check that $size$ is in bounds)
 - **Insert (enqueue):** Add the element at $A[size]$ and increment $size$
 - **Remove (dequeue):** Decrement $size$
 - **Find:** N/A
 - **Iterate:** N/A
- Recommended use: If you need a LIFO queue

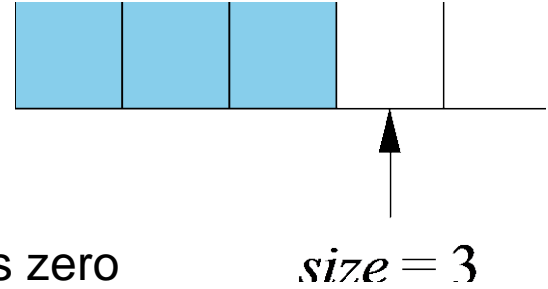

Array-Based FIFO Queue


- FIFO means “first in, first out”
- Implementation is similar to LIFO, but it
 - Uses a circular array (index mod array size)
 - Tracks starting and ending starting positions of queue in the array
 - Performs enqueue at one end of the array, dequeue at the other
 - Dequeue moves *start* forward
- Exercise:
 - Sketch the implementation
 - Pay special attention to the cases where the queue is full and empty
- Example: Buffer Manager in F Prime

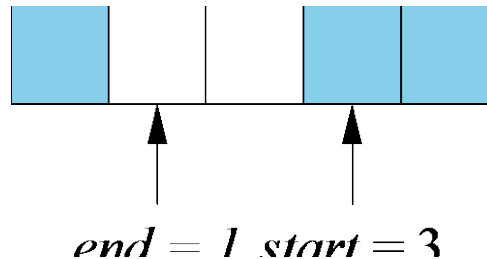

Array-Based Set/Map: Data Representation

- Data representation

- An array A of
 - Elements (small elements); or
 - Indices into elements stored in a different array (large elements).
- A variable $size$ that stores the current size. Initially it is zero.

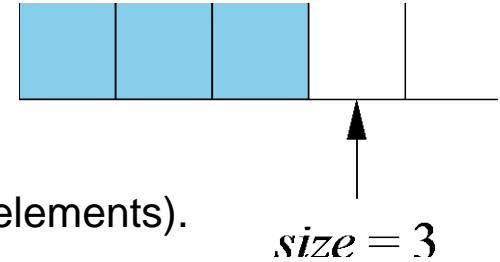

- Operations (check that $size$ is in bounds)


- **Insert:** Add the element at $A[size]$ and increment $size$
- **Remove:**
 - Swap the element with the element at $A[size]$
 - Decrement $size$
- **Find:** Linear search of first $size$ elements of A
- **Iterate:** Loop over the first $size$ elements of A

Array-Based Set/Map: Recommended Use

- Use if
 - The find operation is rare; or
 - The number of elements is small
- Don't use if
 - Find is common and the number of elements is large
 - Use hash set/map instead
- Variant: Mark nodes as unused instead of swapping nodes
 - Avoids moving nodes around
 - But insert is slower (have to search for an unused node)
 - Example: Command Dispatcher component in F Prime

Linked List: Data Representation


- An array A of nodes
 - Each node has a member $next$ that stores a link to the next node or a special $NONE$ value that is distinct from any index.
- A variable $head$ that stores the index of the first node in the list
 - Initially it contains $NONE$.
- A variable $freeHead$ that stores the index of the first node in the free list
 - Initially all nodes in A are in the free list:
 - $freeHead = 0$
 - $A[i].next = i + 1$ for $0 \leq i < n - 1$
 - $A[n - 1].next = NONE$

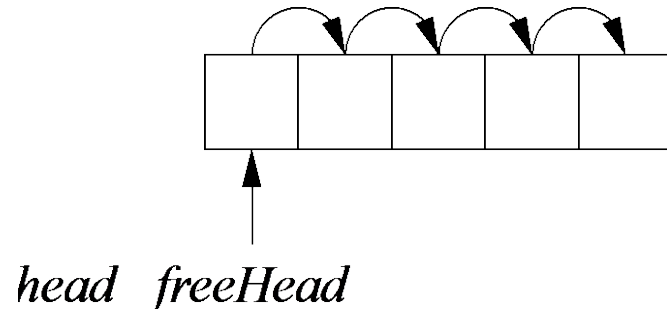

Linked List: Operations

- **Insert:**

- $tmp = A[freeHead].next$
- $A[freeHead].next = head$
- $head = freeHead$
- $freeHead = tmp$

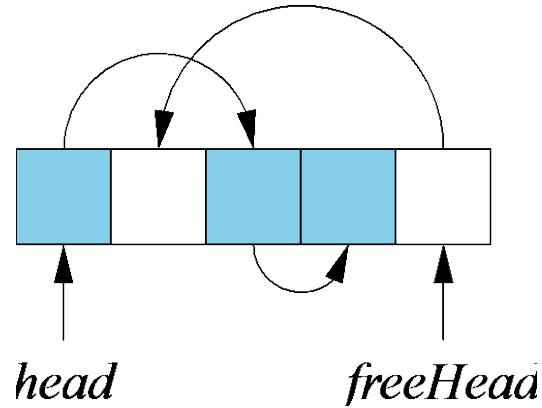

- **Remove:**

- Let N be the node to remove. Search through the linked nodes for N , starting at $head$. Maintain a reference L to the previous link.
- Let I be index in A of N . Set $L = A[I].next$.
- Insert $A[I]$ into the free list.

- **Find:** Linear search through the linked nodes, starting at $head$


- **Iterate:** Loop over the linked nodes, starting at $head$

Linked List: Recommended Use

- Use this if you want several lists to share nodes from a common array
- Otherwise use an array-based set/map
 - It is significantly less complex

Hash Set/Map: Data Representation

- An array A of linked lists that share the same array of nodes
- Each list node stores a key only (set) or a key-value pair (map)
- Initially the lists are all empty

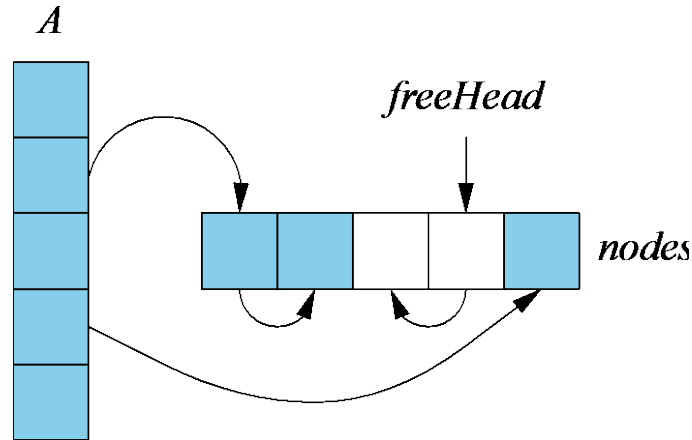

Hash Set/Map: Operations

- **Insert:**
 - Use a hash function to convert the key into an index i into A
 - Insert the key into the linked list at $A[i]$
- **Remove:**
 - Use the hash function to convert the key into an index i
 - Perform a remove on the list at $A[i]$
- **Find:**
 - Use the hash function to convert the key into an index i
 - Perform a find on the list at $A[i]$
- **Iterate:** Iterate over the array and each list in the array

Hash Set/Map: Recommended Use

- Use if
 - There is no numeric index set for the data; or
 - The index set is sparse; or
 - The data set is large, and you need fast find capability
- Otherwise use an array or array-based set/map
- Notes
 - You need to choose a good hash function, and test the performance
 - Interleaving inserts and finds can cause nondeterministic performance
 - If you do all inserts at initialization time, this is not a problem
- Example: *TlmChan* component in F Prime

References

- Lewis and Denenberg, *Data Structures & Their Algorithms*.
- Shaffer, *A Practical Introduction to Data Structures and Algorithm Analysis*.



Jet Propulsion Laboratory
California Institute of Technology

jpl.nasa.gov