



Example of how images are retrieved



```
<html>
```

```
  <body>
```

```
    <img src=images/bart.jpg/>
```

```
  </body>
```

```
</html>
```

*GET hello/bart/*





<http://www.example.com//hello/bart/>

*GET images/bart.jpg*







MIME : text/html






MIME : image/jpeg



A blue rounded square icon with the letters 'API' in white. The icon has a slight 3D effect with a shadow underneath.

**API**

# Example of how images are retrieved

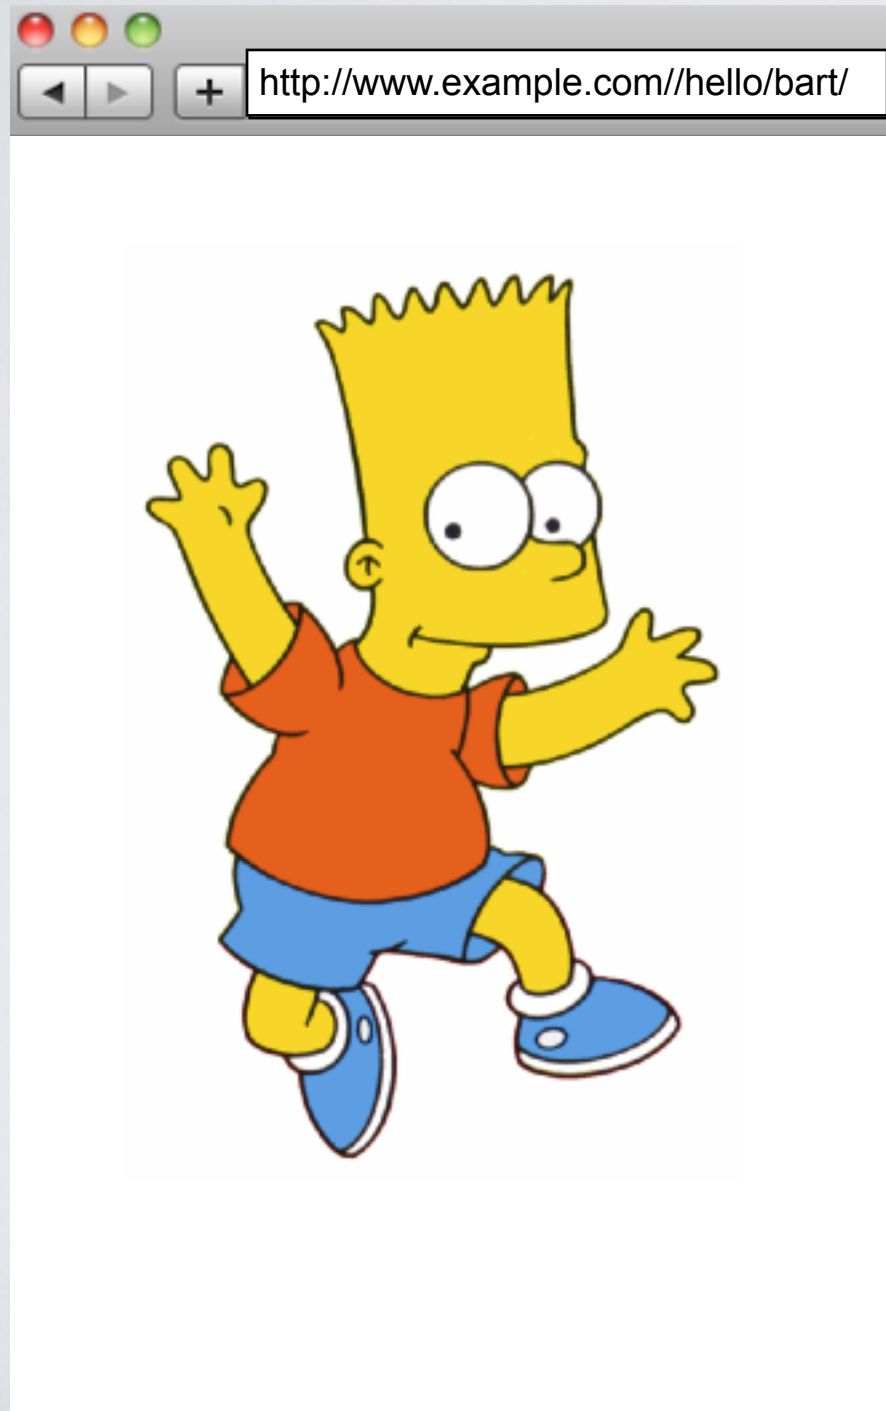

*GET hello/bart/*



```
<html>
  <body>
    <img src=images/bart.jpg/>
  </body>
</html>
```

MIME : text/html



*GET images/bart.jpg*



MIME : image/jpg

# Do/Don't with files

- Do **not** send a base64 encoded file content with JSON, use `multipart/form-data` instead (compression)
- Do **not** store uploaded files with the static content
- Do **not** serve uploaded files statically (security)
- Do store the mimetype and set the HTTP response header mimetype when files are sent back