

# GeNN

## 2.0

Generated by Doxygen 1.8.9.1

Fri Nov 6 2015 22:13:05

## Contents

<b>1</b>	<b>Main Page</b>	<b>1</b>
<b>2</b>	<b>Installation</b>	<b>1</b>
2.1	Downloading a release . . . . .	1
2.2	Obtaining a Git snapshot . . . . .	1
2.3	Installing GeNN . . . . .	2
2.4	Testing Your Installation . . . . .	3
<b>3</b>	<b>Quickstart</b>	<b>3</b>
3.1	Running an Example Model in Unix . . . . .	3
3.2	Running an Example Model in Windows . . . . .	4
3.3	How to use GeNN for New Projects . . . . .	5
3.4	Defining a New Model in GeNN . . . . .	5
<b>4</b>	<b>Examples</b>	<b>7</b>
4.1	Single compartment Izhikevich neuron(s) . . . . .	7
4.2	Izhikevich neurons driven by Poisson input spike trains: . . . . .	8
4.3	Pulse-coupled Izhikevich network . . . . .	8
4.4	Izhikevich network with delayed synapses . . . . .	9
4.5	Insect olfaction model . . . . .	10
4.6	Insect olfaction model with user-defined neuron and synapse models . . . . .	11
4.7	Insect Olfaction Model using INDIVIDUALID connectivity scheme . . . . .	11
4.8	Insect Olfaction Model using INDIVIDUALID connectivity scheme . . . . .	11
4.9	Voltage clamp simulation to estimate Hodgkin-Huxley parameters . . . . .	11
<b>5</b>	<b>Release Notes for GeNN v2.0</b>	<b>12</b>
<b>6</b>	<b>User Manual</b>	<b>15</b>
6.1	Contents . . . . .	15
6.2	Introduction . . . . .	15
6.3	Defining a network model . . . . .	15
6.4	Neuron models . . . . .	17
6.5	Synapse models . . . . .	25
<b>7</b>	<b>Tutorial 1</b>	<b>28</b>
7.1	The Model Definition . . . . .	29
7.2	User Code . . . . .	31
7.3	Makefile . . . . .	32
7.4	Making and Running the Simulation . . . . .	32
7.5	Adding External Input . . . . .	32

<b>8</b>	<b>Tutorial 2</b>	<b>34</b>
8.1	Adding Synaptic connections . . . . .	34
8.2	Defining the Detailed Synaptic Connections . . . . .	35
8.3	Setting Heterogeneous Initial Conditions . . . . .	37
<b>9</b>	<b>Suggestions for users</b>	<b>37</b>
9.1	Creating and simulating a network model . . . . .	37
9.2	Floating point precision . . . . .	39
9.3	Working with variables in GeNN . . . . .	39
9.4	Debugging suggestions . . . . .	41
<b>10</b>	<b>Credits</b>	<b>41</b>
<b>11</b>	<b>Hierarchical Index</b>	<b>42</b>
11.1	Class Hierarchy . . . . .	42
<b>12</b>	<b>Class Index</b>	<b>43</b>
12.1	Class List . . . . .	43
<b>13</b>	<b>File Index</b>	<b>44</b>
13.1	File List . . . . .	44
<b>14</b>	<b>Class Documentation</b>	<b>50</b>
14.1	classlzh Class Reference . . . . .	50
14.2	classol Class Reference . . . . .	52
14.3	CodeHelper Class Reference . . . . .	61
14.4	CStopWatch Class Reference . . . . .	62
14.5	dpclass Class Reference . . . . .	63
14.6	errTupel Struct Reference . . . . .	63
14.7	expDecayDp Class Reference . . . . .	64
14.8	inputSpec Struct Reference . . . . .	64
14.9	neuronModel Struct Reference . . . . .	65
14.10	neuronpop Class Reference . . . . .	67
14.11	NNmodel Class Reference . . . . .	68
14.12	Parameter Struct Reference . . . . .	82
14.13	postSynModel Struct Reference . . . . .	82
14.14	postVarsInPostLearn Class Reference . . . . .	84
14.15	postVarsInPostLearn_sparse Class Reference . . . . .	84
14.16	postVarsInSimCode Class Reference . . . . .	85
14.17	postVarsInSimCode_sparse Class Reference . . . . .	86
14.18	postVarsInSynapseDynamics Class Reference . . . . .	86
14.19	postVarsInSynapseDynamics_sparse Class Reference . . . . .	87

14.20preVarsInPostLearn Class Reference . . . . .	88
14.21preVarsInPostLearn_sparse Class Reference . . . . .	89
14.22preVarsInSimCode Class Reference . . . . .	89
14.23preVarsInSimCode_sparse Class Reference . . . . .	90
14.24preVarsInSynapseDynamics Class Reference . . . . .	91
14.25preVarsInSynapseDynamics_sparse Class Reference . . . . .	92
14.26pwSTDP Class Reference . . . . .	92
14.27pwSTDP_userdef Class Reference . . . . .	93
14.28randomGauss Class Reference . . . . .	95
14.29randomGen Class Reference . . . . .	96
14.30rulkovdp Class Reference . . . . .	97
14.31Schmuker2014_classifier Class Reference . . . . .	98
14.32stdRG Class Reference . . . . .	103
14.33stopWatch Struct Reference . . . . .	104
14.34SynDelay Class Reference . . . . .	105
14.35weightUpdateModel Class Reference . . . . .	105
<b>15 File Documentation</b>	<b>107</b>
15.1 00_MainPage.dox File Reference . . . . .	107
15.2 01_Installation.dox File Reference . . . . .	107
15.3 02_Quickstart.dox File Reference . . . . .	107
15.4 03_Examples.dox File Reference . . . . .	107
15.5 09_ReleaseNotes_v2.dox File Reference . . . . .	107
15.6 10_UserManual.dox File Reference . . . . .	107
15.7 11_Tutorial.dox File Reference . . . . .	107
15.8 12_Tutorial.dox File Reference . . . . .	107
15.9 13_UserGuide.dox File Reference . . . . .	107
15.10 14_Credits.dox File Reference . . . . .	108
15.11 classol_sim.cu File Reference . . . . .	108
15.12 classol_sim.cu File Reference . . . . .	108
15.13 classol_sim.cu File Reference . . . . .	108
15.14 classol_sim.cu File Reference . . . . .	109
15.15 classol_sim.h File Reference . . . . .	109
15.16 classol_sim.h File Reference . . . . .	110
15.17 classol_sim.h File Reference . . . . .	111
15.18 classol_sim.h File Reference . . . . .	112
15.19 CodeHelper.cc File Reference . . . . .	113
15.20 ensureFtype.h File Reference . . . . .	114
15.21 experiment.cu File Reference . . . . .	114
15.22 experiment.h File Reference . . . . .	116

15.23extra_neurons.h File Reference . . . . .	118
15.24extra_postsynapses.h File Reference . . . . .	119
15.25extra_postsynapses.h File Reference . . . . .	120
15.26extra_weightupdates.h File Reference . . . . .	121
15.27GA.cc File Reference . . . . .	121
15.28gauss.cc File Reference . . . . .	121
15.29gauss.h File Reference . . . . .	122
15.30gen_input_structured.cc File Reference . . . . .	122
15.31gen_kcdn_syns.cc File Reference . . . . .	123
15.32gen_kcdn_syns_fixto10K.cc File Reference . . . . .	123
15.33gen_pnkc_syns.cc File Reference . . . . .	124
15.34gen_pnkc_syns_indivID.cc File Reference . . . . .	125
15.35gen_pnlhi_syns.cc File Reference . . . . .	125
15.36gen_syns_sparse.cc File Reference . . . . .	126
15.37gen_syns_sparse_izhModel.cc File Reference . . . . .	127
15.38generate_run.cc File Reference . . . . .	129
15.39generate_run.cc File Reference . . . . .	129
15.40generate_run.cc File Reference . . . . .	130
15.41generate_run.cc File Reference . . . . .	131
15.42generate_run.cc File Reference . . . . .	132
15.43generate_run.cc File Reference . . . . .	133
15.44generate_run.cc File Reference . . . . .	134
15.45generate_run.cc File Reference . . . . .	134
15.46generateALL.cc File Reference . . . . .	135
15.47generateCPU.cc File Reference . . . . .	136
15.48generateKernels.cc File Reference . . . . .	137
15.49generateRunner.cc File Reference . . . . .	139
15.50GeNNHelperKrnls.cu File Reference . . . . .	139
15.51global.h File Reference . . . . .	140
15.52helper.h File Reference . . . . .	142
15.53HHVClamp.cc File Reference . . . . .	144
15.54hr_time.cpp File Reference . . . . .	145
15.55hr_time.h File Reference . . . . .	145
15.56Izh_sim_sparse.cu File Reference . . . . .	146
15.57Izh_sparse.cc File Reference . . . . .	146
15.58Izh_sparse_model.cc File Reference . . . . .	148
15.59Izh_sparse_model.h File Reference . . . . .	148
15.60Izh_sparse_sim.h File Reference . . . . .	148
15.61map_classol.cc File Reference . . . . .	149
15.62map_classol.cc File Reference . . . . .	149

15.63map_classol.cc File Reference . . . . .	150
15.64map_classol.cc File Reference . . . . .	150
15.65map_classol.h File Reference . . . . .	150
15.66map_classol.h File Reference . . . . .	150
15.67map_classol.h File Reference . . . . .	151
15.68map_classol.h File Reference . . . . .	151
15.69MBody1.cc File Reference . . . . .	151
15.70MBody1.cc File Reference . . . . .	154
15.71MBody_delayedSyn.cc File Reference . . . . .	158
15.72MBody_individualID.cc File Reference . . . . .	162
15.73MBody_userdef.cc File Reference . . . . .	166
15.74MBody_userdef.cc File Reference . . . . .	169
15.75Model_Schmuker_2014_classifier.cc File Reference . . . . .	173
15.76modelSpec.cc File Reference . . . . .	174
15.77modelSpec.h File Reference . . . . .	175
15.78OneComp.cc File Reference . . . . .	180
15.79OneComp_model.cc File Reference . . . . .	182
15.80OneComp_model.h File Reference . . . . .	182
15.81OneComp_sim.cu File Reference . . . . .	182
15.82OneComp_sim.h File Reference . . . . .	182
15.83PoissonIzh-model.cc File Reference . . . . .	183
15.84PoissonIzh-model.h File Reference . . . . .	183
15.85PoissonIzh.cc File Reference . . . . .	183
15.86PoissonIzh_sim.cu File Reference . . . . .	185
15.87PoissonIzh_sim.h File Reference . . . . .	186
15.88postVarsInPostLearn.cc File Reference . . . . .	187
15.89postVarsInPostLearn_sparse.cc File Reference . . . . .	188
15.90postVarsInSimCode.cc File Reference . . . . .	189
15.91postVarsInSimCode_sparse.cc File Reference . . . . .	190
15.92postVarsInSynapseDynamics.cc File Reference . . . . .	191
15.93postVarsInSynapseDynamics_sparse.cc File Reference . . . . .	192
15.94preVarsInPostLearn.cc File Reference . . . . .	193
15.95preVarsInPostLearn_sparse.cc File Reference . . . . .	194
15.96preVarsInSimCode.cc File Reference . . . . .	196
15.97preVarsInSimCode_sparse.cc File Reference . . . . .	197
15.98preVarsInSynapseDynamics.cc File Reference . . . . .	198
15.99preVarsInSynapseDynamics_sparse.cc File Reference . . . . .	199
15.100andomGen.cc File Reference . . . . .	200
15.101andomGen.h File Reference . . . . .	200
15.102Schmuker2014_classifier.cu File Reference . . . . .	201

15.10	<del>S</del> chmuker2014_classifier.h File Reference	201
15.10	<del>4</del> impleBit.h File Reference	202
15.10	<del>5</del> izes.h File Reference	202
15.10	<del>6</del> parseUtils.cc File Reference	203
15.10	<del>7</del> tringutils.h File Reference	204
15.10	<del>8</del> ynDelay.cc File Reference	205
15.10	<del>9</del> ynDelaySim.cu File Reference	208
15.11	<del>6</del> ynDelaySim.h File Reference	208
15.11	<del>1</del> estDefaultConstructor.cu File Reference	209
15.11	<del>2</del> estHelper.h File Reference	209
15.11	<del>3</del> estHelper.h File Reference	209
15.11	<del>4</del> estMixedArray.cc File Reference	209
15.11	<del>5</del> estPostVarsInPostLearn.cu File Reference	210
15.11	<del>6</del> estPostVarsInPostLearn.h File Reference	211
15.11	<del>7</del> estPostVarsInPostLearn_sparse.cu File Reference	211
15.11	<del>8</del> estPostVarsInPostLearn_sparse.h File Reference	211
15.11	<del>9</del> estPostVarsInSimCode.cu File Reference	212
15.12	<del>0</del> estPostVarsInSimCode.h File Reference	212
15.12	<del>1</del> estPostVarsInSimCode_sparse.cu File Reference	213
15.12	<del>2</del> estPostVarsInSimCode_sparse.h File Reference	213
15.12	<del>3</del> estPostVarsInSynapseDynamics.cu File Reference	214
15.12	<del>4</del> estPostVarsInSynapseDynamics.h File Reference	214
15.12	<del>5</del> estPostVarsInSynapseDynamics_sparse.cu File Reference	215
15.12	<del>6</del> estPostVarsInSynapseDynamics_sparse.h File Reference	215
15.12	<del>7</del> estPreVarsInPostLearn.cu File Reference	215
15.12	<del>8</del> estPreVarsInPostLearn.h File Reference	216
15.12	<del>9</del> estPreVarsInPostLearn_sparse.cu File Reference	216
15.13	<del>0</del> estPreVarsInPostLearn_sparse.h File Reference	217
15.13	<del>1</del> estPreVarsInSimCode.cu File Reference	217
15.13	<del>2</del> estPreVarsInSimCode.h File Reference	218
15.13	<del>3</del> estPreVarsInSimCode_sparse.cu File Reference	218
15.13	<del>4</del> estPreVarsInSimCode_sparse.h File Reference	219
15.13	<del>5</del> estPreVarsInSynapseDynamics.cu File Reference	219
15.13	<del>6</del> estPreVarsInSynapseDynamics.h File Reference	220
15.13	<del>7</del> estPreVarsInSynapseDynamics_sparse.cu File Reference	220
15.13	<del>8</del> estPreVarsInSynapseDynamics_sparse.h File Reference	221
15.13	<del>9</del> estRegEx.cc File Reference	221
15.14	<del>0</del> String.h File Reference	222
15.14	<del>1</del> utils.h File Reference	223
15.14	<del>2</del> ClampGA.cu File Reference	225

<a href="#">15.143ClampGA.h File Reference</a> . . . . .	226
<a href="#">Bibliography</a>	227
<a href="#">Index</a>	229

## 1 Main Page

GeNN is a software package to enable neuronal network simulations on NVIDIA GPUs by code generation. Models are defined in a simple C-style API and the code for running them on either GPU or CPU hardware is generated by GeNN. GeNN can also be used through external interfaces. Currently there are prototype interfaces for [Spine↔Creator and SpineML](#) and for [Brian2](#).

GeNN is currently developed and maintained by

[James Turner](#) ([contact James](#))  
[Dr. Esin Yavuz](#) ([contact Esin](#))  
[Prof. Thomas Nowotny](#) ([contact Thomas](#))

The development of GeNN is partially supported by the [EPSRC](#) (grant number [EP/J019690/1 - Green Brain Project](#)).

### Note

This documentation is under construction. If you cannot find what you are looking for, please contact the project developers.

[Next](#)

## 2 Installation

You can download GeNN either as a zip file of a stable release or a snapshot of the most recent stable version or the unstable development version using the Git version control system.

### 2.1 Downloading a release

Point your browser to <https://github.com/genn-team/genn/releases> and download a release from the list by clicking the relevant source code button. Note that GeNN is only distributed in the form of source code due to its code generation design. Binary distributions would not make sense in this framework and are not provided. After downloading continue to install GeNN as described in the [Installing GeNN](#) section below.

### 2.2 Obtaining a Git snapshot

If it is not yet installed on your system, download and install Git (<http://git-scm.com/>). Then clone the GeNN repository from Github

```
git clone https://github.com/genn-team/genn.git
```

The github url of GeNN in the command above can be copied from the HTTPS clone URL displayed on the GeNN Github page (<https://github.com/genn-team/genn>).



This will clone the entire repository, including all open branches. By default git will check out the master branch which contains the source version upon which the latest release is based. If you want the most recent (but unstable) development version (which may or may not be fully functional at any given time), checkout the development branch

```
git checkout development
```

There are other branches in the repository that are used for specific development purposes and are opened and closed without warning.

As an alternative to using git you can also download the full content of GeNN sources clicking on the "Download ZIP" button on the bottom right of the GeNN Github page (<https://github.com/genn-team/genn>).

## 2.3 Installing GeNN

Installing GeNN comprises a few simple steps to create the GeNN development environment.

(i) If you have downloaded a zip file, unpack GeNN.zip in a convenient location. Otherwise enter the directory where you downloaded the Git repository.

(ii) Define the environment variable "GENN\_PATH" to point to the main GeNN directory, e.g. if you extracted/downloaded GeNN to /usr/local/GeNN, then you can add "export GENN\_PATH=/usr/local/GeNN" to your login script (e.g. .profile or .bashrc. If you are using WINDOWS, the path should be a windows path as it will be interpreted by the Visual C++ compiler cl, and environment variables are best set using setx in a Windows cmd window. To do so, open a Windows cmd window by typing cmd in the search field of the start menu, followed by the enter key. In the cmd window type

```
setx GENN_PATH "C:\Users\me\GeNN"
```

where C:\Users\me\GeNN is the path to your GeNN directory.

(iii) Add \$GENN\_PATH/lib/bin to your PATH variable, e.g.

```
export PATH=$PATH:$GENN_PATH/lib/bin
```

in your login script, or in windows,

```
setx PATH=%PATH%;%GENN_PATH%/lib/bin
```

(iv) If you haven't installed CUDA on your machine, obtain a fresh installation of the NVIDIA CUDA toolkit from <https://developer.nvidia.com/cuda-downloads>

(v) Set the CUDA\_PATH variable if it is not already set by the system, by putting

```
export CUDA_PATH=/usr/local/cuda
```

in your login script (or, if CUDA is installed in a non-standard location, the appropriate path to the main CUDA directory). For most people, this will be done by the CUDA install script and the default value of /usr/local/cuda is fine. In Windows, use setx to set this variable,

```
setx CUDA_PATH
```

This normally completes the installation.

Depending on the needs of your own projects, e.g., dependencies on other libraries or non-standard installation paths of libraries used by GeNN, you may want to modify Makefile examples under \$GENN\_PATH/userproject/xxx↵\_project and \$GENN\_PATH/userproject/xxx\_project/model to add extra linker-, include- and compiler-flags on a per-project basis, or modify global default flags in \$GENN\_PATH/lib/include/makefile\_↵common.mk.

For all makefiles there are separate makefiles for Unix-style operating systems (GNUMakefile) such as Linux or MacOS and for Windows (WINMakefile).

If you are using GeNN in Windows, you can use `make.bat` to build examples which will attempt to setup your development environment by executing `vcvarsall.bat` which is part of every Visual Studio distribution. For this to work properly, GeNN must be able to locate the Visual Studio install directory, which should be contained in the `VS_PATH` environment variable. You can set this variable by hand if it is not already set by the Visual C++ installer by typing

```
setx VS_PATH "C:\Program Files (x86)\Microsoft Visual Studio 10.0"
```

#### Note

- The exact path and name of Visual C++ installations will vary between systems.
- Double quotation marks like in the above example are necessary whenever a path contains spaces.

GeNN also has experimental CYGWIN support. However, with the introduction of native Windows support in GeNN 1.1.3, this is not being developed further and should be considered as deprecated.

## 2.4 Testing Your Installation

To test your installation, follow the example in the [Quickstart section](#).

[Top](#) | [Next](#)

## 3 Quickstart

GeNN is based on the idea of code generation for the involved GPU or CPU simulation code for neuronal network models but leaves a lot of freedom how to use the generated code in the final application. To facilitate the use of GeNN on the background of this philosophy, it comes with a number of complete examples containing both the model description code that is used by GeNN for code generation and the "user side code" to run the generated model and save the results. Running these complete examples should be achievable in a few minutes. The necessary steps are described below.

### 3.1 Running an Example Model in Unix

In order to get a quick start and run a provided model, open a shell, navigate to `GeNN/tools` and type

```
make
```

This will compile additional tools for creating and running example projects. For a first complete test, the system is best used with a full driver program such as in the [Insect olfaction model](#) example:

```
tools/generate_run <0(CPU)/1(GPU)> <#AL> <#KC> <#LH> <#DN> <gscale> <OUTNAME> <MODEL> <DEBUG> <FTYPE>
<REUSE>.
```

To compile `generate_run.cc`, navigate to the `userproject/MBody1_project` directory and type

```
make all
```

This will generate an executable that you can invoke with, e.g.,

```
./generate_run 1 100 1000 20 100 0.0025 test1 MBody1 0 FLOAT 0
```

which would generate and simulate a model of the locust olfactory system with 100 projection neurons, 1000 Kenyon cells, 20 lateral horn interneurons and 100 output neurons in the mushroom body lobes.

The tool `generate_run` will generate connectivity matrices for the model `MBody1` and store them into files, compile and run the model on the GPU using these files as inputs and output the resulting spiking activity. To fix the GPU used, replace the first argument `1` with the device number of the desired GPU plus 2, e.g., `2` for GPU 0. All input and output files will be prefixed with `test1` and will be created in a sub-directory with the name `test1_output`. The third to last parameter `0` will switch the debugging mode off, `1` would switch it on. More about debugging in the [debugging section](#). The parameter `FLOAT` will run the model in float (single precision floating point), using `DOUBLE` would use double precision. The last parameter regulates whether previously generated files for connectivity and input should be reused (`1`) or files should be generated anew (`0`).

The `MBody1` example is already a highly integrated example that showcases many of the features of GeNN and how to program the user-side code for a GeNN application. More details in the [User Manual](#)

## 3.2 Running an Example Model in Windows

All interaction with GeNN programs are command-line based and hence are executed within a `cmd` window. Open a `cmd` window and navigate to the `userprojects\tools` directory.

```
cd %GENN_PATH%\userprojects\tools
```

Then type

```
make.bat all
```

to compile a number of tools that are used by the example projects to generate connectivity and inputs to model networks.

Then navigate to the `MBody1_project` directory.

```
cd ..\MBody1_project
```

By typing

```
make.bat all
```

you can compile the `generate_run` engine that allows to run a [Insect olfaction model](#) model of the insect mushroom body:

```
tools/generate_run <0(CPU)/1(GPU)> <#AL> <#KC> <#LH> <#DN> <gscale> <OUTNAME> <MODEL> <DEBUG> <FTYPE>
<REUSE>.
```

To invoke `generate_run.exe` type, e.g.,

```
generate_run.exe 1 100 1000 20 100 0.0025 test1 MBody1 0 FLOAT 0
```

which would generate and simulate a model of the locust olfactory system with 100 projection neurons, 1000 Kenyon cells, 20 lateral horn interneurons and 100 output neurons in the mushroom body lobes.

The tool `generate_run.exe` will generate connectivity matrices for the model `MBody1` and store them into files, compile and run the model on an automatically chosen GPU using these files as inputs and output the resulting spiking activity. To fix the GPU used, replace the first argument `1` with the device number of the desired GPU plus 2, e.g., `2` for GPU 0. All input and output files will be prefixed with `test1` and will be created in a sub-directory with the name `test1_output`. The last parameter `0` will switch the debugging mode off, `1` would switch it on. More about debugging in the [debugging section](#).

The `MBody1` example is already a highly integrated example that showcases many of the features of GeNN and how to program the user-side code for a GeNN application. [More details in the User Manual](#)

### 3.3 How to use GeNN for New Projects

Creating and running projects in GeNN involves a few steps ranging from defining the fundamentals of the model, inputs to the model, details of the model like specific connectivity matrices or initial values, running the model and analyzing or saving the data.

The most common way to use GeNN is to create or modify a program such as `userproject/MBody1_project/generate_run.cc` that wraps around other programs that are used for each of the necessary steps listed above. In more detail, what `generate_run` and similar programs do is:

1. To use other tools (programs) to generate connectivity matrices and store them into files.
2. To build the source code of a model simulation using GeNN. In the example of the MBody1\_project this entails writing neuron numbers into `userproject/include/sizes.h`, and executing

```
buildmodel.sh MBody1 [DEBUG OFF/ON]
```

The `buildmodel.sh` script compiles the installed GeNN code generator in conjunction with the user-provided model description (see [below](#)), in this example `model/MBody1.cc`. It then executes the GeNN code generator to generate the complete model simulation code for the MBody1 model.

3. To compile the generated model code, that can be found in `model/MBody1_CODE/` by invoking `make clean && make` in the `model` directory. It is at this stage that GeNN generated model simulation code is combined with user-side run-time code, in this example `classol_sim.cu` (classify-olfaction-simulation) which uses the `map_classol` (map-neuron-based-classifier-olfaction) class.
4. To finally run the resulting stand-alone simulator executable, in the MBody1 example `classol_sim` in the `model` directory.

The `generate_run` tool is only a suggested usage scenario of GeNN. Alternatively, users can manually execute the four steps above or integrate GeNN with development environments of their own choice.

#### Note

The usage scenario described was made explicit for Unix environments. In Windows the setup is essentially the same except for the usual operating system dependent syntax differences, e.g. the build script is named `buildmodel.bat`, compilation of the generated model simulator would be `make.bat clean && make.bat all`, or, `nmake /f WINmakefile clean && nmake /f WINmakefile all`, and the resulting executable would be named `classol_sim.exe`.

GeNN comes with several example projects which showcase how to use its features. The MBody1 example discussed above is one of the many provided examples that are described in more detail in [Example projects](#).

### 3.4 Defining a New Model in GeNN

According to the work flow outlined above, there are several steps to be completed to define a neuronal network model.

1. The neuronal network of interest is defined in a model definition file, e.g. `Example1.cc`.

#### Note

GeNN follows a convention in which C/C++ files end with `.cc` and the model definition file will only be recognized by the `buildmodel.sh` or `buildmodel.bat` scripts if it follows this convention and ends on `.cc`.

2. Within the the model definition file `Example1.cc`, the following tasks need to be completed:
  - a) The time step `DT` needs to be defined, e.g.

```
#define DT 0.1
```

**Note**

All provided examples and pre-defined model elements in GeNN work with units of mV, ms, nF and  $\mu$ S. However, the choice of units is entirely left to the user if custom model elements are used.

b) The GeNN files `modelSpec.h` and `modelSpec.cc` need to be included,

```
#include "modelSpec.h"
#include "modelSpec.cc"
```

c) The values for initial variables and parameters for neuron and synapse populations need to be defined, e.g.

```
float myPOI_p[4]= {
    0.1,      // 0 - firing rate
    2.5,      // 1 - refractory period
    20.0,     // 2 - Vspike
    -60.0,    // 3 - Vrest
};
```

would define the (homogeneous) parameters for a population of Poisson neurons.

**Note**

The number of required parameters and their meaning is defined by the neuron or synapse type. Refer to the [User Manual](#) for details.

We recommend, however, to use comments like in the above example to achieve maximal clarity of each parameter's meaning.

If heterogeneous parameter values are needed for any particular population of neurons (synapses), a new neuron (synapse) type needs to be defined in which these parameters are defined as "variables" rather than parameters. See the [User Manual](#) for how to define new neuron (synapse) types.

d) the actual network needs to be defined in the form of a function `modelDefinition`, i.e.

```
void modelDefinition(NNmodel &model);
```

**Note**

The name `modelDefinition` and its parameter of type `NNmodel&` are fixed and cannot be changed if GeNN is to recognize it as a model definition.

`MBody1.cc` shows a typical example of a model definition function. In its core it contains calls to `model.addNeuronPopulation` and `model.addSynapsePopulation` to build up the network. For a full range of options for defining a network, refer to the [User Manual](#).

1. The programmer defines her own "user-side" modeling code similar to the code in `userproject/MBody1_project/model/map_classol.*` and `userproject/MBody1_project/model/classol*_sim.*`. In this code,
  - a) she defines the connectivity matrices between neuron groups. (In the `MBody1` example those are read from files). Refer to the [User Manual](#) for the required format of connectivity matrices for dense or sparse connectivities.
  - b) she defines input patterns (e.g. for Poisson neurons like in the `MBody1` example) or individual initial values for neuron and/or synapse variables.

**Note**

The initial values given in the `modelDefinition` are automatically applied homogeneously to every individual neuron or synapse in each of the neuron or synapse groups.

c) she uses `stepTimeGPU(...)` to run one time step on the GPU or `stepTimeCPU(...)` to run one on the CPU. (both GPU and CPU versions are always compiled).

**Note**

However, mixing CPU and GPU execution does not make too much sense. Among other things, The CPU version uses the same host side memory where the results from the GPU version are copied, which would lead to collisions between what is calculated on the CPU and on the GPU (see next point). However, in certain circumstances, expert users may want to split the calculation and calculate parts (e.g. neurons) on the GPU and parts (e.g. synapses) on the CPU. In such cases the fundamental kernel and function calls contained in `stepTimeXXX` need to be used and appropriate copies of the data from the CPU to the GPU and vice versa need to be performed.

d) she uses functions like `copyStateFromDevice()` etc to transfer the results from GPU calculations to the main memory of the host computer for further processing.

e) she analyzes the results. In the most simple case this could just be writing the relevant data to output files.

[Previous](#) | [Top](#) | [Next](#)

## 4 Examples

GeNN comes with a number of complete examples. At the moment, there are seven such example projects provided with GeNN.

### 4.1 Single compartment Izhikevich neuron(s)

This is a minimal example, with only one neuron population (with more or less neurons depending on the command line, but without any synapses). The neurons are Izhikevich neurons [1] with homogeneous parameters across the neuron population. The model can be used by navigating to the `userproject/OneComp_project` directory and entering a command line

```
./generate_run <CPU/GPU> <n> <OUTNAME> <MODEL> <DEBUG> <FTYPE> <REUSE>.
```

All parameters are mandatory and signify:

- CPU/GPU: Choose whether to run the simulation on CPU (0) or GPU (1).
- n: Number of neurons
- OUTNAME: The base name of the output location and output files
- MODEL: The name of the model to execute, as provided this would be `OneComp`
- DEBUG: Whether to start in debug mode (1) or normally (0)
- FTYPE: Floating point type `FLOAT` or `DOUBLE`
- REUSE: whether to re-use input files

This would create `n` tonically spiking Izhikevich neuron(s) with no connectivity, receiving a constant, identical 4 nA input current.

For example, navigate to the `userproject/OneComp_project` directory and type

```
make all
./generate_run 1 1 Outdir OneComp_sim OneComp 0 FLOAT 0
```

to model a single neuron which output will be saved in the `Outdir_output` directory.

## 4.2 Izhikevich neurons driven by Poisson input spike trains:

In this example project there is again a pool of non-connected Izhikevich model neurons [1] that are connected to a pool of Poisson input neurons with a fixed probability.

The model can be compiled by navigating to the `userproject\PoissonIzh_project` directory and typing

```
make all
```

Subsequently it can be invoked using the following command line

```
./generate_run <CPU/GPU> <nPOISSON> <nIZHIKEVICH> <PCONN> <GSCALE> <OUTNAME> <MODEL> <DEBUG OFF/ON> <FTYPE> <REUSE>
```

All parameters are mandatory and signify:

- CPU/GPU: Choose whether to run the simulation on CPU (0) or GPU (1).
- \nPOISSON: Number of Poisson input neurons
- \nIZHIKEVICH: Number of Izhikevich neurons
- PCONN: Probability of connections
- OUTNAME: The base name of the output location and output files
- MODEL: The name of the model to execute, as provided this would be `PoissonIzh`
- DEBUG: Whether to start in debug mode (1) or normally (0)
- FTYPE: Floating point type `FLOAT` or `DOUBLE`
- REUSE: whether to re-use input files

For example, navigate to the `userproject/PoissonIzh_project` directory and type

```
./generate_run 1 100 10 0.5 2 Outdir PoissonIzh 0 DOUBLE 0
```

This will generate a network of 100 Poisson neurons connected to 10 Izhikevich neurons with a probability of 0.5. The same example network can be used with sparse connectivity (i.e. sparse matrix representations for the connectivity within GeNN) by using the keyword `SPARSE` in the `addSynapsePopulation` instead of `DENSE` in [PoissonIzh.cc](#), uncommenting the lines following the comment `//SPARSE CONNECTIVITY` in the file [PoissonIzh\\_sim.cu](#) and commenting the lines following `//DENSE CONNECTIVITY`. In this example the model would be simulated with double precision variables and input files and connectivity would not be reused from earlier runs.

## 4.3 Pulse-coupled Izhikevich network

This example model is inspired by simple thalamo-cortical network of Izhikevich [1] with an excitatory and an inhibitory population of spiking neurons that are randomly connected.

The model can be built by navigating to the `userproject/Izh_Sparse_project` directory and typing

```
make all
```

It can then be used as

```
./generate_run <CPU/GPU> <nN> <nCONN> <GSCALE> <OUTNAME> <MODEL> <DEBUG OFF/ON> <FTYPE> <REUSE>
```

All parameters are mandatory and signify:

- CPU/GPU: Choose whether to run the simulation on CPU (0) or GPU (1).
- \nN: Number of neurons
- \nCONN: Number of connections per neuron
- 'GSCALE': General scaling of synaptic conductances
- OUTNAME: The base name of the output location and output files
- MODEL: The name of the model to execute, as provided this would be `Izh_sparse`
- DEBUG: Whether to start in debug mode (1) or normally (0)
- FTYPE: Floating point type `FLOAT` or `DOUBLE`
- REUSE: whether to re-use input files

The model creates a pulse-coupled network [1] with 80% excitatory 20% inhibitory neurons, each connecting to nCONN neurons using the sparse matrix connectivity methods of GeNN.

For example, typing

```
./generate_run 1 10000 1000 1 Outdir Izh_sparse 0 FLOAT 0
```

generates a random network of 8000 excitatory and 2000 inhibitory neurons which each have 1000 outgoing synapses to randomly chosen post-synaptic target neurons. The synapses are of a simple pulse-coupling type. The results of the simulation are saved in the directory `Outdir_output`, debugging is switched off, and the connectivity is generated afresh (rather than being read from existing files).

#### Note

If connectivity were to be read from files, the connectivity files would have to be in the `inputfiles` sub-directory and be named according to the names of the synapse populations involved, e.g., `gIzh_sparse←_ee` (`<variable name>=g <model name>=Izh_sparse <synapse population>=_ee`). These name conventions are not part of the core GeNN definitions and it is the privilege (or burden) of the user to find their own in their own versions of `generate_run`.

## 4.4 Izhikevich network with delayed synapses

This example project demonstrates the feature of synaptic delays in GeNN. It creates a network of three Izhikevich neuron groups, connected all-to-all with short, medium and long delay synapse groups. Synaptic weights are chosen such that neurons in the output group only spike if they are simultaneously excited by the input neurons, via synapses with long delay, and the interneurons, via synapses with shorter delay.

To run this example project, navigate to `userproject/SynDelay_project` and type, e.g.,

```
buildmodel SynDelay
make clean && make
./bin/release/syn_delay 1 output
```



## 4.5 Insect olfaction model

This project implements the insect olfaction model by Nowotny et al. [2] that demonstrates self-organized clustering of odours in a simulation of the insect antennal lobe and mushroom body. As provided the model works with conductance based Hodgkin-Huxley neurons [4] and several different synapse types, conductance based (but pulse-coupled) excitatory synapses, graded inhibitory synapses and synapses with a simplified STDP rule.

To explore the model navigate to `userproject/MBody1_project/` and type

```
make all
./generate_run
```

This will show you the command line parameters that are needed,

```
generate_run <CPU/GPU> <nAL> <nKC> <nLHI> <nDN> <GSCALE> <OUTNAME> <MODEL> <DEBUG> <FTYPE> <REUSE>
```

All parameters are mandatory and signify:

- CPU/GPU: Choose whether to run the simulation on CPU (0) or GPU (1).
- nAL: Number of neurons in the antennal lobe (AL), the input neurons to this model
- nKC: Number of Kenyon cells (KC) in the "hidden layer"
- nLH: Number of lateral horn interneurons, implementing gain control
- nDN: Number of decision neurons (DN) in the output layer
- GSCALE: A general rescaling factor for synaptic strength
- OUTNAME: The base name of the output location and output files
- MODEL: The name of the model to execute, as provided this would be `MBody1`
- DEBUG: Whether to start in debug mode (1) or normally (0)
- FTYPE: Floating point type `FLOAT` or `DOUBLE`
- REUSE: whether to re-use input files

The tool `generate_run` will generate connectivity files for the model `MBody1`, compile this model for the CPU and GPU and execute it. The command line parameters are the numbers of neurons in the different neuropils of the model and an overall synaptic strength scaling factor. A typical call would be, e.g.,

```
./generate_run 1 100 1000 20 100 0.0025 test1 MBody1 0 FLOAT 0
```

which would generate a model, and run it on the GPU (first parameter), with 100 antennal lobe neurons, 1000 mushroom body Kenyon cells, 20 lateral horn interneurons and 100 mushroom body output neurons. All output files will be prefixed with `test1` and stored in `test1_output`. The model that is run is defined in `model/↔MBody1.cc`, debugging is switched off, the model would be simulated using float (single precision floating point) variables and parameters and the connectivity and input would be generated afresh for this run.

As provided, the model outputs a file `test1.out.st` that contains the spiking activity observed in the simulation. There are two columns in this ASCII file, the first one containing the time of a spike and the second one the ID of the neuron that spiked. Users of matlab can use the scripts in the `matlab` directory to plot the results of a simulation. For more about the model itself and the scientific insights gained from it see [2].

## 4.6 Insect olfaction model with user-defined neuron and synapse models

This examples recapitulates the exact same model as [Insect olfaction model](#) above but with user-defined model types for neurons and synapses. It is run the same way as [Insect olfaction model](#), e.g.

```
./generate_run 1 100 1000 20 100 0.0025 test1 MBody_userdef 0 FLOAT 0
```

But the way user-defined types are used should be very instructive to advanced users wishing to do the same with their models.

## 4.7 Insect Olfaction Model using INDIVIDUALID connectivity scheme

This example is very similar to the [Insect olfaction model](#) example. The only difference is that PN to KC connections are defined with the INDIVIDUALID mechanism.

It is run the same way as [Insect olfaction model](#), e.g.

```
./generate_run 1 100 1000 20 100 0.0025 test1 MBody_individualID 0 FLOAT 0
```

## 4.8 Insect Olfaction Model using INDIVIDUALID connectivity scheme

A variation of the [Insect olfaction model](#) example using synaptic delays. In this example, the Kenyon Cell-Decision Neuron synapses are delayed by  $(5 * DT)$  ms, and the Decision Neuron-Decision Neuron synapses are delayed by  $(3 * DT)$  ms. The example is intended to test the operation of synapses which have a combination of delayed spike propagation and STDP (plasticity).

It is run the same way as [Insect olfaction model](#), e.g.

```
./generate_run 1 100 1000 20 100 0.0025 test1 MBody_delayedSyn 0 FLOAT 0
```

## 4.9 Voltage clamp simulation to estimate Hodgkin-Huxley parameters

This example simulates a population of Hodgkin-Huxley neuron models on the GPU and evolves them with a simple guided random search (simple GA) to mimic the dynamics of a separate Hodgkin-Huxley neuron that is simulated on the CPU. The parameters of the CPU simulated "true cell" are drifting according to a user-chosen protocol↔ : Either one of the parameters  $g_{Na}$ ,  $E_{Na}$ ,  $g_{Kd}$ ,  $E_{Kd}$ ,  $g_{leak}$ ,  $E_{leak}$ ,  $C_{mem}$  are modified by a sinusoidal addition (voltage parameters) or factor (conductance or capacitance) - protocol 0-6. For protocol 7 all 7 parameters undergo a random walk concurrently.

The syntax of the generate\_run program is

```
generate_run <CPU=0, GPU=1> <protocol> <nPop> <totalT> <outdir> <debug mode? (0/1)> <GPU choice>
```

The parameters are

- GPU/CPU: Whether to use the GPU (1) or CPU (0) for the model neuron population
- protocol: Which changes to apply during the run to the parameters of the "true cell"

- nPop: Number of neurons in the tracking population
- totalT: Time in ms how long to run the simulation
- outdir: The directory in which to save results
- debug mode: whether to start in debugging mode (1) or not (0) GPU choice: explicit choice of the GPU to be used.

An example invocation is:

```
./generate_run 1 2 5000 1000 test1 0 0
```

This will simulate nPop= 5000 Hodgkin-Huxley neurons on the GPU which will for 1000 ms be matched to a Hodgkin-Huxley neuron where the parameter gKd is sinusoidally modulated. The output files will be written into a directory of the name test1\_output, which will be created if it does not yet exist.

[Previous](#) | [Top](#) | [Next](#)

## 5 Release Notes for GeNN v2.0

Version 2.0 of GeNN comes with a lot of improvements and added features, some of which have necessitated some changes to the structure of parameter arrays among others.

### User Side Changes

1. Users are now required to call `initGeNN()` in the model definition function before adding any populations to the neuronal network model.
2. `glbscnt` is now call `glbSpkCnt` for consistency with `glbSpkEvntCnt`.
3. There is no longer a privileged parameter `Epre`. Spike type events are now defined by a code string `spk↔EvntThreshold`, the same way proper spikes are. The only difference is that Spike type events are specific to a synapse type rather than a neuron type.
4. The function `setSynapseG` has been deprecated. In a `GLOBALG` scenario, the variables of a synapse group are set to the initial values provided in the `modeldefinition` function.
5. Due to the split of synaptic models into `weightUpdateModel` and `postSynModel`, the parameter arrays used during model definition need to be carefully split as well so that each side gets the right parameters. For example, previously

```
“C++ float myPNKC_p[3]= { 0.0, // 0 - Erev: Reversal potential -20.0, // 1 - Epre: Presynaptic thresh-
old potential 1.0 // 2 - tau_S: decay time constant for S [ms] }; “would define the parameter
array of three parameters, Erev, Epre, and tau_S for a synapse of type NSYNAPSE↔
E. This now needs to be “split” into “C++ float *myPNKC_p= NULL; float postExpPNK↔
C[2]={ 1.0, // 0 - tau_S: decay time constant for S [ms] 0.0 // 1 - Erev: Reversal potential }; “i.e.
parameters Erev and tau_S are moved to the post-synaptic model and its parameter
array of two parameters. Epre is discontinued as a parameter for NSYNAPSE. As a
consequence the weightupdate model of NSYNAPSE has no parameters and one can
pass NULL for the parameter array in addSynapsePopulation’.
```

The correct parameter lists for all defined neuron and synapse model types are listed in the [User Manual](#).

Note: \* If the parameters are not redefined appropriately this will lead to uncontrolled behaviour of models and likely to segmentation faults and crashes.

1. Advanced users can now define variables as type `scalar` when introducing new neuron or synapse types. This will at the code generation stage be translated to the model's floating point type (ftype), `float` or

double. This works for defining variables as well as in all code snippets. Users can also use the expressions `SCALAR_MAX` and `SCALAR_MIN` for `FLT_MIN`, `FLT_MAX`, `DBL_MIN` and `DBL_MAX`, respectively. Corresponding definitions of `scalar`, `SCALAR_MIN` and `SCALAR_MAX` are also available for user-side code whenever the code-generated file `runner.cc` has been included.

2. The example projects have been re-organized so that wrapper scripts of the `generate_run` type are now all located together with the models they run instead of in a common `tools` directory. Generally the structure now is that each example project contains the wrapper script `generate_run` and a `model` subdirectory which contains the model description file and the user side code complete with Makefiles for Unix and Windows operating systems. The generated code will be deposited in the `model` subdirectory in its own `modelname_CODE` folder. Simulation results will always be deposited in a new sub-folder of the main project directory.
3. The `addSynapsePopulation(...)` function has now more mandatory parameters relating to the introduction of separate weightupdate models (pre-synaptic models) and postynaptic models. The correct syntax for the `addSynapsePopulation(...)` can be found with detailed explanations in the [User Manual](#).
4. We have introduced a simple performance profiling method that users can employ to get an overview over the differential use of time by different kernels. To enable the timers in GeNN generated code, one needs to declare `“C++ networkmodel.setTiming(TRUE); “`This will make available and operate GPU-side `cudeEvent` based timers whose cumulative value can be found in the double precision variables `neuron_tme`, `synapse_tme` and `learning_tme`. They measure the accumulated time that has been spent calculating the neuron kernel, synapse kernel and learning kernel, respectively. CPU-side timers for the simulation functions are also available and their cumulative values can be obtained through `“C++ float x= sdkGetTimerValue(&neuron_tme); float y= sdkGetTimerValue(&synapse_tme); float z= sdkGetTimerValue(&learning_tme); “` The [Insect olfaction model](#) example shows how these can be used in the user-side code. To enable timing profiling in this example, simply enable it for GeNN: `“C++ model.setTiming(TRUE); “`in `MBody1.cc` `<tt>'smodel</tt>` Definition function and define the macro `TIMING` in `classol_sim.h` `<tt>“C++ #define TIMING “`This will have the effect that timing information is output into `OUTNAME_OUTPUT/OUTNAME.timingprofile`.

#### Developer Side Changes

1. `allocateSparseArrays()` has been changed to take the number of connections, `connN`, as an argument rather than expecting it to have been set in the `Connetion` struct before the function is called as was the arrangement previously.
2. For the case of sparse connectivity, there is now a reverse mapping implemented with `revers` index arrays and a `remap` array that points to the original positions of variable values in the forward array. By this mechanism, `revers` lookups from post to pre synaptic indices are possible but value changes in the sparse array values do only need to be done once.
3. `SpkEvt` code is no longer generated whenever it is not actually used. That is also true on a somewhat finer granularity where variable queues for synapse delays are only maintained if the corresponding variables are used in synaptic code. True spikes on the other hand are always detected in case the user is interested in them.

[Previous](#) | [Top](#) | [Next](#)

/\*!

This release includes some new features and several bug fixes on GeNN v2.0.

#### User Side Changes

1. Block size debugging flag and the `asGoodAsZero` variables are moved into [include/global.h](#).

2. NGRADSYNAPSES dynamics have changed (See Bug fix #4) and this change is applied to the example projects. If you are using this synapse model, you may want to consider changing model parameters.
3. The delay slots are now such that NO\_DELAY is 0 delay slots (previously 1) and 1 means an actual delay of 1 time step.
4. The convenience function `convertProbabilityToRandomNumberThreshold(float *, uint64_t *, int)` was changed so that it actually converts firing probability/timestep into a threshold value for the GeNN random number generator (as its name always suggested). The previous functionality of converting a *rate* in kHz into a firing threshold number for the GeNN random number generator is now provided with the name `convertRateToRandomNumberThreshold(float *, uint64_t *, int)`
5. Every model definition function `modelDefinition()` now needs to end with calling `NNmodel->finalize()` for the defined network model. This will lock down the model and prevent any further changes to it by the supported methods. It also triggers necessary analysis of the model structure that should only be performed once. If the `finalize()` function is not called, GeNN will issue an error and exit before code generation.
6. To be more consistent in function naming the `pull<SYNAPSENAME>FromDevice` and `push<SYNAPSENAME>ToDevice` have been renamed to `pull<SYNAPSENAME>StateFromDevice` and `push<SYNAPSENAME>StateToDevice`. The old versions are still supported through macro definitions to make the transition easier.
7. New convenience macros are now provided to access the current spike numbers and identities of neurons that spiked. These are called `spikeCount_XX` and `spike_XX` where "XX" is the name of the neuron group. They access the values for the current time step even if there are synaptic delays and spikes are stored in circular queues.
8. There is now a pre-defined neuron type "SPIKECOURCE" which is empty and can be used to define PyNN style spike source arrays.
9. The macros `FLOAT` and `DOUBLE` were replaced with `GENN_FLOAT` and `GENN_DOUBLE` due to name clashes with typedefs in Windows that define `FLOAT` and `DOUBLE`.

#### Developer Side Changes

1. We introduced a file `definitions.h`, which is generated and filled with useful macros such as `spkQuePtrShift` which tells users where in the circular spike queue their spikes start.

#### Improvements

1. Improved debugging information for block size optimisation and device choice.
2. Changed the device selection logic so that device occupancy has larger priority than device capability version.
3. A new HH model called `TRAUBMILES_PSTEP` where we can set the number of inner loops as a parameter is introduced. It uses the `TRAUBMILES_SAFE` method.
4. An alternative method is added for the insect olfaction model in order to fix the number of connections to a maximum of 10K in order to avoid negative conductance tails.
5. We introduced a `#define` for an `"int_"` function that translates floating points to integers.

#### Bug fixes:

1. AtomicAdd replacement for old GPUs were used by mistake if the model runs in double precision.
2. Timing of individual kernels is fixed and improved.
3. More careful setting of maximum number of connections in sparse connectivity, covering mixed dense/sparse network scenarios.

4. NGRADSYNAPSES was not scaling correctly with varying time step.
5. Fixed a bug where learning kernel with sparse connectivity was going out of array.
6. Fixed synapse kernel name substitutions where the "dd\_" prefix was omitted by mistake.

[Previous](#) | [Top](#) | [Next](#)

## 6 User Manual

### 6.1 Contents

[Introduction](#)  
[Defining a network model](#)  
[Neuron models](#)  
[Synapse models](#)

### 6.2 Introduction

GeNN is a software library for facilitating the simulation of neuronal network models on NVIDIA CUDA enabled GPU hardware. It was designed with computational neuroscience models in mind rather than artificial neural networks. The main philosophy of GeNN is two-fold:

1. GeNN relies heavily on code generation to make it very flexible and to allow adjusting simulation code to the model of interest and the GPU hardware that is detected at compile time.
2. GeNN is lightweight in that it provides code for running models of neuronal networks on GPU hardware but it leaves it to the user to write a final simulation engine. It so allows maximal flexibility to the user who can use any of the provided code but can fully choose, inspect, extend or otherwise modify the generated code. She can also introduce her own optimisations and in particular control the data flow from and to the GPU in any desired granularity.

This manual gives an overview of how to use GeNN for a novice user and tries to lead the user to more expert use later on. With this we jump right in.

[Previous](#) | [Top](#) | [Next](#)

### 6.3 Defining a network model

A network model is defined by the user by providing the function

```
void modelDefinition(NNmodel &model)
```

in a separate file with name `name.cc`, where `name` is the name of the model network under consideration. In this function, the following tasks must be completed:

1. The name of the model must be defined:

```
model.setName("MyModel");
```

2. Neuron populations (at least one) must be added (see [Defining neuron populations](#)). The user may add as many neuron populations as she wishes. If resources run out, there will not be a warning but GeNN will fail. However, before this breaking point is reached, GeNN will make all necessary efforts in terms of block size optimisation to accommodate the defined models. All populations must have a unique name.
3. Synapse populations (zero or more) can be added (see [Defining synapse populations](#)). Again, the number of synaptic connection populations is unlimited other than by resources.

#### Note

GeNN uses the convention where C/C++ files end in `.cc`. If this is not adhered to the build script `buildmodel.sh` will not recognise the model definition file.

### 6.3.1 Defining neuron populations

Neuron populations are added using the function

```
model.addNeuronPopulation(name, n, TYPE, para, ini);
```

where the arguments are:

- `const char* name`: Unique name of the neuron population
- `int n`: number of neurons in the population
- `int TYPE`: Type of the neurons, refers to either a standard type (see [Neuron models](#)) or user-defined type; this is an integer that indicates the position in the list of all neuron models where the model in question is stored.
- `double *para`: Parameters of this neuron type
- `double *ini`: Initial values for variables of this neuron type

The user may add as many neuron populations as the model necessitates. They must all have unique names. The possible values for the arguments, predefined models and their parameters and initial values are detailed [Neuron models](#) below.

### 6.3.2 Defining synapse populations

Synapse populations are added with the command

```
model.addSynapsePopulation("name", sType, sConn, gType, delay, postSyn, "preName", "postName", sIni, sParam, postSynIni, postSynParam);
```

where the arguments are

- `const char* name`: The name of the synapse population
- `int sType`: The type of synapse to be added. See [Built-in Models](#) below for the available predefined synapse types.
- `int sConn`: The type of synaptic connectivity. the options currently are "ALLTOALL", "DENSE", "SPARSE" (see [Connectivity types](#) )
- `int gType`: The way how the synaptic conductivity  $g$  will be defined. Options are "INDIVIDUALG", "GLOBALG", "INDIVIDUALID". For their meaning, see [LEARN1SYNAPSE \(Learning Synapse with a Primitive Role\)](#) below.

- `int delay`: Synaptic delay (in multiples of the simulation time step `DT`).
- `int postSyn`: Postsynaptic integration method. See [Postsynaptic integration methods](#) for predefined types.
- `char* preName`: Name of the (existing!) pre-synaptic neuron population.
- `char* postName`: Name of the (existing!) post-synaptic neuron population.
- `double *sIni`: A C-array of doubles containing initial values for the (pre-) synaptic variables.
- `double *sParam`: A C-array of double precision that contains parameter values (common to all synapses of the population) which will be used for the defined synapses. The array must contain the right number of parameters in the right order for the chosen synapse type. If too few, segmentation faults will occur, if too many, excess will be ignored. For pre-defined synapse types the required parameters and their meaning are listed in [NSYNAPSE \(No Learning\)](#) below.
- `double *psIni`: A C-array of double precision numbers containing initial values for the post-synaptic model variables
- `double *psPara`: A C-array of double precision numbers containing parameters for the post-synaptic model.

**Note**

If the synapse conductance definition type is "GLOBALG" then the global value of the synapse conductances is taken from the initial value provided in `sINI`. (The function `setSynapseG()` from earlier versions of GeNN has been deprecated).

Synaptic updates can occur per "true" spike (i.e. at one point per spike, e.g. after a threshold was crossed) or for all "spike type events" (e.g. all points above a given threshold). This is defined within each given synapse type.

[Previous](#) | [Top](#) | [Next](#)

**6.4 Neuron models**

There is a number of predefined models which can be chosen in the `addNeuronGroup(...)` function by their unique cardinal number, starting from 0. For convenience, C variables with readable names are predefined

- 0: [MAPNEURON](#)
- 1: [POISSONNEURON](#)
- 2: [TRAUBMILES\\_FAST](#)
- 3: [TRAUBMILES\\_ALTERNATIVE](#)
- 4: [TRAUBMILES\\_SAFE](#)
- 5: [TRAUBMILES\\_PSTEP](#)
- 6: [IZHIKEVICH](#)
- 7: [IZHIKEVICH\\_V](#)
- 8: [SPIKESOURCE](#)

**Note**

It is best practice to not depend on the unique cardinal numbers but use predefined names. While it is not intended that the numbers will change the unique names are guaranteed to work in all future versions of GeNN.



#### 6.4.1 MAPNEURON (Map Neurons)

The MAPNEURON type is a map based neuron model based on [3] but in the 1-dimensional map form used in [2] :

$$V(t + \Delta t) = \begin{cases} V_{\text{spike}} \left( \frac{\alpha V_{\text{spike}}}{V_{\text{spike}} - V(t) \beta I_{\text{syn}}} + y \right) & V(t) \leq 0 \\ V_{\text{spike}}(\alpha + y) & V(t) \leq V_{\text{spike}}(\alpha + y) \ \& \ V(t - \Delta t) \leq 0 \\ -V_{\text{spike}} & \text{otherwise} \end{cases}$$

##### Note

The MAPNEURON type only works as intended for the single time step size of  $\Delta T = 0.5$ .

The MAPNEURON type has 2 variables:

- $V$  - the membrane potential
- $\text{preV}$  - the membrane potential at the previous time step

and it has 4 parameters:

- $V_{\text{spike}}$  - determines the amplitude of spikes, typically -60mV
- $\alpha$  - determines the shape of the iteration function, typically  $\alpha = 3$
- $y$  - "shift / excitation" parameter, also determines the iteration function, originally,  $y = -2.468$
- $\beta$  - roughly speaking equivalent to the input resistance, i.e. it regulates the scale of the input into the neuron, typically  $\beta = 2.64 \text{ M}\Omega$ .

##### Note

The initial values array for the MAPNEURON type needs two entries for  $V$  and  $V_{\text{pre}}$  and the parameter array needs four entries for  $V_{\text{spike}}$ ,  $\alpha$ ,  $y$  and  $\beta$ , *in that order*.

#### 6.4.2 POISSONNEURON (Poisson Neurons)

Poisson neurons have constant membrane potential ( $V_{\text{rest}}$ ) unless they are activated randomly to the  $V_{\text{spike}}$  value if  $(t - \text{SpikeTime}) > t_{\text{refract}}$ .

It has 3 variables:

- $V$  - Membrane potential
- $\text{Seed}$  - Seed for random number generation
- $\text{SpikeTime}$  - Time at which the neuron spiked for the last time

and 4 parameters:

- $t_{\text{rate}}$  - Firing rate
- $t_{\text{refract}}$  - Refractory period
- $V_{\text{spike}}$  - Membrane potential at spike (mV)
- $V_{\text{rest}}$  - Membrane potential at rest (mV)

## Note

The initial values array for the `POISSONNEURON` type needs three entries for `V`, `Seed` and `SpikeTime` and the parameter array needs four entries for `therate`, `trefract`, `Vspike` and `Vrest`, *in that order*. Internally, GeNN uses a linear approximation for the probability of firing a spike in a given time step of size `DT`, i.e. the probability of firing is `therate` times `DT`:  $p = \lambda \Delta t$ . This approximation is usually very good, especially for typical, quite small time steps and moderate firing rates. However, it is worth noting that the approximation becomes poor for very high firing rates and large time steps. An unrelated problem may occur with very low firing rates and small time steps. In that case it can occur that the firing probability is so small that the granularity of the 64 bit integer based random number generator begins to show. The effect manifests itself in that small changes in the firing rate do not seem to have an effect on the behaviour of the Poisson neurons because the numbers are so small that only if the random number is identical 0 a spike will be triggered.

## 6.4.3 TRAUBMILES\_FAST (Hodgkin-Huxley neurons with Traub &amp; Miles algorithm)

This conductance based model has been taken from [4] and can be described by the equations:

$$\begin{aligned} C \frac{dV}{dt} &= -I_{Na} - I_K - I_{leak} - I_M - I_{i,DC} - I_{i,syn} - I_i, \\ I_{Na}(t) &= g_{Na} m_i(t)^3 h_i(t) (V_i(t) - E_{Na}) \\ I_K(t) &= g_K n_i(t)^4 (V_i(t) - E_K) \\ \frac{dy(t)}{dt} &= \alpha_y(V(t))(1 - y(t)) - \beta_y(V(t))y(t), \end{aligned}$$

where  $y_i = m, h, n$ , and

$$\begin{aligned} \alpha_n &= 0.032(-50 - V) / (\exp((-50 - V)/5) - 1) \\ \beta_n &= 0.5 \exp((-55 - V)/40) \\ \alpha_m &= 0.32(-52 - V) / (\exp((-52 - V)/4) - 1) \\ \beta_m &= 0.28(25 + V) / (\exp((25 + V)/5) - 1) \\ \alpha_h &= 0.128 \exp((-48 - V)/18) \\ \beta_h &= 4 / (\exp((-25 - V)/5) + 1). \end{aligned}$$

and typical parameters are  $C = 0.143$  nF,  $g_{leak} = 0.02672$   $\mu$ S,  $E_{leak} = -63.563$  mV,  $g_{Na} = 7.15$   $\mu$ S,  $E_{Na} = 50$  mV,  $g_K = 1.43$   $\mu$ S,  $E_K = -95$  mV.

It has 4 variables:

- `V` - membrane potential `E`
- `m` - probability for Na channel activation `m`
- `h` - probability for not Na channel blocking `h`
- `n` - probability for K channel activation `n`

and 7 parameters:

- `gNa` - Na conductance in  $1/(\text{mOhms} * \text{cm}^2)$
- `ENa` - Na equi potential in mV
- `gK` - K conductance in  $1/(\text{mOhms} * \text{cm}^2)$
- `EK` - K equi potential in mV
- `gl` - Leak conductance in  $1/(\text{mOhms} * \text{cm}^2)$
- `El` - Leak equi potential in mV
- `Cmem` - Membrane capacity density in  $\mu\text{F}/\text{cm}^2$

**Note**

Internally, the ordinary differential equations defining the model are integrated with a linear Euler algorithm and GeNN integrates 25 internal time steps for each neuron for each network time step. I.e., if the network is simulated at  $\Delta T = 0.1$  ms, then the neurons are integrated with a linear Euler algorithm with  $\Delta T = 0.004$  ms.

Other variants of the same model are TRAUBMILES\_ALTERNATIVE, TRAUBMILES\_SAFE and TRAUBMILES\_PSTEP. The former two are addressing the problem of singularities in the original Traub & Miles model [4]. At  $V = -52$  mV,  $-25$  mV, and  $-50$  mV, the equations for  $\alpha$  have denominators with value 0. Mathematically this is not a problem because the nominator is 0 as well and the left and right limits towards these singular points coincide. Numerically, however this does lead to nan (not-a-number) results through division by 0. The TRAUBMILES\_ALTERNATIVE model adds SCALAR\_MIN to the denominators at all times which typically is completely effect-free because it is truncated from the mantissa, except when the denominator is very close to 0, in which case it avoids the singular value.

TRAUBMILES\_SAFE takes a much more direct approach in which at the singular points, the correct value calculated offline with l'Hopital's rule is substituted. This is implemented with "if" statements.

Finally, the TRAUBMILES\_PSTEP model allows users to control the number of internal loops, or sub-timesteps, that are used. This is enabled by making the number of time steps an explicit parameter of the model.

**6.4.4 IZHIKEVICH (Izhikevich neurons with fixed parameters)**

This is the Izhikevich model with fixed parameters [1]. It is usually described as

$$\begin{aligned}\frac{dV}{dt} &= 0.04V^2 + 5V + 140 - U + I, \\ \frac{dU}{dt} &= a(bV - U),\end{aligned}$$

$I$  is an external input current and the voltage  $V$  is reset to parameter  $c$  and  $U$  incremented by parameter  $d$ , whenever  $V \geq 30$  mV. This is paired with a particular integration procedure of two 0.5 ms Euler time steps for the  $V$  equation followed by one 1 ms time step of the  $U$  equation. Because of its popularity we provide this model in this form here even though due to the details of the usual implementation it is strictly speaking inconsistent with the displayed equations.

Variables are:

- $V$  - Membrane potential
- $U$  - Membrane recovery variable

Parameters are:

- $a$  - time scale of  $U$
- $b$  - sensitivity of  $U$
- $c$  - after-spike reset value of  $V$
- $d$  - after-spike reset value of  $U$

**6.4.5 IZHIKEVICH\_V (Izhikevich neurons with variable parameters)**

This is the same model as IZHIKEVICH (Izhikevich neurons with fixed parameters) IZHIKEVICH but parameters are defined as "variables" in order to allow users to provide individual values for each individual neuron instead of fixed values for all neurons across the population.

Accordingly, the model has the Variables:

- $V$  - Membrane potential
- $U$  - Membrane recovery variable
- $a$  - time scale of  $U$
- $b$  - sensitivity of  $U$
- $c$  - after-spike reset value of  $V$
- $d$  - after-spike reset value of  $U$

and no parameters.

#### 6.4.6 SPIKESOURCE (empty neuron which allows setting spikes from external sources)

This model does not contain any update code and can be used to implement the equivalent of a SpikeGeneratorGroup in Brian or a SpikeSourceArray in PyNN.

#### 6.4.7 Defining your own neuron type

In order to define a new neuron type for use in a GeNN application, it is necessary to populate an object of class `neuronModel` and append it to the global vector `nModels`. This can be done conveniently within the modelDefinition function just before the model is needed. The `neuronModel` class has several data members that make up the full description of the neuron model:

- `simCode` of type `string`: This needs to be assigned a C++ (stl) string that contains the code for executing the integration of the model for one time step. Within this code string, variables need to be referred to by `NAME`, where `NAME` is the name of the variable as defined in the vector `varNames`. The code may refer to the predefined primitives `DT` for the time step size and `I_syn` for the total incoming synaptic current. It can also refer to a unique ID (within the population) using `ID`.

Example:

```
neuronModel model;
model.simCode=String("$ (V) += (-$ (a) $ (V) + $ (I_syn)) *DT;");
```

would implement a leaky integrator  $\frac{dV}{dt} = -aV + I_{syn}$ .

- `varNames` of type `vector<string>`: This vector needs to be filled with the names of variables that make up the neuron state. The variables defined here as `NAME` can then be used in the syntax `NAME` in the code string.

Example:

```
model.varNames.push_back(String("V"));
```

would add the variable `V` as needed by the code string in the example above.

- `varTypes` of type `vector<string>`: This vector needs to be filled with the variable type (e.g. "float", "double", etc) for the variables defined in `varNames`. Types and variables are matched to each other by position in the respective vectors, i.e. the 0th entry of `varNames` will have the type stored in the 0th entry of `varTypes` and so on.

Example:

```
model.varTypes.push_back(String("float"));
```

would designate the variable `V` to be of type float.

### Note

- `pNames` of type `vector<string>`: This vector will contain the names of parameters relevant to the model. If defined as `NAME` here, they can then be referenced as `NAME` in the code string. The length of this vector determines the expected number of parameters in the initialisation of the neuron model. Parameters are assumed to be always of type double.

```
model.pNames.push_back(String("a"));
```

stores the parameter `a` needed in the code example above.

- `dpNames` of type `vector<string>`: Names of "dependent parameters". Dependent parameters are a mechanism for enhanced efficiency when running neuron models. If parameters with model-side meaning, such as time constants or conductances always appear in a certain combination in the model, then it is more efficient to pre-compute this combination and define it as a dependent parameter. This vector contains the names of such dependent parameters.
- `thresholdConditionCode` of type `vector<string>` (if applicable): Condition for true spike detection.

For example, if in the example above the original model had been  $\frac{dV}{dt} = -g/CV + I_{syn}$ . Then one could define the code string and parameters as

```
model.simCode=String("$ (V) += (-$(a)$ (V) +$(Isyn)) *DT;");
model.varNames.push_back(String("V"));
model.varTypes.push_back(String("float"));
model.pNames.push_back(String("g"));
model.pNames.push_back(String("C"));
model.dpNames.push_back(String("a"));
```

- `dps` of type `dpclass*`: The dependent parameter class, i.e. an implementation of `dpclass` which would return the value for dependent parameters when queried for them. E.g. in the example above it would return `a` when queried for dependent parameter 0 through `dpclass::calculateDerivedParameter()`. Examples how this is done can be found in the pre-defined classes, e.g. `expDecayDp`, `pwSTDP`, `rulkovdp` etc.

Once the completed `neuronModel` object is appended to the `nModels` vector,

```
nModels.push_back(model);
```

it can be used in network descriptions by referring to its cardinal number in the `nModels` vector. I.e., if the model is added as the 4th entry, it would be model "3" (counting starts at 0 in usual C convention). The information of the cardinal number of a new model can be obtained by referring to `nModels.size()` right before appending the new model, i.e. a typical use case would be.

```
int myModel= nModels.size();
nModels.push_back(model);
```

. Then one can use the model as

```
networkModel.addNeuronPopulation(..., myModel, ...);
```

## 6.4.8 Defining the integration method

Any type of numerical integration method can be used, given that the user provides how it is done in the code snippets. The example above demonstrate how to use the forward Euler method. Implicit or higher-order methods can be tricky to be expressed manually, and the resulting code may look a bit unwieldy. A convenient way would be to use the `brian2genn` interface to automatically create the desired code. For example, the code for 4th order Runge-Kutta integration can be easily created by defining the model in a simple Brian 2 script:

```
from brian2 import *
import brian2genn

set_device('genn')

N = 1
Isyn = 1
gNa = 7.15
ENa = 50
gK = 1.43
EK = -95
gl = 0.02672
El = -63.563
C = 0.143

eqs = '''
dV/dt= (m**3*h*gNa*(ENa-V)+n**4*gK*(EK-V)+gl*(El-V)+Isyn)/C/ms :1
dm/dt= (0.32*(-52-V)/(exp((-52-V)/4)-1)*(1-m)-0.28*(V+25)/(exp((V+25)/5)-1)*m)/ms : 1
dh/dt= (0.128*exp((-48-V)/18)*(1-h)-4.0/(exp((-25-V)/5)+1)*h)/ms :1
dn/dt= (0.032*(-50-V)/(exp((-50-V)/5)-1)*(1-n)-0.5*exp((-55-V)/40)*n)/ms : 1
'''

defaultclock.dt = 0.02*ms

G = NeuronGroup(N, eqs, threshold='V> 0', reset='', method='rk4')
print G

G.V = -60
M = StateMonitor(G, True, record=True)

run(500*ms)

device.build(directory='simple_example_HH',
             compile=True,
             run=True,
             use_GPU=True)
```

`brian2genn` interface created the following GeNN code for this simulation:

```
neuronModel n;

// setp 1: add variables
n.varNames.clear();
n.varTypes.clear();
n.varNames.push_back(tS("i"));
n.varNames.push_back(tS("h"));
n.varNames.push_back(tS("m"));
n.varNames.push_back(tS("V"));
n.varNames.push_back(tS("n"));
n.varTypes.push_back(tS("int32_t"));
n.varTypes.push_back(tS("double"));
n.varTypes.push_back(tS("double"));
n.varTypes.push_back(tS("double"));
n.varTypes.push_back(tS("double"));
// step2: add parameters
n.pNames.clear();
n.pNames.push_back(tS("El"));
n.pNames.push_back(tS("C"));
n.pNames.push_back(tS("gl"));
n.pNames.push_back(tS("ms"));
n.pNames.push_back(tS("EK"));
n.pNames.push_back(tS("ENa"));
n.pNames.push_back(tS("Isyn"));
n.pNames.push_back(tS("N"));
n.pNames.push_back(tS("gNa"));
n.pNames.push_back(tS("gK"));
// step 3: add simcode
n.simCode= tS("double __k_l_h = (DT * ((((-4.0) * $(h)) / ((0.00673794699909 * exp((-0.2) *
$(V))) + 1.0)) + ((((-0.00889388175652) * $(h)) + 0.00889388175652) * exp((-0.0555555555556) * $(V)))) / $(ms);
\n\
double __k_l_n = (DT * ((((-0.126419797902) * $(n)) * exp((-0.025) * $(V))) + ((((-0.032) * $(V)) - 1.6) *
((- $(n)) + 1.0)) / ((4.53999297625e-05 * exp((-0.2) * $(V)) - 1.0)))) / $(ms); \n\
double __k_l_m = (DT * ((((- $(m)) * ((0.28 * $(V)) + 7.0)) / ((148.413159103 * exp(0.2 * $(V)) - 1.0)) +
```



i.e. be time-dependent.

- 2: MATINP: The input is read from a file containing the input matrix.
- 3: INPRULE: The input is defined as a rule. It differs from CONSTINP in the way that the input is injected: CONSTINP creates a value which is modified in real time, hence complex instructions are limited. INPRULE creates an input array which will be copied into the device memory.

## 6.5 Synapse models

A synapse model is a [weightUpdateModel](#) object which consists of variables, parameters, and string objects which will be substituted in the code. The three strings that will be substituted in the code for synapse update are:

- `simCode`: Simulation code that is used when a true spike is detected. The update is performed only once, one time step after threshold condition detection, which is defined by `thresholdConditionCode` in the neuron model of the corresponding presynaptic neuron population.

Typically, spikes lead to update of synaptic variables that then lead to the activation of input into the post-synaptic neuron. Most of the time these inputs add linearly at the post-synaptic neuron. This is assumed in GeNN and the term to be added to the activation of the post-synaptic neuron should be provided as the value of the by the `$(addtoinsyn)` snippet. For example

```
"\$(addtoinsyn) = $(inc);"
```

where "inc" is a parameter of the `weightupdate` model, would define a constant increment of the synaptic input of a post-synaptic neuron for each pre-synaptic spike.

When a spike is detected in the presynaptic neuron population, the `simCode` is executed. Within the code snippet the `$(addtoinsyn)` update just discussed should be followed by the `$(updatelinsyn)` keyword to indicate that the summation of synaptic inputs can now occur. This can then be followed by updates on the internal synapse variables that may have contributed to `addtoinsyn`. For an example, see [NSYNAPSE \(No Learning\)](#) for a simple synapse update model and [LEARN1SYNAPSE \(Learning Synapse with a Primitive Role\)](#) for a more complicated model that uses STDP.

- `simCodeEvtnt`: Simulation code that is used for spike like events, where updates are done for all instances in which the event condition defined by `evntThreshold` is met. `evntThreshold` is also be provided as a code string. For an example, see [NGRADSYNAPSE \(Graded Synapse\)](#).
- `simLearnPost`: Simulation code which is used in the `learnSynapsesPost` kernel/function, which performs updates to synapses that are triggered by post-synaptic spikes. This is rather unusual other than in learning rules like e.g. STDP. For an example that uses `simLearnPost`, see [LEARN1SYNAPSE \(Learning Synapse with a Primitive Role\)](#).
- `synapseDynamics`: Simulation code that applies for every time step, i.e. is unlike the others not gated with a condition. This can be used where synapses have internal variables and dynamics that are described in continuous time, e.g. by ODEs. Using this mechanism is typically computationally very costly because of the large number of synapses in a typical network.

All code snippets can be used to manipulate any synapse variable and so implement both synaptic dynamics and learning processes.

### 6.5.1 Built-in Models

Currently 3 predefined synapse models are available:

- [NSYNAPSE](#)
- [NGRADSYNAPSE](#)



- **LEARN1SYNAPSE**

These are defined in `lib/include/utils.h`. The `MBody_userdef` example also includes a modified version of these models as user-defined models.

### 6.5.2 NSYNAPSE (No Learning)

If this model is selected, no learning rule is applied to the synapse and for each pre-synaptic spikes the synaptic conductances are simply added to the postsynaptic input variable. The model has 1 variable:

- `g` - conductance of `scalar` type

and no other parameters.

`simCode` is:

```
" $(addtoinsyn) = $(g);\n\
$(updatelinsyn);\n"
```

### 6.5.3 NGRADSYNAPSE (Graded Synapse)

In a graded synapse, the conductance is updated gradually with the rule:

$$g_{Syn} = g * \tanh((V - E_{pre})/V_{slope})$$

whenever the membrane potential  $V$  is larger than the threshold  $E_{pre}$ . The model has 1 variable:

- `g`: conductance of `scalar` type

The parameters are:

- `Epre`: Presynaptic threshold potential
- `Vslope`: Activation slope of graded release

`simCodeEvt` is:

```
" $(addtoinsyn) = $(g) * tanh(( $(V_pre) - $(Epre) ) * DT * 2 / $(Vslope));\n\
$(updatelinsyn);\n"
```

`evntThreshold` is:

```
" $(V_pre) > $(Epre) "
```

#### Note

The pre-synaptic variables are referenced with the suffix `_pre` in synapse related code such as an `evntThreshold`. Users can also access post-synaptic neuron variables using the suffix `_post`.

### 6.5.4 LEARN1SYNAPSE (Learning Synapse with a Primitive Role)

This is a simple STDP rule including a time delay for the finite transmission speed of the synapse, defined as a piecewise function.

The model has 2 variables:

- `g`: conductance of `scalar` type

- `gRaw`: raw conductance of scalar type

Parameters are:

- `Epre`: Presynaptic threshold potential
- `tLrn`: Time scale of learning changes
- `tChng`: Width of learning window
- `tDecay`: Time scale of synaptic strength decay
- `tPunish10`: Time window of suppression in response to 1/0
- `tPunish01`: Time window of suppression in response to 0/1
- `gMax`: Maximal conductance achievable
- `gMid`: Midpoint of sigmoid g filter curve
- `gSlope`: Slope of sigmoid g filter curve
- `tauShift`: Shift of learning curve
- `gSyn0`: Value of syn conductance g decays to

For more details about these built-in synapse models, see [2].

#### 6.5.5 LEARN1SYNAPSE (Learning Synapse with a Primitive Role)

If users want to define their own models, they can add a new `weightUpdateModel` that includes the variables, parameters, and update codes as desired, and then push this object in the `weightUpdateModels` vector. The model can be used by referring to its index in the `weightUpdateModels` vector when adding a new population by with a call to `addSynapsePopulation`.

#### 6.5.6 Conductance definition methods

The available options work as follows:

- `INDIVIDUALG`: When this option is chosen in the `addSynapsePopulation` command, GeNN reserves an array of size `n_pre x n_post` float for individual conductance values for each combination of pre and postsynaptic neuron. The actual values of the conductances are passed at runtime from the user side code, using the `pushXXXXXXToDevice` function, where XXXX is the name of the synapse population.
- `GLOBALG`: When this option is chosen, the value of the variables of the synapse model (including its conductance) is taken to be the initial value provided for the synapse model's variables. This option can only be sensibly combined with connectivity type `ALLTOALL`.
- `INDIVIDUALID`: When this option is chosen, GeNN expects to use the same maximal conductance for all existing synaptic connections but which synapses exist will be defined at runtime from the user side code, provided as a binary array (see [Insect olfaction model](#)).

#### 6.5.7 Connectivity types

If `INDIVIDUALG` is used with `ALLTOALL` or `DENSE` connectivity (these are equivalent in this case), synapse variables are stored in an array of size `npre * npost`.

If the connectivity is of `SPARSE` type, connectivity indices are stored in a struct named `SparseProjection` in order to minimize the memory requirements. The struct `SparseProjection` contains the following members: 1: unsigned int `connN`: number of connections in the population. This value is needed for allocation of arrays. The indices that

correspond to these values are defined in a pre-to-post basis by the following arrays: 2: unsigned int ind, of size connN: Indices of corresponding postsynaptic neurons concatenated for each presynaptic neuron. 3: unsigned int \*indInG, of size model.neuronN[model.synapseSource[synInd]]+1: This array defines from which index in the synapse variable array the indices in ind would correspond to the presynaptic neuron that corresponds to the index of the indInG array, with the number of connections being the size of ind. More specifically, indInG[n+1]-indInG[n] would give the number of postsynaptic connections for neuron n.

For example, consider a network of two presynaptic neurons connected to three postsynaptic neurons: 0th presynaptic neuron connected to 1st and 2nd postsynaptic neurons, the 1st presynaptic neuron connected to 0th and 2nd neurons. The struct SparseProjection should have these members, with indexing from 0:

```
ConnN = 4
ind= [1 2 0 2]
indIng= [0 2 4]
```

A synapse variable of a sparsely connected synapse will be kept in an array using this conductance for indexing. For example, a variable caled `g` will be kept in an array such as: `g= [g_Pre0-Post1 g_pre0-post2 g_pre1-post0 g_pre1-post2]` If there are no connections for a presynaptic neuron, then `g[indIng[n]]=gp[indIng[n]+1]`.

See tools/gen\_syns\_sparse\_lzhModel used in lzh\_sparse project to see a working example.

### 6.5.8 Postsynaptic integration methods

The `postSynModel` defines how synaptic activation translates into an input current (or other input term for models that are not current based). It also can contain equations defining dynamics that are applied to the (summed) synaptic activation, e.g. an exponential decay over time.

A `postSynModel` object consists of variables, parameters, derived parameters and two strings that define the code for current generation and continuous dynamics.

- `string postSynDecay`: This code defines the continuous time dynamics of the summed presynaptic inputs at the postsynaptic neuron. This usually consists of some kind of decay function.
- `string postSynToCurrent`: This code defines how the synaptic inputs lead to an input input current (`Isyn`) to the postsynaptic neuron.

There are currently 2 built-in postsynaptic integration methods:

**EXPDECAY**: Exponential decay. Decay time constant and reversal potential parameters are needed for this postsynaptic mechanism.

This model has no variables and two parameters:

- `tau`: Decay time constant
- `E`: Reversal potential

`tau` is used by the derived parameter `expdecay` which returns  $\exp(-dt/tau)$ .

**IZHIKEVICH\_PS**: Empty postsynaptic rule to be used with Izhikevich neurons.

[Previous](#) | [Top](#) | [Next](#)

## 7 Tutorial 1

In this tutorial we will go through step by step instructions how to create and run a GeNN simulation starting from scratch. Normally, we recommend users to use one of the example projects as a starting point but it can be very instructive to go through the necessary steps one by one once to appreciate what parts make a GeNN simulation.

## 7.1 The Model Definition

In this tutorial we will use a pre-defined neuron model type (TRAUBMILES) and create a simulation of ten Hodgkin-Huxley neurons [4] without any synaptic connections. We will run this simulation on a GPU and save the results to stdout.

The first step is to write a model definition function in a model definition file. Create a new empty file `tenHHModel.cc` with your favourite editor, e.g.

```
>> emacs tenHHModel.cc &
```

### Note

The ">>" in the example code snippets refers to a shell prompt in a unix shell, do not enter them as part of your shell commands.

The model definition file contains the definition of the network model we want to simulate. First, we need to define the simulation step size `DT` and include the GeNN model specification codes `modelSpec.h` and `modelSpec.cc`. Then the model definition takes the form of a function named `modelDefinition` that takes one argument, passed by reference, of type `NNmodel`. Type in your `tenHHModel.cc` file:

```
// Model definition file tenHHModel.cc

#define DT 0.1
#include "modelSpec.h"
#include "modelSpec.cc"

void modelDefinition(NNmodel &model)
{
    // definition of tenHHModel
}
```

With this we have fixed the integration time step to `0.1` in the usual time units. The typical units in GeNN are ms, mV, nF, and `\form#10S`. Therefore, this defines `DT = 0.1 ms`. Now we need to fill the actual model definition.

Two standard elements to the `modelDefinition` function are initialising GeNN and setting the name of the model:

```
initGeNN();
model.setName("tenHHModel");
```

### Note

The name of the model given in the `setName` method does not need to match the file name of the model definition file. However, we strongly recommend it and if conflicting, the file name of the model definition file will prevail.

Making the actual model definition makes use of the `addNeuronPopulation` and `addSynapsePopulation` member functions of the `NNmodel` object. The arguments to a call to `addNeuronPopulations` are

- `string name`: the name of the population
- `int N`: The number of neurons in the population
- `int type`: The type of neurons in the population
- `double *p`: An array of parameter values for the neurons in the population
- `double *ini`: An array of initial values for neuron variables

We first create the parameter and initial variable arrays,

```
// definition of tenHHModel
double p[7]= {
    7.15,           // 0 - gNa: Na conductance in muS
    50.0,           // 1 - ENa: Na equi potential in mV
    1.43,           // 2 - gK: K conductance in muS
    -95.0,          // 3 - EK: K equi potential in mV
    0.02672,        // 4 - gl: leak conductance in muS
    -63.563,        // 5 - El: leak equi potential in mV
    0.143           // 6 - Cmem: membr. capacity density in nF
};

double ini[4]= {
    -60.0,          // 0 - membrane potential V
    0.0529324,      // 1 - prob. for Na channel activation m
    0.3176767,      // 2 - prob. for not Na channel blocking h
    0.5961207       // 3 - prob. for K channel activation n
};
```

### Note

The comments are obviously only for clarity, they can in principle be omitted. To avoid any confusion about the meaning of parameters and variables, however, we recommend strongly to always include comments of this type.

Having defined the parameter values and initial values we can now create the neuron population,

```
model.addNeuronPopulation("Pop1", 10, TRAUBMILES, p, ini);
```

### Note

TRAUBMILES is a variable defined in the GeNN model specification that contains the index number of the pre-defined Traub & Miles model [4].

The model definition then needs to end on calling

```
model.finalize();
```

This completes the model definition in this example. The complete `tenHHModel.cc` file now should look like this:

```
// Model definition file tenHHModel.cc

#define DT 0.1
#include "modelSpec.h"
#include "modelSpec.cc"

void modelDefinition(NNmodel &model)
{
    // definition of tenHHModel
    initGeNN();
    model.setName("tenHHModel");
    double p[7]= {
        7.15,           // 0 - gNa: Na conductance in muS
        50.0,           // 1 - ENa: Na equi potential in mV
        1.43,           // 2 - gK: K conductance in muS
        -95.0,          // 3 - EK: K equi potential in mV
        0.02672,        // 4 - gl: leak conductance in muS
        -63.563,        // 5 - El: leak equi potential in mV
        0.143           // 6 - Cmem: membr. capacity density in nF
    };

    double ini[4]= {
        -60.0,          // 0 - membrane potential V
        0.0529324,      // 1 - prob. for Na channel activation m
        0.3176767,      // 2 - prob. for not Na channel blocking h
        0.5961207       // 3 - prob. for K channel activation n
    };
    model.addNeuronPopulation("Pop1", 10, TRAUBMILES, p, ini);
    model.finalize();
}
```

This model definition suffices to generate code for simulating the ten Hodgkin-Huxley neurons on the a GPU or CPU. The second part of a GeNN simulation is the user code that sets up the simulation, does the data handling for input and output and generally defines the numerical experiment to be run.

## 7.2 User Code

For the purposes of this tutorial we will initially simply run the model for one simulated second and record the final neuron variables into a file. GeNN provides the code for simulating the model in a function called `stepTimeCPU()` (execution on CPU only) or `stepTimeGPU()` (execution on a GPU). To make use of this code we need to define a minimal C/C++ main function. Open a new empty file `tenHHSimulation.cc` in an editor and type

```
// tenHHModel simulation code
#include "tenHHModel.cc"
#include "tenHHModel_CODE/runner.cc"

int main()
{
    allocateMem();
    initialize();

    return 0;
}
```

This boiler plate code includes the relevant model definition file we completed earlier and the entry point to the generated code `runner.cc` in the subdirectory `tenHHModel_CODE` where GeNN deposits all generated code.

Calling `allocateMem()` allocates the memory structures for all neuron variables and `initialize()` sets the initial values and copies values to the GPU.

Now we can use the generated code to execute the integration of the neuron equations provided by GeNN. To do so, we add after `initialize()` ;

```
stepTimeGPU(1000.0);
```

and we need to copy the result, and output it to stdout,

```
pullPop1fromDevice();
for (int i= 0; i < 10; i++) {
    cout << VPop1[i] << " ";
    cout << mPop1[i] << " ";
    cout << hPop1[i] << " ";
    cout << nPop1[i] << endl;
}
```

`pullPop1fromDevice()` copies all relevant state variables of the `Pop1` neuron group from the GPU to the CPU main memory. Then we can output the results to stdout by looping through all 10 neurons and outputting the state variables `VPop1`, `mPop1`, `hPop1`, `nPop1`.

### Note

The naming convention for variables in GeNN is the variable name defined by the neuron type, here `TRAUB` BMILES defining `V`, `m`, `h`, and `n`, followed by the population name, here `Pop1`.

This completes the user code. The complete `tenHHSimulation.cu` file should now look like

```
// tenHHModel simulation code
#include "tenHHModel.cc"
#include "tenHHModel_CODE/runner.cc"

int main()
{
    allocateMem();
    initialize();
    stepTimeGPU(1000.0);
    pullPop1fromDevice();
    for (int i= 0; i < 10; i++) {
        cout << VPop1[i] << " ";
        cout << mPop1[i] << " ";
        cout << hPop1[i] << " ";
        cout << nPop1[i] << endl;
    }
    return 0;
}
```

### 7.3 Makefile

A GeNN simulation is built with a simple Makefile. On Unix systems we typically name it `GNUmakefile`. Create this file and enter

```
EXECUTABLE      :=tenHHSimulation
SOURCES         :=tenHHSimulation.cu

include $(GENN_PATH)/userproject/include/makefile_common_gnu.mk
```

This defines that the final executable of this simulation is named `tenHHSimulation` and the simulation code is given in the file `tenHHSimulation.cu` that we completed above.

Now we are ready to compile and run the simulation

### 7.4 Making and Running the Simulation

To build the model and generate the GeNN code, type in a terminal where you are in the directory containing your `tenHHModel.cc` file,

```
>> buildmodel.sh tenHHModel
```

If your environment variables `GENN_PATH` and `CUDA_PATH` are correctly configured, you should see some compile output ending in `Model build complete . . .`. Now type

```
make
```

This should compile your `tenHHSimulation` executable and you can execute it with

```
./tenHHSimulation
```

The output you obtain should look like

```
-63.7838 0.0350042 0.336314 0.563243
-63.7838 0.0350042 0.336314 0.563243
-63.7838 0.0350042 0.336314 0.563243
-63.7838 0.0350042 0.336314 0.563243
-63.7838 0.0350042 0.336314 0.563243
-63.7838 0.0350042 0.336314 0.563243
-63.7838 0.0350042 0.336314 0.563243
-63.7838 0.0350042 0.336314 0.563243
-63.7838 0.0350042 0.336314 0.563243
-63.7838 0.0350042 0.336314 0.563243
```

This completes this tutorial. You have created a GeNN model and simulated it successfully!

### 7.5 Adding External Input

In the example we have created so far, the neurons are not connected and do not receive input. As the TRAUB-MILES model is silent in such conditions, the ten neurons simply will simply rest at their resting potential. To make things more interesting, let us add a constant input to all neurons, add to the end of the `modelDefinition` function

```
model.activateDirectInput("Pop1", CONSTINP);
model.setConstInp("Pop1", 0.1);
```

This will add a constant input of 0.1 nA to all ten neurons. When run with this addition you should observe the output

```
-63.1468 0.0211871 0.987233 0.0423695
-63.1468 0.0211871 0.987233 0.0423695
-63.1468 0.0211871 0.987233 0.0423695
-63.1468 0.0211871 0.987233 0.0423695
-63.1468 0.0211871 0.987233 0.0423695
-63.1468 0.0211871 0.987233 0.0423695
-63.1468 0.0211871 0.987233 0.0423695
-63.1468 0.0211871 0.987233 0.0423695
-63.1468 0.0211871 0.987233 0.0423695
-63.1468 0.0211871 0.987233 0.0423695
```

This is still not particularly interesting as we are just observing the final value of the membrane potentials. To see what is going on in the meantime, we need to copy intermediate values from the device and best save them into a file. This can be done in many ways but one sensible way of doing this is to replace the line

```
stepTimeGPU(1000.0);
```


in `tenHHSimulation.cu` to something like this:

```
ofstream os("tenHH_output.V.dat");
double t= 0.0;
for (int i= 0; i < 5000; i++) {
    stepTimeGPU(0.2);
    pullPopIfromDevice();
    os << t << " ";
    for (int j= 0; j < 10; j++) {
        os << VPopI[j] << " ";
    }
    os << endl;
    t+= 0.2;
}
os.close();
```

After building, making and executing,

```
builmodel.sh tenHHModel
make clean all
./tenHHSimulation
```

there should be a file `tenHH_output.V.dat` in the same directory. If you plot column one (time) against column two (voltage of neuron 0), you should observe dynamics like this:

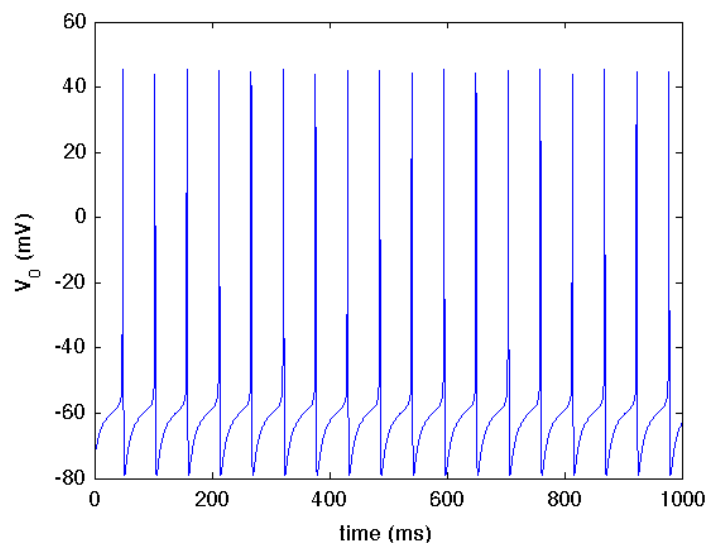

The completed files from this tutorial can be found in `userproject/tenHH_project`.



## 8 Tutorial 2

In this tutorial we will learn to add synapsePopulations to connect neurons in neuron groups to each other with synaptic models. As an example we will connect the ten Hodgkin-Huxley neurons from tutorial 1 in a ring of excitatory synapses.

First, copy the files from Tutorial 1 into a new directory and rename them to new names, e.g.

```
>> cp -r tenHH_project tenHHRing_project
>> cd tenHHRing_project
>> mv tenHHModel.cc tenHHRingModel.cc
>> mv tenHHSimulation.cu tenHHRingSimulation.cu
```

Now, we need to add a synapse group to the model that allows to connect neurons from the Pop1 group to connect to other neurons of this group. Open `tenHHRingModel.cc`, change the model name inside,

```
model.setName("tenHHRing");
```

### 8.1 Adding Synaptic connections

Now we need additional initial values and parameters for the synapse and post-synaptic models. We will use the standard NSYNAPSE weightupdate model and EXPDECAY post-synaptic model. They need initial variables and parameters as follows:

```
double s_ini[1] = {
    0.0      // 0 - g: the synaptic conductance value
};
double *s_p= NULL;
double *ps_ini= NULL;
double ps_p[2]= {
    1.0,      // 0 - tau_S: decay time constant for S [ms]
    -80.0     // 1 - Erev: Reversal potential
};
```

If an array is not needed we set it to the NULL pointer. Here there are for example no synaptic parameters and no initial values for the post-synaptic mechanism. We can then add a synapse population at the end of the `modelDefinition(...)` function,

```
model.addSynapsePopulation("Pop1self", NSYNAPSE,
    DENSE, INDIVIDUALG, NO_DELAY, EXPDECAY, "Pop1", "Pop1", s_ini, s_p, ps_ini,
    ps_p);
```

The `addSynapsePopulation` parameters are

- `const char *name`: The name of the synapse population, here "Pop1self"
- `int sType`: The type of synapse to be added, we here use the predefined type `NSYNAPSE`. See [Built-in Models](#) for all available predefined synapse types.
- `int sConn`: The type of synaptic connectivity, here `DENSE` which means we will provide a full connectivity matrix later.
- `int gType`: The way how the synaptic conductivity `g` will be defined. With `GLOBALG` we indicate that all conductance are of the same conductance value, which will be the value given in `sPara`.
- `int delay`: `NO_DELAY` means that there will be no delays for synaptic signal propagation.
- `int postSyn`: Postsynaptic integration method, we are here using the standard model of an exponential decay of synaptic excitation.
- `char *preName`: Name of the pre-synaptic neuron population, here the `Pop1` population.
- `char *postName`: Name of the post-synaptic neuron population, here also `Pop1`.

- `double *sIni`: A C-array of doubles containing initial values for the synaptic variables.
- `double *sParam`: A C-array of double precision that contains parameter values (common to all synapses of the population)
- `double *psIni`: A C-array of double precision numbers containing initial values for the post-synaptic model variables
- `double *psPara`: A C-array of double precision numbers containing parameters for the post-synaptic model.

Adding the `addSynapsePopulation` command to the model definition informs GeNN that there will be synapses between the named neuron populations, here between population `Pop1` and itself. The detailed connectivity as defined by the variables `g`, we have still to define in the setup of our simulation. As always, the `modelDefinition` function ends on

```
model.finalize();
```

At this point our model definition file `tenHHRingModel.cc` should look like this

```
// Model definition file tenHHRingModel.cc

#define DT 0.1
#include "modelSpec.h"
#include "modelSpec.cc"

void modelDefinition(NNmodel &model)
{
    // definition of tenHHRingModel
    initGeNN();
    model.setName("tenHHRingModel");
    double p[7]= {
        7.15,           // 0 - gNa: Na conductance in muS
        50.0,           // 1 - ENa: Na equi potential in mV
        1.43,           // 2 - gK: K conductance in muS
        -95.0,          // 3 - EK: K equi potential in mV
        0.02672,        // 4 - gl: leak conductance in muS
        -63.563,        // 5 - El: leak equi potential in mV
        0.143           // 6 - Cmem: membr. capacity density in nF
    };

    double ini[4]= {
        -60.0,          // 0 - membrane potential V
        0.0529324,      // 1 - prob. for Na channel activation m
        0.3176767,      // 2 - prob. for not Na channel blocking h
        0.5961207       // 3 - prob. for K channel activation n
    };
    model.addNeuronPopulation("Pop1", 10, TRAUBMILES, p, ini);
    model.activateDirectInput("Pop1", CONSTINP);
    model.setConstInp("Pop1", 0.1);
    double s_ini[1] = {
        0.0             // 0 - g: the synaptic conductance value
    };
    double *s_p= NULL;
    double *ps_ini= NULL;
    double ps_p[2]= {
        1.0,            // 0 - tau_S: decay time constant for S [ms]
        -80.0           // 1 - Erev: Reversal potential
    };
    model.addSynapsePopulation("Pop1self", NSYNAPSE,
        DENSE, INDIVIDUALG, NO_DELAY, EXPDECAY, "Pop1", "Pop1", s_ini, s_p, ps_ini,
        ps_p);
    model.finalize();
}
```

## 8.2 Defining the Detailed Synaptic Connections

Open the `tenHHRingSimulation.cu` file and update the file names of includes:

```
// tenHHRingModel simulation code
#include "tenHHRingModel.cc"
#include "tenHHRingModel_CODE/runner.cc"
```

Now we need to add code to generate the desired ring connectivity.

```

allocateMem();
initialize();
// define the connectivity
int pre, post;
for (int i= 0; i < 10; i++) {
    pre= i;
    post= (i+1)%10;
    gPoplself[pre*10+post]= 0.01;
}
pushPoplselfToDevice();

```

After memory allocation and initialization `gPoplself` will contain only zeros. We then assign in the loop a non-zero conductivity of  $0.01 \mu\text{S}$  to all synapses from neuron `i` to `i+1` (and 9 to 0 to close the ring).

After adjusting the GNUmakefile to read

```

EXECUTABLE      :=tenHHRingSimulation
SOURCES          :=tenHHRingSimulation.cu

include $(GENN_PATH)/userproject/include/makefile_common_gnu.mk

```

we can build the model

```
>> buildmodel.sh tenHHRingModel
```

and make it

```
>> make clean all
```

After this there should be an executable `tenHHRingSimulation`, which can be executed,

```
>> ./tenHHRingSimulation
```


which should again result in

```

-64.9054 0.0147837 0.981337 0.030886
-64.9054 0.0147837 0.981337 0.030886
-64.9054 0.0147837 0.981337 0.030886
-64.9054 0.0147837 0.981337 0.030886
-64.9054 0.0147837 0.981337 0.030886
-64.9054 0.0147837 0.981337 0.030886
-64.9054 0.0147837 0.981337 0.030886
-64.9054 0.0147837 0.981337 0.030886
-64.9054 0.0147837 0.981337 0.030886
-64.9054 0.0147837 0.981337 0.030886

```

If we plot the content of columns one and two of `tenHHexample.V.dat` it looks very similar as in [Tutorial 1](#)

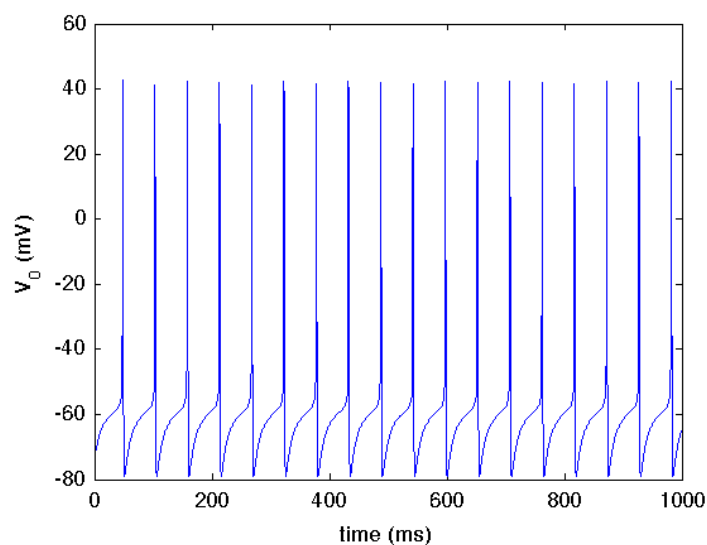

This is because the inhibitory synapses we created were all triggered at the same time so that they act during a post-synaptic spike which makes their effect all but invisible.

### 8.3 Setting Heterogeneous Initial Conditions


If we define different initial conditions for each of the ten neurons, i.e. add after `initialize()`,

```
// set initial variables
for (int i= 0; i < 10; i++) {
    VPop1[i]= -60.0+i;
}
pushPop1ToDevice();
```

then we observe different final values for each neuron,

```
-57.3412 0.06223 0.981374 0.104417
-53.3189 0.442962 0.0664687 0.764513
-73.1413 0.00253709 0.927251 0.0277236
-67.1179 0.00927304 0.986692 0.0206106
-63.5878 0.01938 0.991071 0.0387962
-62.2114 0.0255295 0.990933 0.0504799
-61.404 0.0298902 0.990949 0.0586459
-60.6691 0.034405 0.990225 0.0668015
-59.8977 0.0397467 0.988701 0.0758159
-58.9727 0.0470178 0.98615 0.0866963
```

and zooming in on the first 200 ms, the voltage of the first neuron now looks like this

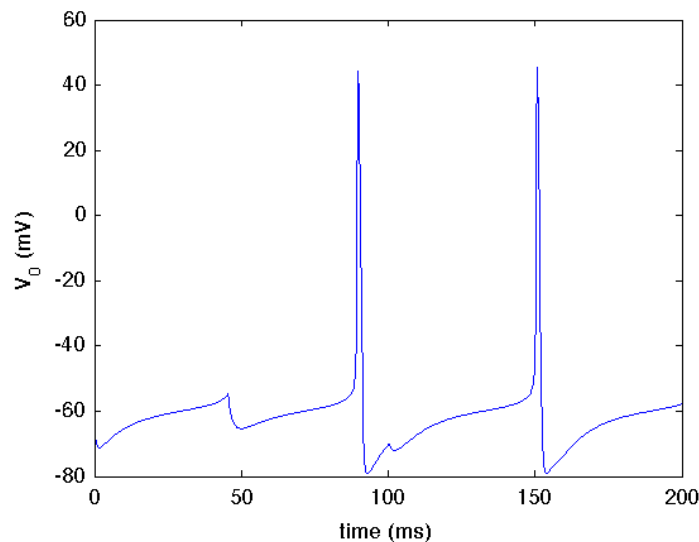

The complete codes for this tutorial are in `userproject\tenHHRing_project`.

## 9 Suggestions for users

GeNN generates code according to the network model defined by the user, but lets users use generated code the way they want. Here we explain in some more detail how to setup GeNN and how to use generated functions. We recommend users to also have a look at the [Examples](#), and to follow the tutorials [Tutorial 1](#) and [Tutorial 2](#).

### 9.1 Creating and simulating a network model

The user is first expected to create an object of class `NNmodel` by creating the function `modelDefinition()` which includes calls to following methods in correct order:

- `initGeNN();`
- `NNmodel::setName();`

Then add neuron populations by:

- `NNmodel::addNeuronPopulation();`

for each neuron population. Add synapse populations by:

- `NNmodel::addSynapsePopulation();`

for each synapse population.

The `modelDefinition()` needs to end with calling `NNmodel::finalize()`.

Other optional functions are explained in `NNmodel` class reference. At the end the function should look like this:

```
void modelDefinition(NNModel &model) {
    initGeNN();
    model.setName("YourModelName");
    model.addNeuronPopulation(...);
    ...
    model.addSynapsePopulation(...);
    ...
    model.finalize();
}
```

`modelSpec.h` and `modelSpec.cc` should be included in the file where this function is defined.

This function will be called by `generateALL.cc` to create corresponding CPU and GPU simulation codes under the `<YourModelName>_CODE` directory.

These functions can then be used in a `.cu` file which runs the simulation. This file should include `<YourModelName>_CODE/runner.cc`. Generated code differ from one model to the other, but core functions are the same and they should be called in correct order. First, the following variables should be defined and initialized:

- `NNmodel` model // initialized by calling `modelDefinition(model)`
- Array containing current input (if any)

The following are declared by GeNN but should be initialized by the user:

- Poisson neuron offset and rates (if any)
- Connectivity matrices (if sparse)
- Neuron and synapse variables (if not initialising to the homogeneous initial value provided during `modelDefinition`)

Core functions generated by GeNN to be included in the user code include:

- `allocateMem()`
- `deviceMemAllocate()`
- `initialize()`
- `initializeAllSparseArrays()`
- `convertProbabilityToRandomNumberThreshold()`
- `convertRateToRandomNumberThreshold()`
- `copyStateToDevice()`
- `push<neuron or synapse name>StateToDevice()`
- `pull<neuron or synapse name>StatefromDevice()`

- `copyStateFromDevice()`
- `copySpikeNFromDevice()`
- `copySpikesFromDevice()`
- `stepTimeCPU()` //arguments depend on model
- `stepTimeGPU()` //arguments depend on model
- `freeMem()`
- `freeDeviceMem()`

Copying elements from GPU to host memory is very costly in terms of performance and should only be done when needed.

## 9.2 Floating point precision

Double precision floating point numbers are supported by devices with compute capability 1.3 or higher. If you have an older GPU, you need to use single precision floating point in your models and simulation.

GPUs are designed to work better with single precision while double precision is the standard for CPUs. This difference should be kept in mind while comparing performance.

While setting up the network for GeNN, double precision floating point numbers are used as this part is done on the CPU. For the simulation, GeNN lets users choose between single or double precision. Overall, new variables in the generated code are defined with the precision specified by `NNmodel::setPrecision(unsigned int)`, providing `GENN_FLOAT` or `GENN_DOUBLE` as argument. `GENN_FLOAT` is the default value. The keyword `scalar` can be used in the user-defined model codes for a variable that could either be single or double precision. This keyword is detected at code generation and substituted with "float" or "double" according to the precision set by `NNmodel::setPrecision(unsigned int)`.

There may be ambiguities in arithmetic operations using explicit numbers. Standard C compilers presume that any number defined as "X" is an integer and any number defined as "X.Y" is a double. Make sure to use the same precision in your operations in order to avoid performance loss.

## 9.3 Working with variables in GeNN

### 9.3.1 Model variables

User-defined model variables originate from core units such as `neuronModel`, `weightUpdateModel` or `postSynModel` objects. The name of a variable is defined when the model type is introduced, i.e. with a statement such as

```
neuronModel model;
model.varNames.push_back(String"x");
model.varTypes.push_back(String("double"));
...
int myModel= nModels.size();
nModels.push_back(model);
```

This declares that whenever the defined model type of cardinal number `myModel` is used, there will be a variable of core name `x`. `varType` can be of `scalar` type (see [Floating point precision](#)). The full GeNN name of this variable is obtained by directly concatenating the core name with the name of the neuron population in which the model type has been used, i.e. after a definition

```
networkModel.addNeuronPopulation("EN", n, myModel, ...);
```

there will be a variable `xEN` of type `double*` available in the global namespace of the simulation program. GeNN will pre-allocate this C array to the correct size of elements corresponding to the size of the neuron population, `n` in the example above. GeNN will also free these variables when the provided function `freeMem()` is called.

Users can otherwise manipulate these variable arrays as they wish. For convenience, GeNN provides functions `pullXXStatefromDevice()` and `pushXXStatetoDevice()` to copy the variables associated to a neuron population `XX` from the device into host memory and vice versa. E.g.

```
pullENStatefromDevice();
```

would copy the C array `xEN` from device memory into host memory (and any other variables that the neuron type of the population `EN` may have).

The user can also directly use CUDA memory copy commands independent of the provided convenience functions. The relevant device pointers for all variables that exist in host memory have the same name as the host variable but are prefixed with `d_`. For example, the copy command that would be contained in `pullENStatefromDevice()` will look like

```
unsigned int size;
size = sizeof(double) * nEN;
cudaMemcpy(xEN, d_xEN, size, cudaMemcpyDeviceToHost);
```

where `nEN` is an integer containing the population size of the `EN` neuron population.

The same convention as for neuron variables applies for the variables of synapse populations, both for those originating from weightupdate models and from post-synaptic models, e.g. the variables in type `NSYNAPSE` contain the variable `g` of type `float`. Then, after

```
networkModel.addSynapsePopulation("ENIN", NSYNAPSE, ...);
```

there will be a global variable of type `float*` with the name `gENIN` that is pre-allocated to the right size. There will also be a matching device pointer with the name `d_gENIN`.

#### Note

The content of `gENIN` needs to be interpreted differently for DENSE connectivity and sparse matrix based SPARSE connectivity representations. For DENSE connectivity `gENIN` would contain "`n_pre`" times "`n_post`" elements, ordered along the pre-synaptic neurons as the major dimension, i.e. the value of `gENIN` for the `i`th pre-synaptic neuron and the `j`th post-synaptic neuron would be `gENIN[i*n_post+j]`. The arrangement of values in the SPARSE representation is explained in section [Connectivity types](#)

Be aware that the above naming conventions do assume that variables from the weightupdate models and the postSynModels that are used together in a synapse population are unique. If both the weightupdate model and the [postSynModel](#) have a variable of the same name, the behaviour is undefined.

### 9.3.2 Built-in Variables in GeNN

Since GeNN 2.0, there are no more explicitly hard-coded synapse and neuron variables. Users are free to name the variable of their models as they want. However, there are some reserved variables that are used for intermediary calculations and communication between different parts of the generated code. They can be used in the user defined code but no other variables should be defined with these names.

- `DT` : Time step (typically in ms) for simulation; Neuron integration can be done in multiple sub-steps inside the neuron model for numerical stability (see Traub-Miles and Izhikevich neuron model variations in [Neuron models](#)).
- `addtoinSyn` : This variable is used by [weightUpdateModel](#) for updating synaptic input. The way it is modified is defined in [weightUpdateModel.simCode](#) or [weightUpdateModel.simCodeEvtnt](#), therefore if a user defines her own model she should update this variable to contain the input to the post-synaptic model.
- `updateinSyn` : At the end of the synaptic update by `addtoinSyn`, final values are copied back to the `d_inSyn<synapsePopulation>` variables which will be used in the next step of the neuron update to provide the input to the postsynaptic neurons. This keyword designated where the changes to `addtoinSyn` have been completed and it is safe to update the summed synaptic input and write back to `d_inSyn<synapsePopulation>` in device memory.

- `inSyn`: This is an intermediary synapse variable which contains the summed input into a postsynaptic neuron (originating from the `addtoinSyn` variables of the incoming synapses) .
- `Isyn`: This is a local variable which contains the (summed) input current to a neuron. It is typically the sum of any explicit current input and all synaptic inputs. The way its value is calculated during the update of the postsynaptic neuron is defined by the code provided in the [postSynModel](#). For example, the standard `EXP↔DECAY` postsynaptic model defines `ps.postSynToCurrent= String("$inSyn)*($E-$V)");` which implements a conductance based synapse in which the postsynaptic current is given by  $I_{syn} = g * s * (V_{rev} - V_{post})$ .

#### Note

The `addtoinSyn` variables from all incoming synapses are automatically summed and added to the current value of `inSyn`.

The value resulting from the `postSynToCurrent` code is assigned to `Isyn` and can then be used in neuron `simCode` like so:

```
$ (V) += ( - $ (V) + $ (Isyn) ) *DT
```

- `sT`: As a neuron variable, this is the last spike time in a neuron and is automatically generated for pre and postsynaptic neuron groups of a synapse group `i` that follows a spike based learning rule (indicated by `usesPostLearning[i]= TRUE` for the `i`th synapse population).

In addition to these variables, neuron variables can be referred to in the synapse models by calling `$(<neuron↔VarName>_pre)` for the presynaptic neuron population, and `$(<neuronVarName>_post)` for the postsynaptic population. For example, `$(sT_pre)`, `$(sT_post)`, `$(V_pre)`, etc.

## 9.4 Debugging suggestions

In Linux, users can use `cuda-gdb` to debug on the GPU. Example projects in `userproject` and `lib/bin/buildmodel.sh` come with a flag to enable debugging. If you are using a project with debugging, the code will be compiled with `-g -G` flags. In CPU mode the executable will be run in `gdb`, and in GPU mode it will be run in `cuda-gdb` in `tui` mode.

#### Note

Do not forget to switch debugging flags `-g` and `-G` off after debugging is complete as they negatively affect performance.

[Previous](#) | [Top](#) | [Next](#)

## 10 Credits

GeNN was created by Thomas Nowotny.

Addition of Izhikevich model, debugging modes and sparse connectivity by Esin Yavuz.

Block size optimisations and delayed synapses by James Turner.

Automatic brackets and dense to sparse network conversion by Alan Diamond.

User-defined synaptic and postsynaptic methods by Alex Cope and Esin Yavuz.

Example projects were provided by Alan Diamond, James Turner, Esin Yavuz and Thomas Nowotny.

[Previous](#) | [Top](#)



## 11 Hierarchical Index

### 11.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

<b>classIzh</b>	<b><a href="#">50</a></b>
<b>classol</b>	<b><a href="#">52</a></b>
<b>CodeHelper</b>	<b><a href="#">61</a></b>
<b>CStopWatch</b>	<b><a href="#">62</a></b>
<b>dpclass</b>	<b><a href="#">63</a></b>
<b>expDecayDp</b>	<b><a href="#">64</a></b>
<b>pwSTDP</b>	<b><a href="#">92</a></b>
<b>pwSTDP_userdef</b>	<b><a href="#">93</a></b>
<b>pwSTDP_userdef</b>	<b><a href="#">93</a></b>
<b>rulkovdp</b>	<b><a href="#">97</a></b>
<b>errTupel</b>	<b><a href="#">63</a></b>
<b>inputSpec</b>	<b><a href="#">64</a></b>
<b>neuronModel</b>	<b><a href="#">65</a></b>
<b>neuronpop</b>	<b><a href="#">67</a></b>
<b>NNmodel</b>	<b><a href="#">68</a></b>
<b>Parameter</b>	<b><a href="#">82</a></b>
<b>postSynModel</b>	<b><a href="#">82</a></b>
<b>postVarsInPostLearn</b>	<b><a href="#">84</a></b>
<b>postVarsInPostLearn_sparse</b>	<b><a href="#">84</a></b>
<b>postVarsInSimCode</b>	<b><a href="#">85</a></b>
<b>postVarsInSimCode_sparse</b>	<b><a href="#">86</a></b>
<b>postVarsInSynapseDynamics</b>	<b><a href="#">86</a></b>
<b>postVarsInSynapseDynamics_sparse</b>	<b><a href="#">87</a></b>
<b>preVarsInPostLearn</b>	<b><a href="#">88</a></b>
<b>preVarsInPostLearn_sparse</b>	<b><a href="#">89</a></b>
<b>preVarsInSimCode</b>	<b><a href="#">89</a></b>
<b>preVarsInSimCode_sparse</b>	<b><a href="#">90</a></b>
<b>preVarsInSynapseDynamics</b>	<b><a href="#">91</a></b>

<code>preVarsInSynapseDynamics_sparse</code>	92
<code>randomGauss</code>	95
<code>randomGen</code>	96
<code>Schmuker2014_classifier</code>	98
<code>stdRG</code>	103
<code>stopWatch</code>	104
<code>SynDelay</code>	105
<code>weightUpdateModel</code>	105

## 12 Class Index

### 12.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

<code>classIzh</code>	50
<code>classol</code>	
This class contains the methods for running the MBody1 example model	52
<code>CodeHelper</code>	61
<code>CStopWatch</code>	62
<code>dpclass</code>	63
<code>errTupel</code>	63
<code>expDecayDp</code>	
Class defining the dependent parameter for exponential decay	64
<code>inputSpec</code>	64
<code>neuronModel</code>	
Class (struct) for specifying a neuron model	65
<code>neuronpop</code>	67
<code>NNmodel</code>	
Structure to hold the information that defines synapse dynamics (a model of how synapse variables change over time, independent of or in addition to changes when spikes occur)	68
<code>Parameter</code>	82
<code>postSynModel</code>	
Structure to hold the information that defines a post-synaptic model (a model of how synapses affect post-synaptic neuron variables, classically in the form of a synaptic current). It also allows to define an equation for the dynamics that can be applied to the summed synaptic input variable "insyn"	82
<code>postVarsInPostLearn</code>	84
<code>postVarsInPostLearn_sparse</code>	84

<a href="#">postVarsInSimCode</a>	85
<a href="#">postVarsInSimCode_sparse</a>	86
<a href="#">postVarsInSynapseDynamics</a>	86
<a href="#">postVarsInSynapseDynamics_sparse</a>	87
<a href="#">preVarsInPostLearn</a>	88
<a href="#">preVarsInPostLearn_sparse</a>	89
<a href="#">preVarsInSimCode</a>	89
<a href="#">preVarsInSimCode_sparse</a>	90
<a href="#">preVarsInSynapseDynamics</a>	91
<a href="#">preVarsInSynapseDynamics_sparse</a>	92
<a href="#">pwSTDP</a>	
TODO This class definition may be code-generated in a future release	92
<a href="#">pwSTDP_userdef</a>	
TODO This class definition may be code-generated in a future release	93
<a href="#">randomGauss</a>	
Class random Gauss encapsulates the methods for generating random neumbers with Gaussian distribution	95
<a href="#">randomGen</a>	
Class <a href="#">randomGen</a> which implements the ISAAC random number generator for uniformly distributed random numbers	96
<a href="#">rulkovdp</a>	
Class defining the dependent parameters of teh Rulkov map neuron	97
<a href="#">Schmuker2014_classifier</a>	
This class cponains the methods for running the Schmuker_2014_classifier example model	98
<a href="#">stdRG</a>	103
<a href="#">stopWatch</a>	104
<a href="#">SynDelay</a>	105
<a href="#">weightUpdateModel</a>	
Structure to hold the information that defines a weightupdate model (a model of how spikes affect synaptic (and/or) (mostly) post-synaptic neuron variables. It also allows to define changes in response to post-synaptic spikes/spike-like events	105

## 13 File Index

### 13.1 File List

Here is a list of all files with brief descriptions:

<a href="#">MBody1_project/model/classol_sim.cu</a>	108
<a href="#">MBody_delayedSyn_project/model/classol_sim.cu</a>	108

<a href="#">MBody_individualID_project/model/classol_sim.cu</a>	108
<a href="#">MBody_userdef_project/model/classol_sim.cu</a>	109
<a href="#">MBody1_project/model/classol_sim.h</a>	109
<a href="#">MBody_delayedSyn_project/model/classol_sim.h</a>	110
<a href="#">MBody_individualID_project/model/classol_sim.h</a>	111
<a href="#">MBody_userdef_project/model/classol_sim.h</a>	112
<a href="#">CodeHelper.cc</a>	113
<a href="#">ensureFtype.h</a>	114
<a href="#">experiment.cu</a>	114
<a href="#">experiment.h</a>	116
<a href="#">extra_neurons.h</a>	118
<a href="#">lib/include/extra_postsynapses.h</a>	119
<a href="#">SpineML_to_GeNN/extra_postsynapses.h</a>	120
<a href="#">extra_weightupdates.h</a>	121
<a href="#">GA.cc</a>	121
<a href="#">gauss.cc</a>	
Contains the implementation of the Gaussian random number generator class <a href="#">randomGauss</a>	121
<a href="#">gauss.h</a>	
Random number generator for Gaussian random variable with mean 0 and standard deviation 1	122
<a href="#">gen_input_structured.cc</a>	122
<a href="#">gen_kcdn_syns.cc</a>	
This file is part of a tool chain for running the classol/MBody1 example model	123
<a href="#">gen_kcdn_syns_fixto10K.cc</a>	123
<a href="#">gen_pnkc_syns.cc</a>	
This file is part of a tool chain for running the classol/MBody1 example model	124
<a href="#">gen_pnkc_syns_indivID.cc</a>	
This file is part of a tool chain for running the classol/MBody1 example model	125
<a href="#">gen_pnlhi_syns.cc</a>	
This file is part of a tool chain for running the classol/MBody1 example model	125
<a href="#">gen_syns_sparse.cc</a>	
This file generates the arrays needed for sparse connectivity. The connectivity is saved to a file for each variable and can then be read to fill the struct of connectivity	126
<a href="#">gen_syns_sparse_izhModel.cc</a>	
This file is part of a tool chain for running the Izhikevich network model	127
<a href="#">HHVclampGA_project/generate_run.cc</a>	129
<a href="#">lzh_sparse_project/generate_run.cc</a>	129

<a href="#">MBody1_project/generate_run.cc</a>	130
<a href="#">MBody_delayedSyn_project/generate_run.cc</a>	131
<a href="#">MBody_individualID_project/generate_run.cc</a>	132
<a href="#">MBody_userdef_project/generate_run.cc</a>	133
<a href="#">OneComp_project/generate_run.cc</a>	134
<a href="#">PoissonIzh_project/generate_run.cc</a>	134
<a href="#">generateALL.cc</a>	
Main file combining the code for code generation. Part of the code generation section	135
<a href="#">generateCPU.cc</a>	
Functions for generating code that will run the neuron and synapse simulations on the CPU. Part of the code generation section	136
<a href="#">generateKernels.cc</a>	
Contains functions that generate code for CUDA kernels. Part of the code generation section	137
<a href="#">generateRunner.cc</a>	
Contains functions to generate code for running the simulation on the GPU, and for I/O convenience functions between GPU and CPU space. Part of the code generation section	139
<a href="#">GeNNHelperKrnls.cu</a>	139
<a href="#">global.h</a>	
Global header file containing a few global variables. Part of the code generation section	140
<a href="#">helper.h</a>	142
<a href="#">HHVClamp.cc</a>	
This file contains the model definition of HHVClamp model. It is used in both the GeNN code generation and the user side simulation code. The HHVClamp model implements a population of unconnected Hodgkin-Huxley neurons that evolve to mimick a model run on the CPU, using genetic algorithm techniques	144
<a href="#">hr_time.cpp</a>	
This file contains the implementation of the <a href="#">CStopWatch</a> class that provides a simple timing tool based on the system clock	145
<a href="#">hr_time.h</a>	
This header file contains the definition of the <a href="#">CStopWatch</a> class that implements a simple timing tool using the system clock	145
<a href="#">Izh_sim_sparse.cu</a>	146
<a href="#">Izh_sparse.cc</a>	146
<a href="#">Izh_sparse_model.cc</a>	148
<a href="#">Izh_sparse_model.h</a>	148
<a href="#">Izh_sparse_sim.h</a>	148
<a href="#">MBody1_project/model/map_classol.cc</a>	149
<a href="#">MBody_delayedSyn_project/model/map_classol.cc</a>	149
<a href="#">MBody_individualID_project/model/map_classol.cc</a>	150

<a href="#">MBody_userdef_project/model/map_classol.cc</a>	150
<a href="#">MBody1_project/model/map_classol.h</a>	150
<a href="#">MBody_delayedSyn_project/model/map_classol.h</a>	150
<a href="#">MBody_individualID_project/model/map_classol.h</a>	151
<a href="#">MBody_userdef_project/model/map_classol.h</a>	151
<a href="#">HHVclampGA_project/model/MBody1.cc</a>	151
<a href="#">MBody1_project/model/MBody1.cc</a>	154
<a href="#">MBody_delayedSyn.cc</a>	
This file contains the model definition of the mushroom body "MBody_delayedSyn" model. It is used in both the GeNN code generation and the user side simulation code (class classol, file classol_sim)	158
<a href="#">MBody_individualID.cc</a>	
This file contains the model definition of the mushroom body "MBody_individualID" model. It is used in both the GeNN code generation and the user side simulation code (class classol, file classol_sim). It uses INDIVIDUALID for the connections from AL to MB allowing quite large numbers of PN and KC	162
<a href="#">featureTests/supportCode/MBody_userdef.cc</a>	166
<a href="#">userproject/MBody_userdef_project/model/MBody_userdef.cc</a>	169
<a href="#">Model_Schmuker_2014_classifier.cc</a>	173
<a href="#">modelSpec.cc</a>	174
<a href="#">modelSpec.h</a>	
Header file that contains the class (struct) definition of <a href="#">neuronModel</a> for defining a neuron model and the class definition of <a href="#">NNmodel</a> for defining a neuronal network model. Part of the code generation and generated code sections	175
<a href="#">OneComp.cc</a>	180
<a href="#">OneComp_model.cc</a>	182
<a href="#">OneComp_model.h</a>	182
<a href="#">OneComp_sim.cu</a>	182
<a href="#">OneComp_sim.h</a>	182
<a href="#">PoissonIzh-model.cc</a>	183
<a href="#">PoissonIzh-model.h</a>	183
<a href="#">PoissonIzh.cc</a>	183
<a href="#">PoissonIzh_sim.cu</a>	185
<a href="#">PoissonIzh_sim.h</a>	186
<a href="#">postVarsInPostLearn.cc</a>	187
<a href="#">postVarsInPostLearn_sparse.cc</a>	188

<a href="#">postVarsInSimCode.cc</a>	189
<a href="#">postVarsInSimCode_sparse.cc</a>	190
<a href="#">postVarsInSynapseDynamics.cc</a>	191
<a href="#">postVarsInSynapseDynamics_sparse.cc</a>	192
<a href="#">preVarsInPostLearn.cc</a>	193
<a href="#">preVarsInPostLearn_sparse.cc</a>	194
<a href="#">preVarsInSimCode.cc</a>	196
<a href="#">preVarsInSimCode_sparse.cc</a>	197
<a href="#">preVarsInSynapseDynamics.cc</a>	198
<a href="#">preVarsInSynapseDynamics_sparse.cc</a>	199
<a href="#">randomGen.cc</a>	
Contains the implementation of the ISAAC random number generator class for uniformly distributed random numbers and for a standard random number generator based on the C function rand()	200
<a href="#">randomGen.h</a>	
Header file containing the class definition for a uniform random generator based on the ISAAC random number generator	200
<a href="#">Schmuker2014_classifier.cu</a>	201
<a href="#">Schmuker2014_classifier.h</a>	
Header file containing the class definition for the Schmuker2014 classifier, which contains the methods for setting up, initialising, simulating and saving results of a multivariate classifier inspired by the insect olfactory system. See "A neuromorphic network for generic multivariate data classification, Michael Schmuker, Thomas Pfeilc, and Martin Paul Nawrota, 2014"	201
<a href="#">simpleBit.h</a>	
Contains three macros that allow simple bit manipulations on an (presumably unsigned) 32 bit integer	202
<a href="#">sizes.h</a>	202
<a href="#">sparseUtils.cc</a>	203
<a href="#">stringutils.h</a>	204
<a href="#">SynDelay.cc</a>	205
<a href="#">SynDelaySim.cu</a>	208
<a href="#">SynDelaySim.h</a>	208
<a href="#">testDefaultContructor.cu</a>	209
<a href="#">postsynapticVariables/testHelper.h</a>	209
<a href="#">presynapticVariables/testHelper.h</a>	209
<a href="#">testMixedArray.cc</a>	209
<a href="#">testPostVarsInPostLearn.cu</a>	210

<a href="#">testPostVarsInPostLearn.h</a>	211
<a href="#">testPostVarsInPostLearn_sparse.cu</a>	211
<a href="#">testPostVarsInPostLearn_sparse.h</a>	211
<a href="#">testPostVarsInSimCode.cu</a>	212
<a href="#">testPostVarsInSimCode.h</a>	212
<a href="#">testPostVarsInSimCode_sparse.cu</a>	213
<a href="#">testPostVarsInSimCode_sparse.h</a>	213
<a href="#">testPostVarsInSynapseDynamics.cu</a>	214
<a href="#">testPostVarsInSynapseDynamics.h</a>	214
<a href="#">testPostVarsInSynapseDynamics_sparse.cu</a>	215
<a href="#">testPostVarsInSynapseDynamics_sparse.h</a>	215
<a href="#">testPreVarsInPostLearn.cu</a>	215
<a href="#">testPreVarsInPostLearn.h</a>	216
<a href="#">testPreVarsInPostLearn_sparse.cu</a>	216
<a href="#">testPreVarsInPostLearn_sparse.h</a>	217
<a href="#">testPreVarsInSimCode.cu</a>	217
<a href="#">testPreVarsInSimCode.h</a>	218
<a href="#">testPreVarsInSimCode_sparse.cu</a>	218
<a href="#">testPreVarsInSimCode_sparse.h</a>	219
<a href="#">testPreVarsInSynapseDynamics.cu</a>	219
<a href="#">testPreVarsInSynapseDynamics.h</a>	220
<a href="#">testPreVarsInSynapseDynamics_sparse.cu</a>	220
<a href="#">testPreVarsInSynapseDynamics_sparse.h</a>	221
<a href="#">testRegEx.cc</a>	221
<a href="#">toString.h</a>	
Contains a template function for string conversion from const char* to C++ string	222
<a href="#">utils.h</a>	
This file contains standard utility functions provide within the NVIDIA CUDA software development toolkit (SDK). The remainder of the file contains a function that defines the standard neuron models	223
<a href="#">VClampGA.cu</a>	
Main entry point for the GeNN project demonstrating realtime fitting of a neuron with a GA running mostly on the GPU	225
<a href="#">VClampGA.h</a>	226



## 14 Class Documentation

### 14.1 classlzh Class Reference

```
#include <Izh_sparse_model.h>
```

#### Public Member Functions

- [classlzh](#) ()
- [~classlzh](#) ()
- void [init](#) (unsigned int)
- void [allocate\\_device\\_mem\\_patterns](#) ()
- void [allocate\\_device\\_mem\\_input](#) ()
- void [copy\\_device\\_mem\\_input](#) ()
- void [read\\_sparsesyms\\_par](#) (int, struct SparseProjection, FILE \*, FILE \*, FILE \*, [scalar](#) \*)
- void [gen\\_alltoall\\_syms](#) ([scalar](#) \*, unsigned int, unsigned int, [scalar](#))
- void [free\\_device\\_mem](#) ()
- void [write\\_input\\_to\\_file](#) (FILE \*)
- void [read\\_input\\_values](#) (FILE \*)
- void [create\\_input\\_values](#) ()
- void [run](#) (double, unsigned int)
- void [getSpikesFromGPU](#) ()
 

*Method for copying all spikes of the last time step from the GPU.*
- void [getSpikeNumbersFromGPU](#) ()
 

*Method for copying the number of spikes in all neuron populations that have occurred during the last time step.*
- void [output\\_state](#) (FILE \*, unsigned int)
- void [output\\_spikes](#) (FILE \*, unsigned int)
- void [output\\_params](#) (FILE \*, FILE \*)
- void [sum\\_spikes](#) ()
- void [setInput](#) (unsigned int)
- void [randomizeVar](#) ([scalar](#) \*, [scalar](#), unsigned int)
- void [randomizeVarSq](#) ([scalar](#) \*, [scalar](#), unsigned int)
- void [initializeAllVars](#) (unsigned int)

#### Public Attributes

- [NNmodel](#) model
- [scalar](#) \* [input1](#)
- [scalar](#) \* [input2](#)
- [scalar](#) \* [d\\_input1](#)
- [scalar](#) \* [d\\_input2](#)
- unsigned int [sumPExc](#)
- unsigned int [sumPInh](#)

#### 14.1.1 Constructor & Destructor Documentation

14.1.1.1 [classlzh::classlzh](#) ( )

14.1.1.2 [classlzh::~~classlzh](#) ( )

#### 14.1.2 Member Function Documentation

14.1.2.1 [void classlzh::allocate\\_device\\_mem\\_input](#) ( )

14.1.2.2 void classzh::allocate\_device\_mem\_patterns ( )

14.1.2.3 void classzh::copy\_device\_mem\_input ( )

14.1.2.4 void classzh::create\_input\_values ( )

14.1.2.5 void classzh::free\_device\_mem ( )

14.1.2.6 void classzh::gen\_alltoall\_syns ( scalar \* *g*, unsigned int *nPre*, unsigned int *nPost*, scalar *gscale* )

Parameters

<i>gscale</i>	Generate random conductivity values for an all to all network
---------------	---

14.1.2.7 void classzh::getSpikeNumbersFromGPU ( )

Method for copying the number of spikes in all neuron populations that have occurred during the last time step.

This method is a simple wrapper for the convenience function copySpikeNFromDevice() provided by GeNN.

14.1.2.8 void classzh::getSpikesFromGPU ( )

Method for copying all spikes of the last time step from the GPU.

This is a simple wrapper for the convenience function copySpikesFromDevice() which is provided by GeNN.

14.1.2.9 void classzh::init ( unsigned int *which* )

14.1.2.10 void classzh::initializeAllVars ( unsigned int *which* )

14.1.2.11 void classzh::output\_params ( FILE \* *f*, FILE \* *f2* )

14.1.2.12 void classzh::output\_spikes ( FILE \* *f*, unsigned int *which* )

14.1.2.13 void classzh::output\_state ( FILE \* *f*, unsigned int *which* )

14.1.2.14 void classzh::randomizeVar ( scalar \* *Var*, scalar *strength*, unsigned int *neuronGrp* )

14.1.2.15 void classzh::randomizeVarSq ( scalar \* *Var*, scalar *strength*, unsigned int *neuronGrp* )

14.1.2.16 void classzh::read\_input\_values ( FILE \* )

14.1.2.17 void classzh::read\_sparsesyns\_par ( int *synInd*, struct SparseProjection *C*, FILE \* *f\_ind*, FILE \* *f\_indInG*, FILE \* *f\_g*, scalar \* *g* )

Parameters

<i>g</i>	File handle for a file containing sparse conductivity values
----------	--

14.1.2.18 void classzh::run ( double *runtime*, unsigned int *which* )

14.1.2.19 void classzh::setInput ( unsigned int *which* )

14.1.2.20 void classzh::sum\_spikes ( )

14.1.2.21 void classzh::write\_input\_to\_file ( FILE \* *f* )

### 14.1.3 Member Data Documentation

14.1.3.1 scalar\* classzh::d\_input1

14.1.3.2 `scalar * classlzh::d_input2`

14.1.3.3 `scalar * classlzh::input1`

14.1.3.4 `scalar * classlzh::input2`

14.1.3.5 `NNmodel classlzh::model`

14.1.3.6 `unsigned int classlzh::sumPExc`

14.1.3.7 `unsigned int classlzh::sumPInh`

The documentation for this class was generated from the following files:

- [lzh\\_sparse\\_model.h](#)
- [lzh\\_sparse\\_model.cc](#)

## 14.2 classol Class Reference

This class contains the methods for running the MBody1 example model.

```
#include <map_classol.h>
```

### Public Member Functions

- [classol](#) ()
- [~classol](#) ()
- void [init](#) (unsigned int)  
*Method for initialising variables.*
- void [allocate\\_device\\_mem\\_patterns](#) ()  
*Method for allocating memory on the GPU device to hold the input patterns.*
- void [free\\_device\\_mem](#) ()  
*Methods for unallocating the memory for input patterns on the GPU device.*
- void [read\\_pnkcsyns](#) (FILE \*)  
*Method for reading the connectivity between PNs and KCs from a file.*
- void [read\\_sparsesyns\\_par](#) (int, struct SparseProjection, [scalar](#) \*, FILE \*, FILE \*, FILE \*)
- void [write\\_pnkcsyns](#) (FILE \*)  
*Method for writing the connectivity between PNs and KCs back into file.*
- void [read\\_pnlhisyns](#) (FILE \*)  
*Method for reading the connectivity between PNs and LHIs from a file.*
- void [write\\_pnlhisyns](#) (FILE \*)  
*Method for writing the connectivity between PNs and LHIs to a file.*
- void [read\\_kcdnsyns](#) (FILE \*)  
*Method for reading the connectivity between KCs and DNs (detector neurons) from a file.*
- void [write\\_kcdnsyns](#) (FILE \*)  
*Method to write the connectivity between KCs and DNs (detector neurons) to a file.*
- void [read\\_input\\_patterns](#) (FILE \*)  
*Method for reading the input patterns from a file.*
- void [generate\\_baserates](#) ()  
*Method for calculating the baseline rates of the Poisson input neurons.*
- void [runGPU](#) ([scalar](#))  
*Method for simulating the model for a given period of time on the GPU.*
- void [runCPU](#) ([scalar](#))  
*Method for simulating the model for a given period of time on the CPU.*

- void `output_state` (FILE \*, unsigned int)  
*Method for copying from device and writing out to file of the entire state of the model.*
- void `getSpikesFromGPU` ()  
*Method for copying all spikes of the last time step from the GPU.*
- void `getSpikeNumbersFromGPU` ()  
*Method for copying the number of spikes in all neuron populations that have occurred during the last time step.*
- void `output_spikes` (FILE \*, unsigned int)  
*Method for writing the spikes occurred in the last time step to a file.*
- void `sum_spikes` ()  
*Method for summing up spike numbers.*
- void `get_kcdnsyns` ()  
*Method for copying the synaptic conductances of the learning synapses between KCs and DNs (detector neurons) back to the CPU memory.*
- `classol` ()
- `~classol` ()
- void `init` (unsigned int)
- void `allocate_device_mem_patterns` ()
- void `free_device_mem` ()
- void `read_pnkcsyns` (FILE \*)
- void `read_sparsesyns_par` (int, struct SparseProjection, scalar \*, FILE \*, FILE \*, FILE \*)
- void `write_pnkcsyns` (FILE \*)
- void `read_pnlhisyns` (FILE \*)
- void `write_pnlhisyns` (FILE \*)
- void `read_kcdnsyns` (FILE \*)
- void `write_kcdnsyns` (FILE \*)
- void `read_input_patterns` (FILE \*)
- void `generate_baserates` ()
- void `run` (scalar, unsigned int)  
*Method for simulating the model for a given period of time.*
- void `output_state` (FILE \*, unsigned int)
- void `getSpikesFromGPU` ()
- void `getSpikeNumbersFromGPU` ()
- void `output_spikes` (FILE \*, unsigned int)
- void `sum_spikes` ()
- void `get_kcdnsyns` ()
- `classol` ()
- `~classol` ()
- void `init` (unsigned int)
- void `allocate_device_mem_patterns` ()
- void `free_device_mem` ()
- void `read_pnkcsyns` (FILE \*)
- void `read_sparsesyns_par` (int, struct SparseProjection, scalar \*, FILE \*, FILE \*, FILE \*)
- void `write_pnkcsyns` (FILE \*)
- void `read_pnlhisyns` (FILE \*)
- void `write_pnlhisyns` (FILE \*)
- void `read_kcdnsyns` (FILE \*)
- void `write_kcdnsyns` (FILE \*)
- void `read_input_patterns` (FILE \*)
- void `generate_baserates` ()
- void `run` (scalar, unsigned int)
- void `output_state` (FILE \*, unsigned int)
- void `getSpikesFromGPU` ()
- void `getSpikeNumbersFromGPU` ()
- void `output_spikes` (FILE \*, unsigned int)

- void [sum\\_spikes](#) ()
- void [get\\_kcdnsyns](#) ()
- [classol](#) ()
- [~classol](#) ()
- void [init](#) (unsigned int)
- void [allocate\\_device\\_mem\\_patterns](#) ()
- void [free\\_device\\_mem](#) ()
- void [read\\_pnkcsyns](#) (FILE \*)
- template<class DATATYPE >  
void [read\\_sparsesyns\\_par](#) (DATATYPE \*, int, struct SparseProjection, FILE \*, FILE \*, FILE \*)
- void [write\\_pnkcsyns](#) (FILE \*)
- void [read\\_pnlhsyns](#) (FILE \*)
- void [write\\_pnlhsyns](#) (FILE \*)
- void [read\\_kcdnsyns](#) (FILE \*)
- void [write\\_kcdnsyns](#) (FILE \*)
- void [read\\_input\\_patterns](#) (FILE \*)
- void [generate\\_baserates](#) ()
- void [runGPU](#) (scalar)
- void [runCPU](#) (scalar)
- void [output\\_state](#) (FILE \*, unsigned int)
- void [getSpikesFromGPU](#) ()
- void [getSpikeNumbersFromGPU](#) ()
- void [output\\_spikes](#) (FILE \*, unsigned int)
- void [sum\\_spikes](#) ()
- void [get\\_kcdnsyns](#) ()
- [classol](#) ()
- [~classol](#) ()
- void [init](#) (unsigned int)
- void [allocate\\_device\\_mem\\_input](#) ()
- void [free\\_device\\_mem](#) ()
- void [read\\_PNlzh1syns](#) (scalar \*, FILE \*)
- void [read\\_sparsesyns\\_par](#) (int, struct SparseProjection, FILE \*, FILE \*, FILE \*, double \*)
- void [generate\\_baserates](#) ()
- void [run](#) (float, unsigned int)
- void [output\\_state](#) (FILE \*, unsigned int)
- void [getSpikesFromGPU](#) ()
- void [getSpikeNumbersFromGPU](#) ()
- void [output\\_spikes](#) (FILE \*, unsigned int)
- void [sum\\_spikes](#) ()

#### Public Attributes

- [NNmodel](#) model
- unsigned int [offset](#)
- uint64\_t \* [theRates](#)
- scalar \* [p\\_pattern](#)
- uint64\_t \* [pattern](#)
- uint64\_t \* [baserates](#)
- uint64\_t \* [d\\_pattern](#)
- uint64\_t \* [d\\_baserates](#)
- unsigned int [sumPN](#)
- unsigned int [sumKC](#)
- unsigned int [sumLHI](#)
- unsigned int [sumDN](#)
- unsigned int [size\\_g](#)
- unsigned int [sumlzh1](#)

### 14.2.1 Detailed Description

This class contains the methods for running the MBody1 example model.

This class contains the methods for running the MBody\_delayedSyn example model.

### 14.2.2 Constructor & Destructor Documentation

14.2.2.1 classol::classol ( )

14.2.2.2 classol::~~classol ( )

14.2.2.3 classol::classol ( )

14.2.2.4 classol::~~classol ( )

14.2.2.5 classol::classol ( )

14.2.2.6 classol::~~classol ( )

14.2.2.7 classol::classol ( )

14.2.2.8 classol::~~classol ( )

14.2.2.9 classol::classol ( )

14.2.2.10 classol::~~classol ( )

### 14.2.3 Member Function Documentation

14.2.3.1 void classol::allocate\_device\_mem\_input ( )

14.2.3.2 void classol::allocate\_device\_mem\_patterns ( )

Method for allocating memory on the GPU device to hold the input patterns.

14.2.3.3 void classol::allocate\_device\_mem\_patterns ( )

14.2.3.4 void classol::allocate\_device\_mem\_patterns ( )

14.2.3.5 void classol::allocate\_device\_mem\_patterns ( )

14.2.3.6 void classol::free\_device\_mem ( )

14.2.3.7 void classol::free\_device\_mem ( )

14.2.3.8 void classol::free\_device\_mem ( )

14.2.3.9 void classol::free\_device\_mem ( )

Methods for unallocating the memory for input patterns on the GPU device.

14.2.3.10 void classol::free\_device\_mem ( )

14.2.3.11 void classol::generate\_baserates ( )

14.2.3.12 void classol::generate\_baserates ( )

14.2.3.13 void classol::generate\_baserates ( )

Method for calculating the baseline rates of the Poisson input neurons.

14.2.3.14 void classol::generate\_baserates ( )

14.2.3.15 void classol::generate\_baserates ( )

14.2.3.16 void classol::get\_kcdnsyns ( )

14.2.3.17 void classol::get\_kcdnsyns ( )

14.2.3.18 void classol::get\_kcdnsyns ( )

Method for copying the synaptic conductances of the learning synapses between KCs and DNs (detector neurons) back to the CPU memory.

14.2.3.19 void classol::get\_kcdnsyns ( )

14.2.3.20 void classol::getSpikeNumbersFromGPU ( )

14.2.3.21 void classol::getSpikeNumbersFromGPU ( )

14.2.3.22 void classol::getSpikeNumbersFromGPU ( )

14.2.3.23 void classol::getSpikeNumbersFromGPU ( )

Method for copying the number of spikes in all neuron populations that have occurred during the last time step.

This method is a simple wrapper for the convenience function copySpikeNFromDevice() provided by GeNN.

14.2.3.24 void classol::getSpikeNumbersFromGPU ( )

14.2.3.25 void classol::getSpikesFromGPU ( )

14.2.3.26 void classol::getSpikesFromGPU ( )

14.2.3.27 void classol::getSpikesFromGPU ( )

14.2.3.28 void classol::getSpikesFromGPU ( )

Method for copying all spikes of the last time step from the GPU.

This is a simple wrapper for the convenience function copySpikesFromDevice() which is provided by GeNN.

14.2.3.29 void classol::getSpikesFromGPU ( )

14.2.3.30 void classol::init ( unsigned int )

14.2.3.31 void classol::init ( unsigned int *which* )

Method for initialising variables.

Parameters

<i>which</i>	Flag defining whether GPU or CPU only version is run
--------------	--

14.2.3.32 void classol::init ( unsigned int )

14.2.3.33 void classol::init ( unsigned int )

14.2.3.34 void classol::init ( unsigned int )

14.2.3.35 void classol::output\_spikes ( FILE \*, unsigned int )

14.2.3.36 void classol::output\_spikes ( FILE \*, unsigned int )

14.2.3.37 void classol::output\_spikes ( FILE \* , unsigned int )

14.2.3.38 void classol::output\_spikes ( FILE \* *f*, unsigned int *which* )

Method for writing the spikes occurred in the last time step to a file.

Parameters

<i>f</i>	File handle for a file to write spike times to
<i>which</i>	Flag determining whether using GPU or CPU only

14.2.3.39 void classol::output\_spikes ( FILE \* , unsigned int )

14.2.3.40 void classol::output\_state ( FILE \* , unsigned int )

14.2.3.41 void classol::output\_state ( FILE \* , unsigned int )

14.2.3.42 void classol::output\_state ( FILE \* , unsigned int )

14.2.3.43 void classol::output\_state ( FILE \* *f*, unsigned int *which* )

Method for copying from device and writing out to file of the entire state of the model.

Parameters

<i>f</i>	File handle for a file to write the model state to
<i>which</i>	Flag determining whether using GPU or CPU only

14.2.3.44 void classol::output\_state ( FILE \* , unsigned int )

14.2.3.45 void classol::read\_input\_patterns ( FILE \* *f* )

Method for reading the input patterns from a file.

Parameters

<i>f</i>	File handle for a file containing input patterns
----------	--

14.2.3.46 void classol::read\_input\_patterns ( FILE \* )

14.2.3.47 void classol::read\_input\_patterns ( FILE \* )

14.2.3.48 void classol::read\_input\_patterns ( FILE \* )

14.2.3.49 void classol::read\_kcdnsyns ( FILE \* *f* )

Method for reading the connectivity between KCs and DNs (detector neurons) from a file.

Parameters

<i>f</i>	File handle for a file containing KC to DN (detector neuron) conductivity values
----------	--

14.2.3.50 void classol::read\_kcdnsyns ( FILE \* )

14.2.3.51 void classol::read\_kcdnsyns ( FILE \* )

14.2.3.52 void classol::read\_kcdnsyns ( FILE \* )

14.2.3.53 void classol::read\_PNlzh1syns ( scalar \* *gp*, FILE \* *f* )

14.2.3.54 void classol::read\_pnkcsyns ( FILE \* )



14.2.3.55 `void classol::read_pnkcsyns ( FILE * f )`

Method for reading the connectivity between PNs and KCs from a file.

## Parameters

<i>f</i>	File handle for a file containing PN to KC conductivity values
----------	--

14.2.3.56 void classol::read\_pnkcsyns ( FILE \* )

14.2.3.57 void classol::read\_pnkcsyns ( FILE \* )

14.2.3.58 void classol::read\_pnlhsyns ( FILE \* *f* )

Method for reading the connectivity between PNs and LHIs from a file.

## Parameters

<i>f</i>	File handle for a file containing PN to LHI conductivity values
----------	---

14.2.3.59 void classol::read\_pnlhsyns ( FILE \* )

14.2.3.60 void classol::read\_pnlhsyns ( FILE \* )

14.2.3.61 void classol::read\_pnlhsyns ( FILE \* )

14.2.3.62 void classol::read\_sparsesyns\_par ( int *synInd*, struct SparseProjection *C*, FILE \* *f\_ind*, FILE \* *f\_indInG*, FILE \* *f\_g*, double \* *g* )

## Parameters

<i>g</i>	File handle for a file containing sparse conductivity values
----------	--

14.2.3.63 void classol::read\_sparsesyns\_par ( int *synInd*, struct SparseProjection *C*, scalar \* *g*, FILE \* *f\_ind*, FILE \* *f\_indInG*, FILE \* *f\_g* )

## Parameters

<i>f_g</i>	File handle for a file containing sparse connectivity values
------------	--

14.2.3.64 void classol::read\_sparsesyns\_par ( int , struct SparseProjection , scalar \* , FILE \* , FILE \* , FILE \* )

14.2.3.65 void classol::read\_sparsesyns\_par ( int , struct SparseProjection , scalar \* , FILE \* , FILE \* , FILE \* )

14.2.3.66 template<class DATATYPE > void classol::read\_sparsesyns\_par ( DATATYPE \* *wuvar*, int *synInd*, struct SparseProjection *C*, FILE \* *f\_ind*, FILE \* *f\_indInG*, FILE \* *f\_g* )

## Parameters

<i>f_g</i>	File handle for a file containing sparse conductivity values
------------	--

14.2.3.67 void classol::run ( float *runtime*, unsigned int *which* )

14.2.3.68 void classol::run ( scalar *runtime*, unsigned int *which* )

Method for simulating the model for a given period of time.

## Parameters

<i>runtime</i>	Duration of time to run the model for
----------------	---------------------------------------

<i>which</i>	Flag determining whether to run on GPU or CPU only
--------------	--

14.2.3.69 `void classol::run ( scalar , unsigned int )`

14.2.3.70 `void classol::runCPU ( scalar runtime )`

Method for simulating the model for a given period of time on the CPU.

Method for simulating the model for a given period of time on th CPU.

Parameters

<i>runtime</i>	Duration of time to run the model for
----------------	---------------------------------------

14.2.3.71 `void classol::runCPU ( scalar )`

14.2.3.72 `void classol::runGPU ( scalar runtime )`

Method for simulating the model for a given period of time on the GPU.

Method for simulating the model for a given period of time on th GPU.

Parameters

<i>runtime</i>	Duration of time to run the model for
----------------	---------------------------------------

14.2.3.73 `void classol::runGPU ( scalar )`

14.2.3.74 `void classol::sum_spikes ( )`

14.2.3.75 `void classol::sum_spikes ( )`

14.2.3.76 `void classol::sum_spikes ( )`

14.2.3.77 `void classol::sum_spikes ( )`

Method for summing up spike numbers.

14.2.3.78 `void classol::sum_spikes ( )`

14.2.3.79 `void classol::write_kcdnsyns ( FILE * f )`

Method to write the connectivity between KCs and DNs (detector neurons) to a file.

Parameters

<i>f</i>	File handle for a file to write KC to DN (detectore neuron) conductivity values to
----------	--

14.2.3.80 `void classol::write_kcdnsyns ( FILE * )`

14.2.3.81 `void classol::write_kcdnsyns ( FILE * )`

14.2.3.82 `void classol::write_kcdnsyns ( FILE * )`

14.2.3.83 `void classol::write_pnkcsyns ( FILE * )`

14.2.3.84 `void classol::write_pnkcsyns ( FILE * )`

14.2.3.85 `void classol::write_pnkcsyns ( FILE * f )`

Method for writing the conenctivity between PNs and KCs back into file.

## Parameters

<i>f</i>	File handle for a file to write PN to KC conductivity values to
----------	---

14.2.3.86 void classol::write\_pnkcsyns ( FILE \* )

14.2.3.87 void classol::write\_pnlhisyns ( FILE \* )

14.2.3.88 void classol::write\_pnlhisyns ( FILE \* *f* )

Method for writing the connectivity between PNs and LHIs to a file.

## Parameters

<i>f</i>	File handle for a file to write PN to LHI conductivity values to
----------	--

14.2.3.89 void classol::write\_pnlhisyns ( FILE \* )

14.2.3.90 void classol::write\_pnlhisyns ( FILE \* )

## 14.2.4 Member Data Documentation

14.2.4.1 uint64\_t \* classol::baserates

14.2.4.2 uint64\_t \* classol::d\_baserates

14.2.4.3 uint64\_t \* classol::d\_pattern

14.2.4.4 NNmodel classol::model

14.2.4.5 unsigned int classol::offset

14.2.4.6 scalar \* classol::p\_pattern

14.2.4.7 uint64\_t \* classol::pattern

14.2.4.8 unsigned int classol::size\_g

14.2.4.9 unsigned int classol::sumDN

14.2.4.10 unsigned int classol::sumlzh1

14.2.4.11 unsigned int classol::sumKC

14.2.4.12 unsigned int classol::sumLHI

14.2.4.13 unsigned int classol::sumPN

14.2.4.14 uint64\_t \* classol::theRates

The documentation for this class was generated from the following files:

- [MBody1\\_project/model/map\\_classol.h](#)
- [Poissonlzh-model.h](#)
- [MBody1\\_project/model/map\\_classol.cc](#)
- [Poissonlzh-model.cc](#)

## 14.3 CodeHelper Class Reference

### Public Member Functions

- [CodeHelper](#) ()
- void [setVerbose](#) (bool isVerbose)
- string [openBrace](#) (unsigned int level)
- string [closeBrace](#) (unsigned int level)
- string [endl](#) ()

### Public Attributes

- vector< unsigned int > [braces](#)
- bool [verbose](#)

### 14.3.1 Constructor & Destructor Documentation

14.3.1.1 [CodeHelper::CodeHelper \( \)](#) [inline]

### 14.3.2 Member Function Documentation

14.3.2.1 [string CodeHelper::closeBrace \( unsigned int \*level\* \)](#) [inline]

14.3.2.2 [string CodeHelper::endl \( \)](#) [inline]

14.3.2.3 [string CodeHelper::openBrace \( unsigned int \*level\* \)](#) [inline]

14.3.2.4 [void CodeHelper::setVerbose \( bool \*isVerbose\* \)](#) [inline]

### 14.3.3 Member Data Documentation

14.3.3.1 [vector<unsigned int> CodeHelper::braces](#)

14.3.3.2 [bool CodeHelper::verbose](#)

The documentation for this class was generated from the following file:

- [CodeHelper.cc](#)

## 14.4 CStopWatch Class Reference

```
#include <hr_time.h>
```

### Public Member Functions

- [CStopWatch](#) ()
- void [startTimer](#) ()  
*This method starts the timer.*
- void [stopTimer](#) ()  
*This method stops the timer.*
- double [getElapsedTime](#) ()  
*This method returns the time elapsed between start and stop of the timer in seconds.*

## 14.4.1 Constructor &amp; Destructor Documentation

## 14.4.1.1 CStopWatch::CStopWatch ( ) [inline]

## 14.4.2 Member Function Documentation

## 14.4.2.1 double CStopWatch::getElapsedTime ( )

This method returns the time elapsed between start and stop of the timer in seconds.

## 14.4.2.2 void CStopWatch::startTimer ( )

This method starts the timer.

## 14.4.2.3 void CStopWatch::stopTimer ( )

This method stops the timer.


The documentation for this class was generated from the following files:

- [hr\\_time.h](#)
- [hr\\_time.cpp](#)

## 14.5 dpclass Class Reference

```
#include <modelSpec.h>
```

Inheritance diagram for dpclass:

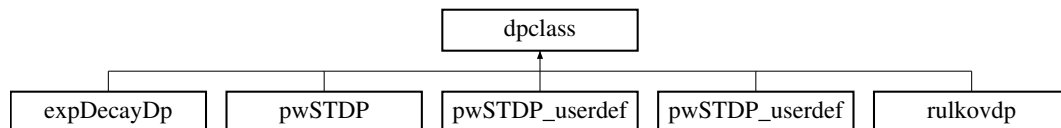

## Public Member Functions

- [dpclass](#) ( )
- virtual double [calculateDerivedParameter](#) (int index, vector< double > pars, double dt=1.0)

## 14.5.1 Constructor &amp; Destructor Documentation

## 14.5.1.1 dpclass::dpclass ( ) [inline]

## 14.5.2 Member Function Documentation

## 14.5.2.1 virtual double dpclass::calculateDerivedParameter ( int index, vector&lt; double &gt; pars, double dt = 1.0 ) [inline], [virtual]

Reimplemented in [expDecayDp](#), [rulkovdp](#), [pwSTDP\\_userdef](#), [pwSTDP\\_userdef](#), and [pwSTDP](#).

The documentation for this class was generated from the following file:

- [modelSpec.h](#)

## 14.6 errTupel Struct Reference

### Public Attributes

- unsigned int [id](#)
- double [err](#)

### 14.6.1 Member Data Documentation

#### 14.6.1.1 double errTupel::err

#### 14.6.1.2 unsigned int errTupel::id

The documentation for this struct was generated from the following file:


- [GA.cc](#)

## 14.7 expDecayDp Class Reference

Class defining the dependent parameter for exponential decay.

```
#include <utils.h>
```

Inheritance diagram for expDecayDp:



### Public Member Functions

- double [calculateDerivedParameter](#) (int index, vector< double > pars, double dt=1.0)
- double [expDecay](#) (vector< double > pars, double dt)

### 14.7.1 Detailed Description

Class defining the dependent parameter for exponential decay.

### 14.7.2 Member Function Documentation

#### 14.7.2.1 double expDecayDp::calculateDerivedParameter ( int *index*, vector< double > *pars*, double *dt* = 1.0 ) [inline], [virtual]

Reimplemented from [dpclass](#).

#### 14.7.2.2 double expDecayDp::expDecay ( vector< double > *pars*, double *dt* ) [inline]

The documentation for this class was generated from the following file:

- [utils.h](#)

## 14.8 inputSpec Struct Reference

```
#include <helper.h>
```

### Public Attributes

- double [t](#)
- double [baseV](#)
- int [N](#)
- vector< double > [st](#)
- vector< double > [V](#)

### 14.8.1 Member Data Documentation

14.8.1.1 double [inputSpec::baseV](#)

14.8.1.2 int [inputSpec::N](#)

14.8.1.3 vector<double> [inputSpec::st](#)

14.8.1.4 double [inputSpec::t](#)

14.8.1.5 vector<double> [inputSpec::V](#)

The documentation for this struct was generated from the following file:

- [helper.h](#)

## 14.9 neuronModel Struct Reference

class (struct) for specifying a neuron model.

```
#include <modelSpec.h>
```

### Public Attributes

- string [simCode](#)  
*Code that defines the execution of one timestep of integration of the neuron model.*
- string [thresholdConditionCode](#)  
*Code evaluating to a bool (e.g. "V > 20") that defines the condition for a true spike in the described neuron model.*
- string [resetCode](#)  
*Code that defines the reset action taken after a spike occurred. This can be empty.*
- vector< string > [varNames](#)  
*Names of the variables in the neuron model.*
- vector< string > [tmpVarNames](#)  
*never used*
- vector< string > [varTypes](#)  
*Types of the variable named above, e.g. "float". Names and types are matched by their order of occurrence in the vector.*
- vector< string > [tmpVarTypes](#)  
*never used*
- vector< string > [pNames](#)  
*Names of (independent) parameters of the model.*
- vector< string > [dpNames](#)



*Names of dependent parameters of the model.*

- `vector< string >` [extraGlobalNeuronKernelParameters](#)

*Additional parameter in the neuron kernel; it is translated to a population specific name but otherwise assumed to be one parameter per population rather than per neuron.*

- `vector< string >` [extraGlobalNeuronKernelParameterTypes](#)

*Additional parameters in the neuron kernel; they are translated to a population specific name but otherwise assumed to be one parameter per population rather than per neuron.*

- `dpclass * dps`

*Derived parameters.*

- `bool` [needPreSt](#)

*Whether presynaptic spike times are needed or not.*

- `bool` [needPostSt](#)

*Whether postsynaptic spike times are needed or not.*

#### 14.9.1 Detailed Description

class (struct) for specifying a neuron model.

#### 14.9.2 Member Data Documentation

##### 14.9.2.1 `vector<string> neuronModel::dpNames`

Names of dependent parameters of the model.

The dependent parameters are functions of independent parameters that enter into the neuron model. To avoid unnecessary computational overhead, these parameters are calculated at compile time and inserted as explicit values into the generated code. See method `NNmodel::initDerivedNeuronPara` for how this is done.

##### 14.9.2.2 `dpclass* neuronModel::dps`

Derived parameters.

##### 14.9.2.3 `vector<string> neuronModel::extraGlobalNeuronKernelParameters`

Additional parameter in the neuron kernel; it is translated to a population specific name but otherwise assumed to be one parameter per population rather than per neuron.

##### 14.9.2.4 `vector<string> neuronModel::extraGlobalNeuronKernelParameterTypes`

Additional parameters in the neuron kernel; they are translated to a population specific name but otherwise assumed to be one parameter per population rather than per neuron.

##### 14.9.2.5 `bool neuronModel::needPostSt`

Whether postsynaptic spike times are needed or not.

##### 14.9.2.6 `bool neuronModel::needPreSt`

Whether presynaptic spike times are needed or not.

##### 14.9.2.7 `vector<string> neuronModel::pNames`

Names of (independent) parameters of the model.

##### 14.9.2.8 `string neuronModel::resetCode`

Code that defines the reset action taken after a spike occurred. This can be empty.

## 14.9.2.9 string neuronModel::simCode

Code that defines the execution of one timestep of integration of the neuron model.

The code will refer to for the value of the variable with name "NN". It needs to refer to the predefined variable "ISYN", i.e. contain , if it is to receive input.

## 14.9.2.10 string neuronModel::thresholdConditionCode

Code evaluating to a bool (e.g. "V > 20") that defines the condition for a true spike in the described neuron model.

## 14.9.2.11 vector&lt;string&gt; neuronModel::tmpVarNames

never used

## 14.9.2.12 vector&lt;string&gt; neuronModel::tmpVarTypes

never used

## 14.9.2.13 vector&lt;string&gt; neuronModel::varNames

Names of the variables in the neuron model.

## 14.9.2.14 vector&lt;string&gt; neuronModel::varTypes

Types of the variable named above, e.g. "float". Names and types are matched by their order of occurrence in the vector.

The documentation for this struct was generated from the following file:

- [modelSpec.h](#)

## 14.10 neuronpop Class Reference

```
#include <OneComp_model.h>
```

## Public Member Functions

- [neuronpop](#) ()
- [~neuronpop](#) ()
- void [init](#) (unsigned int)
- void [allocate\\_device\\_mem\\_patterns](#) ()
- void [allocate\\_device\\_mem\\_input](#) ()
- void [copy\\_device\\_mem\\_input](#) ()
- void [write\\_input\\_to\\_file](#) (FILE \*)
- void [read\\_input\\_values](#) (FILE \*)
- void [create\\_input\\_values](#) (float t)
- void [run](#) (float, unsigned int)
- void [getSpikesFromGPU](#) ()
- void [getSpikeNumbersFromGPU](#) ()
- void [output\\_state](#) (FILE \*, unsigned int)
- void [output\\_spikes](#) (FILE \*, unsigned int)
- void [sum\\_spikes](#) ()

*Method for copying all spikes of the last time step from the GPU.*

*Method for copying the number of spikes in all neuron populations that have occurred during the last time step.*

## Public Attributes

- [NNmodel model](#)
- float \* [input1](#)
- float \* [d\\_input1](#)
- unsigned int [sumlzh1](#)

## 14.10.1 Constructor &amp; Destructor Documentation

14.10.1.1 `neuronpop::neuronpop ( )`14.10.1.2 `neuronpop::~~neuronpop ( )`

## 14.10.2 Member Function Documentation

14.10.2.1 `void neuronpop::allocate_device_mem_input ( )`14.10.2.2 `void neuronpop::allocate_device_mem_patterns ( )`14.10.2.3 `void neuronpop::copy_device_mem_input ( )`14.10.2.4 `void neuronpop::create_input_values ( float t )`14.10.2.5 `void neuronpop::getSpikeNumbersFromGPU ( )`

Method for copying the number of spikes in all neuron populations that have occurred during the last time step.

This method is a simple wrapper for the convenience function `copySpikeNFromDevice()` provided by GeNN.

14.10.2.6 `void neuronpop::getSpikesFromGPU ( )`

Method for copying all spikes of the last time step from the GPU.

This is a simple wrapper for the convenience function `copySpikesFromDevice()` which is provided by GeNN.

14.10.2.7 `void neuronpop::init ( unsigned int which )`14.10.2.8 `void neuronpop::output_spikes ( FILE * f, unsigned int which )`14.10.2.9 `void neuronpop::output_state ( FILE * f, unsigned int which )`14.10.2.10 `void neuronpop::read_input_values ( FILE * f )`14.10.2.11 `void neuronpop::run ( float runtime, unsigned int which )`14.10.2.12 `void neuronpop::sum_spikes ( )`14.10.2.13 `void neuronpop::write_input_to_file ( FILE * f )`

## 14.10.3 Member Data Documentation

14.10.3.1 `float* neuronpop::d_input1`14.10.3.2 `float* neuronpop::input1`14.10.3.3 `NNmodel neuronpop::model`14.10.3.4 `unsigned int neuronpop::sumlzh1`

The documentation for this class was generated from the following files:

- [OneComp\\_model.h](#)

- [OneComp\\_model.cc](#)

## 14.11 NNmodel Class Reference

Structure to hold the information that defines synapse dynamics (a model of how synapse variables change over time, independent of or in addition to changes when spikes occur).

```
#include <modelSpec.h>
```

### Public Member Functions

- [NNmodel](#) ()
- [~NNmodel](#) ()
- void [setName](#) (const string)  
*Method to set the neuronal network model name.*
- void [setPrecision](#) (unsigned int)  
*Set numerical precision for floating point.*
- void [setTiming](#) (bool)  
*Set whether timers and timing commands are to be included.*
- void [setSeed](#) (unsigned int)  
*Set the random seed (disables automatic seeding if argument not 0).*
- void [checkSizes](#) (unsigned int \*, unsigned int \*, unsigned int \*)
- void [setGPUDevice](#) (int)  
*Method to choose the GPU to be used for the model. If "AUTODEVICE" (-1), GeNN will choose the device based on a heuristic rule.*
- void [addNeuronPopulation](#) (const char \*, unsigned int, unsigned int, double \*, double \*)  
*Method for adding a neuron population to a neuronal network model, using C style character array for the name of the population.*
- void [addNeuronPopulation](#) (const string, unsigned int, unsigned int, double \*, double \*)  
*Method for adding a neuron population to a neuronal network model, using C++ string for the name of the population.*
- void [addNeuronPopulation](#) (const string, unsigned int, unsigned int, vector< double >, vector< double >)  
*Method for adding a neuron population to a neuronal network model, using C++ string for the name of the population.*
- void [activateDirectInput](#) (const string, unsigned int)  
*Method for activating explicit current input.*
- void [setConstInp](#) (const string, double)  
*Method for setting the global input value for a neuron population if CONSTINP.*
- void [setNeuronClusterIndex](#) (const string neuronGroup, int hostID, int deviceID)  
*Function for setting which host and which device a neuron group will be simulated on.*
- void [addSynapsePopulation](#) (const string name, unsigned int syntype, unsigned int conntype, unsigned int gtype, const string src, const string trg, double \*p)  
*Overload of method for backwards compatibility.*
- void [addSynapsePopulation](#) (const char \*, unsigned int, unsigned int, unsigned int, unsigned int, unsigned int, const char \*, const char \*, double \*, double \*, double \*)  
*Method for adding a synapse population to a neuronal network model, using C style character array for the name of the population.*
- void [addSynapsePopulation](#) (const string, unsigned int, unsigned int, unsigned int, unsigned int, unsigned int, const string, const string, double \*, double \*, double \*)  
*Overloaded version without initial variables for synapses.*
- void [addSynapsePopulation](#) (const string, unsigned int, unsigned int, unsigned int, unsigned int, unsigned int, const string, const string, double \*, double \*, double \*, double \*)  
*Method for adding a synapse population to a neuronal network model, using C++ string for the name of the population.*
- void [addSynapsePopulation](#) (const string, unsigned int, unsigned int, unsigned int, unsigned int, unsigned int, const string, const string, vector< double >, vector< double >, vector< double >, vector< double >)

*Method for adding a synapse population to a neuronal network model, using C++ string for the name of the population.*

- void [setSynapseG](#) (const string, double)

*Method for setting the conductance (g) value for a synapse population with "GLOBALG" characteristic.*

- void [setMaxConn](#) (const string, unsigned int)

*This function defines the maximum number of connections for a neuron in the population.*

- void [setSynapseClusterIndex](#) (const string synapseGroup, int hostID, int deviceID)

*Function for setting which host and which device a synapse group will be simulated on.*

- void [initLearnGrps](#) ()
- void [finalize](#) ()

## Public Attributes

- string [name](#)

*Name of the neuronal newtwork model.*

- string [ftype](#)

*Type of floating point variables (float, double, ...; default: float)*

- string [RNtype](#)

*Underlying type for random number generation (default: long)*

- int [final](#)

*Flag for whether the model has been finalized.*

- unsigned int [needSt](#)

*Whether last spike times are needed at all in this network model (related to STDP)*

- unsigned int [needSynapseDelay](#)

*Whether delayed synapse conductance is required in the network.*

- int [chooseGPUDevice](#)

- bool [timing](#)

- unsigned int [seed](#)

- unsigned int [neuronGrpN](#)

*Number of neuron groups.*

- vector< string > [neuronName](#)

*Names of neuron groups.*

- vector< unsigned int > [neuronN](#)

*Number of neurons in group.*

- vector< unsigned int > [sumNeuronN](#)

*Summed neuron numbers.*

- vector< unsigned int > [padSumNeuronN](#)

*Padded summed neuron numbers.*

- vector< unsigned int > [neuronPostSyn](#)

- vector< unsigned int > [neuronType](#)

*Postsynaptic methods to the neuron.*

- vector< vector< double > > [neuronPara](#)

*Parameters of neurons.*

- vector< vector< double > > [dnp](#)

*Derived neuron parameters.*

- vector< vector< double > > [neuronIni](#)

*Initial values of neurons.*

- vector< vector< unsigned int > > [inSyn](#)

*The ids of the incoming synapse groups.*

- vector< vector< unsigned int > > [outSyn](#)

*The ids of the outgoing synapse groups.*

- vector< unsigned int > [receivesInputCurrent](#)

- flags whether neurons of a population receive explicit input currents*

  - vector< bool > [neuronNeedSt](#)

*Whether last spike time needs to be saved for a group.*
- vector< bool > [neuronNeedTrueSpk](#)

*Whether spike-like events from a group are required.*
- vector< bool > [neuronNeedSpkEvt](#)

*Whether spike-like events from a group are required.*
- vector< vector< bool > > [neuronVarNeedQueue](#)

*Whether a neuron variable needs queueing for syn code.*
- vector< string > [neuronSpkEvtCondition](#)

*Will contain the spike event condition code when spike events are used.*
- vector< unsigned int > [neuronDelaySlots](#)

*The number of slots needed in the synapse delay queues of a neuron group.*
- vector< int > [neuronHostID](#)

*The ID of the cluster node which the neuron groups are computed on.*
- vector< int > [neuronDeviceID](#)

*The ID of the CUDA device which the neuron groups are computed on.*
- unsigned int [synapseGrpN](#)

*Number of synapse groups.*
- vector< string > [synapseName](#)

*Names of synapse groups.*
- vector< unsigned int > [maxConn](#)

*Padded summed maximum number of connections for a neuron in the neuron groups.*
- vector< unsigned int > [padSumSynapseKrnI](#)
- vector< unsigned int > [synapseType](#)

*Types of synapses.*
- vector< unsigned int > [synapseConnType](#)

*Connectivity type of synapses.*
- vector< unsigned int > [synapseGType](#)

*Type of specification method for synaptic conductance.*
- vector< unsigned int > [synapseSource](#)

*Presynaptic neuron groups.*
- vector< unsigned int > [synapseTarget](#)

*Postsynaptic neuron groups.*
- vector< unsigned int > [synapseInSynNo](#)

*IDs of the target neurons' incoming synapse variables for each synapse group.*
- vector< unsigned int > [synapseOutSynNo](#)

*The target neurons' outgoing synapse for each synapse group.*
- vector< bool > [synapseUsesTrueSpikes](#)

*Defines if synapse update is done after detection of real spikes (only one point after threshold)*
- vector< bool > [synapseUsesSpikeEvents](#)

*Defines if synapse update is done after detection of spike events (every point above threshold)*
- vector< bool > [synapseUsesPostLearning](#)

*Defines if anything is done in case of postsynaptic neuron spiking before presynaptic neuron (punishment in STDP etc.)*
- vector< vector< string > > [synapseSpkEvtVars](#)

*Defines variable names that are needed in the SpkEvt condition and that are pre-fetched for that purpose into shared memory.*
- vector< vector< double > > [synapsePara](#)

*parameters of synapses*
- vector< vector< double > > [synapseIni](#)

- Initial values of synapse variables.*
  - vector< vector< double > > [dsp\\_w](#)
- Derived synapse parameters ([weightUpdateModel](#) only)*
  - vector< unsigned int > [postSynapseType](#)
- Types of post-synaptic model.*
  - vector< vector< double > > [postSynapsePara](#)
- parameters of postsynapses*
  - vector< vector< double > > [postSynIni](#)
- Initial values of postsynaptic variables.*
  - vector< vector< double > > [dpsp](#)
- Derived postsynapse parameters.*
  - vector< double > [globalInp](#)
- Global explicit input if [CONSTINP](#) is chosen.*
  - unsigned int [lInGroups](#)
- Number of synapse groups with learning.*
  - vector< unsigned int > [padSumLearnN](#)
- Padded summed neuron numbers of learn group source populations.*
  - vector< unsigned int > [lInSynGrp](#)
- Enumeration of the IDs of synapse groups that learn.*
  - vector< unsigned int > [synapseDelay](#)
- Global synaptic conductance delay for the group (in time steps)*
  - vector< int > [synapseHostID](#)
- The ID of the cluster node which the synapse groups are computed on.*
  - vector< int > [synapseDeviceID](#)
- The ID of the CUDA device which the synapse groups are computed on.*

#### 14.11.1 Detailed Description

Structure to hold the information that defines synapse dynamics (a model of how synapse variables change over time, independent of or in addition to changes when spikes occur).

#### 14.11.2 Constructor & Destructor Documentation

##### 14.11.2.1 NNmodel::NNmodel ( )

##### 14.11.2.2 NNmodel::~~NNmodel ( )

#### 14.11.3 Member Function Documentation

##### 14.11.3.1 void NNmodel::activateDirectInput ( const string *name*, unsigned int *type* )

Method for activating explicit current input.

This function defines the type of the explicit input to the neuron model. Current options are common constant input to all neurons, input from a file and input defines as a rule.

Parameters

<i>name</i>	Name of the neuron population
<i>type</i>	Type of input: 1 if common input, 2 if custom input from file, 3 if custom input as a rule

##### 14.11.3.2 void NNmodel::addNeuronPopulation ( const char \* *name*, unsigned int *nNo*, unsigned int *type*, double \* *p*, double \* *ini* )

Method for adding a neuron population to a neuronal network model, using C style character array for the name of the population.

## Parameters

<i>name</i>	Name of the neuron population
<i>nNo</i>	Number of neurons in the population
<i>type</i>	Type of the neurons, refers to either a standard type or user-defined type
<i>p</i>	Parameters of this neuron type
<i>ini</i>	Initial values for variables of this neuron type

14.11.3.3 void NNmodel::addNeuronPopulation ( const string *name*, unsigned int *nNo*, unsigned int *type*, double \* *p*, double \* *ini* )

Method for adding a neuron population to a neuronal network model, using C++ string for the name of the population.

## Parameters

<i>name</i>	The name of the neuron population
<i>nNo</i>	Number of neurons in the population
<i>type</i>	Type of the neurons, refers to either a standard type or user-defined type
<i>p</i>	Parameters of this neuron type
<i>ini</i>	Initial values for variables of this neuron type

14.11.3.4 void NNmodel::addNeuronPopulation ( const string *name*, unsigned int *nNo*, unsigned int *type*, vector< double > *p*, vector< double > *ini* )

Method for adding a neuron population to a neuronal network model, using C++ string for the name of the population.

This function adds a neuron population to a neuronal network models, assigning the name, the number of neurons in the group, the neuron type, parameters and initial values. The latter two defined as STL vectors of double.

## Parameters

<i>name</i>	The name of the neuron population
<i>nNo</i>	Number of neurons in the population
<i>type</i>	Type of the neurons, refers to either a standard type or user-defined type
<i>p</i>	Parameters of this neuron type
<i>ini</i>	Initial values for variables of this neuron type

14.11.3.5 void NNmodel::addSynapsePopulation ( const string *name*, unsigned int *syntype*, unsigned int *conntype*, unsigned int *gtype*, const string *src*, const string *target*, double \* *params* )

Overload of method for backwards compatibility.

## Parameters

<i>name</i>	The name of the synapse population
<i>syntype</i>	The type of synapse to be added (i.e. learning mode)
<i>conntype</i>	The type of synaptic connectivity
<i>gtype</i>	The way how the synaptic conductivity g will be defined
<i>src</i>	Name of the (existing!) pre-synaptic neuron population
<i>target</i>	Name of the (existing!) post-synaptic neuron population
<i>params</i>	A C-type array of doubles that contains synapse parameter values (common to all synapses of the population) which will be used for the defined synapses. The array must contain the right number of parameters in the right order for the chosen synapse type. If too few, segmentation faults will occur, if too many, excess will be ignored.



14.11.3.6 void NNmodel::addSynapsePopulation ( const char \* *name*, unsigned int *syntype*, unsigned int *conntype*, unsigned int *gtype*, unsigned int *delaySteps*, unsigned int *postsyn*, const char \* *src*, const char \* *trg*, double \* *p*, double \* *PSVini*, double \* *ps* )

Method for adding a synapse population to a neuronal network model, using C style character array for the name of the population.

## Parameters

<i>name</i>	The name of the synapse population
<i>syntype</i>	The type of synapse to be added (i.e. learning mode)
<i>conntype</i>	The type of synaptic connectivity
<i>gtype</i>	The way how the synaptic conductivity <i>g</i> will be defined
<i>delaySteps</i>	Number of delay slots
<i>postsyn</i>	Postsynaptic integration method
<i>src</i>	Name of the (existing!) pre-synaptic neuron population
<i>trg</i>	Name of the (existing!) post-synaptic neuron population
<i>p</i>	A C-type array of doubles that contains synapse parameter values (common to all synapses of the population) which will be used for the defined synapses. The array must contain the right number of parameters in the right order for the chosen synapse type. If too few, segmentation faults will occur, if too many, excess will be ignored.
<i>PSVini</i>	A C-type array of doubles that contains the initial values for postsynaptic mechanism variables (common to all synapses of the population) which will be used for the defined synapses. The array must contain the right number of parameters in the right order for the chosen synapse type. If too few, segmentation faults will occur, if too many, excess will be ignored.
<i>ps</i>	A C-type array of doubles that contains postsynaptic mechanism parameter values (common to all synapses of the population) which will be used for the defined synapses. The array must contain the right number of parameters in the right order for the chosen synapse type. If too few, segmentation faults will occur, if too many, excess will be ignored.

14.11.3.7 void NNmodel::addSynapsePopulation ( const string *name*, unsigned int *syntype*, unsigned int *conntype*, unsigned int *gtype*, unsigned int *delaySteps*, unsigned int *postsyn*, const string *src*, const string *trg*, double \* *p*, double \* *PSVini*, double \* *ps* )

Overloaded version without initial variables for synapses.

Overloaded old version.

## Parameters

<i>name</i>	The name of the synapse population
<i>syntype</i>	The type of synapse to be added (i.e. learning mode)
<i>conntype</i>	The type of synaptic connectivity
<i>gtype</i>	The way how the synaptic conductivity <i>g</i> will be defined
<i>delaySteps</i>	Number of delay slots
<i>postsyn</i>	Postsynaptic integration method
<i>src</i>	Name of the (existing!) pre-synaptic neuron population
<i>trg</i>	Name of the (existing!) post-synaptic neuron population
<i>p</i>	A C-type array of doubles that contains synapse parameter values (common to all synapses of the population) which will be used for the defined synapses. The array must contain the right number of parameters in the right order for the chosen synapse type. If too few, segmentation faults will occur, if too many, excess will be ignored.
<i>PSVini</i>	A C-type array of doubles that contains the initial values for postsynaptic mechanism variables (common to all synapses of the population) which will be used for the defined synapses. The array must contain the right number of parameters in the right order for the chosen synapse type. If too few, segmentation faults will occur, if too many, excess will be ignored.
<i>ps</i>	A C-type array of doubles that contains postsynaptic mechanism parameter values (common to all synapses of the population) which will be used for the defined synapses. The array must contain the right number of parameters in the right order for the chosen synapse type. If too few, segmentation faults will occur, if too many, excess will be ignored.

14.11.3.8 void NNmodel::addSynapsePopulation ( const string *name*, unsigned int *syntype*, unsigned int *conntype*, unsigned int *gtype*, unsigned int *delaySteps*, unsigned int *postsyn*, const string *src*, const string *trg*, double \* *synini*, double \* *p*, double \* *PSVini*, double \* *ps* )

Method for adding a synapse population to a neuronal network model, using C++ string for the name of the population.

This function adds a synapse population to a neuronal network model, assigning the name, the synapse type, the connectivity type, the type of conductance specification, the source and destination neuron populations, and the synaptic parameters.

#### Parameters

<i>name</i>	The name of the synapse population
<i>syntype</i>	The type of synapse to be added (i.e. learning mode)
<i>conntype</i>	The type of synaptic connectivity
<i>gtype</i>	The way how the synaptic conductivity <i>g</i> will be defined
<i>delaySteps</i>	Number of delay slots
<i>postsyn</i>	Postsynaptic integration method
<i>src</i>	Name of the (existing!) pre-synaptic neuron population
<i>trg</i>	Name of the (existing!) post-synaptic neuron population
<i>synini</i>	A C-type array of doubles that contains the initial values for synapse variables (common to all synapses of the population) which will be used for the defined synapses. The array must contain the right number of parameters in the right order for the chosen synapse type. If too few, segmentation faults will occur, if too many, excess will be ignored.
<i>p</i>	A C-type array of doubles that contains synapse parameter values (common to all synapses of the population) which will be used for the defined synapses. The array must contain the right number of parameters in the right order for the chosen synapse type. If too few, segmentation faults will occur, if too many, excess will be ignored.
<i>PSVini</i>	A C-type array of doubles that contains the initial values for postsynaptic mechanism variables (common to all synapses of the population) which will be used for the defined synapses. The array must contain the right number of parameters in the right order for the chosen synapse type. If too few, segmentation faults will occur, if too many, excess will be ignored.
<i>ps</i>	A C-type array of doubles that contains postsynaptic mechanism parameter values (common to all synapses of the population) which will be used for the defined synapses. The array must contain the right number of parameters in the right order for the chosen synapse type. If too few, segmentation faults will occur, if too many, excess will be ignored.

14.11.3.9 void NNmodel::addSynapsePopulation ( const string *name*, unsigned int *syntype*, unsigned int *conntype*, unsigned int *gtype*, unsigned int *delaySteps*, unsigned int *postsyn*, const string *src*, const string *trg*, vector< double > *synini*, vector< double > *p*, vector< double > *PSVini*, vector< double > *ps* )

Method for adding a synapse population to a neuronal network model, using C++ string for the name of the population.

This function adds a synapse population to a neuronal network model, assigning the name, the synapse type, the connectivity type, the type of conductance specification, the source and destination neuron populations, and the synaptic parameters.

#### Parameters

<i>name</i>	The name of the synapse population
<i>syntype</i>	The type of synapse to be added (i.e. learning mode)
<i>conntype</i>	The type of synaptic connectivity
<i>gtype</i>	The way how the synaptic conductivity <i>g</i> will be defined
<i>delaySteps</i>	Number of delay slots

<i>postsyn</i>	Postsynaptic integration method
<i>src</i>	Name of the (existing!) pre-synaptic neuron population
<i>trg</i>	Name of the (existing!) post-synaptic neuron population
<i>synini</i>	A C-type array of doubles that contains the initial values for synapse variables (common to all synapses of the population) which will be used for the defined synapses. The array must contain the right number of parameters in the right order for the chosen synapse type. If too few, segmentation faults will occur, if too many, excess will be ignored.
<i>p</i>	A C-type array of doubles that contains synapse parameter values (common to all synapses of the population) which will be used for the defined synapses. The array must contain the right number of parameters in the right order for the chosen synapse type. If too few, segmentation faults will occur, if too many, excess will be ignored.
<i>PSVini</i>	A C-type array of doubles that contains the initial values for postsynaptic mechanism variables (common to all synapses of the population) which will be used for the defined synapses. The array must contain the right number of parameters in the right order for the chosen synapse type. If too few, segmentation faults will occur, if too many, excess will be ignored.
<i>ps</i>	A C-type array of doubles that contains postsynaptic mechanism parameter values (common to all synapses of the population) which will be used for the defined synapses. The array must contain the right number of parameters in the right order for the chosen synapse type. If too few, segmentation faults will occur, if too many, excess will be ignored.

14.11.3.10 void NNmodel::checkSizes ( unsigned int \*, unsigned int \*, unsigned int \* )

14.11.3.11 void NNmodel::finalize ( )

14.11.3.12 void NNmodel::initLearnGrps ( )

14.11.3.13 void NNmodel::setConstInp ( const string sName, double globalInp0 )

Method for setting the global input value for a neuron population if CONSTINP.

This function sets a global input value to the specified neuron group.

14.11.3.14 void NNmodel::setGPUDevice ( int device )

Method to choose the GPU to be used for the model. If "AUTODEVICE" (-1), GeNN will choose the device based on a heuristic rule.

This function defines the way how the GPU is chosen. If "AUTODEVICE" (-1) is given as the argument, GeNN will use internal heuristics to choose the device. Otherwise the argument is the device number and the indicated device will be used.

14.11.3.15 void NNmodel::setMaxConn ( const string sname, unsigned int maxConnP )

This function defines the maximum number of connections for a neuron in the population.

14.11.3.16 void NNmodel::setName ( const string inname )

Method to set the neuronal network model name.

14.11.3.17 void NNmodel::setNeuronClusterIndex ( const string neuronGroup, int hostID, int deviceID )

Function for setting which host and which device a neuron group will be simulated on.

This function is for setting which host and which device a neuron group will be simulated on.

#### Parameters

<i>neuronGroup</i>	Name of the neuron population
<i>hostID</i>	ID of the host
<i>deviceID</i>	ID of the device

#### 14.11.3.18 void NNmodel::setPrecision ( unsigned int *floattype* )

Set numerical precision for floating point.

This function sets the numerical precision of floating type variables. By default, it is GENN\_GENN\_FLOAT.

#### 14.11.3.19 void NNmodel::setSeed ( unsigned int *inseed* )

Set the random seed (disables automatic seeding if argument not 0).

This function sets the random seed. If the passed argument is > 0, automatic seeding is disabled. If the argument is 0, the underlying seed is obtained from the time() function.

##### Parameters

<i>inseed</i>	the new seed
---------------	--------------

#### 14.11.3.20 void NNmodel::setSynapseClusterIndex ( const string *synapseGroup*, int *hostID*, int *deviceID* )

Function for setting which host and which device a synapse group will be simulated on.

This function is for setting which host and which device a synapse group will be simulated on.

##### Parameters

<i>synapseGroup</i>	Name of the synapse population
<i>hostID</i>	ID of the host
<i>deviceID</i>	ID of the device

#### 14.11.3.21 void NNmodel::setSynapseG ( const string *sName*, double *g* )

Method for setting the conductance (g) value for a synapse population with "GLOBALG" characteristic.

This functions sets the global value of the maximal synaptic conductance for a synapse population that was identified as conductance specification method "GLOBALG".

#### 14.11.3.22 void NNmodel::setTiming ( bool *theTiming* )

Set whether timers and timing commands are to be included.

This function sets a flag to determine whether timers and timing commands are to be included in generated code.

### 14.11.4 Member Data Documentation

#### 14.11.4.1 int NNmodel::chooseGPUDevice

#### 14.11.4.2 vector<vector<double>> NNmodel::dnp

Derived neuron parameters.

#### 14.11.4.3 vector<vector<double>> NNmodel::dpsp

Derived postsynapse parameters.

#### 14.11.4.4 vector<vector<double>> NNmodel::dsp\_w

Derived synapse parameters ([weightUpdateModel](#) only)

#### 14.11.4.5 int NNmodel::final

Flag for whether the model has been finalized.

**14.11.4.6 string NNmodel::ftype**

Type of floating point variables (float, double, ...; default: float)

**14.11.4.7 vector<double> NNmodel::globalInp**

Global explicit input if CONSTINP is chosen.

**14.11.4.8 vector<vector<unsigned int> > NNmodel::inSyn**

The ids of the incoming synapse groups.

**14.11.4.9 unsigned int NNmodel::lrnGroups**

Number of synapse groups with learning.

**14.11.4.10 vector<unsigned int> NNmodel::lrnSynGrp**

Enumeration of the IDs of synapse groups that learn.

**14.11.4.11 vector<unsigned int> NNmodel::maxConn**

Padded summed maximum number of connections for a neuron in the neuron groups.

**14.11.4.12 string NNmodel::name**

Name of the neuronal newtwork model.

**14.11.4.13 unsigned int NNmodel::needSt**

Whether last spike times are needed at all in this network model (related to STDP)

**14.11.4.14 unsigned int NNmodel::needSynapseDelay**

Whether delayed synapse conductance is required in the network.

**14.11.4.15 vector<unsigned int> NNmodel::neuronDelaySlots**

The number of slots needed in the synapse delay queues of a neuron group.

**14.11.4.16 vector<int> NNmodel::neuronDeviceID**

The ID of the CUDA device which the neuron groups are comnputed on.

**14.11.4.17 unsigned int NNmodel::neuronGrpN**

Number of neuron groups.

**14.11.4.18 vector<int> NNmodel::neuronHostID**

The ID of the cluster node which the neuron groups are computed on.

**14.11.4.19 vector<vector<double> > NNmodel::neuronIni**

Initial values of neurons.

**14.11.4.20 vector<unsigned int> NNmodel::neuronN**

Number of neurons in group.

14.11.4.21 `vector<string> NNmodel::neuronName`

Names of neuron groups.

14.11.4.22 `vector<bool> NNmodel::neuronNeedSpkEvt`

Whether spike-like events from a group are required.

14.11.4.23 `vector<bool> NNmodel::neuronNeedSt`

Whether last spike time needs to be saved for a group.

14.11.4.24 `vector<bool> NNmodel::neuronNeedTrueSpk`

Whether spike-like events from a group are required.

14.11.4.25 `vector<vector<double> > NNmodel::neuronPara`

Parameters of neurons.

14.11.4.26 `vector<unsigned int> NNmodel::neuronPostSyn`

14.11.4.27 `vector<string> NNmodel::neuronSpkEvtCondition`

Will contain the spike event condition code when spike events are used.

14.11.4.28 `vector<unsigned int> NNmodel::neuronType`

Postsynaptic methods to the neuron.

Types of neurons

14.11.4.29 `vector<vector<bool> > NNmodel::neuronVarNeedQueue`

Whether a neuron variable needs queueing for syn code.

14.11.4.30 `vector<vector<unsigned int> > NNmodel::outSyn`

The ids of the outgoing synapse groups.

14.11.4.31 `vector<unsigned int> NNmodel::padSumLearnN`

Padded summed neuron numbers of learn group source populations.

14.11.4.32 `vector<unsigned int> NNmodel::padSumNeuronN`

Padded summed neuron numbers.

14.11.4.33 `vector<unsigned int> NNmodel::padSumSynapseKrnI`

14.11.4.34 `vector<vector<double> > NNmodel::postSynapsePara`

parameters of postsynapses

14.11.4.35 `vector<unsigned int> NNmodel::postSynapseType`

Types of post-synaptic model.

14.11.4.36 `vector<vector<double> > NNmodel::postSynIni`

Initial values of postsynaptic variables.

14.11.4.37 `vector<unsigned int> NNmodel::receivesInputCurrent`

flags whether neurons of a population receive explicit input currents

14.11.4.38 `string NNmodel::RNtype`

Underlying type for random number generation (default: long)

14.11.4.39 `unsigned int NNmodel::seed`

14.11.4.40 `vector<unsigned int> NNmodel::sumNeuronN`

Summed neuron numbers.

14.11.4.41 `vector<unsigned int> NNmodel::synapseConnType`

Connectivity type of synapses.

14.11.4.42 `vector<unsigned int> NNmodel::synapseDelay`

Global synaptic conductance delay for the group (in time steps)

14.11.4.43 `vector<int> NNmodel::synapseDeviceID`

The ID of the CUDA device which the synapse groups are computed on.

14.11.4.44 `unsigned int NNmodel::synapseGrpN`

Number of synapse groups.

14.11.4.45 `vector<unsigned int> NNmodel::synapseGType`

Type of specification method for synaptic conductance.

14.11.4.46 `vector<int> NNmodel::synapseHostID`

The ID of the cluster node which the synapse groups are computed on.

14.11.4.47 `vector<vector<double> > NNmodel::synapseIni`

Initial values of synapse variables.

14.11.4.48 `vector<unsigned int> NNmodel::synapseInSynNo`

IDs of the target neurons' incoming synapse variables for each synapse group.

14.11.4.49 `vector<string> NNmodel::synapseName`

Names of synapse groups.

14.11.4.50 `vector<unsigned int> NNmodel::synapseOutSynNo`

The target neurons' outgoing synapse for each synapse group.

14.11.4.51 `vector<vector<double> > NNmodel::synapsePara`

parameters of synapses

14.11.4.52 `vector<unsigned int> NNmodel::synapseSource`

Presynaptic neuron groups.



#### 14.11.4.53 `vector<vector<string>> NNmodel::synapseSpkEvtVars`

Defines variable names that are needed in the SpkEvt condition and that are pre-fetched for that purpose into shared memory.

#### 14.11.4.54 `vector<unsigned int> NNmodel::synapseTarget`

Postsynaptic neuron groups.

#### 14.11.4.55 `vector<unsigned int> NNmodel::synapseType`

Types of synapses.

#### 14.11.4.56 `vector<bool> NNmodel::synapseUsesPostLearning`

Defines if anything is done in case of postsynaptic neuron spiking before presynaptic neuron (punishment in STDP etc.)

#### 14.11.4.57 `vector<bool> NNmodel::synapseUsesSpikeEvents`

Defines if synapse update is done after detection of spike events (every point above threshold)

#### 14.11.4.58 `vector<bool> NNmodel::synapseUsesTrueSpikes`

Defines if synapse update is done after detection of real spikes (only one point after threshold)

#### 14.11.4.59 `bool NNmodel::timing`

The documentation for this class was generated from the following files:

- [modelSpec.h](#)
- [modelSpec.cc](#)

## 14.12 Parameter Struct Reference

### Public Attributes

- string [name](#)
- string [value](#)

#### 14.12.1 Member Data Documentation

##### 14.12.1.1 `string Parameter::name`

##### 14.12.1.2 `string Parameter::value`

The documentation for this struct was generated from the following file:

- [experiment.cu](#)

## 14.13 `postSynModel` Struct Reference

Structure to hold the information that defines a post-synaptic model (a model of how synapses affect post-synaptic neuron variables, classically in the form of a synaptic current). It also allows to define an equation for the dynamics that can be applied to the summed synaptic input variable "insyn".

```
#include <modelSpec.h>
```

## Public Attributes

- string [postSyntoCurrent](#)  
*Code that defines how postsynaptic update is translated to current.*
- string [postSynDecay](#)  
*Code that defines how postsynaptic current decays.*
- vector< string > [varNames](#)  
*Names of the variables in the postsynaptic model.*
- vector< string > [varTypes](#)  
*Types of the variable named above, e.g. "float". Names and types are matched by their order of occurrence in the vector.*
- vector< string > [pNames](#)  
*Names of (independent) parameters of the model.*
- vector< string > [dpNames](#)  
*Names of dependent parameters of the model.*
- [dpclass](#) \* [dps](#)  
*Derived parameters.*

## 14.13.1 Detailed Description

Structure to hold the information that defines a post-synaptic model (a model of how synapses affect post-synaptic neuron variables, classically in the form of a synaptic current). It also allows to define an equation for the dynamics that can be applied to the summed synaptic input variable "insyn".

## 14.13.2 Member Data Documentation

## 14.13.2.1 vector&lt;string&gt; postSynModel::dpNames

Names of dependent parameters of the model.

## 14.13.2.2 dpclass\* postSynModel::dps

Derived parameters.

## 14.13.2.3 vector&lt;string&gt; postSynModel::pNames

Names of (independent) parameters of the model.

## 14.13.2.4 string postSynModel::postSynDecay

Code that defines how postsynaptic current decays.

## 14.13.2.5 string postSynModel::postSyntoCurrent

Code that defines how postsynaptic update is translated to current.

## 14.13.2.6 vector&lt;string&gt; postSynModel::varNames

Names of the variables in the postsynaptic model.

## 14.13.2.7 vector&lt;string&gt; postSynModel::varTypes

Types of the variable named above, e.g. "float". Names and types are matched by their order of occurrence in the vector.

The documentation for this struct was generated from the following file:

- [modelSpec.h](#)

## 14.14 postVarsInPostLearn Class Reference

```
#include <testPostVarsInPostLearn.h>
```

### Public Member Functions

- [postVarsInPostLearn \(\)](#)
- [~postVarsInPostLearn \(\)](#)
- void [init\\_synapses \(\)](#)
- void [init\\_neurons \(\)](#)
- void [run](#) (float, int)

### Public Attributes

- float \*\* [theW](#)

### 14.14.1 Constructor & Destructor Documentation

14.14.1.1 [postVarsInPostLearn::postVarsInPostLearn \( \)](#)

14.14.1.2 [postVarsInPostLearn::~~postVarsInPostLearn \( \)](#)

### 14.14.2 Member Function Documentation

14.14.2.1 void [postVarsInPostLearn::init\\_neurons \( \)](#)

14.14.2.2 void [postVarsInPostLearn::init\\_synapses \( \)](#)

14.14.2.3 void [postVarsInPostLearn::run \( float \*t\*, int \*which\* \)](#)

### 14.14.3 Member Data Documentation

14.14.3.1 float\*\* [postVarsInPostLearn::theW](#)

The documentation for this class was generated from the following files:

- [testPostVarsInPostLearn.h](#)
- [testPostVarsInPostLearn.cu](#)

## 14.15 postVarsInPostLearn\_sparse Class Reference

```
#include <testPostVarsInPostLearn_sparse.h>
```

### Public Member Functions

- [postVarsInPostLearn\\_sparse \(\)](#)
- [~postVarsInPostLearn\\_sparse \(\)](#)
- void [init\\_synapses \(\)](#)
- void [init\\_neurons \(\)](#)
- void [run](#) (float, int)

### Public Attributes

- float \*\* [theW](#)

## 14.15.1 Constructor &amp; Destructor Documentation

14.15.1.1 postVarsInPostLearn\_sparse::postVarsInPostLearn\_sparse ( )

14.15.1.2 postVarsInPostLearn\_sparse::~~postVarsInPostLearn\_sparse ( )

## 14.15.2 Member Function Documentation

14.15.2.1 void postVarsInPostLearn\_sparse::init\_neurons ( )

14.15.2.2 void postVarsInPostLearn\_sparse::init\_synapses ( )

14.15.2.3 void postVarsInPostLearn\_sparse::run ( float *t*, int *which* )

## 14.15.3 Member Data Documentation

14.15.3.1 float\*\* postVarsInPostLearn\_sparse::theW

The documentation for this class was generated from the following files:

- [testPostVarsInPostLearn\\_sparse.h](#)
- [testPostVarsInPostLearn\\_sparse.cu](#)

## 14.16 postVarsInSimCode Class Reference

```
#include <testPostVarsInSimCode.h>
```

## Public Member Functions

- [postVarsInSimCode](#) ( )
- [~postVarsInSimCode](#) ( )
- void [init\\_synapses](#) ( )
- void [init\\_neurons](#) ( )
- void [run](#) (float, int)

## Public Attributes

- float \*\* [theW](#)

## 14.16.1 Constructor &amp; Destructor Documentation

14.16.1.1 postVarsInSimCode::postVarsInSimCode ( )

14.16.1.2 postVarsInSimCode::~~postVarsInSimCode ( )

## 14.16.2 Member Function Documentation

14.16.2.1 void postVarsInSimCode::init\_neurons ( )

14.16.2.2 void postVarsInSimCode::init\_synapses ( )

14.16.2.3 void postVarsInSimCode::run ( float *t*, int *which* )

## 14.16.3 Member Data Documentation

### 14.16.3.1 float\*\* postVarsInSimCode::theW

The documentation for this class was generated from the following files:

- [testPostVarsInSimCode.h](#)
- [testPostVarsInSimCode.cu](#)

## 14.17 postVarsInSimCode\_sparse Class Reference

```
#include <testPostVarsInSimCode_sparse.h>
```

### Public Member Functions

- [postVarsInSimCode\\_sparse \(\)](#)
- [~postVarsInSimCode\\_sparse \(\)](#)
- void [init\\_synapses \(\)](#)
- void [init\\_neurons \(\)](#)
- void [run](#) (float, int)

### Public Attributes

- float \*\* [theW](#)

### 14.17.1 Constructor & Destructor Documentation

14.17.1.1 [postVarsInSimCode\\_sparse::postVarsInSimCode\\_sparse \( \)](#)

14.17.1.2 [postVarsInSimCode\\_sparse::~~postVarsInSimCode\\_sparse \( \)](#)

### 14.17.2 Member Function Documentation

14.17.2.1 [void postVarsInSimCode\\_sparse::init\\_neurons \( \)](#)

14.17.2.2 [void postVarsInSimCode\\_sparse::init\\_synapses \( \)](#)

14.17.2.3 [void postVarsInSimCode\\_sparse::run \( float t, int which \)](#)

### 14.17.3 Member Data Documentation

14.17.3.1 [float\\*\\* postVarsInSimCode\\_sparse::theW](#)

The documentation for this class was generated from the following files:

- [testPostVarsInSimCode\\_sparse.h](#)
- [testPostVarsInSimCode\\_sparse.cu](#)

## 14.18 postVarsInSynapseDynamics Class Reference

```
#include <testPostVarsInSynapseDynamics.h>
```

## Public Member Functions

- [postVarsInSynapseDynamics](#) ()
- [~postVarsInSynapseDynamics](#) ()
- void [init\\_synapses](#) ()
- void [init\\_neurons](#) ()
- void [run](#) (float, int)

## Public Attributes

- float \*\* [theW](#)

## 14.18.1 Constructor &amp; Destructor Documentation

14.18.1.1 [postVarsInSynapseDynamics::postVarsInSynapseDynamics](#) ( )

14.18.1.2 [postVarsInSynapseDynamics::~~postVarsInSynapseDynamics](#) ( )

## 14.18.2 Member Function Documentation

14.18.2.1 void [postVarsInSynapseDynamics::init\\_neurons](#) ( )

14.18.2.2 void [postVarsInSynapseDynamics::init\\_synapses](#) ( )

14.18.2.3 void [postVarsInSynapseDynamics::run](#) ( float *t*, int *which* )

## 14.18.3 Member Data Documentation

14.18.3.1 float\*\* [postVarsInSynapseDynamics::theW](#)

The documentation for this class was generated from the following files:

- [testPostVarsInSynapseDynamics.h](#)
- [testPostVarsInSynapseDynamics.cu](#)

## 14.19 postVarsInSynapseDynamics\_sparse Class Reference

```
#include <testPostVarsInSynapseDynamics_sparse.h>
```

## Public Member Functions

- [postVarsInSynapseDynamics\\_sparse](#) ()
- [~postVarsInSynapseDynamics\\_sparse](#) ()
- void [init\\_synapses](#) ()
- void [init\\_neurons](#) ()
- void [run](#) (float, int)

## Public Attributes

- float \*\* [theW](#)

#### 14.19.1 Constructor & Destructor Documentation

14.19.1.1 `postVarsInSynapseDynamics_sparse::postVarsInSynapseDynamics_sparse ( )`

14.19.1.2 `postVarsInSynapseDynamics_sparse::~~postVarsInSynapseDynamics_sparse ( )`

#### 14.19.2 Member Function Documentation

14.19.2.1 `void postVarsInSynapseDynamics_sparse::init_neurons ( )`

14.19.2.2 `void postVarsInSynapseDynamics_sparse::init_synapses ( )`

14.19.2.3 `void postVarsInSynapseDynamics_sparse::run ( float t, int which )`

#### 14.19.3 Member Data Documentation

14.19.3.1 `float** postVarsInSynapseDynamics_sparse::theW`

The documentation for this class was generated from the following files:

- [testPostVarsInSynapseDynamics\\_sparse.h](#)
- [testPostVarsInSynapseDynamics\\_sparse.cu](#)

### 14.20 preVarsInPostLearn Class Reference

```
#include <testPreVarsInPostLearn.h>
```

#### Public Member Functions

- [preVarsInPostLearn \(\)](#)
- [~preVarsInPostLearn \(\)](#)
- `void init_synapses ()`
- `void init_neurons ()`
- `void run (float, int)`

#### Public Attributes

- `float ** theW`

#### 14.20.1 Constructor & Destructor Documentation

14.20.1.1 `preVarsInPostLearn::preVarsInPostLearn ( )`

14.20.1.2 `preVarsInPostLearn::~~preVarsInPostLearn ( )`

#### 14.20.2 Member Function Documentation

14.20.2.1 `void preVarsInPostLearn::init_neurons ( )`

14.20.2.2 `void preVarsInPostLearn::init_synapses ( )`

14.20.2.3 `void preVarsInPostLearn::run ( float t, int which )`

#### 14.20.3 Member Data Documentation

## 14.20.3.1 float\*\* preVarsInPostLearn::theW

The documentation for this class was generated from the following files:

- [testPreVarsInPostLearn.h](#)
- [testPreVarsInPostLearn.cu](#)

## 14.21 preVarsInPostLearn\_sparse Class Reference

```
#include <testPreVarsInPostLearn_sparse.h>
```

## Public Member Functions

- [preVarsInPostLearn\\_sparse\(\)](#)
- [~preVarsInPostLearn\\_sparse\(\)](#)
- void [init\\_synapses\(\)](#)
- void [init\\_neurons\(\)](#)
- void [run](#)(float, int)

## Public Attributes

- float\*\* [theW](#)

## 14.21.1 Constructor &amp; Destructor Documentation

14.21.1.1 [preVarsInPostLearn\\_sparse::preVarsInPostLearn\\_sparse\(\)](#)

14.21.1.2 [preVarsInPostLearn\\_sparse::~~preVarsInPostLearn\\_sparse\(\)](#)

## 14.21.2 Member Function Documentation

14.21.2.1 [void preVarsInPostLearn\\_sparse::init\\_neurons\(\)](#)

14.21.2.2 [void preVarsInPostLearn\\_sparse::init\\_synapses\(\)](#)

14.21.2.3 [void preVarsInPostLearn\\_sparse::run\(float t, int which\)](#)

## 14.21.3 Member Data Documentation

14.21.3.1 float\*\* [preVarsInPostLearn\\_sparse::theW](#)

The documentation for this class was generated from the following files:

- [testPreVarsInPostLearn\\_sparse.h](#)
- [testPreVarsInPostLearn\\_sparse.cu](#)

## 14.22 preVarsInSimCode Class Reference

```
#include <testPreVarsInSimCode.h>
```



**Public Member Functions**

- [preVarsInSimCode](#) ()
- [~preVarsInSimCode](#) ()
- void [init\\_synapses](#) ()
- void [init\\_neurons](#) ()
- void [run](#) (float, int)

**Public Attributes**

- float \*\* [theW](#)

**14.22.1 Constructor & Destructor Documentation**

14.22.1.1 [preVarsInSimCode::preVarsInSimCode](#) ( )

14.22.1.2 [preVarsInSimCode::~~preVarsInSimCode](#) ( )

**14.22.2 Member Function Documentation**

14.22.2.1 void [preVarsInSimCode::init\\_neurons](#) ( )

14.22.2.2 void [preVarsInSimCode::init\\_synapses](#) ( )

14.22.2.3 void [preVarsInSimCode::run](#) ( float *t*, int *which* )

**14.22.3 Member Data Documentation**

14.22.3.1 float\*\* [preVarsInSimCode::theW](#)

The documentation for this class was generated from the following files:

- [testPreVarsInSimCode.h](#)
- [testPreVarsInSimCode.cu](#)

**14.23 preVarsInSimCode\_sparse Class Reference**

```
#include <testPreVarsInSimCode_sparse.h>
```

**Public Member Functions**

- [preVarsInSimCode\\_sparse](#) ()
- [~preVarsInSimCode\\_sparse](#) ()
- void [init\\_synapses](#) ()
- void [init\\_neurons](#) ()
- void [run](#) (float, int)

**Public Attributes**

- float \*\* [theW](#)

## 14.23.1 Constructor &amp; Destructor Documentation

14.23.1.1 preVarsInSimCode\_sparse::preVarsInSimCode\_sparse ( )

14.23.1.2 preVarsInSimCode\_sparse::~~preVarsInSimCode\_sparse ( )

## 14.23.2 Member Function Documentation

14.23.2.1 void preVarsInSimCode\_sparse::init\_neurons ( )

14.23.2.2 void preVarsInSimCode\_sparse::init\_synapses ( )

14.23.2.3 void preVarsInSimCode\_sparse::run ( float *t*, int *which* )

## 14.23.3 Member Data Documentation

14.23.3.1 float\*\* preVarsInSimCode\_sparse::theW

The documentation for this class was generated from the following files:

- [testPreVarsInSimCode\\_sparse.h](#)
- [testPreVarsInSimCode\\_sparse.cu](#)

## 14.24 preVarsInSynapseDynamics Class Reference

```
#include <testPreVarsInSynapseDynamics.h>
```

## Public Member Functions

- [preVarsInSynapseDynamics \(\)](#)
- [~preVarsInSynapseDynamics \(\)](#)
- void [init\\_synapses \(\)](#)
- void [init\\_neurons \(\)](#)
- void [run](#) (float, int)

## Public Attributes

- float \*\* [theW](#)

## 14.24.1 Constructor &amp; Destructor Documentation

14.24.1.1 preVarsInSynapseDynamics::preVarsInSynapseDynamics ( )

14.24.1.2 preVarsInSynapseDynamics::~~preVarsInSynapseDynamics ( )

## 14.24.2 Member Function Documentation

14.24.2.1 void preVarsInSynapseDynamics::init\_neurons ( )

14.24.2.2 void preVarsInSynapseDynamics::init\_synapses ( )

14.24.2.3 void preVarsInSynapseDynamics::run ( float *t*, int *which* )

## 14.24.3 Member Data Documentation

#### 14.24.3.1 float\*\* preVarsInSynapseDynamics::theW

The documentation for this class was generated from the following files:

- [testPreVarsInSynapseDynamics.h](#)
- [testPreVarsInSynapseDynamics.cu](#)

### 14.25 preVarsInSynapseDynamics\_sparse Class Reference

```
#include <testPreVarsInSynapseDynamics_sparse.h>
```

#### Public Member Functions

- [preVarsInSynapseDynamics\\_sparse \(\)](#)
- [~preVarsInSynapseDynamics\\_sparse \(\)](#)
- void [init\\_synapses \(\)](#)
- void [init\\_neurons \(\)](#)
- void [run](#) (float, int)

#### Public Attributes

- float \*\* [theW](#)

#### 14.25.1 Constructor & Destructor Documentation

14.25.1.1 [preVarsInSynapseDynamics\\_sparse::preVarsInSynapseDynamics\\_sparse \( \)](#)

14.25.1.2 [preVarsInSynapseDynamics\\_sparse::~~preVarsInSynapseDynamics\\_sparse \( \)](#)

#### 14.25.2 Member Function Documentation

14.25.2.1 void [preVarsInSynapseDynamics\\_sparse::init\\_neurons \( \)](#)

14.25.2.2 void [preVarsInSynapseDynamics\\_sparse::init\\_synapses \( \)](#)

14.25.2.3 void [preVarsInSynapseDynamics\\_sparse::run \( float t, int which \)](#)

#### 14.25.3 Member Data Documentation

14.25.3.1 float\*\* [preVarsInSynapseDynamics\\_sparse::theW](#)

The documentation for this class was generated from the following files:


- [testPreVarsInSynapseDynamics\\_sparse.h](#)
- [testPreVarsInSynapseDynamics\\_sparse.cu](#)

### 14.26 pwSTDP Class Reference

TODO This class definition may be code-generated in a future release.

```
#include <utils.h>
```

Inheritance diagram for pwSTDP:



### Public Member Functions

- double [calculateDerivedParameter](#) (int index, vector< double > pars, double dt)
- double [lim0](#) (vector< double > pars, double dt)
- double [lim1](#) (vector< double > pars, double dt)
- double [slope0](#) (vector< double > pars, double dt)
- double [slope1](#) (vector< double > pars, double dt)
- double [off0](#) (vector< double > pars, double dt)
- double [off1](#) (vector< double > pars, double dt)
- double [off2](#) (vector< double > pars, double dt)

#### 14.26.1 Detailed Description

TODO This class definition may be code-generated in a future release.

This class defines derived parameters for the learn1synapse standard weightupdate model

#### 14.26.2 Member Function Documentation

14.26.2.1 double pwSTDP::calculateDerivedParameter ( int *index*, vector< double > *pars*, double *dt* ) [inline],  
[virtual]

Reimplemented from [dpclass](#).

14.26.2.2 double pwSTDP::lim0 ( vector< double > *pars*, double *dt* ) [inline]

14.26.2.3 double pwSTDP::lim1 ( vector< double > *pars*, double *dt* ) [inline]

14.26.2.4 double pwSTDP::off0 ( vector< double > *pars*, double *dt* ) [inline]

14.26.2.5 double pwSTDP::off1 ( vector< double > *pars*, double *dt* ) [inline]

14.26.2.6 double pwSTDP::off2 ( vector< double > *pars*, double *dt* ) [inline]

14.26.2.7 double pwSTDP::slope0 ( vector< double > *pars*, double *dt* ) [inline]

14.26.2.8 double pwSTDP::slope1 ( vector< double > *pars*, double *dt* ) [inline]


The documentation for this class was generated from the following file:

- [utils.h](#)

## 14.27 pwSTDP\_userdef Class Reference

TODO This class definition may be code-generated in a future release.

Inheritance diagram for pwSTDP\_userdef:



### Public Member Functions

- double [calculateDerivedParameter](#) (int index, vector< double > pars, double dt=[DT](#))
- double [lim0](#) (vector< double > pars, double dt)
- double [lim1](#) (vector< double > pars, double dt)
- double [slope0](#) (vector< double > pars, double dt)
- double [slope1](#) (vector< double > pars, double dt)
- double [off0](#) (vector< double > pars, double dt)
- double [off1](#) (vector< double > pars, double dt)
- double [off2](#) (vector< double > pars, double dt)
- double [calculateDerivedParameter](#) (int index, vector< double > pars, double dt=[DT](#))
- double [lim0](#) (vector< double > pars, double dt)
- double [lim1](#) (vector< double > pars, double dt)
- double [slope0](#) (vector< double > pars, double dt)
- double [slope1](#) (vector< double > pars, double dt)
- double [off0](#) (vector< double > pars, double dt)
- double [off1](#) (vector< double > pars, double dt)
- double [off2](#) (vector< double > pars, double dt)

#### 14.27.1 Detailed Description

TODO This class definition may be code-generated in a future release.

#### 14.27.2 Member Function Documentation

**14.27.2.1** double pwSTDP\_userdef::calculateDerivedParameter ( int *index*, vector< double > *pars*, double *dt* = [DT](#) )  
[inline], [virtual]

Reimplemented from [dpclass](#).

**14.27.2.2** double pwSTDP\_userdef::calculateDerivedParameter ( int *index*, vector< double > *pars*, double *dt* = [DT](#) )  
[inline], [virtual]

Reimplemented from [dpclass](#).

**14.27.2.3** double pwSTDP\_userdef::lim0 ( vector< double > *pars*, double *dt* ) [inline]

**14.27.2.4** double pwSTDP\_userdef::lim0 ( vector< double > *pars*, double *dt* ) [inline]

**14.27.2.5** double pwSTDP\_userdef::lim1 ( vector< double > *pars*, double *dt* ) [inline]

**14.27.2.6** double pwSTDP\_userdef::lim1 ( vector< double > *pars*, double *dt* ) [inline]

**14.27.2.7** double pwSTDP\_userdef::off0 ( vector< double > *pars*, double *dt* ) [inline]

**14.27.2.8** double pwSTDP\_userdef::off0 ( vector< double > *pars*, double *dt* ) [inline]

**14.27.2.9** double pwSTDP\_userdef::off1 ( vector< double > *pars*, double *dt* ) [inline]

- 14.27.2.10 `double pwSTDP_userdef::off1 ( vector< double > pars, double dt ) [inline]`
- 14.27.2.11 `double pwSTDP_userdef::off2 ( vector< double > pars, double dt ) [inline]`
- 14.27.2.12 `double pwSTDP_userdef::off2 ( vector< double > pars, double dt ) [inline]`
- 14.27.2.13 `double pwSTDP_userdef::slope0 ( vector< double > pars, double dt ) [inline]`
- 14.27.2.14 `double pwSTDP_userdef::slope0 ( vector< double > pars, double dt ) [inline]`
- 14.27.2.15 `double pwSTDP_userdef::slope1 ( vector< double > pars, double dt ) [inline]`
- 14.27.2.16 `double pwSTDP_userdef::slope1 ( vector< double > pars, double dt ) [inline]`

The documentation for this class was generated from the following file:

- [featureTests/supportCode/MBody\\_userdef.cc](#)

## 14.28 randomGauss Class Reference

Class random Gauss encapsulates the methods for generating random neumbers with Gaussian distribution.

```
#include <gauss.h>
```

### Public Member Functions

- [randomGauss](#) ()  
*Constructor for the Gaussian random number generator class without giving explicit seeds.*
- [randomGauss](#) (unsigned long, unsigned long, unsigned long)  
*Constructor for the Gaussian random number generator class when seeds are provided explicitly.*
- [~randomGauss](#) ()
- `double n ()`  
*Method for obtaining a random number with Gaussian distribution.*
- `void srand (unsigned long, unsigned long, unsigned long)`  
*Function for seeding with fixed seeds.*

### 14.28.1 Detailed Description

Class random Gauss encapsulates the methods for generating random neumbers with Gaussian distribution.

A random number from a Gaussian distribution of mean 0 and standard deviation 1 is obtained by calling the method [randomGauss::n\(\)](#).

### 14.28.2 Constructor & Destructor Documentation

#### 14.28.2.1 `randomGauss::randomGauss ( ) [explicit]`

Constructor for the Gaussian random number generator class without giving explicit seeds.

The seeds for random number generation are generated from the internal clock of the computer during execution.

#### 14.28.2.2 `randomGauss::randomGauss ( unsigned long seed1, unsigned long seed2, unsigned long seed3 )`

Constructor for the Gaussian random number generator class when seeds are provided explicitly.

The seeds are three arbitrary unsigned long integers.

14.28.2.3 `randomGauss::~~randomGauss ( ) [inline]`

### 14.28.3 Member Function Documentation

14.28.3.1 `double randomGauss::n ( )`

Method for obtaining a random number with Gaussian distribution.

Function for generating a pseudo random number from a Gaussian distribution.

14.28.3.2 `void randomGauss::srand ( unsigned long seed1, unsigned long seed2, unsigned long seed3 )`

Function for seeding with fixed seeds.

The documentation for this class was generated from the following files:

- [gauss.h](#)
- [gauss.cc](#)

## 14.29 randomGen Class Reference

Class [randomGen](#) which implements the ISAAC random number generator for uniformly distributed random numbers.

```
#include <randomGen.h>
```

### Public Member Functions

- [randomGen](#) ()  
*Constructor for the ISAAC random number generator class without giving explicit seeds.*
- [randomGen](#) (unsigned long, unsigned long, unsigned long)  
*Constructor for the Gaussian random number generator class when seeds are provided explicitly.*
- [~randomGen](#) ()
- `double n ()`  
*Method to obtain a random number from a uniform ditribution on [0,1].*
- `void srand` (unsigned long, unsigned long, unsigned long)  
*Function for seeding with fixed seeds.*

### 14.29.1 Detailed Description

Class [randomGen](#) which implements the ISAAC random number generator for uniformly distributed random numbers.

The random number generator initializes with system timea or explicit seeds and returns a random number according to a uniform distribution on [0,1]; making use of the ISAAC random number generator; C++ Implementation by Quinn Tyler Jackson of the RG invented by Bob Jenkins Jr.

### 14.29.2 Constructor & Destructor Documentation

14.29.2.1 `randomGen::randomGen ( ) [explicit]`

Constructor for the ISAAC random number generator class without giving explicit seeds.

The seeds for random number generation are generated from the internal clock of the computer during execution.

14.29.2.2 `randomGen::randomGen ( unsigned long seed1, unsigned long seed2, unsigned long seed3 )`

Constructor for the Gaussian random number generator class when seeds are provided explicitly.  
The seeds are three arbitrary unsigned long integers.

14.29.2.3 `randomGen::~~randomGen ( )` `[inline]`

### 14.29.3 Member Function Documentation

14.29.3.1 `double randomGen::n ( )`

Method to obtain a random number from a uniform ditribution on [0,1].

Function for generating a pseudo random number from a uniform distribution on the interval [0,1].

14.29.3.2 `void randomGen::srand ( unsigned long seed1, unsigned long seed2, unsigned long seed3 )`

Function for seeding with fixed seeds.

The documentation for this class was generated from the following files:


- [randomGen.h](#)
- [randomGen.cc](#)

## 14.30 rulkovdp Class Reference

Class defining the dependent parameters of teh Rulkov map neuron.

```
#include <utils.h>
```

Inheritance diagram for rulkovdp:



### Public Member Functions

- `double calculateDerivedParameter (int index, vector< double > pars, double dt=1.0)`
- `double ip0 (vector< double > pars)`
- `double ip1 (vector< double > pars)`
- `double ip2 (vector< double > pars)`

### 14.30.1 Detailed Description

Class defining the dependent parameters of teh Rulkov map neuron.

### 14.30.2 Member Function Documentation

14.30.2.1 `double rulkovdp::calculateDerivedParameter ( int index, vector< double > pars, double dt = 1.0 )` `[inline]`,  
`[virtual]`

Reimplemented from [dpclass](#).



14.30.2.2 `double rulkovdp::ip0 ( vector< double > pars ) [inline]`

14.30.2.3 `double rulkovdp::ip1 ( vector< double > pars ) [inline]`

14.30.2.4 `double rulkovdp::ip2 ( vector< double > pars ) [inline]`

The documentation for this class was generated from the following file:

- [utils.h](#)

## 14.31 Schmuker2014\_classifier Class Reference

This class contains the methods for running the Schmuker\_2014\_classifier example model.

```
#include <Schmuker2014_classifier.h>
```

### Public Types

- enum `data_type` { `data_type_int`, `data_type_uint`, `data_type_float`, `data_type_double` }

### Public Member Functions

- `Schmuker2014_classifier` ()
- `~Schmuker2014_classifier` ()
- void `allocateHostAndDeviceMemory` ()
- void `populateDeviceMemory` ()
- void `update_input_data_on_device` ()
- void `clearDownDevice` ()
- void `run` (float runtime, string filename\_rasterPlot, bool usePlasticity)
- void `getSpikesFromGPU` ()
- void `getSpikeNumbersFromGPU` ()
- void `outputSpikes` (FILE \*, string delim)
- void `initialiseWeights_SPARSE_RN_PN` ()
- void `initialiseWeights_WTA_PN_PN` ()
- void `initialiseWeights_DENSE_PN_AN` ()
- void `initialiseWeights_WTA_AN_AN` ()
- void `createWTACnectivity` (float \*synapse, `UINT` populationSize, `UINT` clusterSize, float synapseWeight, float probability)
- bool `randomEventOccurred` (float probability)
- void `updateWeights_PN_AN_on_device` ()
- void `generate_or_load_inputrates_dataset` (unsigned int recordingIdx)
- void `generate_inputrates_dataset` (unsigned int recordingIdx)
- FILE \* `openRecordingFile` (`UINT` recordingIndex)
- void `applyLearningRuleSynapses` (float \*synapsesPNAN)
- void `initialiseInputData` ()
- void `load_VR_data` ()
- void `setCorrectClass` (`UINT` recordingIdx)
- `UINT` `getClassCluster` (`UINT` anIdx)
- void `loadClassLabels` ()
- void `addInputRate` (float \*samplePoint, `UINT` timeStep)
- `uint64_t` `convertToRateCode` (float inputRateHz)
- float `calculateVrResponse` (float \*samplePoint, float \*vrPoint)
- void `setMaxMinSampleDistances` ()
- void `findMaxMinSampleDistances` (float \*samples, `UINT` startAt, `UINT` totalSamples)
- float `getSampleDistance` (`UINT` max0\_min1)

- float [getManhattanDistance](#) (float \*pointA, float \*pointB, [UINT](#) numElements)
- float [getRand0to1](#) ()
- [UINT](#) [calculateOverallWinner](#) ()
- [UINT](#) [calculateWinner](#) (unsigned int \*clusterSpikeCount)
- [UINT](#) [calculateCurrentWindowWinner](#) ()
- void [updateIndividualSpikeCountPN](#) ()
- void [resetIndividualSpikeCountPN](#) ()
- void [updateClusterSpikeCountAN](#) ()
- void [resetClusterSpikeCountAN](#) ()
- void [resetOverallWinner](#) ()
- void [updateWeights\\_PN\\_AN](#) ()
- [UINT](#) [getClusterIndex](#) ([UINT](#) neuronIndex, [UINT](#) clusterSize)
- void [generateSimulatedTimeSeriesData](#) ()
- string [getRecordingFilename](#) ([UINT](#) recordingIdx)
- bool [loadArrayFromTextFile](#) (string path, void \*array, string delim, [UINT](#) arrayLen, [data\\_type](#) dataType)
- void [checkContents](#) (string title, void \*array, [UINT](#) howMany, [UINT](#) displayPerLine, [data\\_type](#) dataType, [UINT](#) decimalPoints)
- void [checkContents](#) (string title, void \*array, [UINT](#) howMany, [UINT](#) displayPerLine, [data\\_type](#) dataType, [UINT](#) decimalPoints, string delim)
- void [printSeparator](#) ()
- void [resetDevice](#) ()
- void [startLog](#) ()

#### Public Attributes

- double [d\\_maxRandomNumber](#)
- float [t](#)
- [NNmodel](#) [model](#)
- [uint64\\_t](#) \* [inputRates](#)
- unsigned int [inputRatesSize](#)
- float \* [vrData](#)
- unsigned int \* [classLabel](#)
- unsigned int \* [individualSpikeCountPN](#)
- unsigned int \* [overallWinnerSpikeCountAN](#)
- unsigned int \* [clusterSpikeCountAN](#)
- float \* [plasticWeights](#)
- [uint64\\_t](#) \* [d\\_inputRates](#)
- unsigned int [countRN](#)
- unsigned int [countPN](#)
- unsigned int [countAN](#)
- unsigned int [countPNAN](#)
- float \* [sampleDistance](#)
- string [recordingsDir](#)
- string [cacheDir](#)
- string [outputDir](#)
- string [datasetName](#)
- string [uniqueRunId](#)
- [UINT](#) [correctClass](#)
- int [winningClass](#)
- FILE \* [log](#)
- [UINT](#) [param\\_SPIKING\\_ACTIVITY\\_THRESHOLD\\_HZ](#)
- [UINT](#) [param\\_MAX\\_FIRING\\_RATE\\_HZ](#)
- [UINT](#) [param\\_MIN\\_FIRING\\_RATE\\_HZ](#)
- float [param\\_GLOBAL\\_WEIGHT\\_SCALING](#)

- float [param\\_WEIGHT\\_RN\\_PN](#)
- float [param\\_CONNECTIVITY\\_RN\\_PN](#)
- float [param\\_WEIGHT\\_WTA\\_PN\\_PN](#)
- float [param\\_WEIGHT\\_WTA\\_AN\\_AN](#)
- float [param\\_CONNECTIVITY\\_PN\\_PN](#)
- float [param\\_CONNECTIVITY\\_AN\\_AN](#)
- float [param\\_CONNECTIVITY\\_PN\\_AN](#)
- float [param\\_MIN\\_WEIGHT\\_PN\\_AN](#)
- float [param\\_MAX\\_WEIGHT\\_PN\\_AN](#)
- float [param\\_WEIGHT\\_DELTA\\_PN\\_AN](#)
- float [param\\_PLASTICITY\\_INTERVAL\\_MS](#)
- bool [clearedDownDevice](#)

#### Static Public Attributes

- static const unsigned int [timestepsPerRecording](#) = [RECORDING\\_TIME\\_MS](#) / [DT](#)

#### 14.31.1 Detailed Description

This class contains the methods for running the `Schmuker_2014_classifier` example model.

#### 14.31.2 Member Enumeration Documentation

##### 14.31.2.1 enum `Schmuker2014_classifier::data_type`

Enumerator

***`data_type_int`***  
***`data_type_uint`***  
***`data_type_float`***  
***`data_type_double`***

#### 14.31.3 Constructor & Destructor Documentation

##### 14.31.3.1 `Schmuker2014_classifier::Schmuker2014_classifier ( )`

##### 14.31.3.2 `Schmuker2014_classifier::~~Schmuker2014_classifier ( )`

#### 14.31.4 Member Function Documentation

##### 14.31.4.1 `void Schmuker2014_classifier::addInputRate ( float * samplePoint, UINT timeStep )`

##### 14.31.4.2 `void Schmuker2014_classifier::allocateHostAndDeviceMemory ( )`

##### 14.31.4.3 `void Schmuker2014_classifier::applyLearningRuleSynapses ( float * synapsesPNAN )`

##### 14.31.4.4 `UINT Schmuker2014_classifier::calculateCurrentWindowWinner ( )`

##### 14.31.4.5 `UINT Schmuker2014_classifier::calculateOverallWinner ( )`

##### 14.31.4.6 `float Schmuker2014_classifier::calculateVrResponse ( float * samplePoint, float * vrPoint )`

##### 14.31.4.7 `UINT Schmuker2014_classifier::calculateWinner ( unsigned int * clusterSpikeCount )`

- 14.31.4.8 void Schmuker2014\_classifier::checkContents ( string *title*, void \* *array*, UINT *howMany*, UINT *displayPerLine*, data\_type *dataType*, UINT *decimalPoints* )
- 14.31.4.9 void Schmuker2014\_classifier::checkContents ( string *title*, void \* *array*, UINT *howMany*, UINT *displayPerLine*, data\_type *dataType*, UINT *decimalPoints*, string *delim* )
- 14.31.4.10 void Schmuker2014\_classifier::clearDownDevice ( )
- 14.31.4.11 uint64\_t Schmuker2014\_classifier::convertToRateCode ( float *inputRateHz* )
- 14.31.4.12 void Schmuker2014\_classifier::createWTACnectivity ( float \* *synapse*, UINT *populationSize*, UINT *clusterSize*, float *synapseWeight*, float *probability* )
- 14.31.4.13 void Schmuker2014\_classifier::findMaxMinSampleDistances ( float \* *samples*, UINT *startAt*, UINT *totalSamples* )
- 14.31.4.14 void Schmuker2014\_classifier::generate\_inputrates\_dataset ( unsigned int *recordingIdx* )
- 14.31.4.15 void Schmuker2014\_classifier::generate\_or\_load\_inputrates\_dataset ( unsigned int *recordingIdx* )
- 14.31.4.16 void Schmuker2014\_classifier::generateSimulatedTimeSeriesData ( )
- 14.31.4.17 UINT Schmuker2014\_classifier::getClassCluster ( UINT *anIdx* )
- 14.31.4.18 UINT Schmuker2014\_classifier::getClusterIndex ( UINT *neuronIndex*, UINT *clusterSize* )
- 14.31.4.19 float Schmuker2014\_classifier::getManhattanDistance ( float \* *pointA*, float \* *pointB*, UINT *numElements* )
- 14.31.4.20 float Schmuker2014\_classifier::getRand0to1 ( )
- 14.31.4.21 string Schmuker2014\_classifier::getRecordingFilename ( UINT *recordingIdx* )
- 14.31.4.22 float Schmuker2014\_classifier::getSampleDistance ( UINT *max0\_min1* )
- 14.31.4.23 void Schmuker2014\_classifier::getSpikeNumbersFromGPU ( )
- 14.31.4.24 void Schmuker2014\_classifier::getSpikesFromGPU ( )
- 14.31.4.25 void Schmuker2014\_classifier::initialiseInputData ( )
- 14.31.4.26 void Schmuker2014\_classifier::initialiseWeights\_DENSE\_PN\_AN ( )
- 14.31.4.27 void Schmuker2014\_classifier::initialiseWeights\_SPARSE\_RN\_PN ( )
- 14.31.4.28 void Schmuker2014\_classifier::initialiseWeights\_WTA\_AN\_AN ( )
- 14.31.4.29 void Schmuker2014\_classifier::initialiseWeights\_WTA\_PN\_PN ( )
- 14.31.4.30 void Schmuker2014\_classifier::load\_VR\_data ( )
- 14.31.4.31 bool Schmuker2014\_classifier::loadArrayFromTextFile ( string *path*, void \* *array*, string *delim*, UINT *arrayLen*, data\_type *dataType* )
- 14.31.4.32 void Schmuker2014\_classifier::loadClassLabels ( )
- 14.31.4.33 FILE \* Schmuker2014\_classifier::openRecordingFile ( UINT *recordingIndex* )
- 14.31.4.34 void Schmuker2014\_classifier::outputSpikes ( FILE \* *f*, string *delim* )
- 14.31.4.35 void Schmuker2014\_classifier::populateDeviceMemory ( )
- 14.31.4.36 void Schmuker2014\_classifier::printSeparator ( )

14.31.4.37 `bool Schmuker2014_classifier::randomEventOccurred ( float probability )`  
 14.31.4.38 `void Schmuker2014_classifier::resetClusterSpikeCountAN ( )`  
 14.31.4.39 `void Schmuker2014_classifier::resetDevice ( )`  
 14.31.4.40 `void Schmuker2014_classifier::resetIndividualSpikeCountPN ( )`  
 14.31.4.41 `void Schmuker2014_classifier::resetOverallWinner ( )`  
 14.31.4.42 `void Schmuker2014_classifier::run ( float runtime, string filename_rasterPlot, bool usePlasticity )`  
 14.31.4.43 `void Schmuker2014_classifier::setCorrectClass ( UINT recordingIdx )`  
 14.31.4.44 `void Schmuker2014_classifier::setMaxMinSampleDistances ( )`  
 14.31.4.45 `void Schmuker2014_classifier::startLog ( )`  
 14.31.4.46 `void Schmuker2014_classifier::update_input_data_on_device ( )`  
 14.31.4.47 `void Schmuker2014_classifier::updateClusterSpikeCountAN ( )`  
 14.31.4.48 `void Schmuker2014_classifier::updateIndividualSpikeCountPN ( )`  
 14.31.4.49 `void Schmuker2014_classifier::updateWeights_PN_AN ( )`  
 14.31.4.50 `void Schmuker2014_classifier::updateWeights_PN_AN_on_device ( )`  
 14.31.5 Member Data Documentation

14.31.5.1 `string Schmuker2014_classifier::cacheDir`  
 14.31.5.2 `unsigned int* Schmuker2014_classifier::classLabel`  
 14.31.5.3 `bool Schmuker2014_classifier::clearedDownDevice`  
 14.31.5.4 `unsigned int* Schmuker2014_classifier::clusterSpikeCountAN`  
 14.31.5.5 `UINT Schmuker2014_classifier::correctClass`  
 14.31.5.6 `unsigned int Schmuker2014_classifier::countAN`  
 14.31.5.7 `unsigned int Schmuker2014_classifier::countPN`  
 14.31.5.8 `unsigned int Schmuker2014_classifier::countPNAN`  
 14.31.5.9 `unsigned int Schmuker2014_classifier::countRN`  
 14.31.5.10 `uint64_t* Schmuker2014_classifier::d_inputRates`  
 14.31.5.11 `double Schmuker2014_classifier::d_maxRandomNumber`  
 14.31.5.12 `string Schmuker2014_classifier::datasetName`  
 14.31.5.13 `unsigned int* Schmuker2014_classifier::individualSpikeCountPN`  
 14.31.5.14 `uint64_t* Schmuker2014_classifier::inputRates`  
 14.31.5.15 `unsigned int Schmuker2014_classifier::inputRatesSize`  
 14.31.5.16 `FILE* Schmuker2014_classifier::log`

- 14.31.5.17 **NNmodel** Schmuker2014\_classifier::model
- 14.31.5.18 **string** Schmuker2014\_classifier::outputDir
- 14.31.5.19 **unsigned int\*** Schmuker2014\_classifier::overallWinnerSpikeCountAN
- 14.31.5.20 **float** Schmuker2014\_classifier::param\_CONNECTIVITY\_AN\_AN
- 14.31.5.21 **float** Schmuker2014\_classifier::param\_CONNECTIVITY\_PN\_AN
- 14.31.5.22 **float** Schmuker2014\_classifier::param\_CONNECTIVITY\_PN\_PN
- 14.31.5.23 **float** Schmuker2014\_classifier::param\_CONNECTIVITY\_RN\_PN
- 14.31.5.24 **float** Schmuker2014\_classifier::param\_GLOBAL\_WEIGHT\_SCALING
- 14.31.5.25 **UINT** Schmuker2014\_classifier::param\_MAX\_FIRING\_RATE\_HZ
- 14.31.5.26 **float** Schmuker2014\_classifier::param\_MAX\_WEIGHT\_PN\_AN
- 14.31.5.27 **UINT** Schmuker2014\_classifier::param\_MIN\_FIRING\_RATE\_HZ
- 14.31.5.28 **float** Schmuker2014\_classifier::param\_MIN\_WEIGHT\_PN\_AN
- 14.31.5.29 **float** Schmuker2014\_classifier::param\_PLASTICITY\_INTERVAL\_MS
- 14.31.5.30 **UINT** Schmuker2014\_classifier::param\_SPIKING\_ACTIVITY\_THRESHOLD\_HZ
- 14.31.5.31 **float** Schmuker2014\_classifier::param\_WEIGHT\_DELTA\_PN\_AN
- 14.31.5.32 **float** Schmuker2014\_classifier::param\_WEIGHT\_RN\_PN
- 14.31.5.33 **float** Schmuker2014\_classifier::param\_WEIGHT\_WTA\_AN\_AN
- 14.31.5.34 **float** Schmuker2014\_classifier::param\_WEIGHT\_WTA\_PN\_PN
- 14.31.5.35 **float\*** Schmuker2014\_classifier::plasticWeights
- 14.31.5.36 **string** Schmuker2014\_classifier::recordingsDir
- 14.31.5.37 **float\*** Schmuker2014\_classifier::sampleDistance
- 14.31.5.38 **float** Schmuker2014\_classifier::t
- 14.31.5.39 **const unsigned int** Schmuker2014\_classifier::timestepsPerRecording = RECORDING\_TIME\_MS / DT  
[static]
- 14.31.5.40 **string** Schmuker2014\_classifier::uniqueRunId
- 14.31.5.41 **float\*** Schmuker2014\_classifier::vrData
- 14.31.5.42 **int** Schmuker2014\_classifier::winningClass

The documentation for this class was generated from the following files:

- [Schmuker2014\\_classifier.h](#)
- [Schmuker2014\\_classifier.cu](#)

## 14.32 stdRG Class Reference

```
#include <randomGen.h>
```

## Public Member Functions

- [stdRG](#) ()  
*Constructor of the standard random number generator class without explicit seed.*
- [stdRG](#) (unsigned int)  
*Constructor of the standard random number generator class with explicit seed.*
- [~stdRG](#) ()
- double [n](#) ()  
*Method to generate a uniform random number.*
- unsigned long [nlong](#) ()

### 14.32.1 Constructor & Destructor Documentation

#### 14.32.1.1 `stdRG::stdRG ( ) [explicit]`

Constructor of the standard random number generator class without explicit seed.

The seed is taken from teh internal clock of the computer.

#### 14.32.1.2 `stdRG::stdRG ( unsigned int seed )`

Constructor of the standard random number generator class with explicit seed.

The seed is an arbitrary unsigned int

#### 14.32.1.3 `stdRG::~stdRG ( ) [inline]`

### 14.32.2 Member Function Documentation

#### 14.32.2.1 `double stdRG::n ( )`

Method to generate a uniform random number.

The moethod is a wrapper for the C function rand() and returns a pseudo random number in the interval [0,1[

#### 14.32.2.2 `unsigned long stdRG::nlong ( )`

The documentation for this class was generated from the following files:

- [randomGen.h](#)
- [randomGen.cc](#)

### 14.33 stopWatch Struct Reference

```
#include <hr_time.h>
```

## Public Attributes

- timeval [start](#)
- timeval [stop](#)

### 14.33.1 Member Data Documentation

#### 14.33.1.1 `timeval stopWatch::start`

#### 14.33.1.2 `timeval stopWatch::stop`

The documentation for this struct was generated from the following file:

- [hr\\_time.h](#)

## 14.34 SynDelay Class Reference

```
#include <SynDelaySim.h>
```

### Public Member Functions

- [SynDelay](#) (bool usingGPU)
- [~SynDelay](#) ()
- void [run](#) (float t)

### 14.34.1 Constructor & Destructor Documentation

14.34.1.1 [SynDelay::SynDelay \( bool usingGPU \)](#)

14.34.1.2 [SynDelay::~~SynDelay \( \)](#)

### 14.34.2 Member Function Documentation

14.34.2.1 void [SynDelay::run \( float t \)](#)

The documentation for this class was generated from the following files:

- [SynDelaySim.h](#)
- [SynDelaySim.cu](#)

## 14.35 weightUpdateModel Class Reference

Structure to hold the information that defines a weightupdate model (a model of how spikes affect synaptic (and/or) (mostly) post-synaptic neuron variables. It also allows to define changes in response to post-synaptic spikes/spike-like events.

```
#include <modelSpec.h>
```

### Public Member Functions

- [weightUpdateModel](#) ()

### Public Attributes

- string [simCode](#)  
*Simulation code that is used for true spikes (only one time step after spike detection)*
- string [simCodeEvt](#)  
*Simulation code that is used for spike events (all the instances where event threshold condition is met)*
- string [simLearnPost](#)  
*Simulation code which is used in the learnSynapsesPost kernel/function, where postsynaptic neuron spikes before the presynaptic neuron in the STDP window.*
- string [evntThreshold](#)  
*Simulation code for spike event detection.*
- string [synapseDynamics](#)  
*Simulation code for synapse dynamics independent of spike detection.*
- vector< string > [varNames](#)



*Names of the variables in the postsynaptic model.*

- `vector< string > varTypes`

*Types of the variable named above, e.g. "float". Names and types are matched by their order of occurrence in the vector.*

- `vector< string > pNames`

*Names of (independent) parameters of the model.*

- `vector< string > dpNames`

*Names of dependent parameters of the model.*

- `vector< string > extraGlobalSynapseKernelParameters`

*Additional parameter in the neuron kernel; it is translated to a population specific name but otherwise assumed to be one parameter per population rather than per synapse.*

- `vector< string > extraGlobalSynapseKernelParameterTypes`

*Additional parameters in the neuron kernel; they are translated to a population specific name but otherwise assumed to be one parameter per population rather than per synapse.*

- `dpclass * dps`
- `bool needPreSt`

*Whether presynaptic spike times are needed or not.*

- `bool needPostSt`

*Whether postsynaptic spike times are needed or not.*

#### 14.35.1 Detailed Description

Structure to hold the information that defines a weightupdate model (a model of how spikes affect synaptic (and/or) (mostly) post-synaptic neuron variables. It also allows to define changes in response to post-synaptic spikes/spike-like events.

#### 14.35.2 Constructor & Destructor Documentation

##### 14.35.2.1 `weightUpdateModel::weightUpdateModel ( )` [inline]

#### 14.35.3 Member Data Documentation

##### 14.35.3.1 `vector<string> weightUpdateModel::dpNames`

Names of dependent parameters of the model.

##### 14.35.3.2 `dpclass* weightUpdateModel::dps`

##### 14.35.3.3 `string weightUpdateModel::evntThreshold`

Simulation code for spike event detection.

##### 14.35.3.4 `vector<string> weightUpdateModel::extraGlobalSynapseKernelParameters`

Additional parameter in the neuron kernel; it is translated to a population specific name but otherwise assumed to be one parameter per population rather than per synapse.

##### 14.35.3.5 `vector<string> weightUpdateModel::extraGlobalSynapseKernelParameterTypes`

Additional parameters in the neuron kernel; they are translated to a population specific name but otherwise assumed to be one parameter per population rather than per synapse.

##### 14.35.3.6 `bool weightUpdateModel::needPostSt`

Whether postsynaptic spike times are needed or not.

**14.35.3.7 bool weightUpdateModel::needPreSt**

Whether presynaptic spike times are needed or not.

**14.35.3.8 vector<string> weightUpdateModel::pNames**

Names of (independent) parameters of the model.

**14.35.3.9 string weightUpdateModel::simCode**

Simulation code that is used for true spikes (only one time step after spike detection)

**14.35.3.10 string weightUpdateModel::simCodeEvt**

Simulation code that is used for spike events (all the instances where event threshold condition is met)

**14.35.3.11 string weightUpdateModel::simLearnPost**

Simulation code which is used in the learnSynapsesPost kernel/function, where postsynaptic neuron spikes before the presynaptic neuron in the STDP window.

**14.35.3.12 string weightUpdateModel::synapseDynamics**

Simulation code for synapse dynamics independent of spike detection.

**14.35.3.13 vector<string> weightUpdateModel::varNames**

Names of the variables in the postsynaptic model.

**14.35.3.14 vector<string> weightUpdateModel::varTypes**

Types of the variable named above, e.g. "float". Names and types are matched by their order of occurrence in the vector.

The documentation for this class was generated from the following file:

- [modelSpec.h](#)

## 15 File Documentation

### 15.1 00\_MainPage.dox File Reference

### 15.2 01\_Installation.dox File Reference

### 15.3 02\_Quickstart.dox File Reference

### 15.4 03\_Examples.dox File Reference

### 15.5 09\_ReleaseNotes\_v2.dox File Reference

### 15.6 10\_UserManual.dox File Reference

### 15.7 11\_Tutorial.dox File Reference

### 15.8 12\_Tutorial.dox File Reference

### 15.9 13\_UserGuide.dox File Reference

## 15.10 14\_Credits.dox File Reference

## 15.11 classol\_sim.cu File Reference

```
#include "classol_sim.h"
```

### Functions

- int `main` (int argc, char \*argv[])

*This function is the entry point for running the simulation of the MBody1 model network.*

#### 15.11.1 Function Documentation

##### 15.11.1.1 int main ( int argc, char \* argv[] )

This function is the entry point for running the simulation of the MBody1 model network.

## 15.12 classol\_sim.cu File Reference

```
#include "classol_sim.h"
```

### Functions

- int `main` (int argc, char \*argv[])

*This function is the entry point for running the simulation of the MBody\_delayedSyn model network.*

#### 15.12.1 Function Documentation

##### 15.12.1.1 int main ( int argc, char \* argv[] )

This function is the entry point for running the simulation of the MBody\_delayedSyn model network.

## 15.13 classol\_sim.cu File Reference

```
#include "classol_sim.h"
```

### Functions

- int `main` (int argc, char \*argv[])

*This function is the entry point for running the simulation of the MBody1 model network.*

#### 15.13.1 Function Documentation

##### 15.13.1.1 int main ( int argc, char \* argv[] )

This function is the entry point for running the simulation of the MBody1 model network.

## 15.14 classol\_sim.cu File Reference

```
#include "classol_sim.h"
```

### Functions

- int [main](#) (int argc, char \*argv[])

*This function is the entry point for running the simulation of the MBody1 model network.*

#### 15.14.1 Function Documentation

##### 15.14.1.1 int main ( int argc, char \* argv[] )

This function is the entry point for running the simulation of the MBody1 model network.

## 15.15 classol\_sim.h File Reference

```
#include <cassert>
#include "hr_time.cpp"
#include "utils.h"
#include <cuda_runtime.h>
#include "MBody1.cc"
#include "map_classol.cc"
```

### Macros

- #define [MYRAND](#)(Y, X) Y = Y \* 1103515245 +12345; X= (Y >> 16);
- #define [DBG\\_SIZE](#) 10000
- #define [PATTERNNO](#) 100
- #define [T\\_REPORT\\_TME](#) 10000.0
- #define [SYN\\_OUT\\_TME](#) 20000.0
- #define [PAT\\_TIME](#) 100.0
- #define [PATFTIME](#) 1.5
- #define [TOTAL\\_TME](#) 500.0

### Variables

- scalar [t](#) = 0.0f
- unsigned int [iT](#) = 0
- scalar [InputBaseRate](#) = 2e-04
- int [patSetTime](#)
- int [patFireTime](#)
- [CStopWatch](#) timer

#### 15.15.1 Macro Definition Documentation

##### 15.15.1.1 #define DBG\_SIZE 10000

##### 15.15.1.2 #define MYRAND( Y, X ) Y = Y \* 1103515245 +12345; X= (Y >> 16);

##### 15.15.1.3 #define PAT\_TIME 100.0

15.15.1.4 `#define PATFTIME 1.5`

15.15.1.5 `#define PATTERNNO 100`

15.15.1.6 `#define SYN_OUT_TME 20000.0`

15.15.1.7 `#define T_REPORT_TME 10000.0`

15.15.1.8 `#define TOTAL_TME 500.0`

15.15.2 Variable Documentation

15.15.2.1 `scalar InputBaseRate = 2e-04`

15.15.2.2 `unsigned int iT = 0`

15.15.2.3 `int patFireTime`

15.15.2.4 `int patSetTime`

15.15.2.5 `scalar t = 0.0f`

15.15.2.6 `CStopWatch timer`

## 15.16 `classol_sim.h` File Reference

```
#include <cassert>
#include "hr_time.cpp"
#include "utils.h"
#include <cuda_runtime.h>
#include "MBody_delayedSyn.cc"
#include "map_classol.cc"
```

### Macros

- `#define MYRAND(Y, X) Y = Y * 1103515245 + 12345; X = (Y >> 16);`
- `#define DBG_SIZE 10000`
- `#define PATTERNNO 100`
- `#define T_REPORT_TME 10000.0`
- `#define SYN_OUT_TME 20000.0`
- `#define PAT_TIME 100.0`
- `#define PATFTIME 1.5`
- `#define TOTAL_TME 5000.0`

### Variables

- `scalar t = 0.0f`
- `unsigned int iT = 0`
- `scalar InputBaseRate = 2e-04`
- `int patSetTime`
- `int patFireTime`
- `CStopWatch timer`

## 15.16.1 Macro Definition Documentation

15.16.1.1 `#define DBG_SIZE 10000`15.16.1.2 `#define MYRAND( Y, X ) Y = Y * 1103515245 +12345; X= (Y >> 16);`15.16.1.3 `#define PAT_TIME 100.0`15.16.1.4 `#define PATFTIME 1.5`15.16.1.5 `#define PATTERNNO 100`15.16.1.6 `#define SYN_OUT_TME 20000.0`15.16.1.7 `#define T_REPORT_TME 10000.0`15.16.1.8 `#define TOTAL_TME 5000.0`

## 15.16.2 Variable Documentation

15.16.2.1 scalar `InputBaseRate = 2e-04`15.16.2.2 unsigned int `iT = 0`15.16.2.3 int `patFireTime`15.16.2.4 int `patSetTime`15.16.2.5 scalar `t = 0.0f`15.16.2.6 `CStopWatch` timer

## 15.17 classol\_sim.h File Reference

```
#include <cassert>
#include "hr_time.cpp"
#include "utils.h"
#include <cuda_runtime.h>
#include "MBody_individualID.cc"
#include "map_classol.cc"
```

## Macros

- `#define MYRAND(Y, X) Y = Y * 1103515245 +12345; X= (Y >> 16);`
- `#define DBG_SIZE 10000`
- `#define PATTERNNO 100`
- `#define T_REPORT_TME 10000.0`
- `#define SYN_OUT_TME 20000.0`
- `#define PAT_TIME 100.0`
- `#define PATFTIME 1.5`
- `#define TOTAL_TME 5000.0`

## Variables

- scalar `t = 0.0f`
- unsigned int `iT = 0`
- scalar `InputBaseRate = 2e-04`

- int [patSetTime](#)
- int [patFireTime](#)
- [CStopWatch](#) timer

### 15.17.1 Macro Definition Documentation

15.17.1.1 `#define DBG_SIZE 10000`

15.17.1.2 `#define MYRAND( Y, X ) Y = Y * 1103515245 +12345; X= (Y >> 16);`

15.17.1.3 `#define PAT_TIME 100.0`

15.17.1.4 `#define PATFTIME 1.5`

15.17.1.5 `#define PATTERNNO 100`

15.17.1.6 `#define SYN_OUT_TME 20000.0`

15.17.1.7 `#define T_REPORT_TME 10000.0`

15.17.1.8 `#define TOTAL_TME 5000.0`

### 15.17.2 Variable Documentation

15.17.2.1 scalar `InputBaseRate = 2e-04`

15.17.2.2 unsigned int `iT = 0`

15.17.2.3 int `patFireTime`

15.17.2.4 int `patSetTime`

15.17.2.5 scalar `t = 0.0f`

15.17.2.6 [CStopWatch](#) timer

## 15.18 `classol_sim.h` File Reference

```
#include <cassert>
#include "hr_time.cpp"
#include "utils.h"
#include <cuda_runtime.h>
#include <cfloat>
#include "MBody_userdef.cc"
#include "map_classol.cc"
```

### Macros

- `#define` [MYRAND](#)(Y, X) Y = Y \* 1103515245 +12345; X= (Y >> 16);
- `#define` [DBG\\_SIZE](#) 10000
- `#define` [PATTERNNO](#) 100
- `#define` [T\\_REPORT\\_TME](#) 10000.0
- `#define` [SYN\\_OUT\\_TME](#) 20000.0
- `#define` [PAT\\_TIME](#) 100.0
- `#define` [PATFTIME](#) 1.5
- `#define` [TOTAL\\_TME](#) 5000.0

## Variables

- scalar `t` = 0.0f
- unsigned int `iT` = 0
- scalar `InputBaseRate` = 2e-04
- int `patSetTime`
- int `patFireTime`
- `CStopWatch` timer

## 15.18.1 Macro Definition Documentation

15.18.1.1 `#define DBG_SIZE 10000`

15.18.1.2 `#define MYRAND( Y, X ) Y = Y * 1103515245 + 12345; X = (Y >> 16);`

15.18.1.3 `#define PAT_TIME 100.0`

15.18.1.4 `#define PATFTIME 1.5`

15.18.1.5 `#define PATTERNNO 100`

15.18.1.6 `#define SYN_OUT_TME 20000.0`

15.18.1.7 `#define T_REPORT_TME 10000.0`

15.18.1.8 `#define TOTAL_TME 5000.0`

## 15.18.2 Variable Documentation

15.18.2.1 scalar `InputBaseRate` = 2e-04

15.18.2.2 unsigned int `iT` = 0

15.18.2.3 int `patFireTime`

15.18.2.4 int `patSetTime`

15.18.2.5 scalar `t` = 0.0f

15.18.2.6 `CStopWatch` timer

## 15.19 CodeHelper.cc File Reference

```
#include <iostream>
#include <cstring>
#include <string>
#include <sstream>
#include <vector>
```

## Classes

- class `CodeHelper`

## Macros

- `#define __CODE_HELPER_CC`
- `#define SAVEP(X) "(" << X << ")"`



- `#define OB(X) hlp.openBrace(X)`
- `#define CB(X) hlp.closeBrace(X)`
- `#define ENDL hlp.endl()`

### 15.19.1 Macro Definition Documentation

#### 15.19.1.1 `#define __CODE_HELPER_CC`

#### 15.19.1.2 `#define CB( X ) hlp.closeBrace(X)`

#### 15.19.1.3 `#define ENDL hlp.endl()`

#### 15.19.1.4 `#define OB( X ) hlp.openBrace(X)`

#### 15.19.1.5 `#define SAVEP( X ) "(" << X << "&quot;)"`

## 15.20 ensureFtype.h File Reference

```
#include <string>
```

### Functions

- void `doFinal` (string &code, unsigned int i, string type, unsigned int &state)
- string `ensureFtype` (string oldcode, string type)

### Variables

- string `digits` = string("0123456789")  
*Function for converting code to contain only explicit single precision (float) constants.*
- string `op` = string("+\*/(<>= ,;")+string("\n")+string("\t")

### 15.20.1 Function Documentation

#### 15.20.1.1 void `doFinal` ( string & *code*, unsigned int *i*, string *type*, unsigned int & *state* )

#### 15.20.1.2 string `ensureFtype` ( string *oldcode*, string *type* )

### 15.20.2 Variable Documentation

#### 15.20.2.1 string `digits` = string("0123456789")

Function for converting code to contain only explicit single precision (float) constants.

#### 15.20.2.2 string `op` = string("+\*/(<>= ,;")+string("\n")+string("\t")

## 15.21 experiment.cu File Reference

```
#include "experiment.h"
#include <time.h>
#include <algorithm>
#include <sys/types.h>
#include <sys/stat.h>
```

## Classes

- struct [Parameter](#)

## Macros

- `#define RAND(Y, X) Y = Y * 1103515245 + 12345; X = (unsigned int)(Y >> 16) & 32767`
- `#define S\_ISDIR(mode) (((mode) & S_IFMT) == S_IFDIR)`

## Typedefs

- typedef struct [Parameter](#) [Parameter](#)

## Functions

- bool [directoryExists](#) (string const &path)
- bool [createDirectory](#) (string path)
- float [getAverage](#) (vector< float > &v)
- float [getStdDev](#) (vector< float > &v, float avg)
- bool [printTextFile](#) (string path)
- string [getUniqueRunId](#) ()
- void [outputRunParameters](#) ()
- bool [applyInputToClassifier](#) (UINT recordingIdx, bool usePlasticity)
- bool [vectorContains](#) (vector< int > &vec, int lookingFor)
- void [setDefaultParamValues](#) ()
- int [main](#) (int argc, char \*argv[])

## Variables

- [Schmuker2014\\_classifier](#) classifier

## 15.21.1 Macro Definition Documentation

15.21.1.1 `#define RAND( Y, X ) Y = Y * 1103515245 + 12345; X = (unsigned int)(Y >> 16) & 32767`

15.21.1.2 `#define S\_ISDIR( mode ) (((mode) & S_IFMT) == S_IFDIR)`

## 15.21.2 Typedef Documentation

15.21.2.1 typedef struct [Parameter](#) [Parameter](#)

## 15.21.3 Function Documentation

15.21.3.1 bool [applyInputToClassifier](#) ( [UINT](#) *recordingIdx*, bool *usePlasticity* )

15.21.3.2 bool [createDirectory](#) ( [string](#) *path* )

15.21.3.3 bool [directoryExists](#) ( [string](#) const & *path* )

15.21.3.4 float [getAverage](#) ( [vector](#)< float > & *v* )

15.21.3.5 float [getStdDev](#) ( [vector](#)< float > & *v*, float *avg* )

15.21.3.6 [string](#) [getUniqueRunId](#) ( )

- 15.21.3.7 `int main ( int argc, char * argv[ ] )`
- 15.21.3.8 `void outputRunParameters ( )`
- 15.21.3.9 `bool printTextFile ( string path )`
- 15.21.3.10 `void setDefaultParamValues ( )`
- 15.21.3.11 `bool vectorContains ( vector< int > & vec, int lookingFor )`
- 15.21.4 Variable Documentation
- 15.21.4.1 `Schmuker2014_classifier` classifier

## 15.22 experiment.h File Reference

```
#include <cassert>
#include "hr_time.cpp"
#include "utils.h"
#include "Schmuker2014_classifier.cu"
```

### Macros

- `#define divi "/"`
- `#define D_MAX_RANDOM_NUM 32767`
- `#define RECORDINGS_DIR "recordings_iris_data"`
- `#define CACHE_DIR "cached_iris_data"`
- `#define OUTPUT_DIR "output_iris"`
- `#define VR_DATA_FILENAME "VR-recordings-iris.data"`
- `#define DATASET_NAME "Iris"`
- `#define TOTAL_RECORDINGS 150`
- `#define N_FOLDING 5`
- `#define RECORDING_TIME_MS 1000`
- `#define REPEAT_LEARNING_SET 2`
- `#define SPIKING_ACTIVITY_THRESHOLD_HZ 5`
- `#define FLAG_RUN_ON_CPU 1`
- `#define MAX_FIRING_RATE_HZ 70`
- `#define MIN_FIRING_RATE_HZ 20`
- `#define GLOBAL_WEIGHT_SCALING 1.0`
- `#define WEIGHT_RN_PN 0.5`
- `#define CONNECTIVITY_RN_PN 0.5`
- `#define WEIGHT_WTA_PN_PN 0.01`
- `#define WEIGHT_WTA_AN_AN 0.01`
- `#define CONNECTIVITY_PN_PN 0.5`
- `#define CONNECTIVITY_AN_AN 0.5`
- `#define CONNECTIVITY_PN_AN 0.5`
- `#define MIN_WEIGHT_PN_AN 0.1`
- `#define MAX_WEIGHT_PN_AN 0.4`
- `#define WEIGHT_DELTA_PN_AN 0.04`
- `#define PLASTICITY_INTERVAL_MS 330`

### Typedefs

- `typedef unsigned int UINT`

## Variables

- [CStopWatch timer](#)

## 15.22.1 Macro Definition Documentation

15.22.1.1 `#define CACHE_DIR "cached_iris_data"`

15.22.1.2 `#define CONNECTIVITY_AN_AN 0.5`

15.22.1.3 `#define CONNECTIVITY_PN_AN 0.5`

15.22.1.4 `#define CONNECTIVITY_PN_PN 0.5`

15.22.1.5 `#define CONNECTIVITY_RN_PN 0.5`

15.22.1.6 `#define D_MAX_RANDOM_NUM 32767`

15.22.1.7 `#define DATASET_NAME "Iris"`

15.22.1.8 `#define divi "/"`

15.22.1.9 `#define FLAG_RUN_ON_CPU 1`

15.22.1.10 `#define GLOBAL_WEIGHT_SCALING 1.0`

15.22.1.11 `#define MAX_FIRING_RATE_HZ 70`

15.22.1.12 `#define MAX_WEIGHT_PN_AN 0.4`

15.22.1.13 `#define MIN_FIRING_RATE_HZ 20`

15.22.1.14 `#define MIN_WEIGHT_PN_AN 0.1`

15.22.1.15 `#define N_FOLDING 5`

15.22.1.16 `#define OUTPUT_DIR "output_iris"`

15.22.1.17 `#define PLASTICITY_INTERVAL_MS 330`

15.22.1.18 `#define RECORDING_TIME_MS 1000`

15.22.1.19 `#define RECORDINGS_DIR "recordings_iris_data"`

15.22.1.20 `#define REPEAT_LEARNING_SET 2`

15.22.1.21 `#define SPIKING_ACTIVITY_THRESHOLD_HZ 5`

15.22.1.22 `#define TOTAL_RECORDINGS 150`

15.22.1.23 `#define VR_DATA_FILENAME "VR-recordings-iris.data"`

15.22.1.24 `#define WEIGHT_DELTA_PN_AN 0.04`

15.22.1.25 `#define WEIGHT_RN_PN 0.5`

15.22.1.26 `#define WEIGHT_WTA_AN_AN 0.01`

15.22.1.27 `#define WEIGHT_WTA_PN_PN 0.01`

## 15.22.2 Typedef Documentation

### 15.22.2.1 typedef unsigned int UINT

### 15.22.3 Variable Documentation

#### 15.22.3.1 CStopWatch timer

## 15.23 extra\_neurons.h File Reference

### Functions

- n varNames [clear](#) ()
- n varNames [push\\_back](#) (tS("V"))
- n varTypes [push\\_back](#) (tS("float"))
- n varNames [push\\_back](#) (tS("V\_NB"))
- n varNames [push\\_back](#) (tS("tSpike\_NB"))
- n varNames [push\\_back](#) (tS("\_\_regime\_val"))
- n varTypes [push\\_back](#) (tS("int"))
- n pNames [push\\_back](#) (tS("VReset\_NB"))
- n pNames [push\\_back](#) (tS("VThresh\_NB"))
- n pNames [push\\_back](#) (tS("tRefrac\_NB"))
- n pNames [push\\_back](#) (tS("VRest\_NB"))
- n pNames [push\\_back](#) (tS("TAUm\_NB"))
- n pNames [push\\_back](#) (tS("Cm\_NB"))
- nModels [push\\_back](#) (n)
- n varNames [push\\_back](#) (tS("count\_t\_NB"))
- n pNames [push\\_back](#) (tS("max\_t\_NB"))

### Variables

- n [simCode](#)

### 15.23.1 Function Documentation

#### 15.23.1.1 ps dpNames clear ( )

#### 15.23.1.2 n varNames push\_back ( tS("V") )

#### 15.23.1.3 ps varTypes push\_back ( tS("float") )

#### 15.23.1.4 n varNames push\_back ( tS("V\_NB") )

#### 15.23.1.5 n varNames push\_back ( tS("tSpike\_NB") )

#### 15.23.1.6 n varNames push\_back ( tS("\_\_regime\_val") )

#### 15.23.1.7 n varTypes push\_back ( tS("int") )

#### 15.23.1.8 n pNames push\_back ( tS("VReset\_NB") )

#### 15.23.1.9 n pNames push\_back ( tS("VThresh\_NB") )

#### 15.23.1.10 n pNames push\_back ( tS("tRefrac\_NB") )

#### 15.23.1.11 n pNames push\_back ( tS("VRest\_NB") )

#### 15.23.1.12 n pNames push\_back ( tS("TAUm\_NB") )

15.23.1.13 `n pNames push_back ( tS("Cm_NB") )`

15.23.1.14 `nModels push_back ( n )`

15.23.1.15 `n varNames push_back ( tS("count_t_NB") )`

15.23.1.16 `n pNames push_back ( tS("max_t_NB") )`

## 15.23.2 Variable Documentation

### 15.23.2.1 `n simCode`

#### Initial value:

```
= tS(" \
    $(V) = -1000000; \
    if ($(__regime_val)==1) { \n \
$(V_NB) += (Isyn_NB/$ (Cm_NB) + ($ (VRest_NB) - $ (V_NB)) / $ (TAUm_NB)) *DT; \n \
        if ($ (V_NB) > $ (VThresh_NB)) { \n \
$(V_NB) = $ (VReset_NB); \n \
$(tSpike_NB) = t; \n \
            $(V) = 100000; \
$__regime_val) = 2; \n \
    } \n \
    } \n \
    if ($(__regime_val)==2) { \n \
    if (t-$(tSpike_NB) > $ (tRefrac_NB)) { \n \
$__regime_val) = 1; \n \
    } \n \
    } \n \
")
```

## 15.24 extra\_postsynapses.h File Reference

### Functions

- `ps varNames clear ()`
- `ps varNames push_back (tS("g_PS"))`
- `ps varTypes push_back (tS("float"))`
- `ps pNames push_back (tS("tau_syn_PS"))`
- `ps pNames push_back (tS("E_PS"))`
- `postSynModels push_back (ps)`

### Variables

- `ps postSyntoCurrent`
- `ps postSynDecay`

### 15.24.1 Function Documentation

15.24.1.1 `ps varNames clear ( )`

15.24.1.2 `ps varNames push_back ( tS("g_PS") )`

15.24.1.3 `ps varTypes push_back ( tS("float") )`

15.24.1.4 `ps pNames push_back ( tS("tau_syn_PS") )`

15.24.1.5 `ps pNames push_back ( tS("E_PS") )`

15.24.1.6 `postSynModels push_back ( ps )`

## 15.24.2 Variable Documentation

### 15.24.2.1 `ps postSynDecay`

#### Initial value:

```
= tS(" \
    $(g_PS) += (-$(g_PS)/$(tau_syn_PS))*DT; \n \
    $(inSyn) = 0; \
")
```

### 15.24.2.2 `ps postSyntoCurrent`

#### Initial value:

```
= tS(" \
0; \n \
    float Isyn_NB = 0; \n \
    { \n \
    float v_PS = lV_NB; \n \
    float g_in_PS = $(inSyn); \
    $(g_PS) = $(g_PS)+g_in_PS; \n \
    Isyn_NB += ($(g_PS)*$(E_PS)-v_PS)); \n \
    } \n \
")
```

## 15.25 `extra_postsynapses.h` File Reference

### Functions

- `ps varNames clear ()`
- `postSynModels push_back (ps)`
- `ps varNames push_back (tS("g_PS"))`
- `ps varTypes push_back (tS("float"))`
- `ps pNames push_back (tS("tau_syn_PS"))`
- `ps pNames push_back (tS("E_PS"))`

### Variables

- `postSynModel ps`
- `ps postSyntoCurrent`
- `ps postSynDecay`

### 15.25.1 Function Documentation

#### 15.25.1.1 `ps varNames clear ( )`

#### 15.25.1.2 `postSynModels push_back ( ps )`

#### 15.25.1.3 `ps varNames push_back ( tS("g_PS") )`

#### 15.25.1.4 `ps varTypes push_back ( tS("float") )`

#### 15.25.1.5 `ps pNames push_back ( tS("tau_syn_PS") )`

#### 15.25.1.6 `ps pNames push_back ( tS("E_PS") )`

### 15.25.2 Variable Documentation

#### 15.25.2.1 `ps postSynDecay`

#### Initial value:

```
= ts(" \
    $(inSyn) = 0; \
")
```

### 15.25.2.2 ps postSyntoCurrent

**Initial value:**

```
= ts(" \
0; \n \
    float I_sum_NB = 0; \n \
    { \n \
    float in_PS = $(inSyn); \n \
    I_sum_NB += (in_PS); \n \
    } \n \
")
```

### 15.25.2.3 postSynModel ps

## 15.26 extra\_weightupdates.h File Reference

## 15.27 GA.cc File Reference

```
#include <algorithm>
```

### Classes

- struct [errTupel](#)

### Functions

- int [compareErrTupel](#) (const void \*x, const void \*y)
- void [procreatePop](#) (FILE \*osb)

### 15.27.1 Function Documentation

15.27.1.1 int [compareErrTupel](#) ( const void \* x, const void \* y )

15.27.1.2 void [procreatePop](#) ( FILE \* osb )

## 15.28 gauss.cc File Reference

Contains the implementation of the Gaussian random number generator class [randomGauss](#).

```
#include "gauss.h"
```

### Macros

- #define [GAUSS\\_CC](#)  
*macro for avoiding multiple inclusion during compilation*

### 15.28.1 Detailed Description

Contains the implementation of the Gaussian random number generator class [randomGauss](#).



### 15.28.2 Macro Definition Documentation

#### 15.28.2.1 #define GAUSS\_CC

macro for avoiding multiple inclusion during compilation

### 15.29 gauss.h File Reference

Random number generator for Gaussian random variable with mean 0 and standard deviation 1.

```
#include <cmath>
#include "randomGen.h"
#include "randomGen.cc"
#include "gauss.cc"
```

#### Classes

- class [randomGauss](#)

*Class random Gauss encapsulates the methods for generating random neumbers with Gaussian distribution.*

#### Macros

- #define [GAUSS\\_H](#)

*macro for avoiding multiple inclusion during compilation*

#### 15.29.1 Detailed Description

Random number generator for Gaussian random variable with mean 0 and standard deviation 1.

This random number generator is based on the ratio of uniforms method by A.J. Kinderman and J.F. Monahan and improved with quadratic boundind curves by J.L. Leva. Taken from Algorithm 712 ACM Trans. Math. Softw. 18 p. 454. (the necessary uniform random variables are obtained from the ISAAC random number generator; C++ Implementation by Quinn Tyler Jackson of the RG invented by Bob Jenkins Jr.).

### 15.29.2 Macro Definition Documentation

#### 15.29.2.1 #define GAUSS\_H

macro for avoiding multiple inclusion during compilation

### 15.30 gen\_input\_structured.cc File Reference

```
#include <iostream>
#include <fstream>
#include <stdlib.h>
#include "randomGen.h"
#include "randomGen.cc"
```

#### Functions

- int [main](#) (int argc, char \*argv[ ])

## Variables

- [randomGen R](#)

### 15.30.1 Function Documentation

15.30.1.1 int main ( int *argc*, char \* *argv*[] )

### 15.30.2 Variable Documentation

15.30.2.1 randomGen R

## 15.31 gen\_kcdn\_syns.cc File Reference

This file is part of a tool chain for running the classol/MBody1 example model.

```
#include <iostream>
#include <fstream>
#include <stdlib.h>
#include "randomGen.h"
#include "gauss.h"
#include "randomGen.cc"
```

## Functions

- int [main](#) (int argc, char \*argv[])

## Variables

- [randomGen R](#)
- [randomGauss RG](#)

### 15.31.1 Detailed Description

This file is part of a tool chain for running the classol/MBody1 example model.

This file compiles to a tool to generate appropriate connectivity patterns between KCs and DNs (detector neurons) in the model. The connectivity is saved to file and can then be read by the classol method for reading this connectivity.

### 15.31.2 Function Documentation

15.31.2.1 int main ( int *argc*, char \* *argv*[] )

### 15.31.3 Variable Documentation

15.31.3.1 randomGen R

15.31.3.2 randomGauss RG

## 15.32 gen\_kcdn\_syns\_fixto10K.cc File Reference

```
#include <iostream>
```

```
#include <fstream>
#include <stdlib.h>
#include "randomGen.h"
#include "gauss.h"
#include "randomGen.cc"
```

## Functions

- `int main (int argc, char *argv[ ])`

## Variables

- `randomGen R`
- `randomGen R2`
- `randomGauss RG`

### 15.32.1 Function Documentation

#### 15.32.1.1 `int main ( int argc, char * argv[ ] )`

### 15.32.2 Variable Documentation

#### 15.32.2.1 `randomGen R`

#### 15.32.2.2 `randomGen R2`

#### 15.32.2.3 `randomGauss RG`

## 15.33 `gen_pnkc_syns.cc` File Reference

This file is part of a tool chain for running the classol/MBody1 example model.

```
#include <iostream>
#include <fstream>
#include <stdlib.h>
#include "randomGen.h"
#include "gauss.h"
#include "randomGen.cc"
```

## Functions

- `int main (int argc, char *argv[ ])`

## Variables

- `randomGen R`
- `randomGauss RG`

### 15.33.1 Detailed Description

This file is part of a tool chain for running the classol/MBody1 example model.

This file compiles to a tool to generate appropriate connectivity patterns between PNs and KCs in the model. The connectivity is saved to file and can then be read by the classol method for reading this connectivity.

### 15.33.2 Function Documentation

#### 15.33.2.1 `int main ( int argc, char * argv[] )`

### 15.33.3 Variable Documentation

#### 15.33.3.1 `randomGen R`

#### 15.33.3.2 `randomGauss RG`

## 15.34 `gen_pnkc_syns_indivID.cc` File Reference

This file is part of a tool chain for running the classol/MBody1 example model.

```
#include <iostream>
#include <fstream>
#include <stdlib.h>
#include <stdint>
#include "randomGen.h"
#include "gauss.h"
#include "simpleBit.h"
#include "randomGen.cc"
```

### Functions

- `int main (int argc, char *argv[])`

### Variables

- `randomGen R`
- `randomGauss RG`

### 15.34.1 Detailed Description

This file is part of a tool chain for running the classol/MBody1 example model.

This file compiles to a tool to generate appropriate connectivity patterns between PNs and KCs in the model. In contrast to the `gen_pnkc_syns.cc` tool, here the output is in a format that is suited for the "INDIVIDUALID" method for specifying connectivity. The connectivity is saved to file and can then be read by the classol method for reading this connectivity.

### 15.34.2 Function Documentation

#### 15.34.2.1 `int main ( int argc, char * argv[] )`

### 15.34.3 Variable Documentation

#### 15.34.3.1 `randomGen R`

#### 15.34.3.2 `randomGauss RG`

## 15.35 `gen_pnlhi_syns.cc` File Reference

This file is part of a tool chain for running the classol/MBody1 example model.

```
#include <iostream>
#include <fstream>
#include <stdlib.h>
```

## Functions

- `int main (int argc, char *argv[])`

### 15.35.1 Detailed Description

This file is part of a tool chain for running the classol/MBody1 example model.

This file compiles to a tool to generate appropriate connectivity patterns between PNs and LHIs (lateral horn interneurons) in the model. The connectivity is saved to file and can then be read by the classol method for reading this connectivity.

### 15.35.2 Function Documentation

#### 15.35.2.1 `int main ( int argc, char * argv[] )`

## 15.36 `gen_syns_sparse.cc` File Reference

This file generates the arrays needed for sparse connectivity. The connectivity is saved to a file for each variable and can then be read to fill the struct of connectivity.

```
#include <iostream>
#include <fstream>
#include <string.h>
#include "randomGen.h"
#include "gauss.h"
#include <vector>
```

## Functions

- `int main (int argc, char *argv[])`

## Variables

- `randomGen R`
- `randomGauss RG`

### 15.36.1 Detailed Description

This file generates the arrays needed for sparse connectivity. The connectivity is saved to a file for each variable and can then be read to fill the struct of connectivity.

### 15.36.2 Function Documentation

#### 15.36.2.1 `int main ( int argc, char * argv[] )`

### 15.36.3 Variable Documentation

## 15.36.3.1 randomGen R

## 15.36.3.2 randomGauss RG

## 15.37 gen\_syns\_sparse\_izhModel.cc File Reference

This file is part of a tool chain for running the Izhikevich network model.

```
#include <iostream>
#include <fstream>
#include <stdlib.h>
#include <string.h>
#include <vector>
#include "randomGen.h"
#include "randomGen.cc"
```

## Functions

- int [printVector](#) (vector< unsigned int > &)
- int [printVector](#) (vector< double > &)
- int [main](#) (int argc, char \*argv[])

## Variables

- [randomGen R](#)
- [randomGen Rind](#)
- double [gsyn](#)
- double \* [garray](#)
- unsigned int \* [ind](#)
- double \* [garray\\_ee](#)
- std::vector< double > [g\\_ee](#)
- std::vector< unsigned int > [indInG\\_ee](#)
- std::vector< unsigned int > [ind\\_ee](#)
- double \* [garray\\_ei](#)
- std::vector< double > [g\\_ei](#)
- std::vector< unsigned int > [indInG\\_ei](#)
- std::vector< unsigned int > [ind\\_ei](#)
- double \* [garray\\_ie](#)
- std::vector< double > [g\\_ie](#)
- std::vector< unsigned int > [indInG\\_ie](#)
- std::vector< unsigned int > [ind\\_ie](#)
- double \* [garray\\_ii](#)
- std::vector< double > [g\\_ii](#)
- std::vector< unsigned int > [indInG\\_ii](#)
- std::vector< unsigned int > [ind\\_ii](#)

## 15.37.1 Detailed Description

This file is part of a tool chain for running the Izhikevich network model.

## 15.37.2 Function Documentation

15.37.2.1 `int main ( int argc, char * argv[ ] )`

15.37.2.2 `int printVector ( vector< unsigned int > & v )`

15.37.2.3 `int printVector ( vector< double > & v )`

## 15.37.3 Variable Documentation

15.37.3.1 `std::vector<double> g_ee`

15.37.3.2 `std::vector<double> g_ei`

15.37.3.3 `std::vector<double> g_ie`

15.37.3.4 `std::vector<double> g_ii`

15.37.3.5 `double* garray`

15.37.3.6 `double* garray_ee`

15.37.3.7 `double* garray_ei`

15.37.3.8 `double* garray_ie`

15.37.3.9 `double* garray_ii`

15.37.3.10 `double gsyn`

15.37.3.11 `unsigned int* ind`

15.37.3.12 `std::vector<unsigned int> ind_ee`

15.37.3.13 `std::vector<unsigned int> ind_ei`

15.37.3.14 `std::vector<unsigned int> ind_ie`

15.37.3.15 `std::vector<unsigned int> ind_ii`

15.37.3.16 `std::vector<unsigned int> indInG_ee`

15.37.3.17 `std::vector<unsigned int> indInG_ei`

15.37.3.18 `std::vector<unsigned int> indInG_ie`

15.37.3.19 `std::vector<unsigned int> indInG_ii`

15.37.3.20 `randomGen R`

15.37.3.21 `randomGen Rind`

## 15.38 generate\_run.cc File Reference

```
#include <iostream>
#include <fstream>
#include <string>
#include <sstream>
#include <cstdlib>
#include <cmath>
#include "toString.h"
#include <sys/stat.h>
```

### Functions

- int [main](#) (int argc, char \*argv[])  
*Main entry point for generate\_run.*

#### 15.38.1 Function Documentation

15.38.1.1 int [main](#) ( int *argc*, char \* *argv*[ ] )

Main entry point for generate\_run.

## 15.39 generate\_run.cc File Reference

```
#include <iostream>
#include <fstream>
#include <string>
#include <sstream>
#include <cstdlib>
#include <cmath>
#include <locale>
#include <sys/stat.h>
```

### Macros

- #define [tS](#)(X) [toString](#)(X)  
*Macro providing the abbreviated syntax [tS\(\)](#) instead of [toString\(\)](#).*

### Functions

- template<typename T >  
std::string [toString](#) (T t)  
*Template function for string conversion.*
- string [toUpper](#) (string s)
- string [toLower](#) (string s)
- unsigned int [openFileGetMax](#) (unsigned int \*array, unsigned int size, string name)
- int [main](#) (int argc, char \*argv[])  
*Main entry point for generate\_run.*



### 15.39.1 Macro Definition Documentation

#### 15.39.1.1 #define tS( X ) toString(X)

Macro providing the abbreviated syntax `tS()` instead of `toString()`.

### 15.39.2 Function Documentation

#### 15.39.2.1 int main ( int argc, char \* argv[] )

Main entry point for generate\_run.

#### 15.39.2.2 unsigned int openFileGetMax ( unsigned int \* array, unsigned int size, string name )

#### 15.39.2.3 string toLower ( string s )

#### 15.39.2.4 template<typename T> std::string toString ( T t )

Template function for string conversion.

#### 15.39.2.5 string toUpper ( string s )

## 15.40 generate\_run.cc File Reference

```
#include <iostream>
#include <fstream>
#include <string>
#include <sstream>
#include <cstdlib>
#include <cmath>
#include <cfloat>
#include <locale>
#include <sys/stat.h>
```

### Macros

- #define `tS(X)` `toString(X)`  
Macro providing the abbreviated syntax `tS()` instead of `toString()`.

### Functions

- template<typename T>  
std::string `toString` (T t)  
template function for string conversion from const char\* to C++ string
- string `toUpper` (string s)
- string `toLower` (string s)
- int `main` (int argc, char \*argv[])  
Main entry point for generate\_run.

### 15.40.1 Macro Definition Documentation

#### 15.40.1.1 #define tS( X ) toString(X)

Macro providing the abbreviated syntax `tS()` instead of `toString()`.

### 15.40.2 Function Documentation

#### 15.40.2.1 int main ( int argc, char \* argv[] )

Main entry point for generate\_run.

#### 15.40.2.2 string toLower ( string s )

#### 15.40.2.3 template<typename T> std::string toString ( T t )

template function for string conversion from const char\* to C++ string

#### 15.40.2.4 string toUpper ( string s )

## 15.41 generate\_run.cc File Reference

```
#include <iostream>
#include <fstream>
#include <string>
#include <sstream>
#include <cstdlib>
#include <cmath>
#include <cfloat>
#include <locale>
#include <sys/stat.h>
```

### Macros

- `#define tS(X) toString(X)`  
Macro providing the abbreviated syntax `tS()` instead of `toString()`.

### Functions

- `template<typename T> std::string toString (T t)`  
template function for string conversion from const char\* to C++ string
- `string toUpper (string s)`
- `string toLower (string s)`
- `int main (int argc, char *argv[])`  
Main entry point for generate\_run.

### 15.41.1 Macro Definition Documentation

#### 15.41.1.1 #define tS( X ) toString(X)

Macro providing the abbreviated syntax `tS()` instead of `toString()`.

### 15.41.2 Function Documentation

#### 15.41.2.1 int main ( int argc, char \* argv[] )

Main entry point for generate\_run.

15.41.2.2 `string toLower ( string s )`15.41.2.3 `template<typename T> std::string toString ( T t )`

template function for string conversion from `const char*` to C++ string

15.41.2.4 `string toUpper ( string s )`15.42 `generate_run.cc` File Reference

```
#include <iostream>
#include <fstream>
#include <string>
#include <sstream>
#include <cstdlib>
#include <cmath>
#include <cfloat>
#include <locale>
#include <sys/stat.h>
```

## Macros

- `#define tS(X) toString(X)`

Macro providing the abbreviated syntax `tS()` instead of `toString()`.

## Functions

- `template<typename T>`  
`std::string toString (T t)`

template function for string conversion from `const char*` to C++ string

- `string toUpper (string s)`
- `string toLower (string s)`
- `int main (int argc, char *argv[ ])`

Main entry point for `generate_run`.

## 15.42.1 Macro Definition Documentation

15.42.1.1 `#define tS( X ) toString(X)`

Macro providing the abbreviated syntax `tS()` instead of `toString()`.

## 15.42.2 Function Documentation

15.42.2.1 `int main ( int argc, char * argv[ ] )`

Main entry point for `generate_run`.

15.42.2.2 `string toLower ( string s )`15.42.2.3 `template<typename T> std::string toString ( T t )`

template function for string conversion from `const char*` to C++ string

## 15.42.2.4 string toUpper ( string s )

## 15.43 generate\_run.cc File Reference

```
#include <iostream>
#include <fstream>
#include <string>
#include <sstream>
#include <cstdlib>
#include <cmath>
#include <cfloat>
#include <locale>
#include <sys/stat.h>
```

## Macros

- `#define tS\(X\) toString\(X\)`  
Macro providing the abbreviated syntax [tS\(\)](#) instead of [toString\(\)](#).

## Functions

- `template<typename T > std::string toString (T t)`  
Template function for string conversion.
- `string toUpper (string s)`
- `string toLower (string s)`
- `int main (int argc, char *argv[ ])`  
Main entry point for `generate_run`.

## 15.43.1 Macro Definition Documentation

15.43.1.1 `#define tS\( X \) toString\(X\)`

Macro providing the abbreviated syntax [tS\(\)](#) instead of [toString\(\)](#).

## 15.43.2 Function Documentation

15.43.2.1 `int main ( int argc, char * argv[ ] )`

Main entry point for `generate_run`.

15.43.2.2 `string toLower ( string s )`15.43.2.3 `template<typename T > std::string toString ( T t )`

Template function for string conversion.

15.43.2.4 `string toUpper ( string s )`

## 15.44 generate\_run.cc File Reference

```
#include <iostream>
#include <fstream>
#include <string>
#include <sstream>
#include <cstdlib>
#include <cmath>
#include <sys/stat.h>
```

### Functions

- `template<typename T>`  
`std::string toString (T t)`  
*Template function for string conversion.*
- `int main (int argc, char *argv[])`  
*Main entry point for generate\_run.*

### 15.44.1 Function Documentation

#### 15.44.1.1 `int main ( int argc, char * argv[] )`

Main entry point for generate\_run.

#### 15.44.1.2 `template<typename T> std::string toString ( T t )`

Template function for string conversion.

## 15.45 generate\_run.cc File Reference

```
#include <iostream>
#include <fstream>
#include <string>
#include <sstream>
#include <cstdlib>
#include <cmath>
#include <sys/stat.h>
```

### Functions

- `template<typename T>`  
`std::string toString (T t)`  
*Template function for string conversion.*
- `int main (int argc, char *argv[])`  
*Main entry point for generate\_run.*

### 15.45.1 Function Documentation

#### 15.45.1.1 `int main ( int argc, char * argv[] )`

Main entry point for generate\_run.

15.45.1.2 `template<typename T> std::string toString ( T t )`

Template function for string conversion.

## 15.46 generateALL.cc File Reference

Main file combining the code for code generation. Part of the code generation section.

```
#include "global.h"
#include "modelSpec.h"
#include "modelSpec.cc"
#include "generateKernels.cc"
#include "generateRunner.cc"
#include "generateCPU.cc"
#include <sys/stat.h>
```

## Functions

- void `generate_model_runner` (`NNmodel` &model, string path)  
*This function will call the necessary sub-functions to generate the code for simulating a model.*
- int `chooseDevice` (ostream &mos, `NNmodel` \* &model, string path)  
*Helper function that prepares data structures and detects the hardware properties to enable the code generation code that follows.*
- int `main` (int argc, char \*argv[])  
*Main entry point for the generateALL executable that generates the code for GPU and CPU.*

## 15.46.1 Detailed Description

Main file combining the code for code generation. Part of the code generation section.

The file includes separate files for generating kernels (`generateKernels.cc`), generating the CPU side code for running simulations on either the CPU or GPU (`generateRunner.cc`) and for CPU-only simulation code (`generateCPU.cc`).

## 15.46.2 Function Documentation

15.46.2.1 `int chooseDevice ( ostream & mos, NNmodel * & model, string path )`

Helper function that prepares data structures and detects the hardware properties to enable the code generation code that follows.

The main tasks in this function are the detection and characterization of the GPU device present (if any), choosing which GPU device to use, finding and appropriate block size, taking note of the major and minor version of the C↔UDA enabled device chosen for use, and populating the list of standard neuron models. The chosen device number is returned.

## Parameters

<i>mos</i>	output stream for messages
<i>model</i>	the nn model we are generating code for
<i>path</i>	path the generated code will be deposited

15.46.2.2 `void generate_model_runner ( NNmodel & model, string path )`

This function will call the necessary sub-functions to generate the code for simulating a model.

**Parameters**

<i>model</i>	Model description
<i>path</i>	Path where the generated code will be deposited

**15.46.2.3 int main ( int argc, char \* argv[] )**

Main entry point for the generateALL executable that generates the code for GPU and CPU.

The main function is the entry point for the code generation engine. It prepares the system and then invokes generate\_model\_runner to initiate the different parts of actual code generation.

**Parameters**

<i>argc</i>	number of arguments; expected to be 2
<i>argv</i>	Arguments; expected to contain the target directory for code generation.

**15.47 generateCPU.cc File Reference**

Functions for generating code that will run the neuron and synapse simulations on the CPU. Part of the code generation section.

```
#include <string>
#include "CodeHelper.cc"
#include <cstdio>
```

**Functions**

- void [genNeuronFunction](#) (NNmodel &model, string &path, ostream &mos)  
*Function that generates the code of the function that will simulate all neurons on the CPU.*
- void [generate\\_process\\_presynaptic\\_events\\_code\\_CPU](#) (ostream &os, NNmodel &model, unsigned int src, unsigned int trg, int i, string &localID, unsigned int inSynNo, string postfix)  
*Function for generating the CUDA synapse kernel code that handles presynaptic spikes or spike type events.*
- void [genSynapseFunction](#) (NNmodel &model, string &path, ostream &mos)  
*Function that generates code that will simulate all synapses of the model on the CPU.*

**15.47.1 Detailed Description**

Functions for generating code that will run the neuron and synapse simulations on the CPU. Part of the code generation section.

**15.47.2 Function Documentation****15.47.2.1 void generate\_process\_presynaptic\_events\_code\_CPU ( ostream & os, NNmodel & model, unsigned int src, unsigned int trg, int i, string & localID, unsigned int inSynNo, string postfix )**

Function for generating the CUDA synapse kernel code that handles presynaptic spikes or spike type events.

**Parameters**

<i>os</i>	output stream for code
-----------	------------------------

<i>model</i>	the neuronal network model to generate code for
<i>src</i>	the number of the src neuron population
<i>trg</i>	the number of the target neuron population
<i>i</i>	the index of the synapse group being processed
<i>localID</i>	the variable name of the local ID of the thread within the synapse group
<i>inSynNo</i>	the ID number of the current synapse population as the incoming population to the target neuron population
<i>postfix</i>	whether to generate code for true spikes or spike type events

#### 15.47.2.2 void genNeuronFunction ( NNmodel & model, string & path, ostream & mos )

Function that generates the code of the function the will simulate all neurons on the CPU.

##### Parameters

<i>model</i>	Model description
<i>path</i>	output stream for code
<i>mos</i>	output stream for messages

#### 15.47.2.3 void genSynapseFunction ( NNmodel & model, string & path, ostream & mos )

Function that generates code that will simulate all synapses of the model on the CPU.

##### Parameters

<i>model</i>	Model description
<i>path</i>	Path for code generation
<i>mos</i>	output stream for messages

## 15.48 generateKernels.cc File Reference

Contains functions that generate code for CUDA kernels. Part of the code generation section.

```
#include <string>
#include "CodeHelper.cc"
#include "global.h"
```

### Functions

- void [genNeuronKernel](#) (NNmodel &model, string &path, ostream &mos)  
*Function for generating the CUDA kernel that simulates all neurons in the model.*
- void [generate\\_process\\_presynaptic\\_events\\_code](#) (ostream &os, NNmodel &model, unsigned int src, unsigned int trg, int i, string &localID, unsigned int inSynNo, string postfix)  
*Function for generating the CUDA synapse kernel code that handles presynaptic spikes or spike type events.*
- void [genSynapseKernel](#) (NNmodel &model, string &path, ostream &mos)  
*Function for generating a CUDA kernel for simulating all synapses.*

### Variables

- short \* [isGrpVarNeeded](#)
- [CodeHelper](#) [hlp](#)



### 15.48.1 Detailed Description

Contains functions that generate code for CUDA kernels. Part of the code generation section.

### 15.48.2 Function Documentation

**15.48.2.1** `void generate_process_presynaptic_events_code ( ostream & os, NNmodel & model, unsigned int src, unsigned int trg, int i, string & localID, unsigned int inSynNo, string postfix )`

Function for generating the CUDA synapse kernel code that handles presynaptic spikes or spike type events.

#### Parameters

<i>os</i>	output stream for code
<i>model</i>	the neuronal network model to generate code for
<i>src</i>	the number of the src neuron population
<i>trg</i>	the number of the target neuron population
<i>i</i>	the index of the synapse group being processed
<i>localID</i>	the variable name of the local ID of the thread within the synapse group
<i>inSynNo</i>	the ID number of the current synapse population as the incoming population to the target neuron population
<i>postfix</i>	whether to generate code for true spikes or spike type events

**15.48.2.2** `void genNeuronKernel ( NNmodel & model, string & path, ostream & mos )`

Function for generating the CUDA kernel that simulates all neurons in the model.

The code generated upon execution of this function is for defining GPU side global variables that will hold model state in the GPU global memory and for the actual kernel function for simulating the neurons for one time step. Binary flag for the sparse synapses to use atomic operations when the number of connections is bigger than the block size, and shared variables otherwise

#### Parameters

<i>model</i>	Model description
<i>path</i>	path for code output
<i>mos</i>	output stream for messages

**15.48.2.3** `void genSynapseKernel ( NNmodel & model, string & path, ostream & mos )`

Function for generating a CUDA kernel for simulating all synapses.

This functions generates code for global variables on the GPU side that are synapse-related and the actual CUDA kernel for simulating one time step of the synapses. < "id" if first synapse group, else "lid". lid =(thread index- last thread of the last synapse group)

#### Parameters

<i>model</i>	Model description
<i>path</i>	Path for code output
<i>mos</i>	output stream for messages

### 15.48.3 Variable Documentation

**15.48.3.1** `CodeHelper hlp`

**15.48.3.2** `short* isGrpVarNeeded`

## 15.49 generateRunner.cc File Reference

Contains functions to generate code for running the simulation on the GPU, and for I/O convenience functions between GPU and CPU space. Part of the code generation section.

```
#include <cfloat>
```

### Functions

- void [genRunner](#) ([NNmodel](#) &model, string path, ostream &mos)  
*A function that generates predominantly host-side code.*
- void [genRunnerGPU](#) ([NNmodel](#) &model, string &path, ostream &mos)  
*A function to generate the code that simulates the model on the GPU.*

### 15.49.1 Detailed Description

Contains functions to generate code for running the simulation on the GPU, and for I/O convenience functions between GPU and CPU space. Part of the code generation section.

### 15.49.2 Function Documentation

#### 15.49.2.1 void [genRunner](#) ( [NNmodel](#) & *model*, string *path*, ostream & *mos* )

A function that generates predominantly host-side code.

In this function host-side functions and other code are generated, including: Global host variables, "allocatedMem()" function for allocating memories, "freeMem" function for freeing the allocated memories, "initialize" for initializing host variables, "gFunc" and "initGRaw()" for use with plastic synapses if such synapses exist in the model. Method for cleaning up and resetting device while quitting GeNN

#### Parameters

<i>model</i>	Model description
<i>path</i>	path for code generation
<i>mos</i>	output stream for messages

#### 15.49.2.2 void [genRunnerGPU](#) ( [NNmodel](#) & *model*, string & *path*, ostream & *mos* )

A function to generate the code that simulates the model on the GPU.

The function generates functions that will spawn kernel grids onto the GPU (but not the actual kernel code which is generated in "genNeuronKernel()" and "genSynapseKernel()"). Generated functions include "copyGToDevice()", "copyGFromDevice()", "copyStateToDevice()", "copyStateFromDevice()", "copySpikesFromDevice()", "copySpike←NFromDevice()" and "stepTimeGPU()". The last mentioned function is the function that will initialize the execution on the GPU in the generated simulation engine. All other generated functions are "convenience functions" to handle data transfer from and to the GPU.

#### Parameters

<i>model</i>	Model description
<i>path</i>	path for code generation
<i>mos</i>	output stream for messages

## 15.50 GeNNHelperKrnls.cu File Reference

```
#include <curand_kernel.h>
```

## Macros

- `#define BlkSz 256`

## Functions

- `__global__ void setup_kernel` (curandState \*state, unsigned long seed, int sizeofResult)
- `template<class T > __global__ void generate_random_gpuInput_xorwow` (curandState \*state, T \*result, int sizeofResult, T Rstrength, T Rshift)
- `void xorwow_setup` (curandState \*devStates, long int sampleSize)

### 15.50.1 Macro Definition Documentation

#### 15.50.1.1 `#define BlkSz 256`

### 15.50.2 Function Documentation

#### 15.50.2.1 `template<class T > __global__ void generate_random_gpuInput_xorwow ( curandState * state, T * result, int sizeofResult, T Rstrength, T Rshift )`

#### 15.50.2.2 `__global__ void setup_kernel ( curandState * state, unsigned long seed, int sizeofResult )`

#### 15.50.2.3 `void xorwow_setup ( curandState * devStates, long int sampleSize )`

## 15.51 global.h File Reference

Global header file containing a few global variables. Part of the code generation section.

```
#include <iostream>
#include <cstring>
#include <string>
#include <sstream>
#include <vector>
#include <cmath>
#include <cuda_runtime.h>
#include "toString.h"
#include <stdint.h>
```

## Macros

- `#define _GLOBAL_H_`  
*macro for avoiding multiple inclusion during compilation*

## Variables

- `int neuronBlkSz`
- `int synapseBlkSz`
- `int learnBlkSz`
- `cudaDeviceProp * deviceProp`
- `int theDev`
- `int hostCount`

*Global variable containing the number of hosts within the local compute cluster.*

- int `deviceCount`

*Global variable containing the number of CUDA devices found on this host.*

- int `optimiseBlockSize` = 1

*Flag for signalling whether or not block size optimisation should be performed.*

- int `UIntSz` = sizeof(unsigned int) \* 8

*size of the unsigned int variable type on the local architecture*

- int `logUIntSz` = (int) (logf((float) `UIntSz`) / logf(2.0f) + 1e-5f)

*logarithm of the size of the unsigned int variable type on the local architecture*

- double `asGoodAsZero` = 1e-19

*Global variable that is used when detecting close to zero values, for example when setting sparse connectivity from a dense matrix.*

### 15.51.1 Detailed Description

Global header file containing a few global variables. Part of the code generation section.

This global header file also takes care of including some generally used cuda support header files.

### 15.51.2 Macro Definition Documentation

#### 15.51.2.1 `#define _GLOBAL_H_`

macro for avoiding multiple inclusion during compilation

### 15.51.3 Variable Documentation

#### 15.51.3.1 double `asGoodAsZero` = 1e-19

Global variable that is used when detecting close to zero values, for example when setting sparse connectivity from a dense matrix.

#### 15.51.3.2 int `deviceCount`

Global variable containing the number of CUDA devices found on this host.

#### 15.51.3.3 `cudaDeviceProp*` `deviceProp`

#### 15.51.3.4 int `hostCount`

Global variable containing the number of hosts within the local compute cluster.

#### 15.51.3.5 int `learnBlkSz`

#### 15.51.3.6 int `logUIntSz` = (int) (logf((float) `UIntSz`) / logf(2.0f) + 1e-5f)

logarithm of the size of the unsigned int variable type on the local architecture

#### 15.51.3.7 int `neuronBlkSz`

#### 15.51.3.8 int `optimiseBlockSize` = 1

Flag for signalling whether or not block size optimisation should be performed.

15.51.3.9 int synapseBlkSz

15.51.3.10 int theDev

15.51.3.11 int UIntSz = sizeof(unsigned int) \* 8

size of the unsigned int variable type on the local architecture

## 15.52 helper.h File Reference

```
#include <vector>
```

### Classes

- struct [inputSpec](#)

### Functions

- ostream & [operator<<](#) (ostream &os, [inputSpec](#) &l)
- void [write\\_para](#) ()
- void [single\\_var\\_init\\_fullrange](#) (int n)
- void [single\\_var\\_reinit](#) (int n, double fac)
- void [copy\\_var](#) (int src, int trg)
- void [var\\_init\\_fullrange](#) ()
- void [var\\_reinit](#) (double fac)
- void [truevar\\_init](#) ()
- void [initexpHH](#) ()
- void [truevar\\_initexpHH](#) ()
- void [runexpHH](#) (float t)
- void [initl](#) ([inputSpec](#) &l)

### Variables

- double [sigGNa](#) = 0.1
- double [sigENa](#) = 10.0
- double [sigGK](#) = 0.1
- double [sigEK](#) = 10.0
- double [sigGI](#) = 0.1
- double [sigEI](#) = 10.0
- double [sigC](#) = 0.1
- const double [limit](#) [7][2]
- double [Vexp](#)
- double [mexp](#)
- double [hexp](#)
- double [nexp](#)
- double [gNaexp](#)
- double [ENaexp](#)
- double [gKexp](#)
- double [EKexp](#)
- double [glexp](#)
- double [Elexp](#)
- double [Cexp](#)

## 15.52.1 Function Documentation

15.52.1.1 void copy\_var ( int *src*, int *trg* )

15.52.1.2 void initexpHH ( )

15.52.1.3 void initl ( inputSpec & *I* )15.52.1.4 ostream& operator<< ( ostream & *os*, inputSpec & *I* )15.52.1.5 void runexpHH ( float *t* )15.52.1.6 void single\_var\_init\_fullrange ( int *n* )15.52.1.7 void single\_var\_reinit ( int *n*, double *fac* )

15.52.1.8 void truevar\_init ( )

15.52.1.9 void truevar\_initexpHH ( )

15.52.1.10 void var\_init\_fullrange ( )

15.52.1.11 void var\_reinit ( double *fac* )

15.52.1.12 void write\_para ( )

## 15.52.2 Variable Documentation

15.52.2.1 double Cexp

15.52.2.2 double EKexp

15.52.2.3 double Elexp

15.52.2.4 double ENaexp

15.52.2.5 double gKexp

15.52.2.6 double glexp

15.52.2.7 double gNaexp

15.52.2.8 double hexp

15.52.2.9 const double limit[7][2]

**Initial value:**

```
= { {1.0, 200.0},
    {0.0, 100.0},
    {1.0, 100.0},
    {-100.0, -20.0},
    {1.0, 50.0},
    {-100.0, -20.0},
    {1e-1, 10.0} }
```

15.52.2.10 double mexp

15.52.2.11 double nexp

15.52.2.12 double sigC = 0.1

15.52.2.13 double sigEK = 10.0

15.52.2.14 double sigEI = 10.0

15.52.2.15 double sigENa = 10.0

15.52.2.16 double sigGK = 0.1

15.52.2.17 double sigGI = 0.1

15.52.2.18 double sigGNa = 0.1

15.52.2.19 double Vexp

## 15.53 HHVClamp.cc File Reference

This file contains the model definition of HHVClamp model. It is used in both the GeNN code generation and the user side simulation code. The HHVClamp model implements a population of unconnected Hodgkin-Huxley neurons that evolve to mimick a model run on the CPU, using genetic algorithm techniques.

```
#include "modelSpec.h"
#include "modelSpec.cc"
#include "HHVClampParameters.h"
```

### Macros

- `#define DT 0.25`  
*This defines the global time step at which the simulation will run.*

### Functions

- void `modelDefinition (NNmodel &model)`  
*This function defines the HH model with variable parameters.*

### Variables

- double `myHH_ini` [11]
- double \* `myHH_p` = NULL

#### 15.53.1 Detailed Description

This file contains the model definition of HHVClamp model. It is used in both the GeNN code generation and the user side simulation code. The HHVClamp model implements a population of unconnected Hodgkin-Huxley neurons that evolve to mimick a model run on the CPU, using genetic algorithm techniques.

#### 15.53.2 Macro Definition Documentation

##### 15.53.2.1 `#define DT 0.25`

This defines the global time step at which the simulation will run.

#### 15.53.3 Function Documentation

##### 15.53.3.1 void `modelDefinition ( NNmodel & model )`

This function defines the HH model with variable parameters.

#### 15.53.4 Variable Documentation

##### 15.53.4.1 double myHH\_ini[11]

**Initial value:**

```
= {  
    -60.0,  
    0.0529324,  
    0.3176767,  
    0.5961207,  
    120.0,  
    55.0,  
    36.0,  
    -72.0,  
    0.3,  
    -50.0,  
    1.0  
}
```

##### 15.53.4.2 double\* myHH\_p = NULL

### 15.54 hr\_time.cpp File Reference

This file contains the implementation of the [CStopWatch](#) class that provides a simple timing tool based on the system clock.

```
#include <cstdio>  
#include "hr_time.h"
```

#### Macros

- `#define` [HR\\_TIMER](#)

#### 15.54.1 Detailed Description

This file contains the implementation of the [CStopWatch](#) class that provides a simple timing tool based on the system clock.

#### 15.54.2 Macro Definition Documentation

##### 15.54.2.1 `#define` HR\_TIMER

### 15.55 hr\_time.h File Reference

This header file contains the definition of the [CStopWatch](#) class that implements a simple timing tool using the system clock.

```
#include <sys/time.h>
```

#### Classes

- struct [stopWatch](#)
- class [CStopWatch](#)



### 15.55.1 Detailed Description

This header file contains the definition of the [CStopWatch](#) class that implements a simple timing tool using the system clock.

### 15.56 Izh\_sim\_sparse.cu File Reference

```
#include <iostream>
#include <fstream>
#include "Izh_sparse_sim.h"
#include "../GeNNHelperKrnls.cu"
```

#### Functions

- int [main](#) (int argc, char \*argv[])

#### 15.56.1 Function Documentation

15.56.1.1 int main ( int *argc*, char \* *argv*[] )

### 15.57 Izh\_sparse.cc File Reference

```
#include "modelSpec.h"
#include "modelSpec.cc"
#include <vector>
#include "sizes.h"
```

#### Macros

- #define [DT](#) 1.0

#### Functions

- void [modelDefinition](#) (NNmodel &model)

#### Variables

- std::vector< unsigned int > [neuronPSize](#)
- std::vector< unsigned int > [neuronVSize](#)
- std::vector< unsigned int > [synapsePSize](#)
- scalar [meanInpExc](#) = 5.0
- scalar [meanInpInh](#) = 2.0
- double \* [exclzh\\_p](#) = NULL
- double \* [inhlzh\\_p](#) = NULL
- double [IzhExc\\_ini](#) [6]
- double [IzhInh\\_ini](#) [6]
- double \* [SynIzh\\_p](#) = NULL
- double \* [postExpP](#) = NULL
- double \* [postSynV](#) = NULL
- double [SynIzh\\_ini](#) [1]

## 15.57.1 Macro Definition Documentation

## 15.57.1.1 #define DT 1.0

## 15.57.2 Function Documentation

15.57.2.1 void modelDefinition ( NNmodel & *model* )

## 15.57.3 Variable Documentation

## 15.57.3.1 double\* exclzh\_p = NULL

## 15.57.3.2 double\* inhlzh\_p = NULL

## 15.57.3.3 double lzhExc\_ini[6]

**Initial value:**

```
= {
    -65.0,
    0.0,
    0.02,
    0.2,
    -65.0,
    8.0
}
```

## 15.57.3.4 double lzhInh\_ini[6]

**Initial value:**

```
= {
    -65,
    0.0,
    0.02,
    0.25,
    -65.0,
    2.0
}
```

## 15.57.3.5 scalar meanInpExc = 5.0

## 15.57.3.6 scalar meanInpInh = 2.0

## 15.57.3.7 std::vector&lt;unsigned int&gt; neuronPSize

## 15.57.3.8 std::vector&lt;unsigned int&gt; neuronVSize

## 15.57.3.9 double\* postExpP = NULL

## 15.57.3.10 double\* postSynV = NULL

## 15.57.3.11 std::vector&lt;unsigned int&gt; synapsePSize

## 15.57.3.12 double Synlzh\_ini[1]

**Initial value:**

```
= {
    0.0
}
```

15.57.3.13 `double* SynIzh_p = NULL`

## 15.58 `Izh_sparse_model.cc` File Reference

```
#include "Izh_sparse_CODE/runner.cc"
#include "../../lib/include/numlib/randomGen.h"
#include "../../lib/include/numlib/gauss.h"
#include "Izh_sparse_model.h"
```

### Macros

- `#define IZH_SPARSE_MODEL_CC_`

### Variables

- `randomGauss RG`
- `randomGen R`

#### 15.58.1 Macro Definition Documentation

##### 15.58.1.1 `#define IZH_SPARSE_MODEL_CC_`

#### 15.58.2 Variable Documentation

##### 15.58.2.1 `randomGen R`

##### 15.58.2.2 `randomGauss RG`

## 15.59 `Izh_sparse_model.h` File Reference

### Classes

- class `classIzh`

## 15.60 `Izh_sparse_sim.h` File Reference

```
#include <cassert>
#include "hr_time.cpp"
#include "utils.h"
#include <cuda_runtime.h>
#include "Izh_sparse.cc"
#include "Izh_sparse_model.cc"
```

### Macros

- `#define DBG_SIZE 5000`
- `#define T_REPORT_TME 5000.0`
- `#define TOTAL_TME 5000.0`

## Variables

- float `t` = 0.0f
- unsigned int `iT` = 0
- [CStopWatch](#) timer

## 15.60.1 Macro Definition Documentation

15.60.1.1 `#define DBG_SIZE 5000`15.60.1.2 `#define T_REPORT_TME 5000.0`15.60.1.3 `#define TOTAL_TME 5000.0`

## 15.60.2 Variable Documentation

15.60.2.1 unsigned int `iT` = 015.60.2.2 float `t` = 0.0f15.60.2.3 [CStopWatch](#) timer

## 15.61 map\_classol.cc File Reference

```
#include "map_classol.h"
#include "MBody1_CODE/runner.cc"
```

## Macros

- `#define _MAP_CLASSOL_CC_`  
*macro for avoiding multiple inclusion during compilation*

## 15.61.1 Macro Definition Documentation

15.61.1.1 `#define _MAP_CLASSOL_CC_`

macro for avoiding multiple inclusion during compilation

## 15.62 map\_classol.cc File Reference

```
#include "map_classol.h"
#include "MBody_delayedSyn_CODE/runner.cc"
```

## Macros

- `#define _MAP_CLASSOL_CC_`  
*macro for avoiding multiple inclusion during compilation*

## 15.62.1 Macro Definition Documentation

15.62.1.1 `#define _MAP_CLASSOL_CC_`

macro for avoiding multiple inclusion during compilation

### 15.63 map\_classol.cc File Reference

```
#include "map_classol.h"  
#include "MBody_individualID_CODE/runner.cc"
```

#### Macros

- `#define _MAP_CLASSOL_CC_`  
*macro for avoiding multiple inclusion during compilation*

#### 15.63.1 Macro Definition Documentation

##### 15.63.1.1 `#define _MAP_CLASSOL_CC_`

macro for avoiding multiple inclusion during compilation

### 15.64 map\_classol.cc File Reference

```
#include "MBody_userdef_CODE/runner.cc"  
#include "sparseUtils.cc"  
#include "map_classol.h"
```

#### Macros

- `#define _MAP_CLASSOL_CC_`  
*macro for avoiding multiple inclusion during compilation*

#### 15.64.1 Macro Definition Documentation

##### 15.64.1.1 `#define _MAP_CLASSOL_CC_`

macro for avoiding multiple inclusion during compilation

### 15.65 map\_classol.h File Reference

#### Classes

- class `classol`  
*This class contains the methods for running the MBody1 example model.*

### 15.66 map\_classol.h File Reference

#### Classes

- class `classol`  
*This class contains the methods for running the MBody1 example model.*

## 15.67 map\_classol.h File Reference

### Classes

- class [classol](#)

*This class contains the methods for running the MBody1 example model.*

## 15.68 map\_classol.h File Reference

### Classes

- class [classol](#)

*This class contains the methods for running the MBody1 example model.*

## 15.69 MBody1.cc File Reference

```
#include "modelSpec.h"
#include "modelSpec.cc"
#include "../userproject/include/sizes.h"
```

### Macros

- #define [DT](#) 0.1

*This defines the global time step at which the simulation will run.*

### Functions

- void [modelDefinition](#) ([NNmodel](#) &model)

*This function defines the MBody1 model, and it is a good example of how networks should be defined.*

### Variables

- double [myPOI\\_p](#) [4]
- double [myPOI\\_ini](#) [4]
- double [stdTM\\_p](#) [7]
- double [stdTM\\_ini](#) [4]
- double [myPNKC\\_p](#) [3]
- double [postExpPNKC](#) [2]
- double [myPNLHI\\_p](#) [3]
- double [postExpPNLHI](#) [2]
- double [myLHIKC\\_p](#) [4]
- double [gLHIKC](#) = 0.006
- double [postExpLHIKC](#) [2]
- double [myKCDN\\_p](#) [13]
- double [postExpKCDN](#) [2]
- double [myDNDN\\_p](#) [4]
- double [gDNDN](#) = 0.01
- double [postExpDNDN](#) [2]
- double \* [postSynV](#) = NULL

### 15.69.1 Macro Definition Documentation

#### 15.69.1.1 #define DT 0.1

This defines the global time step at which the simulation will run.

### 15.69.2 Function Documentation

#### 15.69.2.1 void modelDefinition ( NNmodel & *model* )

This function defines the MBody1 model, and it is a good example of how networks should be defined.

### 15.69.3 Variable Documentation

#### 15.69.3.1 double gDNDN = 0.01

#### 15.69.3.2 double gLHIKC = 0.006

#### 15.69.3.3 double myDNDN\_p[4]

**Initial value:**

```
= {
  -92.0,
  -30.0,
   8.0,
  50.0
}
```

#### 15.69.3.4 double myKCDN\_p[13]

**Initial value:**

```
= {
  0.0,
 -20.0,
  5.0,
  25.0,
 100.0,
50000.0,
100000.0,
 100.0,
  0.06,
  0.03,
 33.33,
 10.0,

 0.00006
}
```

#### 15.69.3.5 double myLHIKC\_p[4]

**Initial value:**

```
= {
  -92.0,
 -40.0,
  3.0,
  50.0
}
```

#### 15.69.3.6 double myPNKC\_p[3]

**Initial value:**

```
= {  
    0.0,  
    -20.0,  
    1.0  
}
```

#### 15.69.3.7 double myPNLHI\_p[3]

**Initial value:**

```
= {  
    0.0,  
    -20.0,  
    1.0  
}
```

#### 15.69.3.8 double myPOI\_ini[4]

**Initial value:**

```
= {  
    -60.0,  
    0,  
    -10.0,  
}
```

#### 15.69.3.9 double myPOI\_p[4]

**Initial value:**

```
= {  
    0.1,  
    2.5,  
    20.0,  
    -60.0  
}
```

#### 15.69.3.10 double postExpDNDN[2]

**Initial value:**

```
= {  
    8.0,  
    -92.0  
}
```

#### 15.69.3.11 double postExpKCDN[2]

**Initial value:**

```
= {  
    5.0,  
    0.0  
}
```

#### 15.69.3.12 double postExpLHIKC[2]

**Initial value:**

```
= {  
    3.0,  
    -92.0  
}
```



**15.69.3.13 double postExpPNKC[2]****Initial value:**

```
= {
    1.0,
    0.0
}
```

**15.69.3.14 double postExpPNLHI[2]****Initial value:**

```
= {
    1.0,
    0.0
}
```

**15.69.3.15 double\* postSynV = NULL****15.69.3.16 double stdTM\_ini[4]****Initial value:**

```
= {
    -60.0,
    0.0529324,
    0.3176767,
    0.5961207
}
```

**15.69.3.17 double stdTM\_p[7]****Initial value:**

```
= {
    7.15,
    50.0,
    1.43,
    -95.0,
    0.02672,
    -63.563,
    0.143
}
```

**15.70 MBody1.cc File Reference**

```
#include "modelSpec.h"
#include "modelSpec.cc"
#include "sizes.h"
```

**Macros**

- `#define DT 0.1`  
*This defines the global time step at which the simulation will run.*

**Functions**

- void `modelDefinition` (`NNmodel &model`)  
*This function defines the MBody1 model, and it is a good example of how networks should be defined.*

## Variables

- double `myPOI_p` [4]
- double `myPOI_ini` [3]
- double `stdTM_p` [7]
- double `stdTM_ini` [4]
- double \* `myPNKC_p` = NULL
- double `myPNKC_ini` [1]
- double `postExpPNKC` [2]
- double \* `myPNLHI_p` = NULL
- double `myPNLHI_ini` [1]
- double `postExpPNLHI` [2]
- double `myLHIKC_p` [2]
- double `myLHIKC_ini` [1]
- double `postExpLHIKC` [2]
- double `myKCDN_p` [10]
- double `myKCDN_ini` [2]
- double `postExpKCDN` [2]
- double `myDNDN_p` [2]
- double `myDNDN_ini` [1]
- double `postExpDNDN` [2]
- double \* `postSynV` = NULL

## 15.70.1 Macro Definition Documentation

15.70.1.1 `#define DT 0.1`

This defines the global time step at which the simulation will run.

## 15.70.2 Function Documentation

15.70.2.1 `void modelDefinition ( NNmodel & model )`

This function defines the MBody1 model, and it is a good example of how networks should be defined.

## 15.70.3 Variable Documentation

15.70.3.1 `double myDNDN_ini[1]`**Initial value:**

```
= {
    5.0/_NLB
}
```

15.70.3.2 `double myDNDN_p[2]`**Initial value:**

```
= {
    -30.0,
    50.0
}
```

**15.70.3.3 double myKCDN\_ini[2]****Initial value:**

```
= {  
    0.01,  
    0.01,  
}
```

**15.70.3.4 double myKCDN\_p[10]****Initial value:**

```
= {  
    50.0,  
    50.0,  
    50000.0,  
    100000.0,  
    200.0,  
    0.015,  
    0.0075,  
    33.33,  
    10.0,  
    0.00006  
}
```

**15.70.3.5 double myLHIKC\_ini[1]****Initial value:**

```
= {  
    1.0/_NLHI  
}
```

**15.70.3.6 double myLHIKC\_p[2]****Initial value:**

```
= {  
    -40.0,  
    50.0  
}
```

**15.70.3.7 double myPNKC\_ini[1]****Initial value:**

```
= {  
    0.01  
}
```

**15.70.3.8 double\* myPNKC\_p = NULL****15.70.3.9 double myPNLHI\_ini[1]****Initial value:**

```
= {  
    0.0  
}
```

15.70.3.10 double\* myPNLHI\_p = NULL

15.70.3.11 double myPOI\_ini[3]

**Initial value:**

```
= {  
  -60.0,  
  0,  
  -10.0  
}
```

15.70.3.12 double myPOI\_p[4]

**Initial value:**

```
= {  
  0.1,  
  2.5,  
  20.0,  
  -60.0  
}
```

15.70.3.13 double postExpDNDN[2]

**Initial value:**

```
= {  
  2.5,  
  -92.0  
}
```

15.70.3.14 double postExpKCDN[2]

**Initial value:**

```
= {  
  5.0,  
  0.0  
}
```

15.70.3.15 double postExpLHIKC[2]

**Initial value:**

```
= {  
  1.5,  
  -92.0  
}
```

15.70.3.16 double postExpPNKC[2]

**Initial value:**

```
= {  
  1.0,  
  0.0  
}
```

15.70.3.17 double postExpPNLHI[2]

**Initial value:**

```
= {  
  1.0,  
  0.0  
}
```

15.70.3.18 `double* postSynV = NULL`

15.70.3.19 `double stdTM_ini[4]`

**Initial value:**

```
= {
    -60.0,
    0.0529324,
    0.3176767,
    0.5961207
}
```

15.70.3.20 `double stdTM_p[7]`

**Initial value:**

```
= {
    7.15,
    50.0,
    1.43,
    -95.0,
    0.02672,
    -63.563,
    0.143
}
```

## 15.71 MBody\_delayedSyn.cc File Reference

This file contains the model definition of the mushroom body "MBody\_delayedSyn" model. It is used in both the GeNN code generation and the user side simulation code (class `classol`, file `classol_sim`).

```
#include "modelSpec.h"
#include "modelSpec.cc"
#include "sizes.h"
```

### Macros

- `#define DT 0.1`  
*This defines the global time step at which the simulation will run.*

### Functions

- void `modelDefinition (NNmodel &model)`  
*This function defines the MBody\_delayedSyn model, and it is a good example of how networks should be defined.*

### Variables

- double `myPOI_p` [4]
- double `myPOI_ini` [3]
- double `stdTM_p` [7]
- double `stdTM_ini` [4]
- double \* `myPNKC_p` = NULL
- double `myPNKC_ini` [1]
- double `postExpPNKC` [2]
- double \* `myPNLHI_p` = NULL
- double `myPNLHI_ini` [1]
- double `postExpPNLHI` [2]

- double `myLHIKC_p` [2]
- double `myLHIKC_ini` [1]
- double `postExpLHIKC` [2]
- double `myKCDN_p` [10]
- double `myKCDN_ini` [2]
- double `postExpKCDN` [2]
- double `myDNDN_p` [2]
- double `myDNDN_ini` [1]
- double `postExpDNDN` [2]
- double \* `postSynV` = NULL

### 15.71.1 Detailed Description

This file contains the model definition of the mushroom body "MBody\_delayedSyn" model. It is used in both the GeNN code generation and the user side simulation code (class `classol`, file `classol_sim`).

### 15.71.2 Macro Definition Documentation

#### 15.71.2.1 `#define DT 0.1`

This defines the global time step at which the simulation will run.

### 15.71.3 Function Documentation

#### 15.71.3.1 `void modelDefinition ( NNmodel & model )`

This function defines the MBody\_delayedSyn model, and it is a good example of how networks should be defined.

### 15.71.4 Variable Documentation

#### 15.71.4.1 `double myDNDN_ini[1]`

**Initial value:**

```
= {
    5.0 / _NLB
}
```

#### 15.71.4.2 `double myDNDN_p[2]`

**Initial value:**

```
= {
    -30.0,
    50.0
}
```

#### 15.71.4.3 `double myKCDN_ini[2]`

**Initial value:**

```
= {
    0.01,
    0.01,
}
```

**15.71.4.4 double myKCDN\_p[10]****Initial value:**

```
= {  
    50.0,  
    50.0,  
    50000.0,  
    100000.0,  
    200.0,  
    0.015,  
    0.0075,  
    33.33,  
    10.0,  
    0.00006  
}
```

**15.71.4.5 double myLHIKC\_ini[1]****Initial value:**

```
= {  
    1.0/_NLHI  
}
```

**15.71.4.6 double myLHIKC\_p[2]****Initial value:**

```
= {  
    -40.0,  
    50.0  
}
```

**15.71.4.7 double myPNKC\_ini[1]****Initial value:**

```
= {  
    0.01  
}
```

**15.71.4.8 double\* myPNKC\_p = NULL****15.71.4.9 double myPNLHI\_ini[1]****Initial value:**

```
= {  
    0.0  
}
```

**15.71.4.10 double\* myPNLHI\_p = NULL****15.71.4.11 double myPOI\_ini[3]****Initial value:**

```
= {  
    -60.0,  
    0,  
    -10.0  
}
```

**15.71.4.12 double myPOI\_p[4]****Initial value:**

```
= {  
    0.1,  
    2.5,  
    20.0,  
    -60.0  
}
```

**15.71.4.13 double postExpDNDN[2]****Initial value:**

```
= {  
    2.5,  
    -92.0  
}
```

**15.71.4.14 double postExpKCDN[2]****Initial value:**

```
= {  
    5.0,  
    0.0  
}
```

**15.71.4.15 double postExpLHIKC[2]****Initial value:**

```
= {  
    1.5,  
    -92.0  
}
```

**15.71.4.16 double postExpPNKC[2]****Initial value:**

```
= {  
    1.0,  
    0.0  
}
```

**15.71.4.17 double postExpPNLHI[2]****Initial value:**

```
= {  
    1.0,  
    0.0  
}
```

**15.71.4.18 double\* postSynV = NULL****15.71.4.19 double stdTM\_ini[4]****Initial value:**

```
= {  
    -60.0,  
    0.0529324,  
    0.3176767,  
    0.5961207  
}
```



## 15.71.4.20 double stdTM\_p[7]

**Initial value:**

```
= {
  7.15,
  50.0,
  1.43,
  -95.0,
  0.02672,
  -63.563,
  0.143
}
```

## 15.72 MBody\_individualID.cc File Reference

This file contains the model definition of the mushroom body "MBody\_individualID" model. It is used in both the GeNN code generation and the user side simulation code (class classol, file classol\_sim). It uses INDIVIDUALID for the connections from AL to MB allowing quite large numbers of PN and KC.

```
#include "modelSpec.h"
#include "modelSpec.cc"
#include "sizes.h"
```

**Macros**

- `#define DT 0.1`  
*This defines the global time step at which the simulation will run.*

**Functions**

- void `modelDefinition (NNmodel &model)`  
*This function defines the MBody1 model, and it is a good example of how networks should be defined.*

**Variables**

- double `myPOI_p` [4]
- double `myPOI_ini` [3]
- double `stdTM_p` [7]
- double `stdTM_ini` [4]
- double \* `myPNKC_p` = NULL
- double `myPNKC_ini` [1]
- double `postExpPNKC` [2]
- double \* `myPNLHI_p` = NULL
- double `myPNLHI_ini` [1]
- double `postExpPNLHI` [2]
- double `myLHIKC_p` [2]
- double `myLHIKC_ini` [1]
- double `postExpLHIKC` [2]
- double `myKCDN_p` [11]
- double `myKCDN_ini` [2]
- double `postExpKCDN` [2]
- double `myDNDN_p` [2]
- double `myDNDN_ini` [1]
- double `postExpDNDN` [2]
- double \* `postSynV` = NULL

### 15.72.1 Detailed Description

This file contains the model definition of the mushroom body "MBody\_individualID" model. It is used in both the GeNN code generation and the user side simulation code (class classol, file classol\_sim). It uses INDIVIDUALID for the connections from AL to MB allowing quite large numbers of PN and KC.

### 15.72.2 Macro Definition Documentation

#### 15.72.2.1 #define DT 0.1

This defines the global time step at which the simulation will run.

### 15.72.3 Function Documentation

#### 15.72.3.1 void modelDefinition ( NNmodel & *model* )

This function defines the MBody1 model, and it is a good example of how networks should be defined.

### 15.72.4 Variable Documentation

#### 15.72.4.1 double myDNDN\_ini[1]

**Initial value:**

```
= {
    5.0/_NLB
}
```

#### 15.72.4.2 double myDNDN\_p[2]

**Initial value:**

```
= {
    -30.0,
    50.0
}
```

#### 15.72.4.3 double myKCDN\_ini[2]

**Initial value:**

```
= {
    0.01,
    0.01,
}
```

#### 15.72.4.4 double myKCDN\_p[11]

**Initial value:**

```
= {
    50.0,
    50.0,
    50000.0,
    100000.0,
    200.0,
    0.015,
    0.0075,
    33.33,
    10.0,
    0.00006
}
```

**15.72.4.5 double myLHIKC\_ini[1]****Initial value:**

```
= {  
    1.0/_NLHI  
}
```

**15.72.4.6 double myLHIKC\_p[2]****Initial value:**

```
= {  
    -40.0,  
    50.0  
}
```

**15.72.4.7 double myPNKC\_ini[1]****Initial value:**

```
= {  
    gPNKC_GLOBAL  
}
```

**15.72.4.8 double\* myPNKC\_p = NULL****15.72.4.9 double myPNLHI\_ini[1]****Initial value:**

```
= {  
    0.0  
}
```

**15.72.4.10 double\* myPNLHI\_p = NULL****15.72.4.11 double myPOI\_ini[3]****Initial value:**

```
= {  
    -60.0,  
    0,  
    -10.0  
}
```

**15.72.4.12 double myPOI\_p[4]****Initial value:**

```
= {  
    0.1,  
    2.5,  
    20.0,  
    -60.0  
}
```

**15.72.4.13 double postExpDNDN[2]****Initial value:**

```
= {  
    2.5,  
    -92.0  
}
```

**15.72.4.14 double postExpKCDN[2]****Initial value:**

```
= {  
    5.0,  
    0.0  
}
```

**15.72.4.15 double postExpLHIKC[2]****Initial value:**

```
= {  
    1.5,  
   -92.0  
}
```

**15.72.4.16 double postExpPNKC[2]****Initial value:**

```
= {  
    1.0,  
    0.0  
}
```

**15.72.4.17 double postExpPNLHI[2]****Initial value:**

```
= {  
    1.0,  
    0.0  
}
```

**15.72.4.18 double\* postSynV = NULL****15.72.4.19 double stdTM\_ini[4]****Initial value:**

```
= {  
    -60.0,  
    0.0529324,  
    0.3176767,  
    0.5961207  
}
```

**15.72.4.20 double stdTM\_p[7]****Initial value:**

```
= {  
    7.15,  
    50.0,  
    1.43,  
   -95.0,  
    0.02672,  
   -63.563,  
    0.143  
}
```

## 15.73 MBody\_userdef.cc File Reference

```
#include "modelSpec.h"
#include "modelSpec.cc"
#include "sizes.h"
```

### Classes

- class [pwSTDP\\_userdef](#)  
*TODO This class definition may be code-generated in a future release.*

### Macros

- `#define` [DT](#) 0.1  
*This defines the global time step at which the simulation will run.*
- `#define` [TIMING](#)

### Functions

- void [modelDefinition](#) ([NNmodel](#) &model)  
*This function defines the MBody1 model with user defined synapses.*

### Variables

- double [myPOI\\_p](#) [4]
- double [myPOI\\_ini](#) [3]
- double [stdTM\\_p](#) [7]
- double [stdTM\\_ini](#) [4]
- double \* [myPNKC\\_p](#) = NULL
- double [myPNKC\\_ini](#) [1]
- double [postExpPNKC](#) [2]
- double \* [myPNLHI\\_p](#) = NULL
- double [myPNLHI\\_ini](#) [1]
- double [postExpPNLHI](#) [2]
- double [myLHIKC\\_p](#) [2]
- double [myLHIKC\\_ini](#) [1]
- double [postExpLHIKC](#) [2]
- double [myKCDN\\_p](#) [11]
- double [myKCDN\\_ini](#) [2]
- double [postExpKCDN](#) [2]
- double [myDNDN\\_p](#) [2]
- double [myDNDN\\_ini](#) [1]
- double [postExpDNDN](#) [2]
- double \* [postSynV](#) = NULL
- double [postSynV\\_EXPDECAY\\_EVAR](#) [1]
- scalar \* [gpPNKC](#) = new scalar[\_NAL\*\_NMB]
- scalar \* [gpKCDN](#) = new scalar[\_NMB\*\_NLB]

#### 15.73.1 Macro Definition Documentation

##### 15.73.1.1 `#define` DT 0.1

This defines the global time step at which the simulation will run.

## 15.73.1.2 #define TIMING

## 15.73.2 Function Documentation

15.73.2.1 void modelDefinition ( NNmodel & *model* )

This function defines the MBody1 model with user defined synapses.

## 15.73.3 Variable Documentation

## 15.73.3.1 scalar\* gpKCDN = new scalar[\_NMB\*\_NLB]

## 15.73.3.2 scalar\* gpPNKC = new scalar[\_NAL\*\_NMB]

## 15.73.3.3 double myDNDN\_ini[1]

**Initial value:**

```
= {
    5.0/_NLB
}
```

## 15.73.3.4 double myDNDN\_p[2]

**Initial value:**

```
= {
    -30.0,
    50.0
}
```

## 15.73.3.5 double myKCDN\_ini[2]

**Initial value:**

```
= {
    0.01,
    0.01,
}
```

## 15.73.3.6 double myKCDN\_p[11]

**Initial value:**

```
= {
    -20.0,
    50.0,
    50.0,
    50000.0,
    100000.0,
    200.0,
    0.015,
    0.0075,
    33.33,
    10.0,
    0.00006
}
```

## 15.73.3.7 double myLHIKC\_ini[1]

**Initial value:**

```
= {
    1.0/_NLHI
}
```

**15.73.3.8 double myLHIKC\_p[2]****Initial value:**

```
= {  
    -40.0,  
    50.0  
}
```

**15.73.3.9 double myPNKC\_ini[1]****Initial value:**

```
= {  
    0.01  
}
```

**15.73.3.10 double\* myPNKC\_p = NULL****15.73.3.11 double myPNLHI\_ini[1]****Initial value:**

```
= {  
    0.0  
}
```

**15.73.3.12 double\* myPNLHI\_p = NULL****15.73.3.13 double myPOI\_ini[3]****Initial value:**

```
= {  
    -60.0,  
    0,  
    -10.0  
}
```

**15.73.3.14 double myPOI\_p[4]****Initial value:**

```
= {  
    0.1,  
    2.5,  
    20.0,  
    -60.0  
}
```

**15.73.3.15 double postExpDNDN[2]****Initial value:**

```
= {  
    2.5,  
    -92.0  
}
```

**15.73.3.16 double postExpKCDN[2]****Initial value:**

```
= {  
    5.0,  
    0.0  
}
```

**15.73.3.17 double postExpLHIKC[2]****Initial value:**

```
= {  
    1.5,  
    -92.0  
}
```

**15.73.3.18 double postExpPNKC[2]****Initial value:**

```
= {  
    1.0,  
    0.0  
}
```

**15.73.3.19 double postExpPNLHI[2]****Initial value:**

```
= {  
    1.0,  
    0.0  
}
```

**15.73.3.20 double\* postSynV = NULL****15.73.3.21 double postSynV\_EXPDECAY\_EVAR[1]****Initial value:**

```
= {  
    0  
}
```

**15.73.3.22 double stdTM\_ini[4]****Initial value:**

```
= {  
    -60.0,  
    0.0529324,  
    0.3176767,  
    0.5961207  
}
```

**15.73.3.23 double stdTM\_p[7]****Initial value:**

```
= {  
    7.15,  
    50.0,  
    1.43,  
    -95.0,  
    0.02672,  
    -63.563,  
    0.143  
}
```

**15.74 MBody\_userdef.cc File Reference**

```
#include "modelSpec.h"  
#include "modelSpec.cc"  
#include "sizes.h"
```



## Classes

- class `pwSTDP_userdef`  
*TODO This class definition may be code-generated in a future release.*

## Macros

- `#define DT 0.1`  
*This defines the global time step at which the simulation will run.*
- `#define TIMING`

## Functions

- void `modelDefinition (NNmodel &model)`  
*This function defines the MBody1 model with user defined synapses.*

## Variables

- double `myPOI_p` [4]
- double `myPOI_ini` [3]
- double `stdTM_p` [7]
- double `stdTM_ini` [4]
- double \* `myPNKC_p` = NULL
- double `myPNKC_ini` [1]
- double `postExpPNKC` [2]
- double \* `myPNLHI_p` = NULL
- double `myPNLHI_ini` [1]
- double `postExpPNLHI` [2]
- double `myLHIKC_p` [2]
- double `myLHIKC_ini` [1]
- double `postExpLHIKC` [2]
- double `myKCDN_p` [11]
- double `myKCDN_ini` [2]
- double `postExpKCDN` [2]
- double `myDNDN_p` [2]
- double `myDNDN_ini` [1]
- double `postExpDNDN` [2]
- double \* `postSynV` = NULL
- double `postSynV_EXPDECAY_EVAR` [1]
- scalar \* `gpPNKC` = new scalar[\_NAL\*\_NMB]
- scalar \* `gpKCDN` = new scalar[\_NMB\*\_NLB]

### 15.74.1 Macro Definition Documentation

#### 15.74.1.1 `#define DT 0.1`

This defines the global time step at which the simulation will run.

#### 15.74.1.2 `#define TIMING`

### 15.74.2 Function Documentation

#### 15.74.2.1 void `modelDefinition ( NNmodel & model )`

This function defines the MBody1 model with user defined synapses.

### 15.74.3 Variable Documentation

15.74.3.1 `scalar* gpKCDN = new scalar[_NMB*_NLB]`

15.74.3.2 `scalar* gpPNKC = new scalar[_NAL*_NMB]`

15.74.3.3 `double myDNDN_ini[1]`

**Initial value:**

```
= {  
    5.0/_NLB  
}
```

15.74.3.4 `double myDNDN_p[2]`

**Initial value:**

```
= {  
    -30.0,  
    50.0  
}
```

15.74.3.5 `double myKCDN_ini[2]`

**Initial value:**

```
= {  
    0.01,  
    0.01,  
}
```

15.74.3.6 `double myKCDN_p[11]`

**Initial value:**

```
= {  
    -20.0,  
    50.0,  
    50.0,  
    50000.0,  
    100000.0,  
    200.0,  
    0.015,  
    0.0075,  
    33.33,  
    10.0,  
    0.00006  
}
```

15.74.3.7 `double myLHIKC_ini[1]`

**Initial value:**

```
= {  
    1.0/_NLHI  
}
```

15.74.3.8 `double myLHIKC_p[2]`

**Initial value:**

```
= {  
    -40.0,  
    50.0  
}
```

15.74.3.9 double myPNKC\_ini[1]

**Initial value:**

```
= {  
    0.01  
}
```

15.74.3.10 double\* myPNKC\_p = NULL

15.74.3.11 double myPNLHI\_ini[1]

**Initial value:**

```
= {  
    0.0  
}
```

15.74.3.12 double\* myPNLHI\_p = NULL

15.74.3.13 double myPOI\_ini[3]

**Initial value:**

```
= {  
    -60.0,  
    0,  
    -10.0  
}
```

15.74.3.14 double myPOI\_p[4]

**Initial value:**

```
= {  
    0.1,  
    2.5,  
    20.0,  
    -60.0  
}
```

15.74.3.15 double postExpDNDN[2]

**Initial value:**

```
= {  
    2.5,  
    -92.0  
}
```

15.74.3.16 double postExpKCDN[2]

**Initial value:**

```
= {  
    5.0,  
    0.0  
}
```

15.74.3.17 double postExpLHIKC[2]

**Initial value:**

```
= {  
    1.5,  
    -92.0  
}
```

15.74.3.18 double postExpPNKC[2]

**Initial value:**

```
= {
    1.0,
    0.0
}
```

15.74.3.19 double postExpPNLHI[2]

**Initial value:**

```
= {
    1.0,
    0.0
}
```

15.74.3.20 double\* postSynV = NULL

15.74.3.21 double postSynV\_EXPDECAY\_EVAR[1]

**Initial value:**

```
= {
    0
}
```

15.74.3.22 double stdTM\_ini[4]

**Initial value:**

```
= {
    -60.0,
    0.0529324,
    0.3176767,
    0.5961207
}
```

15.74.3.23 double stdTM\_p[7]

**Initial value:**

```
= {
    7.15,
    50.0,
    1.43,
    -95.0,
    0.02672,
    -63.563,
    0.143
}
```

## 15.75 Model\_Schmuker\_2014\_classifier.cc File Reference

```
#include "modelSpec.h"
#include "modelSpec.cc"
```

### Macros

- #define [DT](#) 0.5

- `#define NUM_VR 10`
- `#define NUM_FEATURES 4`
- `#define NUM_CLASSES 3`
- `#define NETWORK_SCALE 10`
- `#define CLUST_SIZE_AN (NETWORK_SCALE * 6)`
- `#define CLUST_SIZE_PN (NETWORK_SCALE * 6)`
- `#define CLUST_SIZE_RN (NETWORK_SCALE * 6)`
- `#define SYNAPSE_TAU_RNPN 1.0`
- `#define SYNAPSE_TAU_PNPN 5.5`
- `#define SYNAPSE_TAU_PNAN 1.0`
- `#define SYNAPSE_TAU_ANAN 8.0`

## Functions

- `void modelDefinition (NNmodel &model)`

### 15.75.1 Macro Definition Documentation

15.75.1.1 `#define CLUST_SIZE_AN (NETWORK_SCALE * 6)`

15.75.1.2 `#define CLUST_SIZE_PN (NETWORK_SCALE * 6)`

15.75.1.3 `#define CLUST_SIZE_RN (NETWORK_SCALE * 6)`

15.75.1.4 `#define DT 0.5`

15.75.1.5 `#define NETWORK_SCALE 10`

15.75.1.6 `#define NUM_CLASSES 3`

15.75.1.7 `#define NUM_FEATURES 4`

15.75.1.8 `#define NUM_VR 10`

15.75.1.9 `#define SYNAPSE_TAU_ANAN 8.0`

15.75.1.10 `#define SYNAPSE_TAU_PNAN 1.0`

15.75.1.11 `#define SYNAPSE_TAU_PNPN 5.5`

15.75.1.12 `#define SYNAPSE_TAU_RNPN 1.0`

### 15.75.2 Function Documentation

15.75.2.1 `void modelDefinition ( NNmodel & model )`

## 15.76 modelSpec.cc File Reference

```
#include "utils.h"
```

## Macros

- `#define _MODELSPEC_CC_`  
*macro for avoiding multiple inclusion during compilation*

## Functions

- void [initGeNN](#) ()  
*Method for GeNN initialisation (by preparing standard models)*

### 15.76.1 Macro Definition Documentation

#### 15.76.1.1 `#define _MODELSPEC_CC_`

macro for avoiding multiple inclusion during compilation

### 15.76.2 Function Documentation

#### 15.76.2.1 void [initGeNN](#) ( )

Method for GeNN initialisation (by preparing standard models)

## 15.77 modelSpec.h File Reference

Header file that contains the class (struct) definition of [neuronModel](#) for defining a neuron model and the class definition of [NNmodel](#) for defining a neuronal network model. Part of the code generation and generated code sections.

```
#include <vector>
#include "global.h"
```

## Classes

- class [dpclass](#)
- struct [neuronModel](#)  
*class (struct) for specifying a neuron model.*
- struct [postSynModel](#)  
*Structure to hold the information that defines a post-synaptic model (a model of how synapses affect post-synaptic neuron variables, classically in the form of a synaptic current). It also allows to define an equation for the dynamics that can be applied to the summed synaptic input variable "insyn".*
- class [weightUpdateModel](#)  
*Structure to hold the information that defines a weightupdate model (a model of how spikes affect synaptic (and/or) (mostly) post-synaptic neuron variables. It also allows to define changes in response to post-synaptic spikes/spike-like events.*
- class [NNmodel](#)  
*Structure to hold the information that defines synapse dynamics (a model of how synapse variables change over time, independent of or in addition to changes when spikes occur).*

## Macros

- `#define` [\\_MODELSPEC\\_H\\_](#)  
*macro for avoiding multiple inclusion during compilation*
- `#define` [MAXNRN](#) 7
- `#define` [SYNTYPENO](#) 4
- `#define` [NOINP](#) 0  
*Macro attaching the name NOINP (no input) to 0.*
- `#define` [CONSTINP](#) 1

- Macro attaching the name `CONSTINP` (constant input) to 1.
- #define `MATINP` 2
  - Macro attaching the name `MATINP` (explicit input defined as a matrix) to 2.
- #define `INPRULE` 3
  - Macro attaching the name `INPRULE` (explicit dynamic input defined as a rule) to 3.
- #define `RANDNINP` 4
  - Macro attaching the name `RANDNINP` (Random input with Gaussian distribution, calculated real time on the device by the generated code) to 4 (TODO, not implemented yet)
- #define `ALLTOALL` 0
  - Macro attaching the label "ALLTOALL" to connectivity type 0.
- #define `DENSE` 1
  - Macro attaching the label "DENSE" to connectivity type 1.
- #define `SPARSE` 2
  - Macro attaching the label "SPARSE" to connectivity type 2.
- #define `INDIVIDUALG` 0
  - Macro attaching the label "INDIVIDUALG" to method 0 for the definition of synaptic conductances.
- #define `GLOBALG` 1
  - Macro attaching the label "GLOBALG" to method 1 for the definition of synaptic conductances.
- #define `INDIVIDUALID` 2
  - Macro attaching the label "INDIVIDUALID" to method 2 for the definition of synaptic conductances.
- #define `NO_DELAY` 0
  - Macro used to indicate no synapse delay for the group (only one queue slot will be generated)
- #define `NOLEARNING` 0
  - Macro attaching the label "NOLEARNING" to flag 0.
- #define `LEARNING` 1
  - Macro attaching the label "LEARNING" to flag 1.
- #define `EXITSYN` 0
  - Macro attaching the label "EXITSYN" to flag 0 (excitatory synapse)
- #define `INHIBSYN` 1
  - Macro attaching the label "INHIBSYN" to flag 1 (inhibitory synapse)
- #define `TRUE` 1
  - Macro attaching the label "TRUE" to value 1.
- #define `FALSE` 0
  - Macro attaching the label "FALSE" to value 0.
- #define `CPU` 0
  - Macro attaching the label "CPU" to flag 0.
- #define `GPU` 1
  - Macro attaching the label "GPU" to flag 1.
- #define `GENN_FLOAT` 0
  - Macro attaching the label "GENN\_FLOAT" to flag 0. Used by `NNModel::setPrecision()`
- #define `GENN_DOUBLE` 1
  - Macro attaching the label "GENN\_DOUBLE" to flag 1. Used by `NNModel::setPrecision()`
- #define `AUTODEVICE` -1
  - Macro attaching the label `AUTODEVICE` to flag -1. Used by `setGPUDevice`.
- #define `SPK_THRESH_STDP` 0.0f
  - Macro defining the spiking threshold for the purposes of STDP.
- #define `MAXPOSTSYN` 2

## Functions

- void `initGeNN` ()
  - Method for GeNN initialisation (by preparing standard models)

## Variables

- unsigned int [GeNNReady](#) = 0
- unsigned int [MAPNEURON](#)  
variable attaching the name "MAPNEURON"
- unsigned int [POISSONNEURON](#)  
variable attaching the name "POISSONNEURON"
- unsigned int [TRAUBMILES\\_FAST](#)  
variable attaching the name "TRAUBMILES\_FAST"
- unsigned int [TRAUBMILES\\_ALTERNATIVE](#)  
variable attaching the name "TRAUBMILES\_ALTERNATIVE"
- unsigned int [TRAUBMILES\\_SAFE](#)  
variable attaching the name "TRAUBMILES\_SAFE"
- unsigned int [TRAUBMILES](#)  
variable attaching the name "TRAUBMILES"
- unsigned int [TRAUBMILES\\_PSTEP](#)  
variable attaching the name "TRAUBMILES\_PSTEP"
- unsigned int [IZHIKEVICH](#)  
variable attaching the name "IZHIKEVICH"
- unsigned int [IZHIKEVICH\\_V](#)  
variable attaching the name "IZHIKEVICH\_V"
- unsigned int [SPIKESOURCE](#)  
variable attaching the name "SPIKESOURCE"
- unsigned int [NSYNAPSE](#)  
Variable attaching the name NSYNAPSE to predefined synapse type 0, which is a non-learning synapse.
- unsigned int [NGRADSYNAPSE](#)  
Variable attaching the name NGRADSYNAPSE to predefined synapse type 1 which is a graded synapse wrt the presynaptic voltage.
- unsigned int [LEARN1SYNAPSE](#)  
Variable attaching the name LEARN1SYNAPSE to the predefined synapse type 2 which is a learning using spike timing; uses a primitive STDP rule for learning.
- unsigned int [EXPDECAY](#)
- unsigned int [IZHIKEVICH\\_PS](#)

## 15.77.1 Detailed Description

Header file that contains the class (struct) definition of [neuronModel](#) for defining a neuron model and the class definition of [NNmodel](#) for defining a neuronal network model. Part of the code generation and generated code sections.

## 15.77.2 Macro Definition Documentation

15.77.2.1 `#define _MODELSPEC_H_`

macro for avoiding multiple inclusion during compilation

15.77.2.2 `#define ALLTOALL 0`

Macro attaching the label "ALLTOALL" to connectivity type 0.

15.77.2.3 `#define AUTODEVICE -1`

Macro attaching the label AUTODEVICE to flag -1. Used by setGPUDevice.



**15.77.2.4 #define CONSTINP 1**

Macro attaching the name CONSTINP (constant input) to 1.

**15.77.2.5 #define CPU 0**

Macro attaching the label "CPU" to flag 0.

**15.77.2.6 #define DENSE 1**

Macro attaching the label "DENSE" to connectivity type 1.

**15.77.2.7 #define EXITSYN 0**

Macro attaching the label "EXITSYN" to flag 0 (excitatory synapse)

**15.77.2.8 #define FALSE 0**

Macro attaching the label "FALSE" to value 0.

**15.77.2.9 #define GENN\_DOUBLE 1**

Macro attaching the label "GENN\_DOUBLE" to flag 1. Used by NNModel::setPrecision()

**15.77.2.10 #define GENN\_FLOAT 0**

Macro attaching the label "GENN\_FLOAT" to flag 0. Used by NNModel::setPrecision()

**15.77.2.11 #define GLOBALG 1**

Macro attaching the label "GLOBALG" to method 1 for the definition of synaptic conductances.

**15.77.2.12 #define GPU 1**

Macro attaching the label "GPU" to flag 1.

**15.77.2.13 #define INDIVIDUALG 0**

Macro attaching the label "INDIVIDUALG" to method 0 for the definition of synaptic conductances.

**15.77.2.14 #define INDIVIDUALID 2**

Macro attaching the label "INDIVIDUALID" to method 2 for the definition of synaptic conductances.

**15.77.2.15 #define INHIBSYN 1**

Macro attaching the label "INHIBSYN" to flag 1 (inhibitory synapse)

**15.77.2.16 #define INPRULE 3**

Macro attaching the name INPRULE (explicit dynamic input defined as a rule) to 3.

**15.77.2.17 #define LEARNING 1**

Macro attaching the label "LEARNING" to flag 1.

**15.77.2.18 #define MATINP 2**

Macro attaching the name MATINP (explicit input defined as a matrix) to 2.

**15.77.2.19 #define MAXNRN 7**

15.77.2.20 `#define MAXPOSTSYN 2`

15.77.2.21 `#define NO_DELAY 0`

Macro used to indicate no synapse delay for the group (only one queue slot will be generated)

15.77.2.22 `#define NOINP 0`

Macro attaching the name NOINP (no input) to 0.

15.77.2.23 `#define NOLEARNING 0`

Macro attaching the label "NOLEARNING" to flag 0.

15.77.2.24 `#define RANDNINP 4`

Macro attaching the name RANDNINP (Random input with Gaussian distribution, calculated real time on the device by the generated code) to 4 (TODO, not implemented yet)

15.77.2.25 `#define SPARSE 2`

Macro attaching the label "SPARSE" to connectivity type 2.

15.77.2.26 `#define SPK_THRESH_STDP 0.0f`

Macro defining the spiking threshold for the purposes of STDP.

15.77.2.27 `#define SYNTYPENO 4`

15.77.2.28 `#define TRUE 1`

Macro attaching the label "TRUE" to value 1.

### 15.77.3 Function Documentation

15.77.3.1 `void initGeNN ( )`

Method for GeNN initialisation (by preparing standard models)

### 15.77.4 Variable Documentation

15.77.4.1 `unsigned int EXPDECAY`

15.77.4.2 `unsigned int GeNNReady = 0`

15.77.4.3 `unsigned int IZHIKEVICH`

variable attaching the name "IZHIKEVICH"

15.77.4.4 `unsigned int IZHIKEVICH_PS`

15.77.4.5 `unsigned int IZHIKEVICH_V`

variable attaching the name "IZHIKEVICH\_V"

15.77.4.6 `unsigned int LEARN1SYNAPSE`

Variable attaching the name LEARN1SYNAPSE to the predefined synapse type 2 which is a learning using spike timing; uses a primitive STDP rule for learning.

**15.77.4.7 unsigned int MAPNEURON**

variable attaching the name "MAPNEURON"

**15.77.4.8 unsigned int NGRADSYNAPSE**

Variable attaching the name NGRADSYNAPSE to predefined synapse type 1 which is a graded synapse wrt the presynaptic voltage.

**15.77.4.9 unsigned int NSYNAPSE**

Variable attaching the name NSYNAPSE to predefined synapse type 0, which is a non-learning synapse.

**15.77.4.10 unsigned int POISSONNEURON**

variable attaching the name "POISSONNEURON"

**15.77.4.11 unsigned int SPIKESOURCE**

variable attaching the name "SPIKESOURCE"

**15.77.4.12 unsigned int TRAUBMILES**

variable attaching the name "TRAUBMILES"

**15.77.4.13 unsigned int TRAUBMILES\_ALTERNATIVE**

variable attaching the name "TRAUBMILES\_ALTERNATIVE"

**15.77.4.14 unsigned int TRAUBMILES\_FAST**

variable attaching the name "TRAUBMILES\_FAST"

**15.77.4.15 unsigned int TRAUBMILES\_PSTEP**

variable attaching the name "TRAUBMILES\_PSTEP"

**15.77.4.16 unsigned int TRAUBMILES\_SAFE**

variable attaching the name "TRAUBMILES\_SAFE"

**15.78 OneComp.cc File Reference**

```
#include "modelSpec.h"
#include "modelSpec.cc"
#include "../userproject/include/sizes.h"
```

**Macros**

- `#define DT 1.0`

**Functions**

- void `modelDefinition` (`NNmodel` &model)

## Variables

- double `exlzh_p` [4]
- double `exlzh_ini` [2]
- double `mySyn_p` [3]
- double `postExp` [2]
- double \* `postSynV` = NULL
- float `inplzh1` = 4.0

## 15.78.1 Macro Definition Documentation

15.78.1.1 `#define DT 1.0`

## 15.78.2 Function Documentation

15.78.2.1 `void modelDefinition ( NNmodel & model )`

## 15.78.3 Variable Documentation

15.78.3.1 `double exlzh_ini[2]`**Initial value:**

```
= {
    -65,
    -20
}
```

15.78.3.2 `double exlzh_p[4]`**Initial value:**

```
= {
    0.02,
    0.2,
    -65,
    6
}
```

15.78.3.3 `float inplzh1 = 4.0`15.78.3.4 `double mySyn_p[3]`**Initial value:**

```
= {
    0.0,
    -20.0,
    1.0
}
```

15.78.3.5 `double postExp[2]`**Initial value:**

```
= {
    1.0,
    0.0
}
```

15.78.3.6 `double* postSynV = NULL`

## 15.79 OneComp\_model.cc File Reference

```
#include "OneComp_CODE/runner.cc"
```

### Macros

- `#define _ONECOMP_MODEL_CC_`

### 15.79.1 Macro Definition Documentation

15.79.1.1 `#define _ONECOMP_MODEL_CC_`

## 15.80 OneComp\_model.h File Reference

```
#include "OneComp.cc"
```

### Classes

- class `neuronpop`

## 15.81 OneComp\_sim.cu File Reference

```
#include "OneComp_sim.h"
```

### Functions

- int `main` (int argc, char \*argv[])

### 15.81.1 Function Documentation

15.81.1.1 `int main ( int argc, char * argv[] )`

## 15.82 OneComp\_sim.h File Reference

```
#include <cassert>
#include "hr_time.cpp"
#include "utils.h"
#include <cuda_runtime.h>
#include "OneComp_model.h"
#include "OneComp_model.cc"
```

### Macros

- `#define DBG_SIZE 10000`
- `#define T_REPORT_TME 100.0`
- `#define TOTAL_TME 5000`

## Variables

- float `t` = 0.0f
- unsigned int `iT` = 0
- [CStopWatch](#) timer

## 15.82.1 Macro Definition Documentation

15.82.1.1 `#define DBG_SIZE 10000`15.82.1.2 `#define T_REPORT_TME 100.0`15.82.1.3 `#define TOTAL_TME 5000`

## 15.82.2 Variable Documentation

15.82.2.1 unsigned int `iT` = 015.82.2.2 float `t` = 0.0f15.82.2.3 [CStopWatch](#) timer

## 15.83 PoissonIzh-model.cc File Reference

```
#include "PoissonIzh-model.h"
#include "PoissonIzh_CODE/runner.cc"
#include "modelSpec.h"
#include "modelSpec.cc"
```

## Macros

- `#define` [\\_POISSONIZHMODEL\\_CC\\_](#)

## 15.83.1 Macro Definition Documentation

15.83.1.1 `#define _POISSONIZHMODEL_CC_`

## 15.84 PoissonIzh-model.h File Reference

## Classes

- class [classol](#)  
*This class contains the methods for running the MBody1 example model.*

## 15.85 PoissonIzh.cc File Reference

```
#include "modelSpec.h"
#include "modelSpec.cc"
#include "../userproject/include/sizes.h"
```

## Macros

- `#define` [DT](#) 1.0

- `#define _FTYPE GENN_FLOAT`
- `#define scalar float`
- `#define SCALAR_MIN (float)FLT_MIN`
- `#define SCALAR_MAX (float)FLT_MAX`

## Functions

- void `modelDefinition` (`NNmodel` &`model`)

## Variables

- double `myPOI_p` [4]
- double `myPOI_ini` [4]
- double `exlzh_p` [4]
- double `exlzh_ini` [2]
- double `mySyn_p` [3]
- double `mySyn_ini` [1]
- double `postExp` [2]
- double \* `postSynV` = NULL

### 15.85.1 Macro Definition Documentation

#### 15.85.1.1 `#define _FTYPE GENN_FLOAT`

#### 15.85.1.2 `#define DT 1.0`

#### 15.85.1.3 `#define scalar float`

#### 15.85.1.4 `#define SCALAR_MAX (float)FLT_MAX`

#### 15.85.1.5 `#define SCALAR_MIN (float)FLT_MIN`

### 15.85.2 Function Documentation

#### 15.85.2.1 void `modelDefinition` ( `NNmodel` & *model* )

### 15.85.3 Variable Documentation

#### 15.85.3.1 double `exlzh_ini`[2]

##### Initial value:

```
= {
    -65,
    -20
}
```

#### 15.85.3.2 double `exlzh_p`[4]

##### Initial value:

```
= {
    0.02,
    0.2,
    -65,
    6
}
```

### 15.85.3.3 double myPOI\_ini[4]

**Initial value:**

```
= {  
    -60.0,  
    0,  
    -10.0  
}
```

### 15.85.3.4 double myPOI\_p[4]

**Initial value:**

```
= {  
    1,  
    2.5,  
    20.0,  
    -60.0  
}
```

### 15.85.3.5 double mySyn\_ini[1]

**Initial value:**

```
= {  
    0.0  
}
```

### 15.85.3.6 double mySyn\_p[3]

**Initial value:**

```
= {  
    0.0,  
    -20.0,  
    1.0  
}
```

### 15.85.3.7 double postExp[2]

**Initial value:**

```
= {  
    1.0,  
    0.0  
}
```

### 15.85.3.8 double\* postSynV = NULL

## 15.86 PoissonIzh\_sim.cu File Reference

```
#include "PoissonIzh_sim.h"
```

### Functions

- int [main](#) (int argc, char \*argv[ ])



### 15.86.1 Function Documentation

#### 15.86.1.1 `int main ( int argc, char * argv[] )`

### 15.87 PoissonIzh\_sim.h File Reference

```
#include <cassert>
#include "hr_time.cpp"
#include "utils.h"
#include <cuda_runtime.h>
#include "PoissonIzh.cc"
#include "PoissonIzh-model.h"
#include "PoissonIzh-model.cc"
```

#### Macros

- `#define MYRAND(Y, X) Y = Y * 1103515245 + 12345; X= (Y >> 16);`
- `#define INJECTCURRENT 0`
- `#define DBG_SIZE 1000`
- `#define PATTERNNO 100`
- `#define T_REPORT_TME 1000.0`
- `#define SYN_OUT_TME 2000.0`
- `#define TOTAL_TME 5000`

#### Variables

- float `t` = 0.0f
- unsigned int `iT` = 0
- scalar `InputBaseRate` = 2e-02
- `CStopWatch` timer

### 15.87.1 Macro Definition Documentation

#### 15.87.1.1 `#define DBG_SIZE 1000`

#### 15.87.1.2 `#define INJECTCURRENT 0`

#### 15.87.1.3 `#define MYRAND( Y, X ) Y = Y * 1103515245 + 12345; X= (Y >> 16);`

#### 15.87.1.4 `#define PATTERNNO 100`

#### 15.87.1.5 `#define SYN_OUT_TME 2000.0`

#### 15.87.1.6 `#define T_REPORT_TME 1000.0`

#### 15.87.1.7 `#define TOTAL_TME 5000`

### 15.87.2 Variable Documentation

#### 15.87.2.1 scalar `InputBaseRate` = 2e-02

#### 15.87.2.2 unsigned int `iT` = 0

#### 15.87.2.3 float `t` = 0.0f

## 15.87.2.4 CStopWatch timer

## 15.88 postVarsInPostLearn.cc File Reference

```
#include "modelSpec.h"
#include "modelSpec.cc"
```

## Macros

- #define [DT](#) 1.0f

## Functions

- void [modelDefinition](#) ([NNmodel](#) &model)

## Variables

- double [neuron\\_p](#) [1]
- double [neuron\\_p2](#) [1]
- double [neuron\\_ini](#) [2]
- double \* [synapses\\_p](#) = NULL
- double [synapses\\_ini](#) [1]
- double \* [postSyn\\_p](#) = NULL
- double \* [postSyn\\_ini](#) = NULL

## 15.88.1 Macro Definition Documentation

## 15.88.1.1 #define DT 1.0f

## 15.88.2 Function Documentation

15.88.2.1 void modelDefinition ( [NNmodel](#) & *model* )

## 15.88.3 Variable Documentation

15.88.3.1 double [neuron\\_ini](#)[2]

## Initial value:

```
= {
    0.0,
    0.0
}
```

15.88.3.2 double [neuron\\_p](#)[1]

## Initial value:

```
= {
    1.0
}
```

15.88.3.3 `double neuron_p2[1]`

**Initial value:**

```
= {
    2.0
}
```

15.88.3.4 `double* postSyn_ini = NULL`

15.88.3.5 `double* postSyn_p = NULL`

15.88.3.6 `double synapses_ini[1]`

**Initial value:**

```
= {
    0.0
}
```

15.88.3.7 `double* synapses_p = NULL`

## 15.89 `postVarsInPostLearn_sparse.cc` File Reference

```
#include "modelSpec.h"
#include "modelSpec.cc"
```

### Macros

- `#define DT 1.0f`

### Functions

- `void modelDefinition (NNmodel &model)`

### Variables

- `double neuron_p [1]`
- `double neuron_p2 [1]`
- `double neuron_ini [2]`
- `double * synapses_p = NULL`
- `double synapses_ini [1]`
- `double * postSyn_p = NULL`
- `double * postSyn_ini = NULL`

## 15.89.1 Macro Definition Documentation

### 15.89.1.1 `#define DT 1.0f`

## 15.89.2 Function Documentation

### 15.89.2.1 `void modelDefinition ( NNmodel & model )`

## 15.89.3 Variable Documentation

#### 15.89.3.1 double neuron\_ini[2]

**Initial value:**

```
= {  
    0.0,  
    0.0  
}
```

#### 15.89.3.2 double neuron\_p[1]

**Initial value:**

```
= {  
    1.0  
}
```

#### 15.89.3.3 double neuron\_p2[1]

**Initial value:**

```
= {  
    2.0  
}
```

#### 15.89.3.4 double\* postSyn\_ini = NULL

#### 15.89.3.5 double\* postSyn\_p = NULL

#### 15.89.3.6 double synapses\_ini[1]

**Initial value:**

```
= {  
    0.0  
}
```

#### 15.89.3.7 double\* synapses\_p = NULL

### 15.90 postVarsInSimCode.cc File Reference

```
#include "modelSpec.h"  
#include "modelSpec.cc"
```

#### Macros

- `#define DT 1.0f`

#### Functions

- `void modelDefinition (NNmodel &model)`

#### Variables

- `double * neuron_p = NULL`
- `double neuron_ini [2]`
- `double * synapses_p = NULL`
- `double synapses_ini [1]`
- `double * postSyn_p = NULL`
- `double * postSyn_ini = NULL`

### 15.90.1 Macro Definition Documentation

#### 15.90.1.1 #define DT 1.0f

### 15.90.2 Function Documentation

#### 15.90.2.1 void modelDefinition ( NNmodel & model )

### 15.90.3 Variable Documentation

#### 15.90.3.1 double neuron\_ini[2]

##### Initial value:

```
= {
    0.0,
    0.0
}
```

#### 15.90.3.2 double\* neuron\_p = NULL

#### 15.90.3.3 double\* postSyn\_ini = NULL

#### 15.90.3.4 double\* postSyn\_p = NULL

#### 15.90.3.5 double synapses\_ini[1]

##### Initial value:

```
= {
    0.0
}
```

#### 15.90.3.6 double\* synapses\_p = NULL

## 15.91 postVarsInSimCode\_sparse.cc File Reference

```
#include "modelSpec.h"
#include "modelSpec.cc"
```

### Macros

- #define [DT](#) 1.0f

### Functions

- void [modelDefinition](#) (NNmodel &model)

### Variables

- double \* [neuron\\_p](#) = NULL
- double [neuron\\_ini](#) [2]
- double \* [synapses\\_p](#) = NULL
- double [synapses\\_ini](#) [1]
- double \* [postSyn\\_p](#) = NULL
- double \* [postSyn\\_ini](#) = NULL

## 15.91.1 Macro Definition Documentation

## 15.91.1.1 #define DT 1.0f

## 15.91.2 Function Documentation

## 15.91.2.1 void modelDefinition ( NNmodel &amp; model )

## 15.91.3 Variable Documentation

## 15.91.3.1 double neuron\_ini[2]

**Initial value:**

```
= {
    0.0,
    0.0
}
```

## 15.91.3.2 double\* neuron\_p = NULL

## 15.91.3.3 double\* postSyn\_ini = NULL

## 15.91.3.4 double\* postSyn\_p = NULL

## 15.91.3.5 double synapses\_ini[1]

**Initial value:**

```
= {
    0.0
}
```

## 15.91.3.6 double\* synapses\_p = NULL

## 15.92 postVarsInSynapseDynamics.cc File Reference

```
#include "modelSpec.h"
#include "modelSpec.cc"
```

**Macros**

- #define [DT](#) 1.0f

**Functions**

- void [modelDefinition](#) (NNmodel &model)

**Variables**

- double \* [neuron\\_p](#) = NULL
- double [neuron\\_ini](#) [2]
- double \* [synapses\\_p](#) = NULL
- double [synapses\\_ini](#) [1]
- double \* [postSyn\\_p](#) = NULL
- double \* [postSyn\\_ini](#) = NULL

### 15.92.1 Macro Definition Documentation

#### 15.92.1.1 #define DT 1.0f

### 15.92.2 Function Documentation

#### 15.92.2.1 void modelDefinition ( NNmodel & model )

### 15.92.3 Variable Documentation

#### 15.92.3.1 double neuron\_ini[2]

**Initial value:**

```
= {
    0.0,
    0.0
}
```

#### 15.92.3.2 double\* neuron\_p = NULL

#### 15.92.3.3 double\* postSyn\_ini = NULL

#### 15.92.3.4 double\* postSyn\_p = NULL

#### 15.92.3.5 double synapses\_ini[1]

**Initial value:**

```
= {
    0.0
}
```

#### 15.92.3.6 double\* synapses\_p = NULL

## 15.93 postVarsInSynapseDynamics\_sparse.cc File Reference

```
#include "modelSpec.h"
#include "modelSpec.cc"
```

### Macros

- #define [DT](#) 1.0f

### Functions

- void [modelDefinition](#) (NNmodel &model)

### Variables

- double \* [neuron\\_p](#) = NULL
- double [neuron\\_ini](#) [2]
- double \* [synapses\\_p](#) = NULL
- double [synapses\\_ini](#) [1]
- double \* [postSyn\\_p](#) = NULL
- double \* [postSyn\\_ini](#) = NULL

## 15.93.1 Macro Definition Documentation

## 15.93.1.1 #define DT 1.0f

## 15.93.2 Function Documentation

## 15.93.2.1 void modelDefinition ( NNmodel &amp; model )

## 15.93.3 Variable Documentation

## 15.93.3.1 double neuron\_ini[2]

**Initial value:**

```
= {
    0.0,
    0.0
}
```

## 15.93.3.2 double\* neuron\_p = NULL

## 15.93.3.3 double\* postSyn\_ini = NULL

## 15.93.3.4 double\* postSyn\_p = NULL

## 15.93.3.5 double synapses\_ini[1]

**Initial value:**

```
= {
    0.0
}
```

## 15.93.3.6 double\* synapses\_p = NULL

## 15.94 preVarsInPostLearn.cc File Reference

```
#include "modelSpec.h"
#include "modelSpec.cc"
```

**Macros**

- #define [DT](#) 1.0f

**Functions**

- void [modelDefinition](#) (NNmodel &model)

**Variables**

- double [neuron\\_p](#) [1]
- double [neuron\\_p2](#) [1]
- double [neuron\\_ini](#) [2]
- double \* [synapses\\_p](#) = NULL
- double [synapses\\_ini](#) [1]
- double \* [postSyn\\_p](#) = NULL
- double \* [postSyn\\_ini](#) = NULL



### 15.94.1 Macro Definition Documentation

#### 15.94.1.1 #define DT 1.0f

### 15.94.2 Function Documentation

#### 15.94.2.1 void modelDefinition ( NNmodel & *model* )

### 15.94.3 Variable Documentation

#### 15.94.3.1 double neuron\_ini[2]

**Initial value:**

```
= {
    0.0,
    0.0
}
```

#### 15.94.3.2 double neuron\_p[1]

**Initial value:**

```
= {
    1.0
}
```

#### 15.94.3.3 double neuron\_p2[1]

**Initial value:**

```
= {
    2.0
}
```

#### 15.94.3.4 double\* postSyn\_ini = NULL

#### 15.94.3.5 double\* postSyn\_p = NULL

#### 15.94.3.6 double synapses\_ini[1]

**Initial value:**

```
= {
    0.0
}
```

#### 15.94.3.7 double\* synapses\_p = NULL

## 15.95 preVarsInPostLearn\_sparse.cc File Reference

```
#include "modelSpec.h"
#include "modelSpec.cc"
```

### Macros

- #define [DT](#) 1.0f

## Functions

- void [modelDefinition](#) (NNmodel &model)

## Variables

- double [neuron\\_p](#) [1]
- double [neuron\\_p2](#) [1]
- double [neuron\\_ini](#) [2]
- double \* [synapses\\_p](#) = NULL
- double [synapses\\_ini](#) [1]
- double \* [postSyn\\_p](#) = NULL
- double \* [postSyn\\_ini](#) = NULL

### 15.95.1 Macro Definition Documentation

#### 15.95.1.1 #define DT 1.0f

### 15.95.2 Function Documentation

#### 15.95.2.1 void modelDefinition ( NNmodel & *model* )

### 15.95.3 Variable Documentation

#### 15.95.3.1 double neuron\_ini[2]

##### Initial value:

```
= {
    0.0,
    0.0
}
```

#### 15.95.3.2 double neuron\_p[1]

##### Initial value:

```
= {
    1.0
}
```

#### 15.95.3.3 double neuron\_p2[1]

##### Initial value:

```
= {
    2.0
}
```

#### 15.95.3.4 double\* postSyn\_ini = NULL

#### 15.95.3.5 double\* postSyn\_p = NULL

#### 15.95.3.6 double synapses\_ini[1]

##### Initial value:

```
= {
    0.0
}
```

15.95.3.7 double\* synapses\_p = NULL

## 15.96 preVarsInSimCode.cc File Reference

```
#include "modelSpec.h"
#include "modelSpec.cc"
```

### Macros

- #define [DT](#) 1.0f

### Functions

- void [modelDefinition](#) ([NNmodel](#) &model)

### Variables

- double \* [neuron\\_p](#) = NULL
- double [neuron\\_ini](#) [2]
- double \* [synapses\\_p](#) = NULL
- double [synapses\\_ini](#) [1]
- double \* [postSyn\\_p](#) = NULL
- double \* [postSyn\\_ini](#) = NULL

## 15.96.1 Macro Definition Documentation

### 15.96.1.1 #define DT 1.0f

## 15.96.2 Function Documentation

### 15.96.2.1 void modelDefinition ( [NNmodel](#) & *model* )

## 15.96.3 Variable Documentation

### 15.96.3.1 double neuron\_ini[2]

#### Initial value:

```
= {
    0.0,
    0.0
}
```

### 15.96.3.2 double\* neuron\_p = NULL

### 15.96.3.3 double\* postSyn\_ini = NULL

### 15.96.3.4 double\* postSyn\_p = NULL

### 15.96.3.5 double synapses\_ini[1]

#### Initial value:

```
= {
    0.0
}
```

15.96.3.6 double\* synapses\_p = NULL

## 15.97 preVarsInSimCode\_sparse.cc File Reference

```
#include "modelSpec.h"
#include "modelSpec.cc"
```

### Macros

- #define DT 1.0f

### Functions

- void modelDefinition (NNmodel &model)

### Variables

- double \* neuron\_p = NULL
- double neuron\_ini [2]
- double \* synapses\_p = NULL
- double synapses\_ini [1]
- double \* postSyn\_p = NULL
- double \* postSyn\_ini = NULL

## 15.97.1 Macro Definition Documentation

### 15.97.1.1 #define DT 1.0f

## 15.97.2 Function Documentation

### 15.97.2.1 void modelDefinition ( NNmodel & model )

## 15.97.3 Variable Documentation

### 15.97.3.1 double neuron\_ini[2]

#### Initial value:

```
= {
    0.0,
    0.0
}
```

### 15.97.3.2 double\* neuron\_p = NULL

### 15.97.3.3 double\* postSyn\_ini = NULL

### 15.97.3.4 double\* postSyn\_p = NULL

### 15.97.3.5 double synapses\_ini[1]

#### Initial value:

```
= {
    0.0
}
```

15.97.3.6 double\* synapses\_p = NULL

## 15.98 preVarsInSynapseDynamics.cc File Reference

```
#include "modelSpec.h"
#include "modelSpec.cc"
```

### Macros

- #define [DT](#) 1.0f

### Functions

- void [modelDefinition](#) ([NNmodel](#) &model)

### Variables

- double \* [neuron\\_p](#) = NULL
- double [neuron\\_ini](#) [2]
- double \* [synapses\\_p](#) = NULL
- double [synapses\\_ini](#) [1]
- double \* [postSyn\\_p](#) = NULL
- double \* [postSyn\\_ini](#) = NULL

## 15.98.1 Macro Definition Documentation

### 15.98.1.1 #define DT 1.0f

## 15.98.2 Function Documentation

### 15.98.2.1 void modelDefinition ( [NNmodel](#) & *model* )

## 15.98.3 Variable Documentation

### 15.98.3.1 double neuron\_ini[2]

#### Initial value:

```
= {
    0.0,
    0.0
}
```

### 15.98.3.2 double\* neuron\_p = NULL

### 15.98.3.3 double\* postSyn\_ini = NULL

### 15.98.3.4 double\* postSyn\_p = NULL

### 15.98.3.5 double synapses\_ini[1]

#### Initial value:

```
= {
    0.0
}
```

15.98.3.6 double\* synapses\_p = NULL

## 15.99 preVarsInSynapseDynamics\_sparse.cc File Reference

```
#include "modelSpec.h"
#include "modelSpec.cc"
```

### Macros

- #define DT 1.0f

### Functions

- void modelDefinition (NNmodel &model)

### Variables

- double \* neuron\_p = NULL
- double neuron\_ini [2]
- double \* synapses\_p = NULL
- double synapses\_ini [1]
- double \* postSyn\_p = NULL
- double \* postSyn\_ini = NULL

## 15.99.1 Macro Definition Documentation

### 15.99.1.1 #define DT 1.0f

## 15.99.2 Function Documentation

### 15.99.2.1 void modelDefinition ( NNmodel & model )

## 15.99.3 Variable Documentation

### 15.99.3.1 double neuron\_ini[2]

#### Initial value:

```
= {
    0.0,
    0.0
}
```

### 15.99.3.2 double\* neuron\_p = NULL

### 15.99.3.3 double\* postSyn\_ini = NULL

### 15.99.3.4 double\* postSyn\_p = NULL

### 15.99.3.5 double synapses\_ini[1]

#### Initial value:

```
= {
    0.0
}
```

15.99.3.6 `double* synapses_p = NULL`

### 15.100 randomGen.cc File Reference

Contains the implementation of the ISAAC random number generator class for uniformly distributed random numbers and for a standard random number generator based on the C function `rand()`.

```
#include "randomGen.h"
```

#### Macros

- `#define RANDOMGEN_CC`  
*macro for avoiding multiple inclusion during compilation*

#### 15.100.1 Detailed Description

Contains the implementation of the ISAAC random number generator class for uniformly distributed random numbers and for a standard random number generator based on the C function `rand()`.

#### 15.100.2 Macro Definition Documentation

##### 15.100.2.1 `#define RANDOMGEN_CC`

macro for avoiding multiple inclusion during compilation

### 15.101 randomGen.h File Reference

header file containing the class definition for a uniform random generator based on the ISAAC random number generator

```
#include <time.h>
#include <limits.h>
#include <stdlib.h>
#include "isaac.hpp"
#include <assert.h>
```

#### Classes

- class `randomGen`  
*Class `randomGen` which implements the ISAAC random number generator for uniformly distributed random numbers.*
- class `stdRG`

#### Macros

- `#define RANDOMGEN_H`  
*macro for avoiding multiple inclusion during compilation*

#### 15.101.1 Detailed Description

header file containing the class definition for a uniform random generator based on the ISAAC random number generator

### 15.101.2 Macro Definition Documentation

#### 15.101.2.1 #define RANDOMGEN\_H

macro for avoiding multiple inclusion during compilation

## 15.102 Schmuker2014\_classifier.cu File Reference

```
#include <stdio.h>
#include <iostream>
#include <string>
#include <sstream>
#include <fstream>
#include <stdlib.h>
#include <time.h>
#include "Schmuker2014_classifier.h"
#include "Schmuker_2014_classifier_CODE/runner.cc"
#include "sparseUtils.cc"
```

### Macros

- [#define \\_SCHMUKER2014\\_CLASSIFIER\\_](#)  
*macro for avoiding multiple inclusion during compilation*

### 15.102.1 Macro Definition Documentation

#### 15.102.1.1 #define \_SCHMUKER2014\_CLASSIFIER\_

macro for avoiding multiple inclusion during compilation

## 15.103 Schmuker2014\_classifier.h File Reference

Header file containing the class definition for the Schmuker2014 classifier, which contains the methods for setting up, initialising, simulating and saving results of a multivariate classifier inspired by the insect olfactory system. See "A neuromorphic network for generic multivariate data classification, Michael Schmuker, Thomas Pfeilc, and Martin Paul Nawrota, 2014".

```
#include "Model_Schmuker_2014_classifier.cc"
```

### Classes

- class [Schmuker2014\\_classifier](#)  
*This class contains the methods for running the Schmuker\_2014\_classifier example model.*

### 15.103.1 Detailed Description

Header file containing the class definition for the Schmuker2014 classifier, which contains the methods for setting up, initialising, simulating and saving results of a multivariate classifier inspired by the insect olfactory system. See "A neuromorphic network for generic multivariate data classification, Michael Schmuker, Thomas Pfeilc, and Martin Paul Nawrota, 2014".



## 15.104 simpleBit.h File Reference

Contains three macros that allow simple bit manipulations on an (presumably unsigned) 32 bit integer.

```
#include <cassert>
#include <cmath>
```

### Macros

- `#define SIMPLEBIT_H`  
*macro for avoiding multiple inclusion during compilation*
- `#define B(x, i) ((x) & (0x80000000 >> (i)))`  
*Extract the bit at the specified position i from x.*
- `#define setB(x, i) x= ((x) | (0x80000000 >> (i)))`  
*Set the bit at the specified position i in x to 1.*
- `#define delB(x, i) x= ((x) & (~(0x80000000 >> (i))))`  
*Set the bit at the specified position i in x to 0.*

### 15.104.1 Detailed Description

Contains three macros that allow simple bit manipulations on an (presumably unsigned) 32 bit integer.

### 15.104.2 Macro Definition Documentation

#### 15.104.2.1 `#define B( x, i ) ((x) & (0x80000000 >> (i)))`

Extract the bit at the specified position i from x.

#### 15.104.2.2 `#define delB( x, i ) x= ((x) & (~(0x80000000 >> (i))))`

Set the bit at the specified position i in x to 0.

#### 15.104.2.3 `#define setB( x, i ) x= ((x) | (0x80000000 >> (i)))`

Set the bit at the specified position i in x to 1.

#### 15.104.2.4 `#define SIMPLEBIT_H`

macro for avoiding multiple inclusion during compilation

## 15.105 sizes.h File Reference

### Macros

- `#define _NC1 1`

### 15.105.1 Macro Definition Documentation

#### 15.105.1.1 `#define _NC1 1`

## 15.106 sparseUtils.cc File Reference

```
#include <cstdio>
#include <cmath>
```

## Macros

- #define [sparse\\_utils\\_cc](#)

## Functions

- template<class DATATYPE >  
unsigned int [countEntriesAbove](#) (DATATYPE \*Array, int sz, double includeAbove)
- template<class DATATYPE >  
DATATYPE [getG](#) (DATATYPE \*wuvar, SparseProjection \*sparseStruct, int x, int y)
- template<class DATATYPE >  
float [getSparseVar](#) (DATATYPE \*wuvar, SparseProjection \*sparseStruct, int x, int y)
- template<class DATATYPE >  
void [setSparseConnectivityFromDense](#) (DATATYPE \*wuvar, int preN, int postN, DATATYPE \*tmp\_gRNPN, SparseProjection \*sparseStruct)
- template<class DATATYPE >  
void [createSparseConnectivityFromDense](#) (DATATYPE \*wuvar, int preN, int postN, DATATYPE \*tmp\_gRNPN, SparseProjection \*sparseStruct, bool runTest)
- void [createPosttoPreArray](#) (unsigned int preN, unsigned int postN, SparseProjection \*sparseStruct)
- void [strsearch](#) (string &s, const string trg)

!!!!find var to check if a string is used in a code (atm it is used to create post-to-pre arrays)

## 15.106.1 Macro Definition Documentation

## 15.106.1.1 #define sparse\_utils\_cc

## 15.106.2 Function Documentation

15.106.2.1 template<class DATATYPE > unsigned int countEntriesAbove ( DATATYPE \* Array, int sz, double includeAbove )

15.106.2.2 void createPosttoPreArray ( unsigned int preN, unsigned int postN, SparseProjection \* sparseStruct )

15.106.2.3 template<class DATATYPE > void createSparseConnectivityFromDense ( DATATYPE \* wuvar, int preN, int postN, DATATYPE \* tmp\_gRNPN, SparseProjection \* sparseStruct, bool runTest )

15.106.2.4 template<class DATATYPE > DATATYPE getG ( DATATYPE \* wuvar, SparseProjection \* sparseStruct, int x, int y )

15.106.2.5 template<class DATATYPE > float getSparseVar ( DATATYPE \* wuvar, SparseProjection \* sparseStruct, int x, int y )

15.106.2.6 template<class DATATYPE > void setSparseConnectivityFromDense ( DATATYPE \* wuvar, int preN, int postN, DATATYPE \* tmp\_gRNPN, SparseProjection \* sparseStruct )

15.106.2.7 void strsearch ( string & s, const string trg )

!!!!find var to check if a string is used in a code (atm it is used to create post-to-pre arrays)

## 15.107 stringutils.h File Reference

```
#include <string>
```

### Macros

- `#define __mathFN` 56

### Functions

- void `substitute` (string &s, const string trg, const string rep)  
*Tool for substituting strings in the neuron code strings or other templates.*
- void `name_substitutions` (string &code, string prefix, vector< string > &names, string postfix=string(""))  
*This function performs a list of name substitutions for variables in code snippets.*
- void `value_substitutions` (string &code, vector< string > &names, vector< double > &values)  
*This function performs a list of value substitutions for parameters in code snippets.*
- void `extended_name_substitutions` (string &code, string prefix, vector< string > &names, string ext, string postfix=string(""))  
*This function performs a list of name substitutions for variables in code snippets where the variables have a prefix/postfix in their names.*
- void `extended_value_substitutions` (string &code, vector< string > &names, string ext, vector< double > &values)  
*This function performs a list of value substitutions for parameters in code snippets where the parameters have a prefix/postfix in their names.*
- void `ensureMathFunctionFtype` (string &code, string type)  
*This function converts code to contain only explicit single precision (float) function calls (C99 standard)*
- void `doFinal` (string &code, unsigned int i, string type, unsigned int &state)  
*This function is part of the parser that converts any floating point constant in a code snippet to a floating point constant with an explicit precision (by appending "f" or removing it).*
- string `ensureFtype` (string oldcode, string type)  
*This function implements a parser that converts any floating point constant in a code snippet to a floating point constant with an explicit precision (by appending "f" or removing it).*

### Variables

- string `digits` = string("0123456789")
- string `op` = string("+\*/(<>= ,:")+string("\n")+string("\t")
- const char \* `__dnames` [`__mathFN`]
- const char \* `__fnames` [`__mathFN`]

#### 15.107.1 Macro Definition Documentation

##### 15.107.1.1 `#define __mathFN` 56

#### 15.107.2 Function Documentation

##### 15.107.2.1 void `doFinal` ( string & code, unsigned int i, string type, unsigned int & state )

This function is part of the parser that converts any floating point constant in a code snippet to a floating point constant with an explicit precision (by appending "f" or removing it).

#### 15.107.2.2 string ensureFtype ( string *oldcode*, string *type* )

This function implements a parser that converts any floating point constant in a code snippet to a floating point constant with an explicit precision (by appending "f" or removing it).

#### 15.107.2.3 void ensureMathFunctionFtype ( string & *code*, string *type* )

This function converts code to contain only explicit single precision (float) function calls (C99 standard)

#### 15.107.2.4 void extended\_name\_substitutions ( string & *code*, string *prefix*, vector< string > & *names*, string *ext*, string *postfix* = string( " " ) )

This function performs a list of name substitutions for variables in code snippets where the variables have a prefix/postfix in their names.

#### 15.107.2.5 void extended\_value\_substitutions ( string & *code*, vector< string > & *names*, string *ext*, vector< double > & *values* )

This function performs a list of value substitutions for parameters in code snippets where the parameters have a prefix/postfix in their names.

#### 15.107.2.6 void name\_substitutions ( string & *code*, string *prefix*, vector< string > & *names*, string *postfix* = string( " " ) )

This function performs a list of name substitutions for variables in code snippets.

#### 15.107.2.7 void substitute ( string & *s*, const string *trg*, const string *rep* )

Tool for substituting strings in the neuron code strings or other templates.

#### 15.107.2.8 void value\_substitutions ( string & *code*, vector< string > & *names*, vector< double > & *values* )

This function performs a list of value substitutions for parameters in code snippets.

### 15.107.3 Variable Documentation

#### 15.107.3.1 const char\* \_\_dnames[\_\_mathFN]

#### 15.107.3.2 const char\* \_\_fnames[\_\_mathFN]

#### 15.107.3.3 string digits = string("0123456789")

#### 15.107.3.4 string op = string("+\*/(<>=,;")+string("\n")+string("\t")

## 15.108 SynDelay.cc File Reference

```
#include "modelSpec.h"
#include "modelSpec.cc"
```

### Macros

- #define [DT](#) 1.0f

### Functions

- void [modelDefinition](#) ([NNmodel](#) &model)

## Variables

- double `input_p` [4]
- double `input_ini` [2]
- double `postExpInp` [2]
- double `inter_p` [4]
- double `inter_ini` [2]
- double `postExpInt` [2]
- double `output_p` [4]
- double `output_ini` [2]
- double `postExpOut` [2]
- double \* `synapses_p` = NULL
- double `inputInter_ini` [1]
- double `inputOutput_ini` [1]
- double `interOutput_ini` [1]
- double \* `postSynV` = NULL
- double `constInput` = 4.0

## 15.108.1 Macro Definition Documentation

15.108.1.1 `#define DT 1.0f`

## 15.108.2 Function Documentation

15.108.2.1 `void modelDefinition ( NNmodel & model )`

## 15.108.3 Variable Documentation

15.108.3.1 `double constInput = 4.0`15.108.3.2 `double input_ini[2]`**Initial value:**

```
= {
    -65,
    -20
}
```

15.108.3.3 `double input_p[4]`**Initial value:**

```
= {
    0.02,
    0.2,
    -65,
    6
}
```

15.108.3.4 `double inputInter_ini[1]`**Initial value:**

```
= {
    0.06
}
```

**15.108.3.5 double inputOutput\_ini[1]****Initial value:**

```
= {  
    0.03  
}
```

**15.108.3.6 double inter\_ini[2]****Initial value:**

```
= {  
    -65,  
    -20  
}
```

**15.108.3.7 double inter\_p[4]****Initial value:**

```
= {  
    0.02,  
    0.2,  
    -65,  
    6  
}
```

**15.108.3.8 double interOutput\_ini[1]****Initial value:**

```
= {  
    0.03  
}
```

**15.108.3.9 double output\_ini[2]****Initial value:**

```
= {  
    -65,  
    -20  
}
```

**15.108.3.10 double output\_p[4]****Initial value:**

```
= {  
    0.02,  
    0.2,  
    -65,  
    6  
}
```

**15.108.3.11 double postExpInp[2]****Initial value:**

```
= {  
    1.0,  
    0.0  
}
```

**15.108.3.12 double postExpInt[2]****Initial value:**

```
= {
    1.0,
    0.0
}
```

**15.108.3.13 double postExpOut[2]****Initial value:**

```
= {
    1.0,
    0.0
}
```

**15.108.3.14 double\* postSynV = NULL****15.108.3.15 double\* synapses\_p = NULL****15.109 SynDelaySim.cu File Reference**

```
#include <cstdlib>
#include <iostream>
#include <fstream>
#include "hr_time.cpp"
#include "utils.h"
#include "SynDelaySim.h"
#include "SynDelay_CODE/definitions.h"
#include "SynDelay_CODE/runner.cc"
```

**Macros**

- `#define SYNDELAYSIM_CU`

**Functions**

- `int main (int argc, char *argv[ ])`

**15.109.1 Macro Definition Documentation****15.109.1.1 #define SYNDELAYSIM\_CU****15.109.2 Function Documentation****15.109.2.1 int main ( int *argc*, char \* *argv*[ ] )****15.110 SynDelaySim.h File Reference****Classes**

- class `SynDelay`

## Macros

- `#define DT 1.0f`
- `#define TOTAL_TIME 5000.0f`
- `#define REPORT_TIME 1000.0f`

### 15.110.1 Macro Definition Documentation

#### 15.110.1.1 `#define DT 1.0f`

#### 15.110.1.2 `#define REPORT_TIME 1000.0f`

#### 15.110.1.3 `#define TOTAL_TIME 5000.0f`

## 15.111 testDefaultConstructor.cu File Reference

```
#include <iostream>
```

## Functions

- `int main ()`

### 15.111.1 Function Documentation

#### 15.111.1.1 `int main ( void )`

## 15.112 testHelper.h File Reference

## Functions

- `template<class T >`  
`T absDiff (T *x0, T *x1, int n)`

### 15.112.1 Function Documentation

#### 15.112.1.1 `template<class T > T absDiff ( T * x0, T * x1, int n )`

## 15.113 testHelper.h File Reference

## Functions

- `template<class T >`  
`T absDiff (T *x0, T *x1, int n)`

### 15.113.1 Function Documentation

#### 15.113.1.1 `template<class T > T absDiff ( T * x0, T * x1, int n )`

## 15.114 testMixedArray.cc File Reference

```
#include <iostream>
```



## Functions

- int [main](#) (void)

## Variables

- char [ptr](#) [20]
- float & [fv](#) = \*((float \*) [ptr](#))
- int & [iv](#) = \*((int \*) ([ptr](#)+sizeof(float)))
- double & [dv](#) = \*((double \*) ([ptr](#)+sizeof(float)+sizeof(int)))

### 15.114.1 Function Documentation

#### 15.114.1.1 int main ( void )

### 15.114.2 Variable Documentation

#### 15.114.2.1 double& dv = \*((double \*) (ptr+sizeof(float)+sizeof(int)))

#### 15.114.2.2 float& fv = \*((float \*) ptr)

#### 15.114.2.3 int& iv = \*((int \*) (ptr+sizeof(float)))

#### 15.114.2.4 char ptr[20]

## 15.115 testPostVarsInPostLearn.cu File Reference

```
#include <cstdlib>
#include <cstdio>
#include <iostream>
#include <fstream>
#include "hr_time.cpp"
#include "utils.h"
#include "testHelper.h"
#include "testPostVarsInPostLearn.h"
#include "postVarsInPostLearn_CODE/definitions.h"
#include "postVarsInPostLearn_CODE/runner.cc"
```

## Macros

- #define [TESTPREVARSINSIMCODE\\_CU](#)

## Functions

- int [main](#) (int argc, char \*argv[ ])

### 15.115.1 Macro Definition Documentation

#### 15.115.1.1 #define TESTPREVARSINSIMCODE\_CU

### 15.115.2 Function Documentation

#### 15.115.2.1 int main ( int argc, char \* argv[ ] )

## 15.116 testPostVarsInPostLearn.h File Reference

### Classes

- class [postVarsInPostLearn](#)

### Macros

- #define [DT](#) 0.1f
- #define [TOTAL\\_TIME](#) 20.0f
- #define [REPORT\\_TIME](#) 1.0f

#### 15.116.1 Macro Definition Documentation

##### 15.116.1.1 #define DT 0.1f

##### 15.116.1.2 #define REPORT\_TIME 1.0f

##### 15.116.1.3 #define TOTAL\_TIME 20.0f

## 15.117 testPostVarsInPostLearn\_sparse.cu File Reference

```
#include <cstdlib>
#include <cfloat>
#include <iostream>
#include <fstream>
#include "hr_time.cpp"
#include "utils.h"
#include "testHelper.h"
#include "testPostVarsInPostLearn_sparse.h"
#include "postVarsInPostLearn_sparse_CODE/definitions.h"
#include "postVarsInPostLearn_sparse_CODE/runner.cc"
```

### Macros

- #define [TESTPREVAR SINPOSTLEARN\\_SPARSE\\_CU](#)

### Functions

- int [main](#) (int argc, char \*argv[])

#### 15.117.1 Macro Definition Documentation

##### 15.117.1.1 #define TESTPREVAR SINPOSTLEARN\_SPARSE\_CU

#### 15.117.2 Function Documentation

##### 15.117.2.1 int main ( int argc, char \* argv[] )

## 15.118 testPostVarsInPostLearn\_sparse.h File Reference

### Classes

- class [postVarsInPostLearn\\_sparse](#)

## Macros

- `#define DT 0.1f`
- `#define TOTAL_TIME 20.0f`
- `#define REPORT_TIME 1.0f`

### 15.118.1 Macro Definition Documentation

#### 15.118.1.1 `#define DT 0.1f`

#### 15.118.1.2 `#define REPORT_TIME 1.0f`

#### 15.118.1.3 `#define TOTAL_TIME 20.0f`

## 15.119 testPostVarsInSimCode.cu File Reference

```
#include <cstdlib>
#include <cfloat>
#include <iostream>
#include <fstream>
#include "hr_time.cpp"
#include "utils.h"
#include "testHelper.h"
#include "testPostVarsInSimCode.h"
#include "postVarsInSimCode_CODE/definitions.h"
#include "postVarsInSimCode_CODE/runner.cc"
```

## Macros

- `#define TESTPREVARSINSIMCODE_CU`

## Functions

- `int main (int argc, char *argv[ ])`

### 15.119.1 Macro Definition Documentation

#### 15.119.1.1 `#define TESTPREVARSINSIMCODE_CU`

### 15.119.2 Function Documentation

#### 15.119.2.1 `int main ( int argc, char * argv[ ] )`

## 15.120 testPostVarsInSimCode.h File Reference

## Classes

- class `postVarsInSimCode`

## Macros

- `#define DT 0.1f`
- `#define TOTAL_TIME 20.0f`
- `#define REPORT_TIME 1.0f`

### 15.120.1 Macro Definition Documentation

15.120.1.1 `#define DT 0.1f`

15.120.1.2 `#define REPORT_TIME 1.0f`

15.120.1.3 `#define TOTAL_TIME 20.0f`

## 15.121 testPostVarsInSimCode\_sparse.cu File Reference

```
#include <cstdlib>
#include <cfloat>
#include <iostream>
#include <fstream>
#include "hr_time.cpp"
#include "utils.h"
#include "testHelper.h"
#include "testPostVarsInSimCode_sparse.h"
#include "postVarsInSimCode_sparse_CODE/definitions.h"
#include "postVarsInSimCode_sparse_CODE/runner.cc"
```

### Macros

- `#define TESTPREVARSINSIMCODE_CU`

### Functions

- `int main (int argc, char *argv[])`

### 15.121.1 Macro Definition Documentation

15.121.1.1 `#define TESTPREVARSINSIMCODE_CU`

### 15.121.2 Function Documentation

15.121.2.1 `int main ( int argc, char * argv[] )`

## 15.122 testPostVarsInSimCode\_sparse.h File Reference

### Classes

- class `postVarsInSimCode_sparse`

### Macros

- `#define DT 0.1f`
- `#define TOTAL_TIME 20.0f`
- `#define REPORT_TIME 1.0f`

### 15.122.1 Macro Definition Documentation

15.122.1.1 `#define DT 0.1f`

15.122.1.2 `#define REPORT_TIME 1.0f`

15.122.1.3 `#define TOTAL_TIME 20.0f`

### 15.123 `testPostVarsInSynapseDynamics.cu` File Reference

```
#include <cstdlib>
#include <cfloat>
#include <iostream>
#include <fstream>
#include "hr_time.cpp"
#include "utils.h"
#include "testHelper.h"
#include "testPostVarsInSynapseDynamics.h"
#include "postVarsInSynapseDynamics_CODE/definitions.h"
#include "postVarsInSynapseDynamics_CODE/runner.cc"
```

#### Macros

- `#define TESTPREVARSINSYNAPSEDYNAMICS_CU`

#### Functions

- `int main (int argc, char *argv[ ])`

#### 15.123.1 Macro Definition Documentation

15.123.1.1 `#define TESTPREVARSINSYNAPSEDYNAMICS_CU`

#### 15.123.2 Function Documentation

15.123.2.1 `int main ( int argc, char * argv[ ] )`

### 15.124 `testPostVarsInSynapseDynamics.h` File Reference

#### Classes

- `class postVarsInSynapseDynamics`

#### Macros

- `#define DT 0.1f`
- `#define TOTAL_TIME 20.0f`
- `#define REPORT_TIME 1.0f`

#### 15.124.1 Macro Definition Documentation

15.124.1.1 `#define DT 0.1f`

15.124.1.2 `#define REPORT_TIME 1.0f`

15.124.1.3 `#define TOTAL_TIME 20.0f`

## 15.125 testPostVarsInSynapseDynamics\_sparse.cu File Reference

```
#include <cstdlib>
#include <cfloat>
#include <iostream>
#include <fstream>
#include "hr_time.cpp"
#include "utils.h"
#include "testHelper.h"
#include "testPostVarsInSynapseDynamics_sparse.h"
#include "postVarsInSynapseDynamics_sparse_CODE/definitions.h"
#include "postVarsInSynapseDynamics_sparse_CODE/runner.cc"
```

### Macros

- `#define` [TESTPREVARSSYNAPSEDYNAMICS\\_SPARSE\\_CU](#)

### Functions

- `int` [main](#) (`int argc`, `char *argv[]`)

#### 15.125.1 Macro Definition Documentation

##### 15.125.1.1 `#define` TESTPREVARSSYNAPSEDYNAMICS\_SPARSE\_CU

#### 15.125.2 Function Documentation

##### 15.125.2.1 `int` main ( `int argc`, `char * argv[]` )

## 15.126 testPostVarsInSynapseDynamics\_sparse.h File Reference

### Classes

- `class` [postVarsInSynapseDynamics\\_sparse](#)

### Macros

- `#define` [DT](#) 0.1f
- `#define` [TOTAL\\_TIME](#) 20.0f
- `#define` [REPORT\\_TIME](#) 1.0f

#### 15.126.1 Macro Definition Documentation

##### 15.126.1.1 `#define` DT 0.1f

##### 15.126.1.2 `#define` REPORT\_TIME 1.0f

##### 15.126.1.3 `#define` TOTAL\_TIME 20.0f

## 15.127 testPreVarsInPostLearn.cu File Reference

```
#include <cstdlib>
```

```
#include <cfloat>
#include <iostream>
#include <fstream>
#include "hr_time.cpp"
#include "utils.h"
#include "testHelper.h"
#include "testPreVarsInPostLearn.h"
#include "preVarsInPostLearn_CODE/definitions.h"
#include "preVarsInPostLearn_CODE/runner.cc"
```

## Macros

- `#define TESTPREVARSINSIMCODE_CU`

## Functions

- `int main (int argc, char *argv[ ])`

### 15.127.1 Macro Definition Documentation

#### 15.127.1.1 `#define TESTPREVARSINSIMCODE_CU`

### 15.127.2 Function Documentation

#### 15.127.2.1 `int main ( int argc, char * argv[ ] )`

## 15.128 testPreVarsInPostLearn.h File Reference

## Classes

- class `preVarsInPostLearn`

## Macros

- `#define DT 0.1f`
- `#define TOTAL_TIME 20.0f`
- `#define REPORT_TIME 1.0f`

### 15.128.1 Macro Definition Documentation

#### 15.128.1.1 `#define DT 0.1f`

#### 15.128.1.2 `#define REPORT_TIME 1.0f`

#### 15.128.1.3 `#define TOTAL_TIME 20.0f`

## 15.129 testPreVarsInPostLearn\_sparse.cu File Reference

```
#include <cstdlib>
```

```
#include <cfloat>
#include <iostream>
#include <fstream>
#include "hr_time.cpp"
#include "utils.h"
#include "testHelper.h"
#include "testPreVarsInPostLearn_sparse.h"
#include "preVarsInPostLearn_sparse_CODE/definitions.h"
#include "preVarsInPostLearn_sparse_CODE/runner.cc"
```

## Macros

- `#define` [TESTPREVARSINPOSTLEARN\\_SPARSE\\_CU](#)

## Functions

- `int` [main](#) (`int argc`, `char *argv[]`)

### 15.129.1 Macro Definition Documentation

#### 15.129.1.1 `#define` TESTPREVARSINPOSTLEARN\_SPARSE\_CU

### 15.129.2 Function Documentation

#### 15.129.2.1 `int` main ( `int argc`, `char * argv[]` )

## 15.130 testPreVarsInPostLearn\_sparse.h File Reference

## Classes

- `class` [preVarsInPostLearn\\_sparse](#)

## Macros

- `#define` [DT](#) 0.1f
- `#define` [TOTAL\\_TIME](#) 20.0f
- `#define` [REPORT\\_TIME](#) 1.0f

### 15.130.1 Macro Definition Documentation

#### 15.130.1.1 `#define` DT 0.1f

#### 15.130.1.2 `#define` REPORT\_TIME 1.0f

#### 15.130.1.3 `#define` TOTAL\_TIME 20.0f

## 15.131 testPreVarsInSimCode.cu File Reference

```
#include <cstdlib>
```



```
#include <cfloat>
#include <iostream>
#include <fstream>
#include "hr_time.cpp"
#include "utils.h"
#include "testHelper.h"
#include "testPreVarsInSimCode.h"
#include "preVarsInSimCode_CODE/definitions.h"
#include "preVarsInSimCode_CODE/runner.cc"
```

## Macros

- `#define` [TESTPREVARSINSIMCODE\\_CU](#)

## Functions

- `int` [main](#) (`int argc`, `char *argv[]`)

### 15.131.1 Macro Definition Documentation

#### 15.131.1.1 `#define` [TESTPREVARSINSIMCODE\\_CU](#)

### 15.131.2 Function Documentation

#### 15.131.2.1 `int` [main](#) ( `int argc`, `char * argv[]` )

## 15.132 testPreVarsInSimCode.h File Reference

## Classes

- `class` [preVarsInSimCode](#)

## Macros

- `#define` [DT](#) 0.1f
- `#define` [TOTAL\\_TIME](#) 20.0f
- `#define` [REPORT\\_TIME](#) 1.0f

### 15.132.1 Macro Definition Documentation

#### 15.132.1.1 `#define` [DT](#) 0.1f

#### 15.132.1.2 `#define` [REPORT\\_TIME](#) 1.0f

#### 15.132.1.3 `#define` [TOTAL\\_TIME](#) 20.0f

## 15.133 testPreVarsInSimCode\_sparse.cu File Reference

```
#include <cstdlib>
```

```
#include <cfloat>
#include <iostream>
#include <fstream>
#include "hr_time.cpp"
#include "utils.h"
#include "testHelper.h"
#include "testPreVarsInSimCode_sparse.h"
#include "preVarsInSimCode_sparse_CODE/definitions.h"
#include "preVarsInSimCode_sparse_CODE/runner.cc"
```

## Macros

- `#define TESTPREVARSINSIMCODE_CU`

## Functions

- `int main (int argc, char *argv[ ])`

### 15.133.1 Macro Definition Documentation

#### 15.133.1.1 `#define TESTPREVARSINSIMCODE_CU`

### 15.133.2 Function Documentation

#### 15.133.2.1 `int main ( int argc, char * argv[ ] )`

## 15.134 testPreVarsInSimCode\_sparse.h File Reference

## Classes

- class `preVarsInSimCode_sparse`

## Macros

- `#define DT 0.1f`
- `#define TOTAL_TIME 20.0f`
- `#define REPORT_TIME 1.0f`

### 15.134.1 Macro Definition Documentation

#### 15.134.1.1 `#define DT 0.1f`

#### 15.134.1.2 `#define REPORT_TIME 1.0f`

#### 15.134.1.3 `#define TOTAL_TIME 20.0f`

## 15.135 testPreVarsInSynapseDynamics.cu File Reference

```
#include <cstdlib>
```

```
#include <cfloat>
#include <iostream>
#include <fstream>
#include "hr_time.cpp"
#include "utils.h"
#include "testHelper.h"
#include "testPreVarsInSynapseDynamics.h"
#include "preVarsInSynapseDynamics_CODE/definitions.h"
#include "preVarsInSynapseDynamics_CODE/runner.cc"
```

## Macros

- `#define` [TESTPREVARSINSYNAPSEDYNAMICS\\_CU](#)

## Functions

- `int` [main](#) (`int argc`, `char *argv[]`)

### 15.135.1 Macro Definition Documentation

#### 15.135.1.1 `#define` [TESTPREVARSINSYNAPSEDYNAMICS\\_CU](#)

### 15.135.2 Function Documentation

#### 15.135.2.1 `int` [main](#) ( `int argc`, `char * argv[]` )

## 15.136 testPreVarsInSynapseDynamics.h File Reference

## Classes

- `class` [preVarsInSynapseDynamics](#)

## Macros

- `#define` [DT](#) 0.1f
- `#define` [TOTAL\\_TIME](#) 20.0f
- `#define` [REPORT\\_TIME](#) 1.0f

### 15.136.1 Macro Definition Documentation

#### 15.136.1.1 `#define` [DT](#) 0.1f

#### 15.136.1.2 `#define` [REPORT\\_TIME](#) 1.0f

#### 15.136.1.3 `#define` [TOTAL\\_TIME](#) 20.0f

## 15.137 testPreVarsInSynapseDynamics\_sparse.cu File Reference

```
#include <cstdlib>
```

```
#include <cfloat>
#include <iostream>
#include <fstream>
#include "hr_time.cpp"
#include "utils.h"
#include "testHelper.h"
#include "testPreVarsInSynapseDynamics_sparse.h"
#include "preVarsInSynapseDynamics_sparse_CODE/definitions.h"
#include "preVarsInSynapseDynamics_sparse_CODE/runner.cc"
```

## Macros

- `#define` [TESTPREVARSINSYNAPSEDYNAMICS\\_SPARSE\\_CU](#)

## Functions

- `int` [main](#) (`int argc`, `char *argv[]`)

### 15.137.1 Macro Definition Documentation

#### 15.137.1.1 `#define` TESTPREVARSINSYNAPSEDYNAMICS\_SPARSE\_CU

### 15.137.2 Function Documentation

#### 15.137.2.1 `int` main ( `int argc`, `char * argv[]` )

## 15.138 testPreVarsInSynapseDynamics\_sparse.h File Reference

## Classes

- `class` [preVarsInSynapseDynamics\\_sparse](#)

## Macros

- `#define` [DT](#) 0.1f
- `#define` [TOTAL\\_TIME](#) 20.0f
- `#define` [REPORT\\_TIME](#) 1.0f

### 15.138.1 Macro Definition Documentation

#### 15.138.1.1 `#define` DT 0.1f

#### 15.138.1.2 `#define` REPORT\_TIME 1.0f

#### 15.138.1.3 `#define` TOTAL\_TIME 20.0f

## 15.139 testRegEx.cc File Reference

```
#include <string>
#include <regex>
#include <iostream>
```

## Functions

- int [main](#) (void)

### 15.139.1 Function Documentation

#### 15.139.1.1 int main ( void )

### 15.140 toString.h File Reference

Contains a template function for string conversion from const char\* to C++ string.

```
#include <string>
#include <sstream>
```

## Macros

- `#define \_TOSTRING\_H\_`  
*macro for avoiding multiple inclusion during compilation*
- `#define tS\(X\) toString\(X\)`  
*Macro providing the abbreviated syntax [tS\(\)](#) instead of [toString\(\)](#).*

## Functions

- `template<class T >`  
`std::string toString (T t)`  
*template function for string conversion from const char\* to C++ string*
- `template<>`  
`std::string toString (float t)`
- `template<>`  
`std::string toString (double t)`

### 15.140.1 Detailed Description

Contains a template function for string conversion from const char\* to C++ string.

### 15.140.2 Macro Definition Documentation

#### 15.140.2.1 `#define \_TOSTRING\_H\_`

macro for avoiding multiple inclusion during compilation

#### 15.140.2.2 `#define tS\( X \) toString\(X\)`

Macro providing the abbreviated syntax [tS\(\)](#) instead of [toString\(\)](#).

### 15.140.3 Function Documentation

#### 15.140.3.1 `template<class T > std::string toString ( T t )`

template function for string conversion from const char\* to C++ string

15.140.3.2 `template<> std::string toString ( float t )`

15.140.3.3 `template<> std::string toString ( double t )`

## 15.141 utils.h File Reference

This file contains standard utility functions provide within the NVIDIA CUDA software development toolkit (SDK). The remainder of the file contains a function that defines the standard neuron models.

```
#include <cstdlib>
#include <iostream>
#include <string>
#include <vector>
#include <map>
#include <memory>
#include <fstream>
#include <cmath>
#include <cuda_runtime.h>
#include "modelSpec.h"
#include "toString.h"
#include "stringutils.h"
#include "extra_neurons.h"
#include "extra_postsynapses.h"
#include "extra_weightupdates.h"
#include "numlib/simpleBit.h"
```

### Classes

- class [rulkovdp](#)  
*Class defining the dependent parameters of teh Rulkov map neuron.*
- class [expDecayDp](#)  
*Class defining the dependent parameter for exponential decay.*
- class [pwSTDP](#)  
*TODO This class definition may be code-generated in a future release.*

### Macros

- `#define _UTILS_H_`  
*macro for avoiding multiple inclusion during compilation*
- `#define CHECK_CUDA_ERRORS(call)`  
*Macro for wrapping cuda runtime function calls and catching any errors that may be thrown.*

### Functions

- void [gennError](#) (string error)  
*Function called upon the detection of an error. Outputs an error message and then exits.*
- void [gennError](#) (const char \*error)  
*Function called upon the detection of an error. Outputs an error message and then exits.*
- void [writeHeader](#) (ostream &os)  
*Function to write the comment header denoting file authorship and contact details into the generated code.*
- unsigned int [theSize](#) (string type)  
*Tool for determining the size of variable types on the current architecture.*
- void [prepareStandardModels](#) ()

*Function that defines standard neuron models.*

- void `preparePostSynModels` ()

*Function that prepares the standard post-synaptic models, including their variables, parameters, dependent parameters and code strings.*

- void `prepareWeightUpdateModels` ()

*Function that prepares the standard (pre) synaptic models, including their variables, parameters, dependent parameters and code strings.*

## Variables

- vector< `neuronModel` > `nModels`

*Global C++ vector containing all neuron model descriptions.*

- vector< `postSynModel` > `postSynModels`

*Global C++ vector containing all post-synaptic update model descriptions.*

- vector< `weightUpdateModel` > `weightUpdateModels`

*Global C++ vector containing all weightupdate model descriptions.*

### 15.141.1 Detailed Description

This file contains standard utility functions provide within the NVIDIA CUDA software development toolkit (SDK). The remainder of the file contains a function that defines the standard neuron models.

### 15.141.2 Macro Definition Documentation

#### 15.141.2.1 `#define _UTILS_H_`

macro for avoiding multiple inclusion during compilation

#### 15.141.2.2 `#define CHECK_CUDA_ERRORS( call )`

#### Value:

```
{
    cudaError_t error = call;
    if (error != cudaSuccess)
    {
        fprintf(stderr, "%s: %i: cuda error %i: %s\n",
            __FILE__, __LINE__, (int)error, cudaGetErrorString(error));
        exit(EXIT_FAILURE);
    }
}
```

Macro for wrapping cuda runtime function calls and catching any errors that may be thrown.

### 15.141.3 Function Documentation

#### 15.141.3.1 void `gennError` ( string *error* )

Function called upon the detection of an error. Outputs an error message and then exits.

#### 15.141.3.2 void `gennError` ( const char \* *error* )

Function called upon the detection of an error. Outputs an error message and then exits.

#### 15.141.3.3 void `preparePostSynModels` ( )

Function that prepares the standard post-synaptic models, including their variables, parameters, dependent parameters and code strings.

## 15.141.3.4 void prepareStandardModels ( )

Function that defines standard neuron models.

The neuron models are defined and added to the C++ vector `nModels` that is holding all neuron model descriptions. User defined neuron models can be appended to this vector later in (a) separate function(s).

## 15.141.3.5 void prepareWeightUpdateModels ( )

Function that prepares the standard (pre) synaptic models, including their variables, parameters, dependent parameters and code strings.

## 15.141.3.6 unsigned int theSize ( string type )

Tool for determining the size of variable types on the current architecture.

## 15.141.3.7 void writeHeader ( ostream &amp; os )

Function to write the comment header denoting file authorship and contact details into the generated code.

## 15.141.4 Variable Documentation

## 15.141.4.1 vector&lt;neuronModel&gt; nModels

Global C++ vector containing all neuron model descriptions.

## 15.141.4.2 vector&lt;postSynModel&gt; postSynModels

Global C++ vector containing all post-synaptic update model descriptions.

## 15.141.4.3 vector&lt;weightUpdateModel&gt; weightUpdateModels

Global C++ vector containing all weightupdate model descriptions.

## 15.142 VClampGA.cu File Reference

Main entry point for the GeNN project demonstrating realtime fitting of a neuron with a GA running mostly on the GPU.

```
#include "VClampGA.h"
```

## Functions

- int `main` (int argc, char \*argv[])

*This function is the entry point for running the project.*

## 15.142.1 Detailed Description

Main entry point for the GeNN project demonstrating realtime fitting of a neuron with a GA running mostly on the GPU.

## 15.142.2 Function Documentation

## 15.142.2.1 int main ( int argc, char \* argv[] )

This function is the entry point for running the project.



### 15.143 VClampGA.h File Reference

```
#include <cassert>
#include "hr_time.cpp"
#include "utils.h"
#include <cuda_runtime.h>
#include "HHVClamp.cc"
#include "HHVClamp_CODE/runner.cc"
#include "../lib/include/numlib/randomGen.h"
#include "../lib/include/numlib/gauss.h"
#include "helper.h"
#include "GA.cc"
```

#### Macros

- `#define RAND(Y, X) Y = Y * 1103515245 + 12345; X = (unsigned int)(Y >> 16) & 32767`

#### Variables

- [randomGen](#) R
- [randomGauss](#) RG
- double [t](#) = 0.0f
- unsigned int [iT](#) = 0
- [CStopWatch](#) timer

#### 15.143.1 Macro Definition Documentation

15.143.1.1 `#define RAND( Y, X ) Y = Y * 1103515245 + 12345; X = (unsigned int)(Y >> 16) & 32767`

#### 15.143.2 Variable Documentation

15.143.2.1 unsigned int [iT](#) = 0

15.143.2.2 [randomGen](#) R

15.143.2.3 [randomGauss](#) RG

15.143.2.4 double [t](#) = 0.0f

15.143.2.5 [CStopWatch](#) timer

## References

- [1] Eugene M Izhikevich. Simple model of spiking neurons. *IEEE Transactions on neural networks*, 14(6):1569–1572, 2003. [7](#), [8](#), [9](#), [20](#)
- [2] Thomas Nowotny, Ramón Huerta, Henry DI Abarbanel, and Mikhail I Rabinovich. Self-organization in the olfactory system: one shot odor recognition in insects. *Biological cybernetics*, 93(6):436–446, 2005. [10](#), [18](#), [27](#)
- [3] Nikolai F Rulkov. Modeling of spiking-bursting neural behavior using two-dimensional map. *Physical Review E*, 65(4):041922, 2002. [18](#)
- [4] R. D. Traub and R. Miles. *Neural Networks of the Hippocampus*. Cambridge University Press, New York, 1991. [10](#), [19](#), [20](#), [29](#), [30](#)



## Index

- `_FTYPE`
  - `PoissonIzh.cc`, 184
- `_GLOBAL_H_`
  - `global.h`, 141
- `_IZH_SPARSE_MODEL_CC_`
  - `Izh_sparse_model.cc`, 148
- `_MAP_CLASSOL_CC_`
  - `MBody1_project/model/map_classol.cc`, 149
  - `MBody_delayedSyn_project/model/map_classol.cc`, 149
  - `MBody_individualID_project/model/map_classol.cc`, 150
  - `MBody_userdef_project/model/map_classol.cc`, 150
- `_MODELSPEC_CC_`
  - `modelSpec.cc`, 175
- `_MODELSPEC_H_`
  - `modelSpec.h`, 177
- `_NC1`
  - `sizes.h`, 202
- `_ONECOMP_MODEL_CC_`
  - `OneComp_model.cc`, 182
- `_POISSONIZHMODEL_CC_`
  - `PoissonIzh-model.cc`, 183
- `_SCHMUKER2014_CLASSIFIER_`
  - `Schmuker2014_classifier.cu`, 201
- `_TOSTRING_H_`
  - `toString.h`, 222
- `_UTILS_H_`
  - `utils.h`, 224
- `__CODE_HELPER_CC`
  - `CodeHelper.cc`, 114
- `__dnames`
  - `stringutils.h`, 205
- `__fnames`
  - `stringutils.h`, 205
- `__mathFN`
  - `stringutils.h`, 204
- `~NNmodel`
  - `NNmodel`, 72
- `~Schmuker2014_classifier`
  - `Schmuker2014_classifier`, 100
- `~SynDelay`
  - `SynDelay`, 105
- `~classIzh`
  - `classIzh`, 50
- `~classol`
  - `classol`, 55
- `~neuronpop`
  - `neuronpop`, 67
- `~postVarsInPostLearn`
  - `postVarsInPostLearn`, 84
- `~postVarsInPostLearn_sparse`
  - `postVarsInPostLearn_sparse`, 85
- `~postVarsInSimCode`
  - `postVarsInSimCode`, 85
  - `~postVarsInSimCode_sparse`
    - `postVarsInSimCode_sparse`, 86
  - `~postVarsInSynapseDynamics`
    - `postVarsInSynapseDynamics`, 87
  - `~postVarsInSynapseDynamics_sparse`
    - `postVarsInSynapseDynamics_sparse`, 88
  - `~preVarsInPostLearn`
    - `preVarsInPostLearn`, 88
  - `~preVarsInPostLearn_sparse`
    - `preVarsInPostLearn_sparse`, 89
  - `~preVarsInSimCode`
    - `preVarsInSimCode`, 90
  - `~preVarsInSimCode_sparse`
    - `preVarsInSimCode_sparse`, 91
  - `~preVarsInSynapseDynamics`
    - `preVarsInSynapseDynamics`, 91
  - `~preVarsInSynapseDynamics_sparse`
    - `preVarsInSynapseDynamics_sparse`, 92
  - `~randomGauss`
    - `randomGauss`, 95
  - `~randomGen`
    - `randomGen`, 97
  - `~stdRG`
    - `stdRG`, 104
- `00_MainPage.dox`, 107
- `01_Installation.dox`, 107
- `02_Quickstart.dox`, 107
- `03_Examples.dox`, 107
- `09_ReleaseNotes_v2.dox`, 107
- `10_UserManual.dox`, 107
- `11_Tutorial.dox`, 107
- `12_Tutorial.dox`, 107
- `13_UserGuide.dox`, 107
- `14_Credits.dox`, 108
- `ALLTOALL`
  - `modelSpec.h`, 177
- `AUTODEVICE`
  - `modelSpec.h`, 177
- `absDiff`
  - `postsynapticVariables/testHelper.h`, 209
  - `presynapticVariables/testHelper.h`, 209
- `activateDirectInput`
  - `NNmodel`, 72
- `addInputRate`
  - `Schmuker2014_classifier`, 100
- `addNeuronPopulation`
  - `NNmodel`, 72, 74
- `addSynapsePopulation`
  - `NNmodel`, 74–76
- `allocate_device_mem_input`
  - `classIzh`, 50
  - `classol`, 55
  - `neuronpop`, 67

- allocate\_device\_mem\_patterns
  - classlzh, 50
  - classol, 55
  - neuronpop, 67
- allocateHostAndDeviceMemory
  - Schmuker2014\_classifier, 100
- applyInputToClassifier
  - experiment.cu, 115
- applyLearningRuleSynapses
  - Schmuker2014\_classifier, 100
- asGoodAsZero
  - global.h, 141
- B
  - simpleBit.h, 202
- baseV
  - inputSpec, 65
- baserates
  - classol, 61
- BlkSz
  - GeNNHelperKrnls.cu, 140
- braces
  - CodeHelper, 62
- CACHE\_DIR
  - experiment.h, 117
- CB
  - CodeHelper.cc, 114
- CHECK\_CUDA\_ERRORS
  - utils.h, 224
- CLUST\_SIZE\_AN
  - Model\_Schmuker\_2014\_classifier.cc, 174
- CLUST\_SIZE\_PN
  - Model\_Schmuker\_2014\_classifier.cc, 174
- CLUST\_SIZE\_RN
  - Model\_Schmuker\_2014\_classifier.cc, 174
- CONNECTIVITY\_AN\_AN
  - experiment.h, 117
- CONNECTIVITY\_PN\_AN
  - experiment.h, 117
- CONNECTIVITY\_PN\_PN
  - experiment.h, 117
- CONNECTIVITY\_RN\_PN
  - experiment.h, 117
- CONSTINP
  - modelSpec.h, 177
- CPU
  - modelSpec.h, 178
- CStopWatch, 62
  - CStopWatch, 62
  - getElapsedTime, 62
  - startTimer, 62
  - stopTimer, 63
- cacheDir
  - Schmuker2014\_classifier, 102
- calculateCurrentWindowWinner
  - Schmuker2014\_classifier, 100
- calculateDerivedParameter
  - dpclass, 63
  - expDecayDp, 64
  - pwSTDP, 93
  - pwSTDP\_userdef, 94
  - rulkovdp, 97
- calculateOverallWinner
  - Schmuker2014\_classifier, 100
- calculateVrResponse
  - Schmuker2014\_classifier, 100
- calculateWinner
  - Schmuker2014\_classifier, 100
- Cexp
  - helper.h, 143
- checkContents
  - Schmuker2014\_classifier, 100, 101
- checkSizes
  - NNmodel, 77
- chooseDevice
  - generateALL.cc, 135
- chooseGPUDevice
  - NNmodel, 78
- classlzh, 50
  - ~classlzh, 50
  - allocate\_device\_mem\_input, 50
  - allocate\_device\_mem\_patterns, 50
  - classlzh, 50
  - copy\_device\_mem\_input, 51
  - create\_input\_values, 51
  - d\_input1, 51
  - d\_input2, 51
  - free\_device\_mem, 51
  - gen\_alltoall\_syns, 51
  - getSpikeNumbersFromGPU, 51
  - getSpikesFromGPU, 51
  - init, 51
  - initializeAllVars, 51
  - input1, 52
  - input2, 52
  - model, 52
  - output\_params, 51
  - output\_spikes, 51
  - output\_state, 51
  - randomizeVar, 51
  - randomizeVarSq, 51
  - read\_input\_values, 51
  - read\_sparsesyns\_par, 51
  - run, 51
  - setInput, 51
  - sum\_spikes, 51
  - sumPExc, 52
  - sumPINh, 52
  - write\_input\_to\_file, 51
- classLabel
  - Schmuker2014\_classifier, 102
- classifier
  - experiment.cu, 116
- classol, 52
  - ~classol, 55
  - allocate\_device\_mem\_input, 55

- allocate\_device\_mem\_patterns, 55
- baserates, 61
- classol, 55
- d\_baserates, 61
- d\_pattern, 61
- free\_device\_mem, 55
- generate\_baserates, 55, 56
- get\_kcdnsyns, 56
- getSpikeNumbersFromGPU, 56
- getSpikesFromGPU, 56
- init, 56
- model, 61
- offset, 61
- output\_spikes, 56, 57
- output\_state, 57
- p\_pattern, 61
- pattern, 61
- read\_PNIzh1syns, 57
- read\_input\_patterns, 57
- read\_kcdnsyns, 57
- read\_pnkcsyns, 57, 59
- read\_pnlhsyns, 59
- read\_sparsesyns\_par, 59
- run, 59
- runCPU, 59, 60
- runGPU, 60
- size\_g, 61
- sum\_spikes, 60
- sumDN, 61
- sumIzh1, 61
- sumKC, 61
- sumLHI, 61
- sumPN, 61
- theRates, 61
- write\_kcdnsyns, 60
- write\_pnkcsyns, 60
- write\_pnlhsyns, 61
- classol\_sim.cu, 108, 109
- classol\_sim.h, 109–112
- clear
  - extra\_neurons.h, 118
  - lib/include/extra\_postsynapses.h, 119
  - SpineML\_to\_GeNN/extra\_postsynapses.h, 120
- clearDownDevice
  - Schmuker2014\_classifier, 101
- clearedDownDevice
  - Schmuker2014\_classifier, 102
- closeBrace
  - CodeHelper, 62
- clusterSpikeCountAN
  - Schmuker2014\_classifier, 102
- CodeHelper, 61
  - braces, 62
  - closeBrace, 62
  - CodeHelper, 62
  - endl, 62
  - openBrace, 62
  - setVerbose, 62
  - verbose, 62
- CodeHelper.cc, 113
  - \_\_CODE\_HELPER\_CC, 114
  - CB, 114
  - ENDL, 114
  - OB, 114
  - SAVEP, 114
- compareErrTupel
  - GA.cc, 121
- constInput
  - SynDelay.cc, 206
- convertToRateCode
  - Schmuker2014\_classifier, 101
- copy\_device\_mem\_input
  - classlzh, 51
  - neuronpop, 68
- copy\_var
  - helper.h, 143
- correctClass
  - Schmuker2014\_classifier, 102
- countAN
  - Schmuker2014\_classifier, 102
- countEntriesAbove
  - sparseUtils.cc, 203
- countPN
  - Schmuker2014\_classifier, 102
- countPNAN
  - Schmuker2014\_classifier, 102
- countRN
  - Schmuker2014\_classifier, 102
- create\_input\_values
  - classlzh, 51
  - neuronpop, 68
- createDirectory
  - experiment.cu, 115
- createPosttoPreArray
  - sparseUtils.cc, 203
- createSparseConnectivityFromDense
  - sparseUtils.cc, 203
- createWTACConnectivity
  - Schmuker2014\_classifier, 101
- D\_MAX\_RANDOM\_NUM
  - experiment.h, 117
- d\_baserates
  - classol, 61
- d\_input1
  - classlzh, 51
  - neuronpop, 68
- d\_input2
  - classlzh, 51
- d\_inputRates
  - Schmuker2014\_classifier, 102
- d\_maxRandomNumber
  - Schmuker2014\_classifier, 102
- d\_pattern
  - classol, 61
- DATASET\_NAME
  - experiment.h, 117

- DBG\_SIZE
  - lzh\_sparse\_sim.h, 149
  - MBody1\_project/model/classol\_sim.h, 109
  - MBody\_delayedSyn\_project/model/classol\_sim.h, 111
  - MBody\_individualID\_project/model/classol\_sim.h, 112
  - MBody\_userdef\_project/model/classol\_sim.h, 113
  - OneComp\_sim.h, 183
  - Poissonlzh\_sim.h, 186
- DENSE
  - modelSpec.h, 178
- DT
  - featureTests/supportCode/MBody\_userdef.cc, 166
  - HHVClamp.cc, 144
  - HHVclampGA\_project/model/MBody1.cc, 152
  - lzh\_sparse.cc, 147
  - MBody1\_project/model/MBody1.cc, 155
  - MBody\_delayedSyn.cc, 159
  - MBody\_individualID.cc, 163
  - Model\_Schmuker\_2014\_classifier.cc, 174
  - OneComp.cc, 181
  - Poissonlzh.cc, 184
  - postVarsInPostLearn.cc, 187
  - postVarsInPostLearn\_sparse.cc, 188
  - postVarsInSimCode.cc, 190
  - postVarsInSimCode\_sparse.cc, 191
  - postVarsInSynapseDynamics.cc, 192
  - postVarsInSynapseDynamics\_sparse.cc, 193
  - preVarsInPostLearn.cc, 194
  - preVarsInPostLearn\_sparse.cc, 195
  - preVarsInSimCode.cc, 196
  - preVarsInSimCode\_sparse.cc, 197
  - preVarsInSynapseDynamics.cc, 198
  - preVarsInSynapseDynamics\_sparse.cc, 199
  - SynDelay.cc, 206
  - SynDelaySim.h, 209
  - testPostVarsInPostLearn.h, 211
  - testPostVarsInPostLearn\_sparse.h, 212
  - testPostVarsInSimCode.h, 213
  - testPostVarsInSimCode\_sparse.h, 213
  - testPostVarsInSynapseDynamics.h, 214
  - testPostVarsInSynapseDynamics\_sparse.h, 215
  - testPreVarsInPostLearn.h, 216
  - testPreVarsInPostLearn\_sparse.h, 217
  - testPreVarsInSimCode.h, 218
  - testPreVarsInSimCode\_sparse.h, 219
  - testPreVarsInSynapseDynamics.h, 220
  - testPreVarsInSynapseDynamics\_sparse.h, 221
  - userproject/MBody\_userdef\_project/model/MBody\_userdef.cc, 170
- data\_type
  - Schmuker2014\_classifier, 100
- data\_type\_double
  - Schmuker2014\_classifier, 100
- data\_type\_float
  - Schmuker2014\_classifier, 100
- data\_type\_int
  - Schmuker2014\_classifier, 100
- data\_type\_uint
  - Schmuker2014\_classifier, 100
- datasetName
  - Schmuker2014\_classifier, 102
- delB
  - simpleBit.h, 202
- deviceCount
  - global.h, 141
- deviceProp
  - global.h, 141
- digits
  - ensureFtype.h, 114
  - stringutils.h, 205
- directoryExists
  - experiment.cu, 115
- divi
  - experiment.h, 117
- dnp
  - NNmodel, 78
- doFinal
  - ensureFtype.h, 114
  - stringutils.h, 204
- dpNames
  - neuronModel, 66
  - postSynModel, 83
  - weightUpdateModel, 106
- dpclass, 63
  - calculateDerivedParameter, 63
  - dpclass, 63
- dps
  - neuronModel, 66
  - postSynModel, 83
  - weightUpdateModel, 106
- dpsp
  - NNmodel, 78
- dsp\_w
  - NNmodel, 78
- dv
  - testMixedArray.cc, 210
- EKexp
  - helper.h, 143
- ENDL
  - CodeHelper.cc, 114
- ENaexp
  - helper.h, 143
- EXITSYN
  - modelSpec.h, 178
- EXPDECAY
  - modelSpec.h, 179
- Elexp
  - helper.h, 143
- endl
  - CodeHelper, 62
- ensureFtype
  - ensureFtype.h, 114
  - stringutils.h, 204
- ensureFtype.h, 114

- digits, 114
  - doFinal, 114
  - ensureFtype, 114
  - op, 114
- ensureMathFunctionFtype
  - stringutils.h, 205
- err
  - errTupel, 63
- errTupel, 63
  - err, 63
  - id, 63
- evntThreshold
  - weightUpdateModel, 106
- exlzh\_ini
  - OneComp.cc, 181
  - Poissonlzh.cc, 184
- exlzh\_p
  - OneComp.cc, 181
  - Poissonlzh.cc, 184
- exclzh\_p
  - lzh\_sparse.cc, 147
- expDecay
  - expDecayDp, 64
- expDecayDp, 64
  - calculateDerivedParameter, 64
  - expDecay, 64
- experiment.cu, 114
  - applyInputToClassifier, 115
  - classifier, 116
  - createDirectory, 115
  - directoryExists, 115
  - getAverage, 115
  - getStdDev, 115
  - getUniqueRunId, 115
  - main, 115
  - outputRunParameters, 116
  - Parameter, 115
  - printTextFile, 116
  - RAND, 115
  - S\_ISDIR, 115
  - setDefaultParamValues, 116
  - vectorContains, 116
- experiment.h, 116
  - CACHE\_DIR, 117
  - CONNECTIVITY\_AN\_AN, 117
  - CONNECTIVITY\_PN\_AN, 117
  - CONNECTIVITY\_PN\_PN, 117
  - CONNECTIVITY\_RN\_PN, 117
  - D\_MAX\_RANDOM\_NUM, 117
  - DATASET\_NAME, 117
  - divi, 117
  - FLAG\_RUN\_ON\_CPU, 117
  - GLOBAL\_WEIGHT\_SCALING, 117
  - MAX\_FIRING\_RATE\_HZ, 117
  - MAX\_WEIGHT\_PN\_AN, 117
  - MIN\_FIRING\_RATE\_HZ, 117
  - MIN\_WEIGHT\_PN\_AN, 117
  - N\_FOLDING, 117
  - OUTPUT\_DIR, 117
  - PLASTICITY\_INTERVAL\_MS, 117
  - RECORDING\_TIME\_MS, 117
  - RECORDINGS\_DIR, 117
  - REPEAT\_LEARNING\_SET, 117
  - SPIKING\_ACTIVITY\_THRESHOLD\_HZ, 117
  - TOTAL\_RECORDINGS, 117
  - timer, 118
  - UINT, 117
  - VR\_DATA\_FILENAME, 117
  - WEIGHT\_DELTA\_PN\_AN, 117
  - WEIGHT\_RN\_PN, 117
  - WEIGHT\_WTA\_AN\_AN, 117
  - WEIGHT\_WTA\_PN\_PN, 117
- extended\_name\_substitutions
  - stringutils.h, 205
- extended\_value\_substitutions
  - stringutils.h, 205
- extra\_neurons.h, 118
  - clear, 118
  - push\_back, 118, 119
  - simCode, 119
- extra\_postsynapses.h, 119, 120
- extra\_weightupdates.h, 121
- extraGlobalNeuronKernelParameterTypes
  - neuronModel, 66
- extraGlobalNeuronKernelParameters
  - neuronModel, 66
- extraGlobalSynapseKernelParameterTypes
  - weightUpdateModel, 106
- extraGlobalSynapseKernelParameters
  - weightUpdateModel, 106
- FALSE
  - modelSpec.h, 178
- FLAG\_RUN\_ON\_CPU
  - experiment.h, 117
- featureTests/supportCode/MBody\_userdef.cc
  - DT, 166
  - gpKCDN, 167
  - gpPNKC, 167
  - modelDefinition, 167
  - myDNDN\_ini, 167
  - myDNDN\_p, 167
  - myKCDN\_ini, 167
  - myKCDN\_p, 167
  - myLHIKC\_ini, 167
  - myLHIKC\_p, 167
  - myPNKC\_ini, 168
  - myPNKC\_p, 168
  - myPNLHI\_ini, 168
  - myPNLHI\_p, 168
  - myPOI\_ini, 168
  - myPOI\_p, 168
  - postExpDNDN, 168
  - postExpKCDN, 168
  - postExpLHIKC, 168
  - postExpPNKC, 169
  - postExpPNLHI, 169



- postSynV, [169](#)
  - postSynV\_EXPDECAY\_EVAR, [169](#)
  - stdTM\_ini, [169](#)
  - stdTM\_p, [169](#)
  - TIMING, [166](#)
- final
  - NNmodel, [78](#)
- finalize
  - NNmodel, [77](#)
- findMaxMinSampleDistances
  - Schmuker2014\_classifier, [101](#)
- free\_device\_mem
  - classlzh, [51](#)
  - classol, [55](#)
- ftype
  - NNmodel, [78](#)
- fv
  - testMixedArray.cc, [210](#)
- g\_ee
  - gen\_syns\_sparse\_izhModel.cc, [128](#)
- g\_ei
  - gen\_syns\_sparse\_izhModel.cc, [128](#)
- g\_ie
  - gen\_syns\_sparse\_izhModel.cc, [128](#)
- g\_ii
  - gen\_syns\_sparse\_izhModel.cc, [128](#)
- GA.cc, [121](#)
  - compareErrTupel, [121](#)
  - procreatePop, [121](#)
- GAUSS\_CC
  - gauss.cc, [122](#)
- GAUSS\_H
  - gauss.h, [122](#)
- gDNDN
  - HHVclampGA\_project/model/MBody1.cc, [152](#)
- GENN\_DOUBLE
  - modelSpec.h, [178](#)
- GENN\_FLOAT
  - modelSpec.h, [178](#)
- gKexp
  - helper.h, [143](#)
- gLHIKC
  - HHVclampGA\_project/model/MBody1.cc, [152](#)
- GLOBAL\_WEIGHT\_SCALING
  - experiment.h, [117](#)
- GLOBALG
  - modelSpec.h, [178](#)
- gNaexp
  - helper.h, [143](#)
- GPU
  - modelSpec.h, [178](#)
- garray
  - gen\_syns\_sparse\_izhModel.cc, [128](#)
- garray\_ee
  - gen\_syns\_sparse\_izhModel.cc, [128](#)
- garray\_ei
  - gen\_syns\_sparse\_izhModel.cc, [128](#)
- garray\_ie
  - gen\_syns\_sparse\_izhModel.cc, [128](#)
- gen\_syns\_sparse\_izhModel.cc, [128](#)
- garray\_ii
  - gen\_syns\_sparse\_izhModel.cc, [128](#)
- gauss.cc, [121](#)
  - GAUSS\_CC, [122](#)
- gauss.h, [122](#)
  - GAUSS\_H, [122](#)
- GeNNHelperKrnls.cu, [139](#)
  - BlkSz, [140](#)
  - generate\_random\_gpulInput\_xorwow, [140](#)
  - setup\_kernel, [140](#)
  - xorwow\_setup, [140](#)
- GeNNReady
  - modelSpec.h, [179](#)
- gen\_alltoall\_syns
  - classlzh, [51](#)
- gen\_input\_structured.cc, [122](#)
  - main, [123](#)
  - R, [123](#)
- gen\_kcdn\_syns.cc, [123](#)
  - main, [123](#)
  - R, [123](#)
  - RG, [123](#)
- gen\_kcdn\_syns\_fixto10K.cc, [123](#)
  - main, [124](#)
  - R, [124](#)
  - R2, [124](#)
  - RG, [124](#)
- gen\_pnkc\_syns.cc, [124](#)
  - main, [125](#)
  - R, [125](#)
  - RG, [125](#)
- gen\_pnkc\_syns\_indivID.cc, [125](#)
  - main, [125](#)
  - R, [125](#)
  - RG, [125](#)
- gen\_pnlhi\_syns.cc, [125](#)
  - main, [126](#)
- gen\_syns\_sparse.cc, [126](#)
  - main, [126](#)
  - R, [126](#)
  - RG, [127](#)
- gen\_syns\_sparse\_izhModel.cc, [127](#)
  - g\_ee, [128](#)
  - g\_ei, [128](#)
  - g\_ie, [128](#)
  - g\_ii, [128](#)
  - garray, [128](#)
  - garray\_ee, [128](#)
  - garray\_ei, [128](#)
  - garray\_ie, [128](#)
  - garray\_ii, [128](#)
  - gsyn, [128](#)
  - ind, [128](#)
  - ind\_ee, [128](#)
  - ind\_ei, [128](#)
  - ind\_ie, [128](#)
  - ind\_ii, [128](#)

- indInG\_ee, 128
- indInG\_ei, 128
- indInG\_ie, 128
- indInG\_ii, 128
- main, 128
- printVector, 128
- R, 128
- Rind, 128
- genNeuronFunction
  - generateCPU.cc, 137
- genNeuronKernel
  - generateKernels.cc, 138
- genRunner
  - generateRunner.cc, 139
- genRunnerGPU
  - generateRunner.cc, 139
- genSynapseFunction
  - generateCPU.cc, 137
- genSynapseKernel
  - generateKernels.cc, 138
- generate\_baserates
  - classol, 55, 56
- generate\_inputrates\_dataset
  - Schmuker2014\_classifier, 101
- generate\_model\_runner
  - generateALL.cc, 135
- generate\_or\_load\_inputrates\_dataset
  - Schmuker2014\_classifier, 101
- generate\_process\_presynaptic\_events\_code
  - generateKernels.cc, 138
- generate\_process\_presynaptic\_events\_code\_CPU
  - generateCPU.cc, 136
- generate\_random\_gpuInput\_xorwow
  - GeNNHelperKrnls.cu, 140
- generate\_run.cc, 129–134
- generateALL.cc, 135
  - chooseDevice, 135
  - generate\_model\_runner, 135
  - main, 136
- generateCPU.cc, 136
  - genNeuronFunction, 137
  - genSynapseFunction, 137
  - generate\_process\_presynaptic\_events\_code\_C↔PU, 136
- generateKernels.cc, 137
  - genNeuronKernel, 138
  - genSynapseKernel, 138
  - generate\_process\_presynaptic\_events\_code, 138
  - hlp, 138
  - isGrpVarNeeded, 138
- generateRunner.cc, 139
  - genRunner, 139
  - genRunnerGPU, 139
- generateSimulatedTimeSeriesData
  - Schmuker2014\_classifier, 101
- gennError
  - utils.h, 224
- get\_kcdnsyns
  - classol, 56
- getAverage
  - experiment.cu, 115
- getClassCluster
  - Schmuker2014\_classifier, 101
- getClusterIndex
  - Schmuker2014\_classifier, 101
- getElapsedTime
  - CStopWatch, 62
- getG
  - sparseUtils.cc, 203
- getManhattanDistance
  - Schmuker2014\_classifier, 101
- getRand0to1
  - Schmuker2014\_classifier, 101
- getRecordingFilename
  - Schmuker2014\_classifier, 101
- getSampleDistance
  - Schmuker2014\_classifier, 101
- getSparseVar
  - sparseUtils.cc, 203
- getSpikeNumbersFromGPU
  - classlzh, 51
  - classol, 56
  - neuronpop, 68
  - Schmuker2014\_classifier, 101
- getSpikesFromGPU
  - classlzh, 51
  - classol, 56
  - neuronpop, 68
  - Schmuker2014\_classifier, 101
- getStdDev
  - experiment.cu, 115
- getUniqueRunId
  - experiment.cu, 115
- glexp
  - helper.h, 143
- global.h, 140
  - \_GLOBAL\_H\_, 141
  - asGoodAsZero, 141
  - deviceCount, 141
  - deviceProp, 141
  - hostCount, 141
  - learnBlkSz, 141
  - logUIntSz, 141
  - neuronBlkSz, 141
  - optimiseBlockSize, 141
  - synapseBlkSz, 141
  - theDev, 142
  - UIntSz, 142
- globalInp
  - NNmodel, 78
- gpKCDN
  - featureTests/supportCode/MBody\_userdef.cc, 167
  - userproject/MBody\_userdef\_project/model/M↔Body\_userdef.cc, 171
- gpPNKC
  - featureTests/supportCode/MBody\_userdef.cc, 167

- userproject/MBody\_userdef\_project/model/MBody\_userdef.cc, 171
- gsyn
  - gen\_syns\_sparse\_izhModel.cc, 128
- HHVClamp.cc, 144
  - DT, 144
  - modelDefinition, 144
  - myHH\_ini, 145
  - myHH\_p, 145
- HHVclampGA\_project/generate\_run.cc
  - main, 129
- HHVclampGA\_project/model/MBody1.cc
  - DT, 152
  - gDNDN, 152
  - gLHIKC, 152
  - modelDefinition, 152
  - myDNDN\_p, 152
  - myKCDN\_p, 152
  - myLHIKC\_p, 152
  - myPNKC\_p, 152
  - myPNLHI\_p, 153
  - myPOI\_ini, 153
  - myPOI\_p, 153
  - postExpDNDN, 153
  - postExpKCDN, 153
  - postExpLHIKC, 153
  - postExpPNKC, 153
  - postExpPNLHI, 154
  - postSynV, 154
  - stdTM\_ini, 154
  - stdTM\_p, 154
- HR\_TIMER
  - hr\_time.cpp, 145
- helper.h, 142
  - Cexp, 143
  - copy\_var, 143
  - EKexp, 143
  - ENaexp, 143
  - Elexp, 143
  - gKexp, 143
  - gNaexp, 143
  - glexp, 143
  - hexp, 143
  - initI, 143
  - initexpHH, 143
  - limit, 143
  - mexp, 143
  - nexp, 143
  - operator<=, 143
  - runexpHH, 143
  - sigC, 143
  - sigEK, 143
  - sigENa, 144
  - sigEI, 143
  - sigGK, 144
  - sigGNa, 144
  - sigGI, 144
  - single\_var\_init\_fullrange, 143
  - single\_var\_reinit, 143
  - truevar\_init, 143
  - truevar\_initexpHH, 143
  - var\_init\_fullrange, 143
  - var\_reinit, 143
  - Vexp, 144
  - write\_para, 143
- hexp
  - helper.h, 143
- hlp
  - generateKernels.cc, 138
- hostCount
  - global.h, 141
- hr\_time.cpp, 145
  - HR\_TIMER, 145
- hr\_time.h, 145
- INDIVIDUALG
  - modelSpec.h, 178
- INDIVIDUALID
  - modelSpec.h, 178
- INHIBSYN
  - modelSpec.h, 178
- INJECTCURRENT
  - PoissonIzh\_sim.h, 186
- INPRULE
  - modelSpec.h, 178
- iT
  - Izh\_sparse\_sim.h, 149
  - MBody1\_project/model/classol\_sim.h, 110
  - MBody\_delayedSyn\_project/model/classol\_sim.h, 111
  - MBody\_individualID\_project/model/classol\_sim.h, 112
  - MBody\_userdef\_project/model/classol\_sim.h, 113
  - OneComp\_sim.h, 183
  - PoissonIzh\_sim.h, 186
  - VClampGA.h, 226
- IZHIKEVICH
  - modelSpec.h, 179
- IZHIKEVICH\_PS
  - modelSpec.h, 179
- IZHIKEVICH\_V
  - modelSpec.h, 179
- id
  - errTupel, 63
- inSyn
  - NNmodel, 79
- ind
  - gen\_syns\_sparse\_izhModel.cc, 128
- ind\_ee
  - gen\_syns\_sparse\_izhModel.cc, 128
- ind\_ei
  - gen\_syns\_sparse\_izhModel.cc, 128
- ind\_ie
  - gen\_syns\_sparse\_izhModel.cc, 128
- ind\_ii
  - gen\_syns\_sparse\_izhModel.cc, 128
- indInG\_ee

- gen\_syns\_sparse\_izhModel.cc, 128
- indInG\_ei
  - gen\_syns\_sparse\_izhModel.cc, 128
- indInG\_ie
  - gen\_syns\_sparse\_izhModel.cc, 128
- indInG\_ii
  - gen\_syns\_sparse\_izhModel.cc, 128
- individualSpikeCountPN
  - Schmuker2014\_classifier, 102
- inhlzh\_p
  - lzh\_sparse.cc, 147
- init
  - classlzh, 51
  - classol, 56
  - neuronpop, 68
- init\_neurons
  - postVarsInPostLearn, 84
  - postVarsInPostLearn\_sparse, 85
  - postVarsInSimCode, 85
  - postVarsInSimCode\_sparse, 86
  - postVarsInSynapseDynamics, 87
  - postVarsInSynapseDynamics\_sparse, 88
  - preVarsInPostLearn, 88
  - preVarsInPostLearn\_sparse, 89
  - preVarsInSimCode, 90
  - preVarsInSimCode\_sparse, 91
  - preVarsInSynapseDynamics, 91
  - preVarsInSynapseDynamics\_sparse, 92
- init\_synapses
  - postVarsInPostLearn, 84
  - postVarsInPostLearn\_sparse, 85
  - postVarsInSimCode, 85
  - postVarsInSimCode\_sparse, 86
  - postVarsInSynapseDynamics, 87
  - postVarsInSynapseDynamics\_sparse, 88
  - preVarsInPostLearn, 88
  - preVarsInPostLearn\_sparse, 89
  - preVarsInSimCode, 90
  - preVarsInSimCode\_sparse, 91
  - preVarsInSynapseDynamics, 91
  - preVarsInSynapseDynamics\_sparse, 92
- initGeNN
  - modelSpec.cc, 175
  - modelSpec.h, 179
- initl
  - helper.h, 143
- initLearnGrps
  - NNmodel, 77
- initexpHH
  - helper.h, 143
- initialiseInputData
  - Schmuker2014\_classifier, 101
- initialiseWeights\_DENSE\_PN\_AN
  - Schmuker2014\_classifier, 101
- initialiseWeights\_SPARSE\_RN\_PN
  - Schmuker2014\_classifier, 101
- initialiseWeights\_WTA\_AN\_AN
  - Schmuker2014\_classifier, 101
- initialiseWeights\_WTA\_PN\_PN
  - Schmuker2014\_classifier, 101
- initializeAllVars
  - classlzh, 51
- inplzh1
  - OneComp.cc, 181
- input1
  - classlzh, 52
  - neuronpop, 68
- input2
  - classlzh, 52
- input\_ini
  - SynDelay.cc, 206
- input\_p
  - SynDelay.cc, 206
- InputBaseRate
  - MBody1\_project/model/classol\_sim.h, 110
  - MBody\_delayedSyn\_project/model/classol\_sim.h, 111
  - MBody\_individualID\_project/model/classol\_sim.h, 112
  - MBody\_userdef\_project/model/classol\_sim.h, 113
  - Poissonlzh\_sim.h, 186
- inputInter\_ini
  - SynDelay.cc, 206
- inputOutput\_ini
  - SynDelay.cc, 206
- inputRates
  - Schmuker2014\_classifier, 102
- inputRatesSize
  - Schmuker2014\_classifier, 102
- inputSpec, 64
  - baseV, 65
  - N, 65
  - st, 65
  - t, 65
  - V, 65
- inter\_ini
  - SynDelay.cc, 207
- inter\_p
  - SynDelay.cc, 207
- interOutput\_ini
  - SynDelay.cc, 207
- ip0
  - rulkovdp, 97
- ip1
  - rulkovdp, 98
- ip2
  - rulkovdp, 98
- isGrpVarNeeded
  - generateKernels.cc, 138
- iv
  - testMixedArray.cc, 210
- lzh\_sim\_sparse.cu, 146
  - main, 146
- lzh\_sparse.cc, 146
  - DT, 147
  - exclzh\_p, 147

- inhlzh\_p, [147](#)
- lzhExc\_ini, [147](#)
- lzhInh\_ini, [147](#)
- meanInpExc, [147](#)
- meanInpInh, [147](#)
- modelDefinition, [147](#)
- neuronPSize, [147](#)
- neuronVSize, [147](#)
- postExpP, [147](#)
- postSynV, [147](#)
- Synlzh\_ini, [147](#)
- Synlzh\_p, [147](#)
- synapsePSize, [147](#)
- lzh\_sparse\_model.cc, [148](#)
- \_IZH\_SPARSE\_MODEL\_CC\_, [148](#)
- R, [148](#)
- RG, [148](#)
- lzh\_sparse\_model.h, [148](#)
- lzh\_sparse\_project/generate\_run.cc
- main, [130](#)
- openFileGetMax, [130](#)
- tS, [130](#)
- toLower, [130](#)
- toString, [130](#)
- toUpper, [130](#)
- lzh\_sparse\_sim.h, [148](#)
- DBG\_SIZE, [149](#)
- iT, [149](#)
- t, [149](#)
- T\_REPORT\_TME, [149](#)
- TOTAL\_TME, [149](#)
- timer, [149](#)
- lzhExc\_ini
- lzh\_sparse.cc, [147](#)
- lzhInh\_ini
- lzh\_sparse.cc, [147](#)
- LEARN1SYNAPSE
- modelSpec.h, [179](#)
- LEARNING
- modelSpec.h, [178](#)
- learnBlkSz
- global.h, [141](#)
- lib/include/extra\_postsynapses.h
- clear, [119](#)
- postSynDecay, [120](#)
- postSyntoCurrent, [120](#)
- push\_back, [119](#)
- lim0
- pwSTDP, [93](#)
- pwSTDP\_userdef, [94](#)
- lim1
- pwSTDP, [93](#)
- pwSTDP\_userdef, [94](#)
- limit
- helper.h, [143](#)
- load\_VR\_data
- Schmuker2014\_classifier, [101](#)
- loadArrayFromTextFile
- Schmuker2014\_classifier, [101](#)
- loadClassLabels
- Schmuker2014\_classifier, [101](#)
- log
- Schmuker2014\_classifier, [102](#)
- logUIntSz
- global.h, [141](#)
- lInGroups
- NNmodel, [79](#)
- lInSynGrp
- NNmodel, [79](#)
- MAPNEURON
- modelSpec.h, [179](#)
- MATINP
- modelSpec.h, [178](#)
- MAX\_FIRING\_RATE\_HZ
- experiment.h, [117](#)
- MAX\_WEIGHT\_PN\_AN
- experiment.h, [117](#)
- MAXNRN
- modelSpec.h, [178](#)
- MAXPOSTSYN
- modelSpec.h, [178](#)
- MBody1.cc, [151](#), [154](#)
- MBody1\_project/generate\_run.cc
- main, [131](#)
- tS, [130](#)
- toLower, [131](#)
- toString, [131](#)
- toUpper, [131](#)
- MBody1\_project/model/MBody1.cc
- DT, [155](#)
- modelDefinition, [155](#)
- myDNDN\_ini, [155](#)
- myDNDN\_p, [155](#)
- myKCDN\_ini, [155](#)
- myKCDN\_p, [156](#)
- myLHIKC\_ini, [156](#)
- myLHIKC\_p, [156](#)
- myPNKC\_ini, [156](#)
- myPNKC\_p, [156](#)
- myPNLHI\_ini, [156](#)
- myPNLHI\_p, [156](#)
- myPOI\_ini, [157](#)
- myPOI\_p, [157](#)
- postExpDNDN, [157](#)
- postExpKCDN, [157](#)
- postExpLHIKC, [157](#)
- postExpPNKC, [157](#)
- postExpPNLHI, [157](#)
- postSynV, [157](#)
- stdTM\_ini, [158](#)
- stdTM\_p, [158](#)
- MBody1\_project/model/classol\_sim.cu
- main, [108](#)
- MBody1\_project/model/classol\_sim.h
- DBG\_SIZE, [109](#)
- iT, [110](#)

- InputBaseRate, [110](#)
- MYRAND, [109](#)
- PAT\_TIME, [109](#)
- PATFTIME, [109](#)
- PATTERNNO, [110](#)
- patFireTime, [110](#)
- patSetTime, [110](#)
- SYN\_OUT\_TME, [110](#)
- t, [110](#)
- T\_REPORT\_TME, [110](#)
- TOTAL\_TME, [110](#)
- timer, [110](#)
- MBody1\_project/model/map\_classol.cc
  - \_MAP\_CLASSOL\_CC\_, [149](#)
- MBody\_delayedSyn.cc, [158](#)
  - DT, [159](#)
  - modelDefinition, [159](#)
  - myDNDN\_ini, [159](#)
  - myDNDN\_p, [159](#)
  - myKCDN\_ini, [159](#)
  - myKCDN\_p, [159](#)
  - myLHIKC\_ini, [160](#)
  - myLHIKC\_p, [160](#)
  - myPNKC\_ini, [160](#)
  - myPNKC\_p, [160](#)
  - myPNLHI\_ini, [160](#)
  - myPNLHI\_p, [160](#)
  - myPOI\_ini, [160](#)
  - myPOI\_p, [160](#)
  - postExpDNDN, [161](#)
  - postExpKCDN, [161](#)
  - postExpLHIKC, [161](#)
  - postExpPNKC, [161](#)
  - postExpPNLHI, [161](#)
  - postSynV, [161](#)
  - stdTM\_ini, [161](#)
  - stdTM\_p, [161](#)
- MBody\_delayedSyn\_project/generate\_run.cc
  - main, [131](#)
  - tS, [131](#)
  - toLower, [131](#)
  - toString, [132](#)
  - toUpper, [132](#)
- MBody\_delayedSyn\_project/model/classol\_sim.cu
  - main, [108](#)
- MBody\_delayedSyn\_project/model/classol\_sim.h
  - DBG\_SIZE, [111](#)
  - iT, [111](#)
  - InputBaseRate, [111](#)
  - MYRAND, [111](#)
  - PAT\_TIME, [111](#)
  - PATFTIME, [111](#)
  - PATTERNNO, [111](#)
  - patFireTime, [111](#)
  - patSetTime, [111](#)
  - SYN\_OUT\_TME, [111](#)
  - t, [111](#)
  - T\_REPORT\_TME, [111](#)
  - TOTAL\_TME, [111](#)
  - timer, [111](#)
- MBody\_individualID\_project/model/map\_classol.cc
  - \_MAP\_CLASSOL\_CC\_, [149](#)
- MBody\_individualID.cc, [162](#)
  - DT, [163](#)
  - modelDefinition, [163](#)
  - myDNDN\_ini, [163](#)
  - myDNDN\_p, [163](#)
  - myKCDN\_ini, [163](#)
  - myKCDN\_p, [163](#)
  - myLHIKC\_ini, [163](#)
  - myLHIKC\_p, [164](#)
  - myPNKC\_ini, [164](#)
  - myPNKC\_p, [164](#)
  - myPNLHI\_ini, [164](#)
  - myPNLHI\_p, [164](#)
  - myPOI\_ini, [164](#)
  - myPOI\_p, [164](#)
  - postExpDNDN, [164](#)
  - postExpKCDN, [164](#)
  - postExpLHIKC, [165](#)
  - postExpPNKC, [165](#)
  - postExpPNLHI, [165](#)
  - postSynV, [165](#)
  - stdTM\_ini, [165](#)
  - stdTM\_p, [165](#)
- MBody\_individualID\_project/generate\_run.cc
  - main, [132](#)
  - tS, [132](#)
  - toLower, [132](#)
  - toString, [132](#)
  - toUpper, [132](#)
- MBody\_individualID\_project/model/classol\_sim.cu
  - main, [108](#)
- MBody\_individualID\_project/model/classol\_sim.h
  - DBG\_SIZE, [112](#)
  - iT, [112](#)
  - InputBaseRate, [112](#)
  - MYRAND, [112](#)
  - PAT\_TIME, [112](#)
  - PATFTIME, [112](#)
  - PATTERNNO, [112](#)
  - patFireTime, [112](#)
  - patSetTime, [112](#)
  - SYN\_OUT\_TME, [112](#)
  - t, [112](#)
  - T\_REPORT\_TME, [112](#)
  - TOTAL\_TME, [112](#)
  - timer, [112](#)
- MBody\_individualID\_project/model/map\_classol.cc
  - \_MAP\_CLASSOL\_CC\_, [150](#)
- MBody\_userdef.cc, [166](#), [169](#)
- MBody\_userdef\_project/generate\_run.cc
  - main, [133](#)
  - tS, [133](#)
  - toLower, [133](#)
  - toString, [133](#)

- toUpper, 133
- MBody\_userdef\_project/model/classol\_sim.cu
  - main, 109
- MBody\_userdef\_project/model/classol\_sim.h
  - DBG\_SIZE, 113
  - iT, 113
  - InputBaseRate, 113
  - MYRAND, 113
  - PAT\_TIME, 113
  - PATFTIME, 113
  - PATTERNNO, 113
  - patFireTime, 113
  - patSetTime, 113
  - SYN\_OUT\_TME, 113
  - t, 113
  - T\_REPORT\_TME, 113
  - TOTAL\_TME, 113
  - timer, 113
- MBody\_userdef\_project/model/map\_classol.cc
  - \_MAP\_CLASSOL\_CC\_, 150
- MIN\_FIRING\_RATE\_HZ
  - experiment.h, 117
- MIN\_WEIGHT\_PN\_AN
  - experiment.h, 117
- MYRAND
  - MBody1\_project/model/classol\_sim.h, 109
  - MBody\_delayedSyn\_project/model/classol\_sim.h, 111
  - MBody\_individualID\_project/model/classol\_sim.h, 112
  - MBody\_userdef\_project/model/classol\_sim.h, 113
  - PoissonIzh\_sim.h, 186
- main
  - experiment.cu, 115
  - gen\_input\_structured.cc, 123
  - gen\_kcdn\_syms.cc, 123
  - gen\_kcdn\_syms\_fixto10K.cc, 124
  - gen\_pnkc\_syms.cc, 125
  - gen\_pnkc\_syms\_indivID.cc, 125
  - gen\_pnlhi\_syms.cc, 126
  - gen\_syms\_sparse.cc, 126
  - gen\_syms\_sparse\_izhModel.cc, 128
  - generateALL.cc, 136
  - HHVclampGA\_project/generate\_run.cc, 129
  - lzh\_sim\_sparse.cu, 146
  - lzh\_sparse\_project/generate\_run.cc, 130
  - MBody1\_project/generate\_run.cc, 131
  - MBody1\_project/model/classol\_sim.cu, 108
  - MBody\_delayedSyn\_project/generate\_run.cc, 131
  - MBody\_delayedSyn\_project/model/classol\_sim.cu, 108
  - MBody\_individualID\_project/generate\_run.cc, 132
  - MBody\_individualID\_project/model/classol\_sim.cu, 108
  - MBody\_userdef\_project/generate\_run.cc, 133
  - MBody\_userdef\_project/model/classol\_sim.cu, 109
  - OneComp\_project/generate\_run.cc, 134
  - OneComp\_sim.cu, 182
  - PoissonIzh\_project/generate\_run.cc, 134
  - PoissonIzh\_sim.cu, 186
  - SynDelaySim.cu, 208
  - testDefaultConstructor.cu, 209
  - testMixedArray.cc, 210
  - testPostVarsInPostLearn.cu, 210
  - testPostVarsInPostLearn\_sparse.cu, 211
  - testPostVarsInSimCode.cu, 212
  - testPostVarsInSimCode\_sparse.cu, 213
  - testPostVarsInSynapseDynamics.cu, 214
  - testPostVarsInSynapseDynamics\_sparse.cu, 215
  - testPreVarsInPostLearn.cu, 216
  - testPreVarsInPostLearn\_sparse.cu, 217
  - testPreVarsInSimCode.cu, 218
  - testPreVarsInSimCode\_sparse.cu, 219
  - testPreVarsInSynapseDynamics.cu, 220
  - testPreVarsInSynapseDynamics\_sparse.cu, 221
  - testRegEx.cc, 222
  - VClampGA.cu, 225
- map\_classol.cc, 149, 150
- map\_classol.h, 150, 151
- maxConn
  - NNmodel, 79
- meanInpExc
  - lzh\_sparse.cc, 147
- meanInpInh
  - lzh\_sparse.cc, 147
- mexp
  - helper.h, 143
- model
  - classlzh, 52
  - classol, 61
  - neuronpop, 68
  - Schmuker2014\_classifier, 102
- Model\_Schmuker\_2014\_classifier.cc, 173
  - CLUST\_SIZE\_AN, 174
  - CLUST\_SIZE\_PN, 174
  - CLUST\_SIZE\_RN, 174
  - DT, 174
  - modelDefinition, 174
  - NETWORK\_SCALE, 174
  - NUM\_CLASSES, 174
  - NUM\_FEATURES, 174
  - NUM\_VR, 174
  - SYNAPSE\_TAU\_ANAN, 174
  - SYNAPSE\_TAU\_PNAN, 174
  - SYNAPSE\_TAU\_PNP, 174
  - SYNAPSE\_TAU\_RNP, 174
- modelDefinition
  - featureTests/supportCode/MBody\_userdef.cc, 167
  - HHVClamp.cc, 144
  - HHVclampGA\_project/model/MBody1.cc, 152
  - lzh\_sparse.cc, 147
  - MBody1\_project/model/MBody1.cc, 155
  - MBody\_delayedSyn.cc, 159
  - MBody\_individualID.cc, 163
  - Model\_Schmuker\_2014\_classifier.cc, 174
  - OneComp.cc, 181



- PoissonIzh.cc, 184
- postVarsInPostLearn.cc, 187
- postVarsInPostLearn\_sparse.cc, 188
- postVarsInSimCode.cc, 190
- postVarsInSimCode\_sparse.cc, 191
- postVarsInSynapseDynamics.cc, 192
- postVarsInSynapseDynamics\_sparse.cc, 193
- preVarsInPostLearn.cc, 194
- preVarsInPostLearn\_sparse.cc, 195
- preVarsInSimCode.cc, 196
- preVarsInSimCode\_sparse.cc, 197
- preVarsInSynapseDynamics.cc, 198
- preVarsInSynapseDynamics\_sparse.cc, 199
- SynDelay.cc, 206
- userproject/MBody\_userdef\_project/model/MBody\_userdef.cc, 170
- modelSpec.cc, 174
  - \_MODELSPEC\_CC\_, 175
- initGeNN, 175
- modelSpec.h, 175
  - \_MODELSPEC\_H\_, 177
  - ALLTOALL, 177
  - AUTODEVICE, 177
  - CONSTINP, 177
  - CPU, 178
  - DENSE, 178
  - EXITSYN, 178
  - EXPDECAY, 179
  - FALSE, 178
  - GENN\_DOUBLE, 178
  - GENN\_FLOAT, 178
  - GLOBALG, 178
  - GPU, 178
  - GeNNReady, 179
  - INDIVIDUALG, 178
  - INDIVIDUALID, 178
  - INHIBSYN, 178
  - INPRULE, 178
  - IZHIKEVICH, 179
  - IZHIKEVICH\_PS, 179
  - IZHIKEVICH\_V, 179
  - initGeNN, 179
  - LEARN1SYNAPSE, 179
  - LEARNING, 178
  - MAPNEURON, 179
  - MATINP, 178
  - MAXNRN, 178
  - MAXPOSTSYN, 178
  - NGRADSYNAPSE, 180
  - NO\_DELAY, 179
  - NOINP, 179
  - NOLEARNING, 179
  - NSYNAPSE, 180
  - POISSONNEURON, 180
  - RANDNINP, 179
  - SPARSE, 179
  - SPIKESOURCE, 180
  - SPK\_THRESH\_STDP, 179
- SYNTYPENO, 179
- TRAUBMILES, 180
- TRAUBMILES\_ALTERNATIVE, 180
- TRAUBMILES\_FAST, 180
- TRAUBMILES\_PSTEP, 180
- TRAUBMILES\_SAFE, 180
- TRUE, 179
- myDNDN\_ini
  - featureTests/supportCode/MBody\_userdef.cc, 167
  - MBody1\_project/model/MBody1.cc, 155
  - MBody\_delayedSyn.cc, 159
  - MBody\_individualID.cc, 163
  - userproject/MBody\_userdef\_project/model/MBody\_userdef.cc, 171
- myDNDN\_p
  - featureTests/supportCode/MBody\_userdef.cc, 167
  - HHVclampGA\_project/model/MBody1.cc, 152
  - MBody1\_project/model/MBody1.cc, 155
  - MBody\_delayedSyn.cc, 159
  - MBody\_individualID.cc, 163
  - userproject/MBody\_userdef\_project/model/MBody\_userdef.cc, 171
- myHH\_ini
  - HHVClamp.cc, 145
- myHH\_p
  - HHVClamp.cc, 145
- myKCDN\_ini
  - featureTests/supportCode/MBody\_userdef.cc, 167
  - MBody1\_project/model/MBody1.cc, 155
  - MBody\_delayedSyn.cc, 159
  - MBody\_individualID.cc, 163
  - userproject/MBody\_userdef\_project/model/MBody\_userdef.cc, 171
- myKCDN\_p
  - featureTests/supportCode/MBody\_userdef.cc, 167
  - HHVclampGA\_project/model/MBody1.cc, 152
  - MBody1\_project/model/MBody1.cc, 156
  - MBody\_delayedSyn.cc, 159
  - MBody\_individualID.cc, 163
  - userproject/MBody\_userdef\_project/model/MBody\_userdef.cc, 171
- myLHIKC\_ini
  - featureTests/supportCode/MBody\_userdef.cc, 167
  - MBody1\_project/model/MBody1.cc, 156
  - MBody\_delayedSyn.cc, 160
  - MBody\_individualID.cc, 163
  - userproject/MBody\_userdef\_project/model/MBody\_userdef.cc, 171
- myLHIKC\_p
  - featureTests/supportCode/MBody\_userdef.cc, 167
  - HHVclampGA\_project/model/MBody1.cc, 152
  - MBody1\_project/model/MBody1.cc, 156
  - MBody\_delayedSyn.cc, 160
  - MBody\_individualID.cc, 164
  - userproject/MBody\_userdef\_project/model/MBody\_userdef.cc, 171
- myPNKC\_ini
  - featureTests/supportCode/MBody\_userdef.cc, 168



- MBody1\_project/model/MBody1.cc, 156
  - MBody\_delayedSyn.cc, 160
  - MBody\_individualID.cc, 164
  - userproject/MBody\_userdef\_project/model/MBody\_userdef.cc, 171
- myPNKC\_p
  - featureTests/supportCode/MBody\_userdef.cc, 168
  - HHVclampGA\_project/model/MBody1.cc, 152
  - MBody1\_project/model/MBody1.cc, 156
  - MBody\_delayedSyn.cc, 160
  - MBody\_individualID.cc, 164
  - userproject/MBody\_userdef\_project/model/MBody\_userdef.cc, 172
- myPNLHI\_ini
  - featureTests/supportCode/MBody\_userdef.cc, 168
  - MBody1\_project/model/MBody1.cc, 156
  - MBody\_delayedSyn.cc, 160
  - MBody\_individualID.cc, 164
  - userproject/MBody\_userdef\_project/model/MBody\_userdef.cc, 172
- myPNLHI\_p
  - featureTests/supportCode/MBody\_userdef.cc, 168
  - HHVclampGA\_project/model/MBody1.cc, 153
  - MBody1\_project/model/MBody1.cc, 156
  - MBody\_delayedSyn.cc, 160
  - MBody\_individualID.cc, 164
  - userproject/MBody\_userdef\_project/model/MBody\_userdef.cc, 172
- myPOI\_ini
  - featureTests/supportCode/MBody\_userdef.cc, 168
  - HHVclampGA\_project/model/MBody1.cc, 153
  - MBody1\_project/model/MBody1.cc, 157
  - MBody\_delayedSyn.cc, 160
  - MBody\_individualID.cc, 164
  - PoissonIzh.cc, 184
  - userproject/MBody\_userdef\_project/model/MBody\_userdef.cc, 172
- myPOI\_p
  - featureTests/supportCode/MBody\_userdef.cc, 168
  - HHVclampGA\_project/model/MBody1.cc, 153
  - MBody1\_project/model/MBody1.cc, 157
  - MBody\_delayedSyn.cc, 160
  - MBody\_individualID.cc, 164
  - PoissonIzh.cc, 185
  - userproject/MBody\_userdef\_project/model/MBody\_userdef.cc, 172
- mySyn\_ini
  - PoissonIzh.cc, 185
- mySyn\_p
  - OneComp.cc, 181
  - PoissonIzh.cc, 185
- N
  - inputSpec, 65
- n
  - randomGauss, 96
  - randomGen, 97
  - stdRG, 104
- N\_FOLDING
  - experiment.h, 117
- NETWORK\_SCALE
  - Model\_Schmuker\_2014\_classifier.cc, 174
- NGRADSYNAPSE
  - modelSpec.h, 180
- nModels
  - utils.h, 225
- NNmodel, 68
  - ~NNmodel, 72
  - activateDirectInput, 72
  - addNeuronPopulation, 72, 74
  - addSynapsePopulation, 74–76
  - checkSizes, 77
  - chooseGPUDevice, 78
  - dnp, 78
  - dpsp, 78
  - dsp\_w, 78
  - final, 78
  - finalize, 77
  - ftype, 78
  - globalInp, 78
  - inSyn, 79
  - initLearnGrps, 77
  - lnGroups, 79
  - lnSynGrp, 79
  - maxConn, 79
  - NNmodel, 72
  - name, 79
  - needSt, 79
  - needSynapseDelay, 79
  - neuronDelaySlots, 79
  - neuronDeviceID, 79
  - neuronGrpN, 79
  - neuronHostID, 79
  - neuronIni, 79
  - neuronN, 79
  - neuronName, 79
  - neuronNeedSpkEvt, 79
  - neuronNeedSt, 80
  - neuronNeedTrueSpk, 80
  - neuronPara, 80
  - neuronPostSyn, 80
  - neuronSpkEvtCondition, 80
  - neuronType, 80
  - neuronVarNeedQueue, 80
  - outSyn, 80
  - padSumLearnN, 80
  - padSumNeuronN, 80
  - padSumSynapseKrnI, 80
  - postSynIni, 80
  - postSynapsePara, 80
  - postSynapseType, 80
  - RNtype, 80
  - receivesInputCurrent, 80
  - seed, 81
  - setConstInp, 77
  - setGPUDevice, 77
  - setMaxConn, 77

- setName, 77
- setNeuronClusterIndex, 77
- setPrecision, 77
- setSeed, 77
- setSynapseClusterIndex, 78
- setSynapseG, 78
- setTiming, 78
- sumNeuronN, 81
- synapseConnType, 81
- synapseDelay, 81
- synapseDeviceID, 81
- synapseGType, 81
- synapseGrpN, 81
- synapseHostID, 81
- synapseInSynNo, 81
- synapseIni, 81
- synapseName, 81
- synapseOutSynNo, 81
- synapsePara, 81
- synapseSource, 81
- synapseSpkEvtVars, 81
- synapseTarget, 81
- synapseType, 82
- synapseUsesPostLearning, 82
- synapseUsesSpikeEvents, 82
- synapseUsesTrueSpikes, 82
- timing, 82
- NO\_DELAY
  - modelSpec.h, 179
- NOINP
  - modelSpec.h, 179
- NOLEARNING
  - modelSpec.h, 179
- NSYNAPSE
  - modelSpec.h, 180
- NUM\_CLASSES
  - Model\_Schmuker\_2014\_classifier.cc, 174
- NUM\_FEATURES
  - Model\_Schmuker\_2014\_classifier.cc, 174
- NUM\_VR
  - Model\_Schmuker\_2014\_classifier.cc, 174
- name
  - NNmodel, 79
  - Parameter, 82
- name\_substitutions
  - stringutils.h, 205
- needPostSt
  - neuronModel, 66
  - weightUpdateModel, 106
- needPreSt
  - neuronModel, 66
  - weightUpdateModel, 106
- needSt
  - NNmodel, 79
- needSynapseDelay
  - NNmodel, 79
- neuron\_ini
  - postVarsInPostLearn.cc, 187
- postVarsInPostLearn\_sparse.cc, 188
- postVarsInSimCode.cc, 190
- postVarsInSimCode\_sparse.cc, 191
- postVarsInSynapseDynamics.cc, 192
- postVarsInSynapseDynamics\_sparse.cc, 193
- preVarsInPostLearn.cc, 194
- preVarsInPostLearn\_sparse.cc, 195
- preVarsInSimCode.cc, 196
- preVarsInSimCode\_sparse.cc, 197
- preVarsInSynapseDynamics.cc, 198
- preVarsInSynapseDynamics\_sparse.cc, 199
- neuron\_p
  - postVarsInPostLearn.cc, 187
  - postVarsInPostLearn\_sparse.cc, 189
  - postVarsInSimCode.cc, 190
  - postVarsInSimCode\_sparse.cc, 191
  - postVarsInSynapseDynamics.cc, 192
  - postVarsInSynapseDynamics\_sparse.cc, 193
  - preVarsInPostLearn.cc, 194
  - preVarsInPostLearn\_sparse.cc, 195
  - preVarsInSimCode.cc, 196
  - preVarsInSimCode\_sparse.cc, 197
  - preVarsInSynapseDynamics.cc, 198
  - preVarsInSynapseDynamics\_sparse.cc, 199
- neuron\_p2
  - postVarsInPostLearn.cc, 187
  - postVarsInPostLearn\_sparse.cc, 189
  - preVarsInPostLearn.cc, 194
  - preVarsInPostLearn\_sparse.cc, 195
- neuronBlkSz
  - global.h, 141
- neuronDelaySlots
  - NNmodel, 79
- neuronDeviceID
  - NNmodel, 79
- neuronGrpN
  - NNmodel, 79
- neuronHostID
  - NNmodel, 79
- neuronIni
  - NNmodel, 79
- neuronModel, 65
  - dpNames, 66
  - dps, 66
  - extraGlobalNeuronKernelParameterTypes, 66
  - extraGlobalNeuronKernelParameters, 66
  - needPostSt, 66
  - needPreSt, 66
  - pNames, 66
  - resetCode, 66
  - simCode, 66
  - thresholdConditionCode, 66
  - tmpVarNames, 66
  - tmpVarTypes, 66
  - varNames, 66
  - varTypes, 67
- neuronN
  - NNmodel, 79

- neuronName
  - NNmodel, [79](#)
- neuronNeedSpkEvt
  - NNmodel, [79](#)
- neuronNeedSt
  - NNmodel, [80](#)
- neuronNeedTrueSpk
  - NNmodel, [80](#)
- neuronPSize
  - lzh\_sparse.cc, [147](#)
- neuronPara
  - NNmodel, [80](#)
- neuronPostSyn
  - NNmodel, [80](#)
- neuronSpkEvtCondition
  - NNmodel, [80](#)
- neuronType
  - NNmodel, [80](#)
- neuronVSize
  - lzh\_sparse.cc, [147](#)
- neuronVarNeedQueue
  - NNmodel, [80](#)
- neuronpop, [67](#)
  - ~neuronpop, [67](#)
  - allocate\_device\_mem\_input, [67](#)
  - allocate\_device\_mem\_patterns, [67](#)
  - copy\_device\_mem\_input, [68](#)
  - create\_input\_values, [68](#)
  - d\_input1, [68](#)
  - getSpikeNumbersFromGPU, [68](#)
  - getSpikesFromGPU, [68](#)
  - init, [68](#)
  - input1, [68](#)
  - model, [68](#)
  - neuronpop, [67](#)
  - output\_spikes, [68](#)
  - output\_state, [68](#)
  - read\_input\_values, [68](#)
  - run, [68](#)
  - sum\_spikes, [68](#)
  - sumlzh1, [68](#)
  - write\_input\_to\_file, [68](#)
- nexp
  - helper.h, [143](#)
- nlong
  - stdRG, [104](#)
- OB
  - CodeHelper.cc, [114](#)
- OUTPUT\_DIR
  - experiment.h, [117](#)
- off0
  - pwSTDP, [93](#)
  - pwSTDP\_userdef, [94](#)
- off1
  - pwSTDP, [93](#)
  - pwSTDP\_userdef, [94](#)
- off2
  - pwSTDP, [93](#)
- pwSTDP\_userdef, [95](#)
- offset
  - classol, [61](#)
- OneComp.cc, [180](#)
  - DT, [181](#)
  - exlzh\_ini, [181](#)
  - exlzh\_p, [181](#)
  - inplzh1, [181](#)
  - modelDefinition, [181](#)
  - mySyn\_p, [181](#)
  - postExp, [181](#)
  - postSynV, [181](#)
- OneComp\_model.cc, [182](#)
  - \_ONECOMP\_MODEL\_CC\_, [182](#)
- OneComp\_model.h, [182](#)
- OneComp\_project/generate\_run.cc
  - main, [134](#)
  - toString, [134](#)
- OneComp\_sim.cu, [182](#)
  - main, [182](#)
- OneComp\_sim.h, [182](#)
  - DBG\_SIZE, [183](#)
  - iT, [183](#)
  - t, [183](#)
  - T\_REPORT\_TME, [183](#)
  - TOTAL\_TME, [183](#)
  - timer, [183](#)
- op
  - ensureFtype.h, [114](#)
  - stringutils.h, [205](#)
- openBrace
  - CodeHelper, [62](#)
- openFileGetMax
  - lzh\_sparse\_project/generate\_run.cc, [130](#)
- openRecordingFile
  - Schmuker2014\_classifier, [101](#)
- operator<<
  - helper.h, [143](#)
- optimiseBlockSize
  - global.h, [141](#)
- outSyn
  - NNmodel, [80](#)
- output\_ini
  - SynDelay.cc, [207](#)
- output\_p
  - SynDelay.cc, [207](#)
- output\_params
  - classlzh, [51](#)
- output\_spikes
  - classlzh, [51](#)
  - classol, [56](#), [57](#)
  - neuronpop, [68](#)
- output\_state
  - classlzh, [51](#)
  - classol, [57](#)
  - neuronpop, [68](#)
- outputDir
  - Schmuker2014\_classifier, [103](#)

- outputRunParameters
  - experiment.cu, [116](#)
- outputSpikes
  - Schmuker2014\_classifier, [101](#)
- overallWinnerSpikeCountAN
  - Schmuker2014\_classifier, [103](#)
- p\_pattern
  - classol, [61](#)
- PAT\_TIME
  - MBody1\_project/model/classol\_sim.h, [109](#)
  - MBody\_delayedSyn\_project/model/classol\_sim.h, [111](#)
  - MBody\_individualID\_project/model/classol\_sim.h, [112](#)
  - MBody\_userdef\_project/model/classol\_sim.h, [113](#)
- PATFTIME
  - MBody1\_project/model/classol\_sim.h, [109](#)
  - MBody\_delayedSyn\_project/model/classol\_sim.h, [111](#)
  - MBody\_individualID\_project/model/classol\_sim.h, [112](#)
  - MBody\_userdef\_project/model/classol\_sim.h, [113](#)
- PATTERNNO
  - MBody1\_project/model/classol\_sim.h, [110](#)
  - MBody\_delayedSyn\_project/model/classol\_sim.h, [111](#)
  - MBody\_individualID\_project/model/classol\_sim.h, [112](#)
  - MBody\_userdef\_project/model/classol\_sim.h, [113](#)
  - PoissonIzh\_sim.h, [186](#)
- PLASTICITY\_INTERVAL\_MS
  - experiment.h, [117](#)
- pNames
  - neuronModel, [66](#)
  - postSynModel, [83](#)
  - weightUpdateModel, [107](#)
- POISSONNEURON
  - modelSpec.h, [180](#)
- padSumLearnN
  - NNmodel, [80](#)
- padSumNeuronN
  - NNmodel, [80](#)
- padSumSynapseKrnI
  - NNmodel, [80](#)
- param\_CONNECTIVITY\_AN\_AN
  - Schmuker2014\_classifier, [103](#)
- param\_CONNECTIVITY\_PN\_AN
  - Schmuker2014\_classifier, [103](#)
- param\_CONNECTIVITY\_PN\_PN
  - Schmuker2014\_classifier, [103](#)
- param\_CONNECTIVITY\_RN\_PN
  - Schmuker2014\_classifier, [103](#)
- param\_GLOBAL\_WEIGHT\_SCALING
  - Schmuker2014\_classifier, [103](#)
- param\_MAX\_FIRING\_RATE\_HZ
  - Schmuker2014\_classifier, [103](#)
- param\_MAX\_WEIGHT\_PN\_AN
  - Schmuker2014\_classifier, [103](#)
- param\_MIN\_FIRING\_RATE\_HZ
  - Schmuker2014\_classifier, [103](#)
- param\_MIN\_WEIGHT\_PN\_AN
  - Schmuker2014\_classifier, [103](#)
- param\_PLASTICITY\_INTERVAL\_MS
  - Schmuker2014\_classifier, [103](#)
- param\_SPIKING\_ACTIVITY\_THRESHOLD\_HZ
  - Schmuker2014\_classifier, [103](#)
- param\_WEIGHT\_DELTA\_PN\_AN
  - Schmuker2014\_classifier, [103](#)
- param\_WEIGHT\_RN\_PN
  - Schmuker2014\_classifier, [103](#)
- param\_WEIGHT\_WTA\_AN\_AN
  - Schmuker2014\_classifier, [103](#)
- param\_WEIGHT\_WTA\_PN\_PN
  - Schmuker2014\_classifier, [103](#)
- Parameter, [82](#)
  - experiment.cu, [115](#)
  - name, [82](#)
  - value, [82](#)
- patFireTime
  - MBody1\_project/model/classol\_sim.h, [110](#)
  - MBody\_delayedSyn\_project/model/classol\_sim.h, [111](#)
  - MBody\_individualID\_project/model/classol\_sim.h, [112](#)
  - MBody\_userdef\_project/model/classol\_sim.h, [113](#)
- patSetTime
  - MBody1\_project/model/classol\_sim.h, [110](#)
  - MBody\_delayedSyn\_project/model/classol\_sim.h, [111](#)
  - MBody\_individualID\_project/model/classol\_sim.h, [112](#)
  - MBody\_userdef\_project/model/classol\_sim.h, [113](#)
- pattern
  - classol, [61](#)
- plasticWeights
  - Schmuker2014\_classifier, [103](#)
- PoissonIzh-model.cc, [183](#)
  - \_POISSONIZHMODEL\_CC\_, [183](#)
- PoissonIzh-model.h, [183](#)
  - \_FTYPE, [184](#)
  - DT, [184](#)
  - exIzh\_ini, [184](#)
  - exIzh\_p, [184](#)
  - modelDefinition, [184](#)
  - myPOI\_ini, [184](#)
  - myPOI\_p, [185](#)
  - mySyn\_ini, [185](#)
  - mySyn\_p, [185](#)
  - postExp, [185](#)
  - postSynV, [185](#)
  - SCALAR\_MAX, [184](#)
  - SCALAR\_MIN, [184](#)
  - scalar, [184](#)
- PoissonIzh\_project/generate\_run.cc
  - main, [134](#)

- toString, 134
- PoissonIzh\_sim.cu, 185
  - main, 186
- PoissonIzh\_sim.h, 186
  - DBG\_SIZE, 186
  - INJECTCURRENT, 186
  - iT, 186
  - InputBaseRate, 186
  - MYRAND, 186
  - PATTERNNO, 186
  - SYN\_OUT\_TME, 186
  - t, 186
  - T\_REPORT\_TME, 186
  - TOTAL\_TME, 186
  - timer, 186
- populateDeviceMemory
  - Schmuker2014\_classifier, 101
- postExp
  - OneComp.cc, 181
  - PoissonIzh.cc, 185
- postExpDNDN
  - featureTests/supportCode/MBody\_userdef.cc, 168
  - HHVclampGA\_project/model/MBody1.cc, 153
  - MBody1\_project/model/MBody1.cc, 157
  - MBody\_delayedSyn.cc, 161
  - MBody\_individualID.cc, 164
  - userproject/MBody\_userdef\_project/model/MBody\_userdef.cc, 172
- postExpInp
  - SynDelay.cc, 207
- postExpInt
  - SynDelay.cc, 207
- postExpKCDN
  - featureTests/supportCode/MBody\_userdef.cc, 168
  - HHVclampGA\_project/model/MBody1.cc, 153
  - MBody1\_project/model/MBody1.cc, 157
  - MBody\_delayedSyn.cc, 161
  - MBody\_individualID.cc, 164
  - userproject/MBody\_userdef\_project/model/MBody\_userdef.cc, 172
- postExpLHIKC
  - featureTests/supportCode/MBody\_userdef.cc, 168
  - HHVclampGA\_project/model/MBody1.cc, 153
  - MBody1\_project/model/MBody1.cc, 157
  - MBody\_delayedSyn.cc, 161
  - MBody\_individualID.cc, 165
  - userproject/MBody\_userdef\_project/model/MBody\_userdef.cc, 172
- postExpOut
  - SynDelay.cc, 208
- postExpP
  - Izh\_sparse.cc, 147
- postExpPNKC
  - featureTests/supportCode/MBody\_userdef.cc, 169
  - HHVclampGA\_project/model/MBody1.cc, 153
  - MBody1\_project/model/MBody1.cc, 157
  - MBody\_delayedSyn.cc, 161
  - MBody\_individualID.cc, 165
- userproject/MBody\_userdef\_project/model/MBody\_userdef.cc, 172
- postExpPNLHI
  - featureTests/supportCode/MBody\_userdef.cc, 169
  - HHVclampGA\_project/model/MBody1.cc, 154
  - MBody1\_project/model/MBody1.cc, 157
  - MBody\_delayedSyn.cc, 161
  - MBody\_individualID.cc, 165
  - userproject/MBody\_userdef\_project/model/MBody\_userdef.cc, 173
- postSyn\_ini
  - postVarsInPostLearn.cc, 188
  - postVarsInPostLearn\_sparse.cc, 189
  - postVarsInSimCode.cc, 190
  - postVarsInSimCode\_sparse.cc, 191
  - postVarsInSynapseDynamics.cc, 192
  - postVarsInSynapseDynamics\_sparse.cc, 193
  - preVarsInPostLearn.cc, 194
  - preVarsInPostLearn\_sparse.cc, 195
  - preVarsInSimCode.cc, 196
  - preVarsInSimCode\_sparse.cc, 197
  - preVarsInSynapseDynamics.cc, 198
  - preVarsInSynapseDynamics\_sparse.cc, 199
- postSyn\_p
  - postVarsInPostLearn.cc, 188
  - postVarsInPostLearn\_sparse.cc, 189
  - postVarsInSimCode.cc, 190
  - postVarsInSimCode\_sparse.cc, 191
  - postVarsInSynapseDynamics.cc, 192
  - postVarsInSynapseDynamics\_sparse.cc, 193
  - preVarsInPostLearn.cc, 194
  - preVarsInPostLearn\_sparse.cc, 195
  - preVarsInSimCode.cc, 196
  - preVarsInSimCode\_sparse.cc, 197
  - preVarsInSynapseDynamics.cc, 198
  - preVarsInSynapseDynamics\_sparse.cc, 199
- postSynDecay
  - lib/include/extra\_postsynapses.h, 120
  - postSynModel, 83
  - SpineML\_to\_GeNN/extra\_postsynapses.h, 120
- postSynIni
  - NNmodel, 80
- postSynModel, 82
  - dpNames, 83
  - dps, 83
  - pNames, 83
  - postSynDecay, 83
  - postSynToCurrent, 83
  - varNames, 83
  - varTypes, 83
- postSynModels
  - utils.h, 225
- postSynV
  - featureTests/supportCode/MBody\_userdef.cc, 169
  - HHVclampGA\_project/model/MBody1.cc, 154
  - Izh\_sparse.cc, 147
  - MBody1\_project/model/MBody1.cc, 157
  - MBody\_delayedSyn.cc, 161

- MBody\_individualID.cc, 165
- OneComp.cc, 181
- PoissonIzh.cc, 185
- SynDelay.cc, 208
- userproject/MBody\_userdef\_project/model/MBody\_userdef.cc, 173
- postSynV\_EXPDECAY\_EVAR
  - featureTests/supportCode/MBody\_userdef.cc, 169
  - userproject/MBody\_userdef\_project/model/MBody\_userdef.cc, 173
- postSynapsePara
  - NNmodel, 80
- postSynapseType
  - NNmodel, 80
- postSyntoCurrent
  - lib/include/extra\_postsynapses.h, 120
  - postSynModel, 83
  - SpineML\_to\_GeNN/extra\_postsynapses.h, 121
- postVarsInPostLearn, 84
  - ~postVarsInPostLearn, 84
  - init\_neurons, 84
  - init\_synapses, 84
  - postVarsInPostLearn, 84
  - run, 84
  - theW, 84
- postVarsInPostLearn.cc, 187
  - DT, 187
  - modelDefinition, 187
  - neuron\_ini, 187
  - neuron\_p, 187
  - neuron\_p2, 187
  - postSyn\_ini, 188
  - postSyn\_p, 188
  - synapses\_ini, 188
  - synapses\_p, 188
- postVarsInPostLearn\_sparse, 84
  - ~postVarsInPostLearn\_sparse, 85
  - init\_neurons, 85
  - init\_synapses, 85
  - postVarsInPostLearn\_sparse, 85
  - run, 85
  - theW, 85
- postVarsInPostLearn\_sparse.cc, 188
  - DT, 188
  - modelDefinition, 188
  - neuron\_ini, 188
  - neuron\_p, 189
  - neuron\_p2, 189
  - postSyn\_ini, 189
  - postSyn\_p, 189
  - synapses\_ini, 189
  - synapses\_p, 189
- postVarsInSimCode, 85
  - ~postVarsInSimCode, 85
  - init\_neurons, 85
  - init\_synapses, 85
  - postVarsInSimCode, 85
  - run, 85
  - theW, 85
- postVarsInSimCode.cc, 189
  - DT, 190
  - modelDefinition, 190
  - neuron\_ini, 190
  - neuron\_p, 190
  - postSyn\_ini, 190
  - postSyn\_p, 190
  - synapses\_ini, 190
  - synapses\_p, 190
- postVarsInSimCode\_sparse, 86
  - ~postVarsInSimCode\_sparse, 86
  - init\_neurons, 86
  - init\_synapses, 86
  - postVarsInSimCode\_sparse, 86
  - run, 86
  - theW, 86
- postVarsInSimCode\_sparse.cc, 190
  - DT, 191
  - modelDefinition, 191
  - neuron\_ini, 191
  - neuron\_p, 191
  - postSyn\_ini, 191
  - postSyn\_p, 191
  - synapses\_ini, 191
  - synapses\_p, 191
- postVarsInSynapseDynamics, 86
  - ~postVarsInSynapseDynamics, 87
  - init\_neurons, 87
  - init\_synapses, 87
  - postVarsInSynapseDynamics, 87
  - run, 87
  - theW, 87
- postVarsInSynapseDynamics.cc, 191
  - DT, 192
  - modelDefinition, 192
  - neuron\_ini, 192
  - neuron\_p, 192
  - postSyn\_ini, 192
  - postSyn\_p, 192
  - synapses\_ini, 192
  - synapses\_p, 192
- postVarsInSynapseDynamics\_sparse, 87
  - ~postVarsInSynapseDynamics\_sparse, 88
  - init\_neurons, 88
  - init\_synapses, 88
  - postVarsInSynapseDynamics\_sparse, 88
  - run, 88
  - theW, 88
- postVarsInSynapseDynamics\_sparse.cc, 192
  - DT, 193
  - modelDefinition, 193
  - neuron\_ini, 193
  - neuron\_p, 193
  - postSyn\_ini, 193
  - postSyn\_p, 193
  - synapses\_ini, 193
  - synapses\_p, 193

postsynapticVariables/testHelper.h  
 absDiff, 209

preVarsInPostLearn, 88  
 ~preVarsInPostLearn, 88  
 init\_neurons, 88  
 init\_synapses, 88  
 preVarsInPostLearn, 88  
 run, 88  
 theW, 88

preVarsInPostLearn.cc, 193  
 DT, 194  
 modelDefinition, 194  
 neuron\_ini, 194  
 neuron\_p, 194  
 neuron\_p2, 194  
 postSyn\_ini, 194  
 postSyn\_p, 194  
 synapses\_ini, 194  
 synapses\_p, 194

preVarsInPostLearn\_sparse, 89  
 ~preVarsInPostLearn\_sparse, 89  
 init\_neurons, 89  
 init\_synapses, 89  
 preVarsInPostLearn\_sparse, 89  
 run, 89  
 theW, 89

preVarsInPostLearn\_sparse.cc, 194  
 DT, 195  
 modelDefinition, 195  
 neuron\_ini, 195  
 neuron\_p, 195  
 neuron\_p2, 195  
 postSyn\_ini, 195  
 postSyn\_p, 195  
 synapses\_ini, 195  
 synapses\_p, 195

preVarsInSimCode, 89  
 ~preVarsInSimCode, 90  
 init\_neurons, 90  
 init\_synapses, 90  
 preVarsInSimCode, 90  
 run, 90  
 theW, 90

preVarsInSimCode.cc, 196  
 DT, 196  
 modelDefinition, 196  
 neuron\_ini, 196  
 neuron\_p, 196  
 postSyn\_ini, 196  
 postSyn\_p, 196  
 synapses\_ini, 196  
 synapses\_p, 196

preVarsInSimCode\_sparse, 90  
 ~preVarsInSimCode\_sparse, 91  
 init\_neurons, 91  
 init\_synapses, 91  
 preVarsInSimCode\_sparse, 91  
 run, 91

theW, 91

preVarsInSimCode\_sparse.cc, 197  
 DT, 197  
 modelDefinition, 197  
 neuron\_ini, 197  
 neuron\_p, 197  
 postSyn\_ini, 197  
 postSyn\_p, 197  
 synapses\_ini, 197  
 synapses\_p, 197

preVarsInSynapseDynamics, 91  
 ~preVarsInSynapseDynamics, 91  
 init\_neurons, 91  
 init\_synapses, 91  
 preVarsInSynapseDynamics, 91  
 run, 91  
 theW, 91

preVarsInSynapseDynamics.cc, 198  
 DT, 198  
 modelDefinition, 198  
 neuron\_ini, 198  
 neuron\_p, 198  
 postSyn\_ini, 198  
 postSyn\_p, 198  
 synapses\_ini, 198  
 synapses\_p, 198

preVarsInSynapseDynamics\_sparse, 92  
 ~preVarsInSynapseDynamics\_sparse, 92  
 init\_neurons, 92  
 init\_synapses, 92  
 preVarsInSynapseDynamics\_sparse, 92  
 run, 92  
 theW, 92

preVarsInSynapseDynamics\_sparse.cc, 199  
 DT, 199  
 modelDefinition, 199  
 neuron\_ini, 199  
 neuron\_p, 199  
 postSyn\_ini, 199  
 postSyn\_p, 199  
 synapses\_ini, 199  
 synapses\_p, 199

preparePostSynModels  
 utils.h, 224

prepareStandardModels  
 utils.h, 224

prepareWeightUpdateModels  
 utils.h, 225

presynapticVariables/testHelper.h  
 absDiff, 209

printSeparator  
 Schmuker2014\_classifier, 101

printTextFile  
 experiment.cu, 116

printVector  
 gen\_syns\_sparse\_izhModel.cc, 128

procreatePop  
 GA.cc, 121



- ps
  - SpineML\_to\_GeNN/extra\_postsynapses.h, 121
- ptr
  - testMixedArray.cc, 210
- push\_back
  - extra\_neurons.h, 118, 119
  - lib/include/extra\_postsynapses.h, 119
  - SpineML\_to\_GeNN/extra\_postsynapses.h, 120
- pwSTDP, 92
  - calculateDerivedParameter, 93
  - lim0, 93
  - lim1, 93
  - off0, 93
  - off1, 93
  - off2, 93
  - slope0, 93
  - slope1, 93
- pwSTDP\_userdef, 93
  - calculateDerivedParameter, 94
  - lim0, 94
  - lim1, 94
  - off0, 94
  - off1, 94
  - off2, 95
  - slope0, 95
  - slope1, 95
- R
  - gen\_input\_structured.cc, 123
  - gen\_kcdn\_syns.cc, 123
  - gen\_kcdn\_syns\_fixto10K.cc, 124
  - gen\_pnkc\_syns.cc, 125
  - gen\_pnkc\_syns\_indivID.cc, 125
  - gen\_syns\_sparse.cc, 126
  - gen\_syns\_sparse\_izhModel.cc, 128
  - lzh\_sparse\_model.cc, 148
  - VClampGA.h, 226
- R2
  - gen\_kcdn\_syns\_fixto10K.cc, 124
- RAND
  - experiment.cu, 115
  - VClampGA.h, 226
- RANDNINP
  - modelSpec.h, 179
- RANDOMGEN\_CC
  - randomGen.cc, 200
- RANDOMGEN\_H
  - randomGen.h, 201
- RECORDING\_TIME\_MS
  - experiment.h, 117
- RECORDINGS\_DIR
  - experiment.h, 117
- REPEAT\_LEARNING\_SET
  - experiment.h, 117
- REPORT\_TIME
  - SynDelaySim.h, 209
  - testPostVarsInPostLearn.h, 211
  - testPostVarsInPostLearn\_sparse.h, 212
  - testPostVarsInSimCode.h, 213
  - testPostVarsInSimCode\_sparse.h, 213
  - testPostVarsInSynapseDynamics.h, 214
  - testPostVarsInSynapseDynamics\_sparse.h, 215
  - testPreVarsInPostLearn.h, 216
  - testPreVarsInPostLearn\_sparse.h, 217
  - testPreVarsInSimCode.h, 218
  - testPreVarsInSimCode\_sparse.h, 219
  - testPreVarsInSynapseDynamics.h, 220
  - testPreVarsInSynapseDynamics\_sparse.h, 221
- RG
  - gen\_kcdn\_syns.cc, 123
  - gen\_kcdn\_syns\_fixto10K.cc, 124
  - gen\_pnkc\_syns.cc, 125
  - gen\_pnkc\_syns\_indivID.cc, 125
  - gen\_syns\_sparse.cc, 127
  - lzh\_sparse\_model.cc, 148
  - VClampGA.h, 226
- RNtype
  - NNmodel, 80
- randomEventOccurred
  - Schmuker2014\_classifier, 101
- randomGauss, 95
  - ~randomGauss, 95
  - n, 96
  - randomGauss, 95
  - srand, 96
- randomGen, 96
  - ~randomGen, 97
  - n, 97
  - randomGen, 96
  - srand, 97
- randomGen.cc, 200
  - RANDOMGEN\_CC, 200
- randomGen.h, 200
  - RANDOMGEN\_H, 201
- randomizeVar
  - classlzh, 51
- randomizeVarSq
  - classlzh, 51
- read\_PNlzh1syns
  - classsol, 57
- read\_input\_patterns
  - classsol, 57
- read\_input\_values
  - classlzh, 51
  - neuronpop, 68
- read\_kcdnsyns
  - classsol, 57
- read\_pnkcsyns
  - classsol, 57, 59
- read\_pnlhisyns
  - classsol, 59
- read\_sparsesyns\_par
  - classlzh, 51
  - classsol, 59
- receivesInputCurrent
  - NNmodel, 80
- recordingsDir



- Schmuker2014\_classifier, 103
- resetClusterSpikeCountAN
  - Schmuker2014\_classifier, 102
- resetCode
  - neuronModel, 66
- resetDevice
  - Schmuker2014\_classifier, 102
- resetIndividualSpikeCountPN
  - Schmuker2014\_classifier, 102
- resetOverallWinner
  - Schmuker2014\_classifier, 102
- Rind
  - gen\_syns\_sparse\_izhModel.cc, 128
- rulkovdp, 97
  - calculateDerivedParameter, 97
  - ip0, 97
  - ip1, 98
  - ip2, 98
- run
  - classIzh, 51
  - classol, 59
  - neuronpop, 68
  - postVarsInPostLearn, 84
  - postVarsInPostLearn\_sparse, 85
  - postVarsInSimCode, 85
  - postVarsInSimCode\_sparse, 86
  - postVarsInSynapseDynamics, 87
  - postVarsInSynapseDynamics\_sparse, 88
  - preVarsInPostLearn, 88
  - preVarsInPostLearn\_sparse, 89
  - preVarsInSimCode, 90
  - preVarsInSimCode\_sparse, 91
  - preVarsInSynapseDynamics, 91
  - preVarsInSynapseDynamics\_sparse, 92
  - Schmuker2014\_classifier, 102
  - SynDelay, 105
- runCPU
  - classol, 59, 60
- runGPU
  - classol, 60
- runexpHH
  - helper.h, 143
- S\_ISDIR
  - experiment.cu, 115
- SAVEP
  - CodeHelper.cc, 114
- SCALAR\_MAX
  - PoissonIzh.cc, 184
- SCALAR\_MIN
  - PoissonIzh.cc, 184
- SIMPLEBIT\_H
  - simpleBit.h, 202
- SPARSE
  - modelSpec.h, 179
- SPIKESOURCE
  - modelSpec.h, 180
- SPIKING\_ACTIVITY\_THRESHOLD\_HZ
  - experiment.h, 117
- SPK\_THRESH\_STDP
  - modelSpec.h, 179
- SYN\_OUT\_TME
  - MBody1\_project/model/classol\_sim.h, 110
  - MBody\_delayedSyn\_project/model/classol\_sim.h, 111
  - MBody\_individualID\_project/model/classol\_sim.h, 112
  - MBody\_userdef\_project/model/classol\_sim.h, 113
  - PoissonIzh\_sim.h, 186
- SYNAPSE\_TAU\_ANAN
  - Model\_Schmuker\_2014\_classifier.cc, 174
- SYNAPSE\_TAU\_PNAN
  - Model\_Schmuker\_2014\_classifier.cc, 174
- SYNAPSE\_TAU\_PNPN
  - Model\_Schmuker\_2014\_classifier.cc, 174
- SYNAPSE\_TAU\_RNPN
  - Model\_Schmuker\_2014\_classifier.cc, 174
- SYNDELAYSIM\_CU
  - SynDelaySim.cu, 208
- SYNTYPENO
  - modelSpec.h, 179
- sampleDistance
  - Schmuker2014\_classifier, 103
- scalar
  - PoissonIzh.cc, 184
- Schmuker2014\_classifier, 98
  - ~Schmuker2014\_classifier, 100
  - addInputRate, 100
  - allocateHostAndDeviceMemory, 100
  - applyLearningRuleSynapses, 100
  - cacheDir, 102
  - calculateCurrentWindowWinner, 100
  - calculateOverallWinner, 100
  - calculateVrResponse, 100
  - calculateWinner, 100
  - checkContents, 100, 101
  - classLabel, 102
  - clearDownDevice, 101
  - clearedDownDevice, 102
  - clusterSpikeCountAN, 102
  - convertToRateCode, 101
  - correctClass, 102
  - countAN, 102
  - countPN, 102
  - countPNAN, 102
  - countRN, 102
  - createWTACnectivity, 101
  - d\_inputRates, 102
  - d\_maxRandomNumber, 102
  - data\_type, 100
  - data\_type\_double, 100
  - data\_type\_float, 100
  - data\_type\_int, 100
  - data\_type\_uint, 100
  - datasetName, 102
  - findMaxMinSampleDistances, 101
  - generate\_inputrates\_dataset, 101

generate\_or\_load\_inputrates\_dataset, 101  
 generateSimulatedTimeSeriesData, 101  
 getClassCluster, 101  
 getClusterIndex, 101  
 getManhattanDistance, 101  
 getRand0to1, 101  
 getRecordingFilename, 101  
 getSampleDistance, 101  
 getSpikeNumbersFromGPU, 101  
 getSpikesFromGPU, 101  
 individualSpikeCountPN, 102  
 initialiseInputData, 101  
 initialiseWeights\_DENSE\_PN\_AN, 101  
 initialiseWeights\_SPARSE\_RN\_PN, 101  
 initialiseWeights\_WTA\_AN\_AN, 101  
 initialiseWeights\_WTA\_PN\_PN, 101  
 inputRates, 102  
 inputRatesSize, 102  
 load\_VR\_data, 101  
 loadArrayFromTextFile, 101  
 loadClassLabels, 101  
 log, 102  
 model, 102  
 openRecordingFile, 101  
 outputDir, 103  
 outputSpikes, 101  
 overallWinnerSpikeCountAN, 103  
 param\_CONNECTIVITY\_AN\_AN, 103  
 param\_CONNECTIVITY\_PN\_AN, 103  
 param\_CONNECTIVITY\_PN\_PN, 103  
 param\_CONNECTIVITY\_RN\_PN, 103  
 param\_GLOBAL\_WEIGHT\_SCALING, 103  
 param\_MAX\_FIRING\_RATE\_HZ, 103  
 param\_MAX\_WEIGHT\_PN\_AN, 103  
 param\_MIN\_FIRING\_RATE\_HZ, 103  
 param\_MIN\_WEIGHT\_PN\_AN, 103  
 param\_PLASTICITY\_INTERVAL\_MS, 103  
 param\_SPIKING\_ACTIVITY\_THRESHOLD\_HZ, 103  
 param\_WEIGHT\_DELTA\_PN\_AN, 103  
 param\_WEIGHT\_RN\_PN, 103  
 param\_WEIGHT\_WTA\_AN\_AN, 103  
 param\_WEIGHT\_WTA\_PN\_PN, 103  
 plasticWeights, 103  
 populateDeviceMemory, 101  
 printSeparator, 101  
 randomEventOccurred, 101  
 recordingsDir, 103  
 resetClusterSpikeCountAN, 102  
 resetDevice, 102  
 resetIndividualSpikeCountPN, 102  
 resetOverallWinner, 102  
 run, 102  
 sampleDistance, 103  
 Schmuker2014\_classifier, 100  
 setCorrectClass, 102  
 setMaxMinSampleDistances, 102  
 startLog, 102  
 t, 103  
 timestepsPerRecording, 103  
 uniqueRunId, 103  
 update\_input\_data\_on\_device, 102  
 updateClusterSpikeCountAN, 102  
 updateIndividualSpikeCountPN, 102  
 updateWeights\_PN\_AN, 102  
 updateWeights\_PN\_AN\_on\_device, 102  
 vrData, 103  
 winningClass, 103  
 Schmuker2014\_classifier.cu, 201  
 \_SCHMUKER2014\_CLASSIFIER\_, 201  
 Schmuker2014\_classifier.h, 201  
 seed  
     NNmodel, 81  
 setB  
     simpleBit.h, 202  
 setConstInp  
     NNmodel, 77  
 setCorrectClass  
     Schmuker2014\_classifier, 102  
 setDefaultParamValues  
     experiment.cu, 116  
 setGPUDevice  
     NNmodel, 77  
 setInput  
     classlzh, 51  
 setMaxConn  
     NNmodel, 77  
 setMaxMinSampleDistances  
     Schmuker2014\_classifier, 102  
 setName  
     NNmodel, 77  
 setNeuronClusterIndex  
     NNmodel, 77  
 setPrecision  
     NNmodel, 77  
 setSeed  
     NNmodel, 77  
 setSparseConnectivityFromDense  
     sparseUtils.cc, 203  
 setSynapseClusterIndex  
     NNmodel, 78  
 setSynapseG  
     NNmodel, 78  
 setTiming  
     NNmodel, 78  
 setVerbose  
     CodeHelper, 62  
 setup\_kernel  
     GeNNHelperKrnls.cu, 140  
 sigC  
     helper.h, 143  
 sigEK  
     helper.h, 143  
 sigENa  
     helper.h, 144  
 sigEI

- helper.h, [143](#)
- sigGK
  - helper.h, [144](#)
- sigGNa
  - helper.h, [144](#)
- sigGl
  - helper.h, [144](#)
- simCode
  - extra\_neurons.h, [119](#)
  - neuronModel, [66](#)
  - weightUpdateModel, [107](#)
- simCodeEvt
  - weightUpdateModel, [107](#)
- simLearnPost
  - weightUpdateModel, [107](#)
- simpleBit.h, [202](#)
  - B, [202](#)
  - delB, [202](#)
  - SIMPLEBIT\_H, [202](#)
  - setB, [202](#)
- single\_var\_init\_fullrange
  - helper.h, [143](#)
- single\_var\_reinit
  - helper.h, [143](#)
- size\_g
  - classol, [61](#)
- sizes.h, [202](#)
  - \_NC1, [202](#)
- slope0
  - pwSTDP, [93](#)
  - pwSTDP\_userdef, [95](#)
- slope1
  - pwSTDP, [93](#)
  - pwSTDP\_userdef, [95](#)
- sparse\_utils\_cc
  - sparseUtils.cc, [203](#)
- sparseUtils.cc, [203](#)
  - countEntriesAbove, [203](#)
  - createPosttoPreArray, [203](#)
  - createSparseConnectivityFromDense, [203](#)
  - getG, [203](#)
  - getSparseVar, [203](#)
  - setSparseConnectivityFromDense, [203](#)
  - sparse\_utils\_cc, [203](#)
  - strsearch, [203](#)
- SpineML\_to\_GeNN/extra\_postsynapses.h
  - clear, [120](#)
  - postSynDecay, [120](#)
  - postSynToCurrent, [121](#)
  - ps, [121](#)
  - push\_back, [120](#)
- srand
  - randomGauss, [96](#)
  - randomGen, [97](#)
- st
  - inputSpec, [65](#)
- start
  - stopWatch, [104](#)
- startLog
  - Schmuker2014\_classifier, [102](#)
- startTimer
  - CStopWatch, [62](#)
- stdRG, [103](#)
  - ~stdRG, [104](#)
  - n, [104](#)
  - nlong, [104](#)
  - stdRG, [104](#)
- stdTM\_ini
  - featureTests/supportCode/MBody\_userdef.cc, [169](#)
  - HHVclampGA\_project/model/MBody1.cc, [154](#)
  - MBody1\_project/model/MBody1.cc, [158](#)
  - MBody\_delayedSyn.cc, [161](#)
  - MBody\_individualID.cc, [165](#)
  - userproject/MBody\_userdef\_project/model/MBody\_userdef.cc, [173](#)
- stdTM\_p
  - featureTests/supportCode/MBody\_userdef.cc, [169](#)
  - HHVclampGA\_project/model/MBody1.cc, [154](#)
  - MBody1\_project/model/MBody1.cc, [158](#)
  - MBody\_delayedSyn.cc, [161](#)
  - MBody\_individualID.cc, [165](#)
  - userproject/MBody\_userdef\_project/model/MBody\_userdef.cc, [173](#)
- stop
  - stopWatch, [104](#)
- stopTimer
  - CStopWatch, [63](#)
- stopWatch, [104](#)
  - start, [104](#)
  - stop, [104](#)
- stringutils.h, [204](#)
  - \_\_dnames, [205](#)
  - \_\_fnames, [205](#)
  - \_\_mathFN, [204](#)
  - digits, [205](#)
  - doFinal, [204](#)
  - ensureFtype, [204](#)
  - ensureMathFunctionFtype, [205](#)
  - extended\_name\_substitutions, [205](#)
  - extended\_value\_substitutions, [205](#)
  - name\_substitutions, [205](#)
  - op, [205](#)
  - substitute, [205](#)
  - value\_substitutions, [205](#)
- strsearch
  - sparseUtils.cc, [203](#)
- substitute
  - stringutils.h, [205](#)
- sum\_spikes
  - classlzh, [51](#)
  - classol, [60](#)
  - neuronpop, [68](#)
- sumDN
  - classol, [61](#)
- sumlzh1
  - classol, [61](#)

- neuronpop, 68
- sumKC
  - classol, 61
- sumLHI
  - classol, 61
- sumNeuronN
  - NNmodel, 81
- sumPExc
  - classlzh, 52
- sumPinh
  - classlzh, 52
- sumPN
  - classol, 61
- SynDelay, 105
  - ~SynDelay, 105
  - run, 105
  - SynDelay, 105
- SynDelay.cc, 205
  - constInput, 206
  - DT, 206
  - input\_ini, 206
  - input\_p, 206
  - inputInter\_ini, 206
  - inputOutput\_ini, 206
  - inter\_ini, 207
  - inter\_p, 207
  - interOutput\_ini, 207
  - modelDefinition, 206
  - output\_ini, 207
  - output\_p, 207
  - postExpInp, 207
  - postExpInt, 207
  - postExpOut, 208
  - postSynV, 208
  - synapses\_p, 208
- SynDelaySim.cu, 208
  - main, 208
  - SYNDELAYSIM\_CU, 208
- SynDelaySim.h, 208
  - DT, 209
  - REPORT\_TIME, 209
  - TOTAL\_TIME, 209
- Synlzh\_ini
  - lzh\_sparse.cc, 147
- Synlzh\_p
  - lzh\_sparse.cc, 147
- synapseBlkSz
  - global.h, 141
- synapseConnType
  - NNmodel, 81
- synapseDelay
  - NNmodel, 81
- synapseDeviceID
  - NNmodel, 81
- synapseDynamics
  - weightUpdateModel, 107
- synapseGType
  - NNmodel, 81
- synapseGrpN
  - NNmodel, 81
- synapseHostID
  - NNmodel, 81
- synapseInSynNo
  - NNmodel, 81
- synapseIni
  - NNmodel, 81
- synapseName
  - NNmodel, 81
- synapseOutSynNo
  - NNmodel, 81
- synapsePSize
  - lzh\_sparse.cc, 147
- synapsePara
  - NNmodel, 81
- synapseSource
  - NNmodel, 81
- synapseSpkEvtVars
  - NNmodel, 81
- synapseTarget
  - NNmodel, 81
- synapseType
  - NNmodel, 82
- synapseUsesPostLearning
  - NNmodel, 82
- synapseUsesSpikeEvents
  - NNmodel, 82
- synapseUsesTrueSpikes
  - NNmodel, 82
- synapses\_ini
  - postVarsInPostLearn.cc, 188
  - postVarsInPostLearn\_sparse.cc, 189
  - postVarsInSimCode.cc, 190
  - postVarsInSimCode\_sparse.cc, 191
  - postVarsInSynapseDynamics.cc, 192
  - postVarsInSynapseDynamics\_sparse.cc, 193
  - preVarsInPostLearn.cc, 194
  - preVarsInPostLearn\_sparse.cc, 195
  - preVarsInSimCode.cc, 196
  - preVarsInSimCode\_sparse.cc, 197
  - preVarsInSynapseDynamics.cc, 198
  - preVarsInSynapseDynamics\_sparse.cc, 199
- synapses\_p
  - postVarsInPostLearn.cc, 188
  - postVarsInPostLearn\_sparse.cc, 189
  - postVarsInSimCode.cc, 190
  - postVarsInSimCode\_sparse.cc, 191
  - postVarsInSynapseDynamics.cc, 192
  - postVarsInSynapseDynamics\_sparse.cc, 193
  - preVarsInPostLearn.cc, 194
  - preVarsInPostLearn\_sparse.cc, 195
  - preVarsInSimCode.cc, 196
  - preVarsInSimCode\_sparse.cc, 197
  - preVarsInSynapseDynamics.cc, 198
  - preVarsInSynapseDynamics\_sparse.cc, 199
  - SynDelay.cc, 208
- t

- inputSpec, 65
- Izh\_sparse\_sim.h, 149
- MBody1\_project/model/classol\_sim.h, 110
- MBody\_delayedSyn\_project/model/classol\_sim.h, 111
- MBody\_individualID\_project/model/classol\_sim.h, 112
- MBody\_userdef\_project/model/classol\_sim.h, 113
- OneComp\_sim.h, 183
- PoissonIzh\_sim.h, 186
- Schmuker2014\_classifier, 103
- VClampGA.h, 226
- T\_REPORT\_TME
  - Izh\_sparse\_sim.h, 149
  - MBody1\_project/model/classol\_sim.h, 110
  - MBody\_delayedSyn\_project/model/classol\_sim.h, 111
  - MBody\_individualID\_project/model/classol\_sim.h, 112
  - MBody\_userdef\_project/model/classol\_sim.h, 113
  - OneComp\_sim.h, 183
  - PoissonIzh\_sim.h, 186
- TESTPREVARSPINPOSTLEARN\_SPARSE\_CU
  - testPostVarsInPostLearn\_sparse.cu, 211
  - testPreVarsInPostLearn\_sparse.cu, 217
- TESTPREVARSPINSIMCODE\_CU
  - testPostVarsInPostLearn.cu, 210
  - testPostVarsInSimCode.cu, 212
  - testPostVarsInSimCode\_sparse.cu, 213
  - testPreVarsInPostLearn.cu, 216
  - testPreVarsInSimCode.cu, 218
  - testPreVarsInSimCode\_sparse.cu, 219
- TESTPREVARSPINSYNAPSEDYNAMICS\_CU
  - testPostVarsInSynapseDynamics.cu, 214
  - testPreVarsInSynapseDynamics.cu, 220
- TESTPREVARSPINSYNAPSEDYNAMICS\_SPARSE\_CU
  - testPostVarsInSynapseDynamics\_sparse.cu, 215
  - testPreVarsInSynapseDynamics\_sparse.cu, 221
- TIMING
  - featureTests/supportCode/MBody\_userdef.cc, 166
  - userproject/MBody\_userdef\_project/model/MBody\_userdef.cc, 170
- TOTAL\_RECORDINGS
  - experiment.h, 117
- TOTAL\_TIME
  - SynDelaySim.h, 209
  - testPostVarsInPostLearn.h, 211
  - testPostVarsInPostLearn\_sparse.h, 212
  - testPostVarsInSimCode.h, 213
  - testPostVarsInSimCode\_sparse.h, 213
  - testPostVarsInSynapseDynamics.h, 214
  - testPostVarsInSynapseDynamics\_sparse.h, 215
  - testPreVarsInPostLearn.h, 216
  - testPreVarsInPostLearn\_sparse.h, 217
  - testPreVarsInSimCode.h, 218
  - testPreVarsInSimCode\_sparse.h, 219
  - testPreVarsInSynapseDynamics.h, 220
  - testPreVarsInSynapseDynamics\_sparse.h, 221
- TOTAL\_TME
  - Izh\_sparse\_sim.h, 149
  - MBody1\_project/model/classol\_sim.h, 110
  - MBody\_delayedSyn\_project/model/classol\_sim.h, 111
  - MBody\_individualID\_project/model/classol\_sim.h, 112
  - MBody\_userdef\_project/model/classol\_sim.h, 113
  - OneComp\_sim.h, 183
  - PoissonIzh\_sim.h, 186
- TRAUBMILES
  - modelSpec.h, 180
- TRAUBMILES\_ALTERNATIVE
  - modelSpec.h, 180
- TRAUBMILES\_FAST
  - modelSpec.h, 180
- TRAUBMILES\_PSTEP
  - modelSpec.h, 180
- TRAUBMILES\_SAFE
  - modelSpec.h, 180
- TRUE
  - modelSpec.h, 179
- tS
  - Izh\_sparse\_project/generate\_run.cc, 130
  - MBody1\_project/generate\_run.cc, 130
  - MBody\_delayedSyn\_project/generate\_run.cc, 131
  - MBody\_individualID\_project/generate\_run.cc, 132
  - MBody\_userdef\_project/generate\_run.cc, 133
  - toString.h, 222
- testDefaultConstructor.cu, 209
  - main, 209
- testHelper.h, 209
- testMixedArray.cc, 209
  - dv, 210
  - fv, 210
  - iv, 210
  - main, 210
  - ptr, 210
- testPostVarsInPostLearn.cu, 210
  - main, 210
  - TESTPREVARSPINSIMCODE\_CU, 210
- testPostVarsInPostLearn.h, 211
  - DT, 211
  - REPORT\_TIME, 211
  - TOTAL\_TIME, 211
- testPostVarsInPostLearn\_sparse.cu, 211
  - main, 211
  - TESTPREVARSPINPOSTLEARN\_SPARSE\_CU, 211
- testPostVarsInPostLearn\_sparse.h, 211
  - DT, 212
  - REPORT\_TIME, 212
  - TOTAL\_TIME, 212
- testPostVarsInSimCode.cu, 212
  - main, 212
  - TESTPREVARSPINSIMCODE\_CU, 212
- testPostVarsInSimCode.h, 212

- DT, 213
- REPORT\_TIME, 213
- TOTAL\_TIME, 213
- testPostVarsInSimCode\_sparse.cu, 213
  - main, 213
  - TESTPREVARSINSIMCODE\_CU, 213
- testPostVarsInSimCode\_sparse.h, 213
  - DT, 213
  - REPORT\_TIME, 213
  - TOTAL\_TIME, 213
- testPostVarsInSynapseDynamics.cu, 214
  - main, 214
  - TESTPREVARSINSYNAPSEDYNAMICS\_CU, 214
- testPostVarsInSynapseDynamics.h, 214
  - DT, 214
  - REPORT\_TIME, 214
  - TOTAL\_TIME, 214
- testPostVarsInSynapseDynamics\_sparse.cu, 215
  - main, 215
  - TESTPREVARSINSYNAPSEDYNAMICS\_SPARSE\_CU, 215
- testPostVarsInSynapseDynamics\_sparse.h, 215
  - DT, 215
  - REPORT\_TIME, 215
  - TOTAL\_TIME, 215
- testPreVarsInPostLearn.cu, 215
  - main, 216
  - TESTPREVARSINSIMCODE\_CU, 216
- testPreVarsInPostLearn.h, 216
  - DT, 216
  - REPORT\_TIME, 216
  - TOTAL\_TIME, 216
- testPreVarsInPostLearn\_sparse.cu, 216
  - main, 217
  - TESTPREVARSINPOSTLEARN\_SPARSE\_CU, 217
- testPreVarsInPostLearn\_sparse.h, 217
  - DT, 217
  - REPORT\_TIME, 217
  - TOTAL\_TIME, 217
- testPreVarsInSimCode.cu, 217
  - main, 218
  - TESTPREVARSINSIMCODE\_CU, 218
- testPreVarsInSimCode.h, 218
  - DT, 218
  - REPORT\_TIME, 218
  - TOTAL\_TIME, 218
- testPreVarsInSimCode\_sparse.cu, 218
  - main, 219
  - TESTPREVARSINSIMCODE\_CU, 219
- testPreVarsInSimCode\_sparse.h, 219
  - DT, 219
  - REPORT\_TIME, 219
  - TOTAL\_TIME, 219
- testPreVarsInSynapseDynamics.cu, 219
  - main, 220
  - TESTPREVARSINSYNAPSEDYNAMICS\_CU, 220
- testPreVarsInSynapseDynamics.h, 220
  - DT, 220
  - REPORT\_TIME, 220
  - TOTAL\_TIME, 220
- testPreVarsInSynapseDynamics\_sparse.cu, 220
  - main, 221
  - TESTPREVARSINSYNAPSEDYNAMICS\_SPARSE\_CU, 221
- testPreVarsInSynapseDynamics\_sparse.h, 221
  - DT, 221
  - REPORT\_TIME, 221
  - TOTAL\_TIME, 221
- testRegEx.cc, 221
  - main, 222
- theDev
  - global.h, 142
- theRates
  - classol, 61
- theSize
  - utils.h, 225
- theW
  - postVarsInPostLearn, 84
  - postVarsInPostLearn\_sparse, 85
  - postVarsInSimCode, 85
  - postVarsInSimCode\_sparse, 86
  - postVarsInSynapseDynamics, 87
  - postVarsInSynapseDynamics\_sparse, 88
  - preVarsInPostLearn, 88
  - preVarsInPostLearn\_sparse, 89
  - preVarsInSimCode, 90
  - preVarsInSimCode\_sparse, 91
  - preVarsInSynapseDynamics, 91
  - preVarsInSynapseDynamics\_sparse, 92
- thresholdConditionCode
  - neuronModel, 66
- timer
  - experiment.h, 118
  - lzh\_sparse\_sim.h, 149
  - MBody1\_project/model/classol\_sim.h, 110
  - MBody\_delayedSyn\_project/model/classol\_sim.h, 111
  - MBody\_individualID\_project/model/classol\_sim.h, 112
  - MBody\_userdef\_project/model/classol\_sim.h, 113
  - OneComp\_sim.h, 183
  - Poissonlzh\_sim.h, 186
  - VClampGA.h, 226
- timestepsPerRecording
  - Schmuker2014\_classifier, 103
- timing
  - NNmodel, 82
- tmpVarNames
  - neuronModel, 66
- tmpVarTypes
  - neuronModel, 66
- toLower
  - lzh\_sparse\_project/generate\_run.cc, 130
  - MBody1\_project/generate\_run.cc, 131
  - MBody\_delayedSyn\_project/generate\_run.cc, 131

- MBody\_individualID\_project/generate\_run.cc, 132
- MBody\_userdef\_project/generate\_run.cc, 133
- toString
  - lzh\_sparse\_project/generate\_run.cc, 130
  - MBody1\_project/generate\_run.cc, 131
  - MBody\_delayedSyn\_project/generate\_run.cc, 132
  - MBody\_individualID\_project/generate\_run.cc, 132
  - MBody\_userdef\_project/generate\_run.cc, 133
  - OneComp\_project/generate\_run.cc, 134
  - Poissonlzh\_project/generate\_run.cc, 134
  - toString.h, 222, 223
- toString.h, 222
  - \_TOSTRING\_H\_, 222
  - tS, 222
  - toString, 222, 223
- toUpper
  - lzh\_sparse\_project/generate\_run.cc, 130
  - MBody1\_project/generate\_run.cc, 131
  - MBody\_delayedSyn\_project/generate\_run.cc, 132
  - MBody\_individualID\_project/generate\_run.cc, 132
  - MBody\_userdef\_project/generate\_run.cc, 133
- truevar\_init
  - helper.h, 143
- truevar\_initexpHH
  - helper.h, 143
- UINT
  - experiment.h, 117
- UIntSz
  - global.h, 142
- uniqueRunId
  - Schmuker2014\_classifier, 103
- update\_input\_data\_on\_device
  - Schmuker2014\_classifier, 102
- updateClusterSpikeCountAN
  - Schmuker2014\_classifier, 102
- updateIndividualSpikeCountPN
  - Schmuker2014\_classifier, 102
- updateWeights\_PN\_AN
  - Schmuker2014\_classifier, 102
- updateWeights\_PN\_AN\_on\_device
  - Schmuker2014\_classifier, 102
- userproject/MBody\_userdef\_project/model/MBody\_↵
  - userdef.cc
    - DT, 170
    - gpKCDN, 171
    - gpPNKC, 171
    - modelDefinition, 170
    - myDNDN\_ini, 171
    - myDNDN\_p, 171
    - myKCDN\_ini, 171
    - myKCDN\_p, 171
    - myLHIKC\_ini, 171
    - myLHIKC\_p, 171
    - myPNKC\_ini, 171
    - myPNKC\_p, 172
    - myPNLHI\_ini, 172
    - myPNLHI\_p, 172
    - myPOI\_ini, 172
    - myPOI\_p, 172
    - postExpDNDN, 172
    - postExpKCDN, 172
    - postExpLHIKC, 172
    - postExpPNKC, 172
    - postExpPNLHI, 173
    - postSynV, 173
    - postSynV\_EXPDECAY\_EVAR, 173
    - stdTM\_ini, 173
    - stdTM\_p, 173
    - TIMING, 170
- utils.h, 223
  - \_UTILS\_H\_, 224
  - CHECK\_CUDA\_ERRORS, 224
  - gennError, 224
  - nModels, 225
  - postSynModels, 225
  - preparePostSynModels, 224
  - prepareStandardModels, 224
  - prepareWeightUpdateModels, 225
  - theSize, 225
  - weightUpdateModels, 225
  - writeHeader, 225
- V
  - inputSpec, 65
- VClampGA.cu, 225
  - main, 225
- VClampGA.h, 226
  - iT, 226
  - R, 226
  - RAND, 226
  - RG, 226
  - t, 226
  - timer, 226
- VR\_DATA\_FILENAME
  - experiment.h, 117
- value
  - Parameter, 82
- value\_substitutions
  - stringutils.h, 205
- var\_init\_fullrange
  - helper.h, 143
- var\_reinit
  - helper.h, 143
- varNames
  - neuronModel, 66
  - postSynModel, 83
  - weightUpdateModel, 107
- varTypes
  - neuronModel, 67
  - postSynModel, 83
  - weightUpdateModel, 107
- vectorContains
  - experiment.cu, 116
- verbose
  - CodeHelper, 62
- Vexp
  - helper.h, 144



- vrData
  - Schmuker2014\_classifier, [103](#)
- WEIGHT\_DELTA\_PN\_AN
  - experiment.h, [117](#)
- WEIGHT\_RN\_PN
  - experiment.h, [117](#)
- WEIGHT\_WTA\_AN\_AN
  - experiment.h, [117](#)
- WEIGHT\_WTA\_PN\_PN
  - experiment.h, [117](#)
- weightUpdateModel, [105](#)
  - dpNames, [106](#)
  - dps, [106](#)
  - evntThreshold, [106](#)
  - extraGlobalSynapseKernelParameterTypes, [106](#)
  - extraGlobalSynapseKernelParameters, [106](#)
  - needPostSt, [106](#)
  - needPreSt, [106](#)
  - pNames, [107](#)
  - simCode, [107](#)
  - simCodeEvt, [107](#)
  - simLearnPost, [107](#)
  - synapseDynamics, [107](#)
  - varNames, [107](#)
  - varTypes, [107](#)
  - weightUpdateModel, [106](#)
- weightUpdateModels
  - utils.h, [225](#)
- winningClass
  - Schmuker2014\_classifier, [103](#)
- write\_input\_to\_file
  - classlzh, [51](#)
  - neuronpop, [68](#)
- write\_kcdnsyns
  - classol, [60](#)
- write\_para
  - helper.h, [143](#)
- write\_pnkcsyns
  - classol, [60](#)
- write\_pnlhisyns
  - classol, [61](#)
- writeHeader
  - utils.h, [225](#)
- xorwow\_setup
  - GeNNHelperKrnls.cu, [140](#)