

Department of Computer Engineering

E	~****	+ N	T_ 1
EXD	erime	шιг	NO. I
1			

Hadoop HDFS Practical

Date of Performance: 17/07/2023

Date of Submission: 24/07/2023




Department of Computer Engineering

Aim: Installation, Configuration of hadoop and performing basic file management operations in hadoop.

Theory:

What is the Hadoop Ecosystem?

Hadoop Ecosystem is a platform or a suite which provides various services to solve the big data problems. It includes Apache projects and various commercial tools and solutions. There are four major elements of Hadoop i.e. HDFS, MapReduce, YARN, and Hadoop Common.

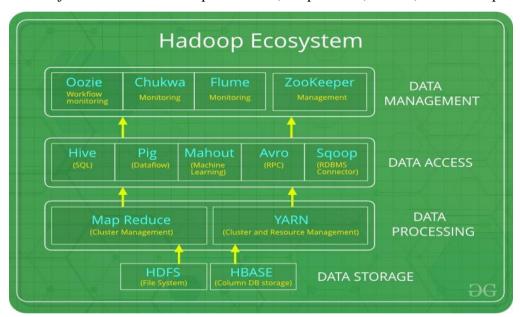

Following are the components that collectively form a Hadoop ecosystem:

- HDFS: Hadoop Distributed File System
- YARN: Yet Another Resource Negotiator
- MapReduce: Programming based Data Processing
- Spark: In-Memory data processing
- PIG, HIVE: Query based processing of data services
- HBase: NoSQL Database
- Mahout, Spark MLLib: Machine Learning algorithm libraries
- Solar, Lucene: Searching and Indexing
- Zookeeper: Managing cluster



Department of Computer Engineering

• Oozie: Job Scheduling HDFS:

HDFS is the primary or major component of Hadoop ecosystem and is responsible for storing large data sets of structured or unstructured data across various nodes and thereby maintaining the metadata in the form of log files. HDFS consists of two core components i.e.

- Name node
- Data Node

Name Node is the prime node which contains metadata (data about data) requiring comparatively fewer resources than the data nodes that stores the actual data. These data nodes are commodity hardware in the distributed environment.

HDFS maintains all the coordination between the clusters and hardware.

YARN:

Yet Another Resource Negotiator, as the name implies, YARN is the one who helps to manage the resources across the clusters. In short, it performs scheduling and resource allocation for the Hadoop System. Resource manager has the privilege of allocating resources for the applications in a system whereas Node managers work on the allocation of resources such as CPU, memory, bandwidth per machine and later on acknowledges the resource manager. Application manager works as an interface between the resource manager and node manager and performs negotiations as per the requirement of the two.

MapReduce:

MapReduce makes the use of two functions i.e. Map() and Reduce() whose task is:

Map() performs sorting and filtering of data and thereby organizing them in the form of group. Map generates a key-value pair based result which is later on processed by the Reduce() method. Reduce(), as the name suggests does the summarization by aggregating the mapped data. In simple, Reduce() takes the output generated by Map() as input and combines those tuples into smaller set of tuples.

HIVE:

Hive is an ETL and Data warehousing tool used to query or analyze large datasets stored within the Hadoop ecosystem. Hive has three main functions: data summarization, query, and analysis of unstructured and semi-structured data in Hadoop. It features a SQL-like interface, HQL language that works similar to SQL and automatically translates queries into MapReduce jobs.

A CONTROL OF THE PARTY OF THE P

Vidyavardhini's College of Engineering & Technology

Department of Computer Engineering

PIG:

Pig was basically developed by Yahoo which works on a pig Latin language, which is Query based language similar to SQL. It is a platform for structuring the data flow, processing and analyzing huge data sets. Pig does the work of executing commands and in the background, all the activities of MapReduce are taken care of. After the processing, pig stores the result in HDFS.

Apache Spark:

It's a platform that handles all the process consumptive tasks like batch processing, interactive or iterative real-time processing, graph conversions, and visualization, etc. It consumes in memory resources hence, thus being faster than the prior in terms of optimization.

Installation of Hadoop:


Download Hadoop 2.8.0

(Link: http://www-eu.apache.org/dist/hadoop/common/hadoop- 2.8.0/hadoop-2.8.0.tar.gz) OR

(http://archive.apache.org/dist/hadoop/core//hadoop- 2.8.0/hadoop-2.8.0.tar.gz)

Java JDK 1.8.0.zip (Link: http://www.oracle.com/technetwork/java/javase/downloads/jdk8-downloads-2133151.html)


Check either Java 1.8.0 is already installed on your system or not, use "Javac -version" to check.

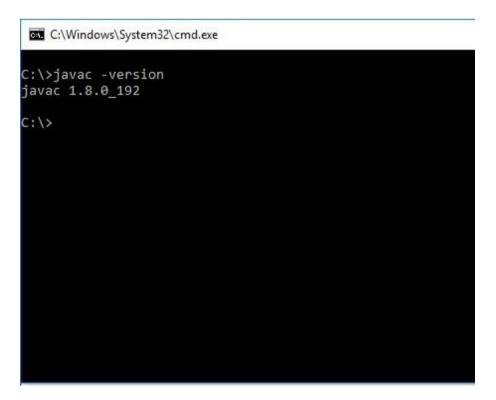




Department of Computer Engineering

If Java is not installed on your system then first install java under "C:\JAVA"

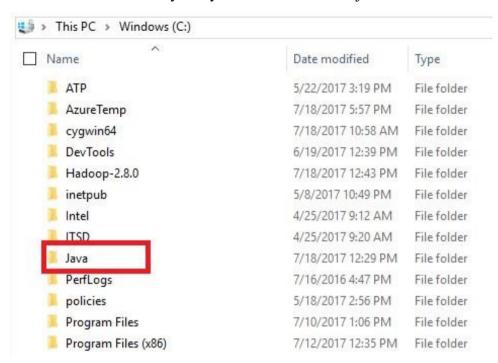


Extract file Hadoop 2.8.0.tar.gz or Hadoop-2.8.0.zip and place under "C:\Hadoop-2.8.0".

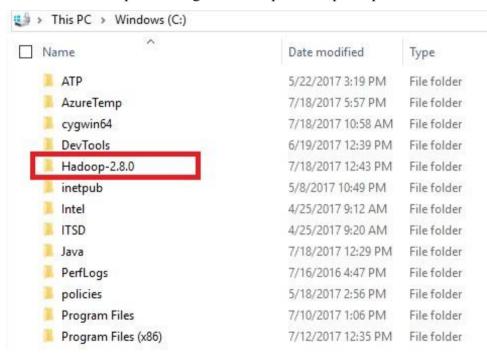



Department of Computer Engineering


Set the path HADOOP_HOME Environment variable on windows 10(see Step 1,2,3 and 4 below).

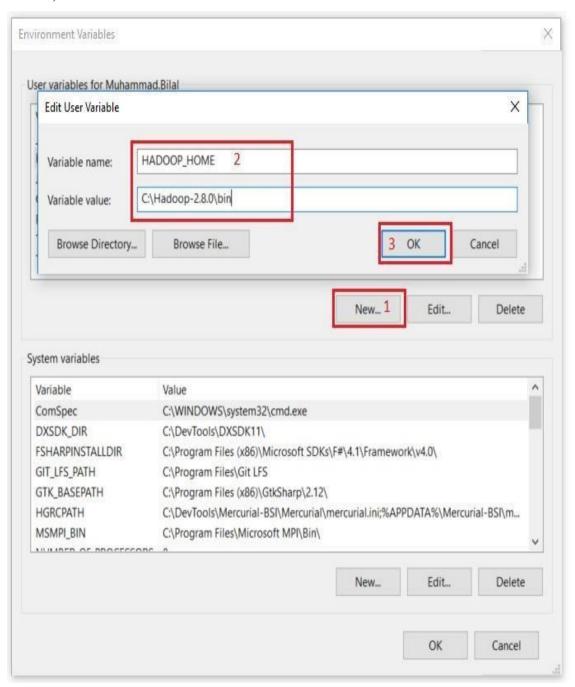



Department of Computer Engineering


Set the path JAVA HOME Environment variable on windows 10(see Step 1,2,3 and 4 below).

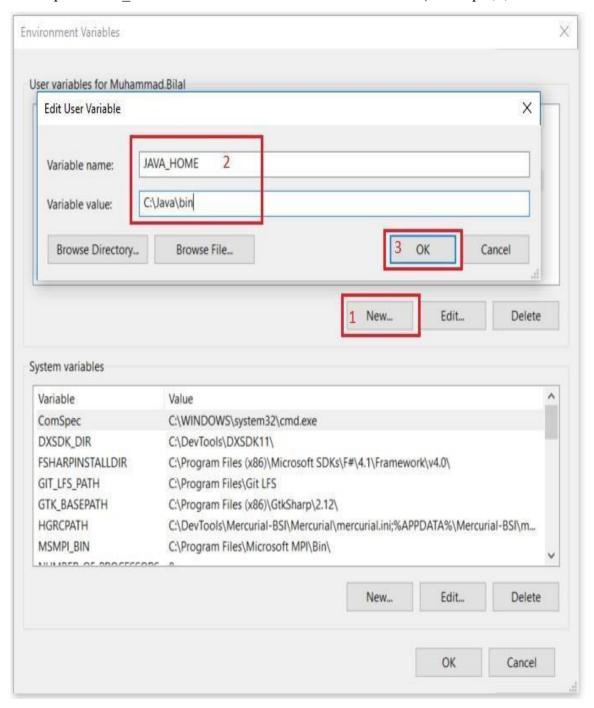



Department of Computer Engineering

Next we set the Hadoop bin directory path and JAVA bin directory path.

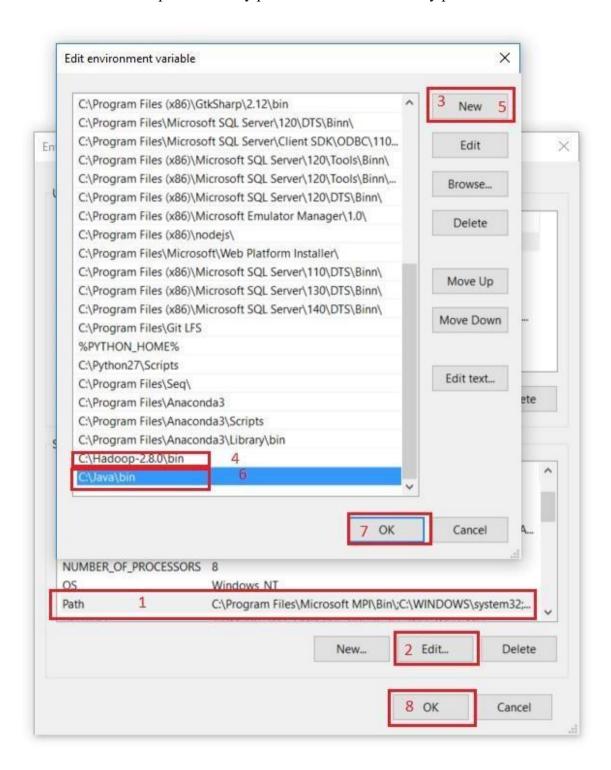

Department of Computer Engineering

CONFIGURATION:

Edit file C:/Hadoop-2.8.0/etc/hadoop/core-site.xml, paste below xml paragraph and save this file.

```
<configuration>
<name>fs.defaultFS</name>

<value>hdfs://localhost:9000</value>

</configuration>
```


Rename "mapred-site.xml.template" to "mapred-site.xml" and edit this file C:/Hadoop-

2.8.0/etc/hadoop/mapred-site.xml, paste below xml paragraph and save this file. <configuration>

```
<name>mapreduce.framework.name</name>
     <value>yarn</value>
     </property>
</configuration>
```

Create folder "data" under "C:\Hadoop-2.8.0" Create folder "datanode" under "C:\Hadoop-2.8.0\data"

Create folder "namenode" under "C:\Hadoop-2.8.0\data"

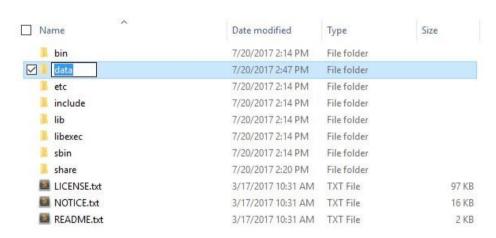

Edit file C:\Hadoop-2.8.0/etc/hadoop/hdfs-site.xml, paste below xml paragraph and save this file.

Department of Computer Engineering

```
<name>dfs.namenode.name.dir</name>
  <value>C:\hadoop-2.8.0\data\namenode</value>
</property>
  <property>
  <name>dfs.datanode.data.dir</name>
    <value>C:\hadoop-2.8.0\data\datanode</value> </property>
</configuration>
```

Edit file C:/Hadoop-2.8.0/etc/hadoop/yarn-site.xml, paste below xml paragraph and save this file.

Edit file C:/Hadoop-2.8.0/etc/hadoop/hadoop-env.cmd by closing the command line "JAVA_HOME=%JAVA_HOME%" instead of set JAVA_HOME="C:\Java\jdk\bin" (On C:\java this is path to file jdk.18.0)

```
@rem The java implementation to use. Required.
@rem set JAVA_HOME=%JAVA_HOME%
set JAVA_HOME=C:\java
```


HADOOP CONFIGURATION:

Dowload file Hadoop Configuration.zip (Link:

https://github.com/MuhammadBilalYar/HADOOP-INSTALLATION-ON-WINDOW-10/blob/master/Hadoop%20Configuration.zip)

Delete file bin on C:\Hadoop-2.8.0\bin, replaced by file bin on file just download (from Hadoop Configuration.zip).

Open cmd and typing command "hdfs namenode -format". You will see

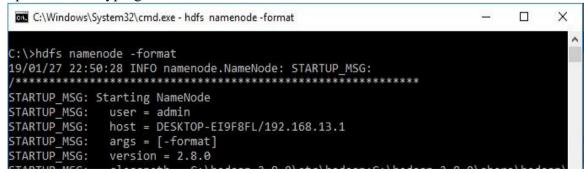

Department of Computer Engineering

TESTING:

Open cmd and change directory to "C:\Hadoop-2.8.0\sbin" and type "start-all.cmd" to start apache.

```
C:\hadoopsetup\hadoop-3.3.6\sbin> .\start-dfs.cmd
C:\hadoopsetup\hadoop-3.3.6\sbin> .\start-yarn.cmd
starting yarn daemons
C:\hadoopsetup\hadoop-3.3.6\sbin>jps
14736 DataNode
3588 NodeManager
3512 ResourceManager
8296 Jps
```

Make sure these apps are running:


- > Hadoop Namenode
- Hadoop Datanode
- YARN Resource Manager
- > YARN Node Manager





Department of Computer Engineering

Open: http://localhost:8088

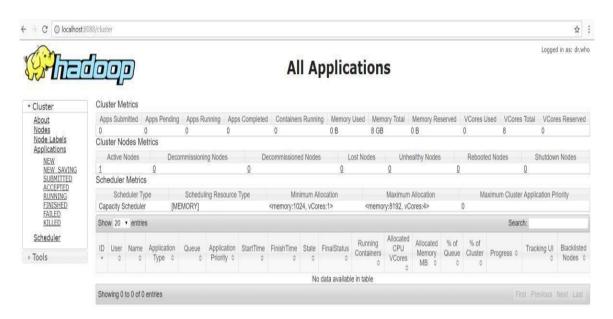

Open: http://localhost:50070



Overview 'localhost:9000' (active)

Started:	Thu Jul 20 15:44:11 +0500 2017
Version:	2.8.0, r91f2b7a13d1e97b 7cc29ac0009
Compiled:	Fri Mar 17 09:12:00 +0500 2017 by jdu from branch-2.8.0
Cluster ID:	CID-098b09fc-fc
Block Pool ID:	BP-10805048 47106632

Summary

Security is off.	
Safemode is off.	
1 files and directories, 0 blocks = 1 total filesystem object(s).	
Heap Memory used 36.53 MB of 311 MB Heap Memory. Max Heap Memory is 889 MB.	
Non Heap Memory used 40.68 MB of 41.53 MB Committed Non Heap Memory. Max Non H	leap Memory is <unbounded>.</unbounded>
Configured Capacity:	475.24 GB
DFS Used:	321 B (0%)
Non DFS Used:	261.08 GB



Department of Computer Engineering

File management tasks in Hadoop:

In order to perform operations on Hadoop like copy, delete, move etc., following steps can be used:

Basic Operations:

1. Create a directory in HDFS at given path(s).

Usage: hadoop fs -mkdir

<paths>

2. List the contents of a directory.

Usage: hadoop fs -ls <args>

3. See contents of a file Same as

unix cat command:

hadoop fs -cat <path[filename]> 4. Copy

a file from source to destination

This command allows multiple sources as well in which case the destination must be a directory.

Usage:

hadoop fs -cp <source> <dest>

5. Copy a file from/To Local file system to HDFS

copyFromLocal Usage: hadoop fs -

copyFromLocal <localsrc> URI

Similar to put command, except that the source is restricted to a local file reference.

copyToLocal Usage: hadoop fs -copyToLocal [-ignorecrc]

[-crc] URI <localdst>

Similar to get command, except that the destination is restricted to a local file reference.

7. Move file from source to destination.

Note:- Moving files across filesystem is not permitted.

Usage:

hadoop fs -mv <src> <dest>

8. Remove a file or directory in HDFS.

Remove files specified as argument. Deletes directory only when it is empty Usage:

hadoop fs -rm <arg>

Department of Computer Engineering

Steps for copying file

- 1) Go to Hadoop folder and then to sbin C:\>cd C:\hadoop-2.8.0\sbin
- 2) Start namenode and datanode with this command, Two more cmd windows will open C:\hadoop-2.8.0\sbin>start-dfs.cmd
- 3) Now start yarn through following command, Two more windows will open, one for yarn resource manager and one for yarn node manager
 C:\hadoop-2.8.0\sbin>start-yarn.cmd
- 4) Create a directory named 'sample' in the hadoop directory using the following command C:\hadoop-2.8.0\sbin> hdfs dfs -mkdir/sample
- 5) To verify if the directory is created C:\hadoop-2.8.0\sbin>hdfs dfs -ls /
- 6) Copy text file from D drive to sampleC:\hadoop-2.8.0\sbin>hdfs dfs -copyFromLocal d:\rally.txt /sample
- 7) To verify if the file is copiedC:\hadoop-2.8.0\sbin>hdfs dfs -ls /sample

OUTPUT:

C:\hadoopsetup\hadoop-3.3.6\sbin> .\start-dfs.cmd

C:\hadoopsetup\hadoop-3.3.6\sbin> .\start-yarn.cmd
starting yarn daemons

C:\hadoopsetup\hadoop-3.3.6\sbin>jps

14736 DataNode

3588 NodeManager

3512 ResourceManager


8296 Jps




Showing 0 to 0 of 0 entries

Vidyavardhini's College of Engineering & Technology


Department of Computer Engineering

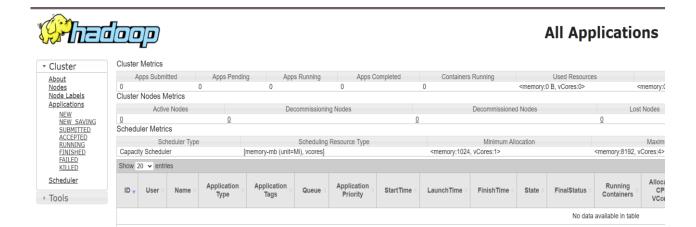

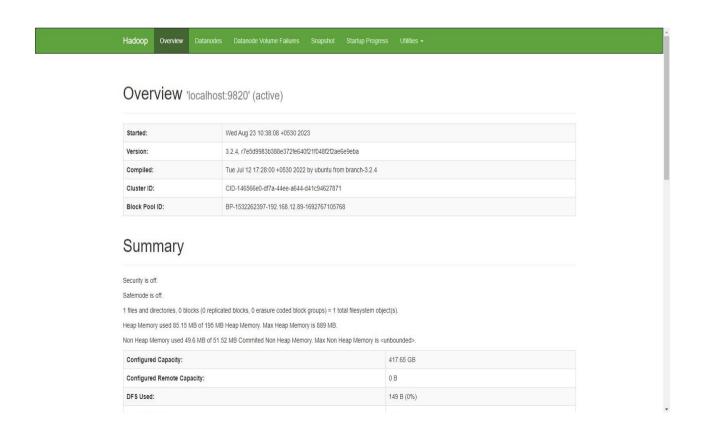



Department of Computer Engineering

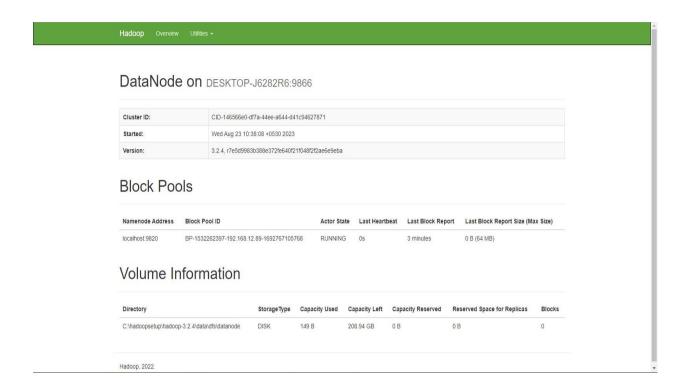

- C:\hadoopsetup\hadoop-3.3.6\sbin> hdfs dfs -mkdir /psm
- C:\hadoopsetup\hadoop-3.3.6\sbin> hdfs dfs -ls / Found 1 items
- drwxr-xr-x admin rootgroup 0 2023-10-11 11:40 /psm
- C:\hadoopsetup\hadoop-3.3.6\sbin> hdfs dfs -copyFromLocal
 C:\Users\Prathmesh\OneDrive\Desktop\psm
- C:\hadoopsetup\hadoop-3.3.6\sbin> hdfs dfs -ls /psm
 - Found 1 items
 - -rw-r--r- 1 admin rootgroup 14 2023-10-11 11:50 /psm/psm.txt

CONCLUSION:

Hadoop Ecosystem is a platform or a suite which provides various services to solve the big data problems. HDFS is the major component of Hadoop ecosystem and is responsible for storing large data sets of structured or unstructured data across the various nodes and thereby maintaining the metadata in the form of log files.

In this experiment, we successfully implemented the Installation and Configuration of Hadoop along with performing basic file management operations in hadoop.