
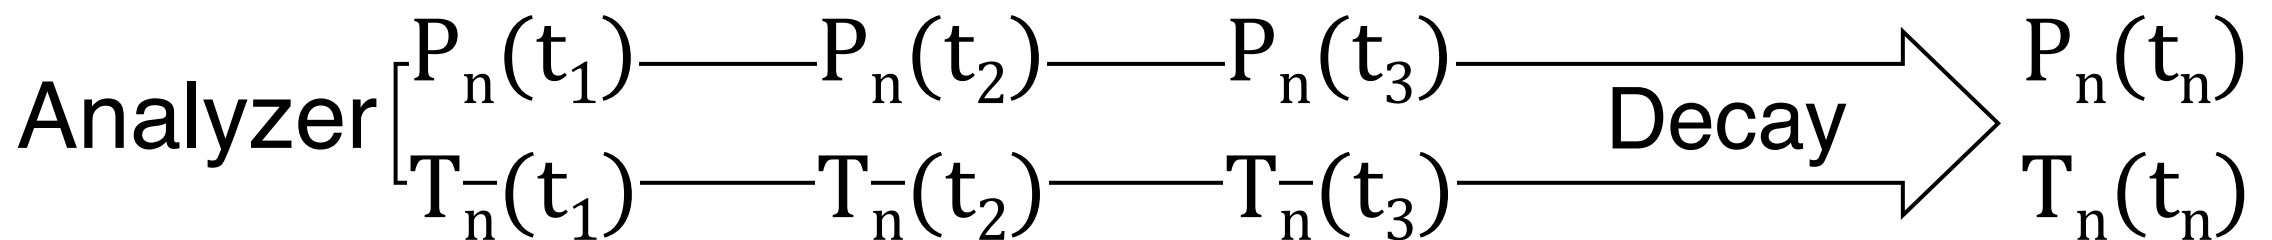


Data set

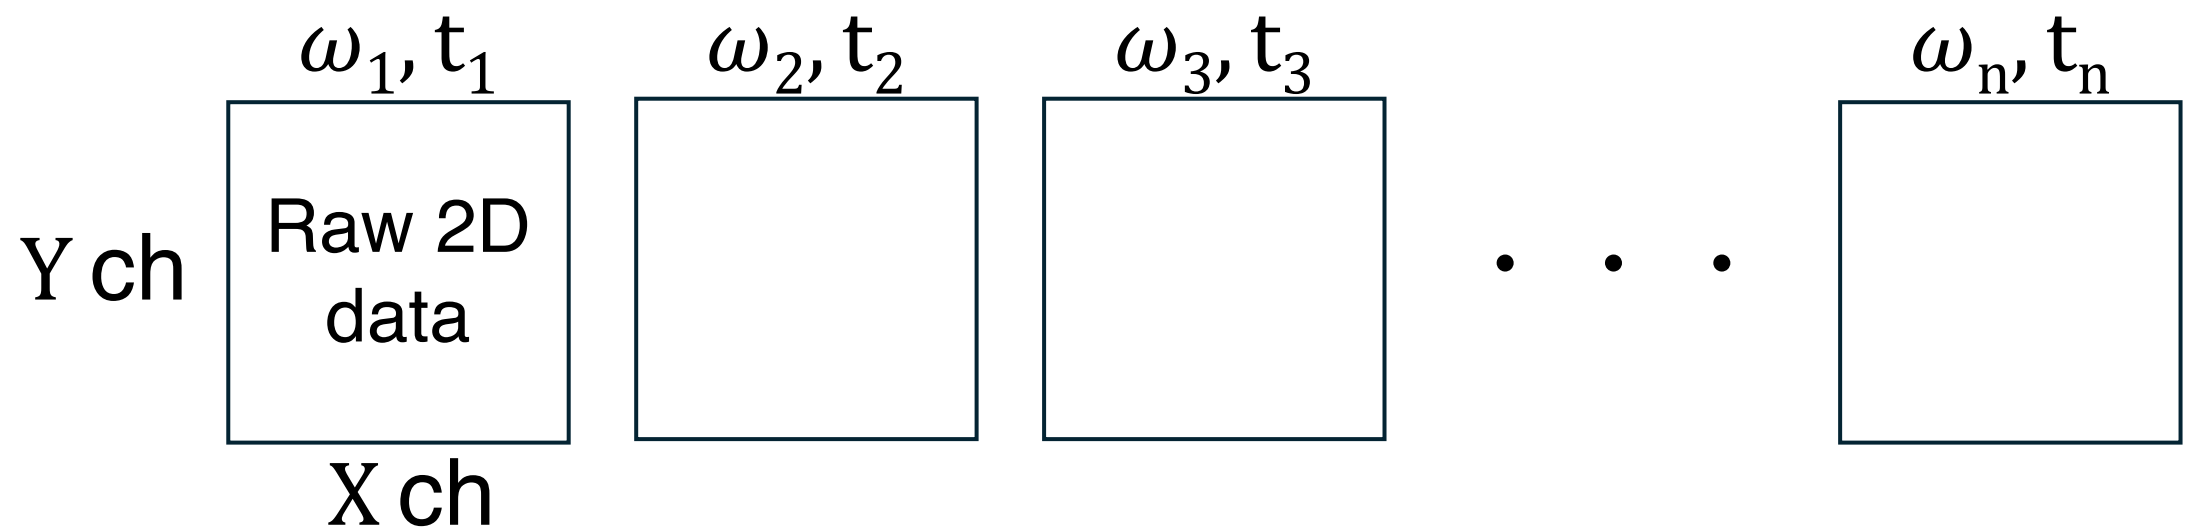

-
- Apply $P_n(t)$, $T_n(t)$ correction to each data.
 - Convert detector coordinates X, Y and sample orientation ω to Q_x, Q_y, Q_z .
 - Transform Q_x, Q_y, Q_z to H, K, L using the UB matrix.

Slice the (H, K, L) data on an arbitrary plane.