

Windowing Query

Segment Tree



- Common Ancestor

Junhui DENG

deng@tsinghua.edu.cn

👁 If some of the leaves share a **CA**, then

a search path ends in **any** of them iff the **CA** is visited

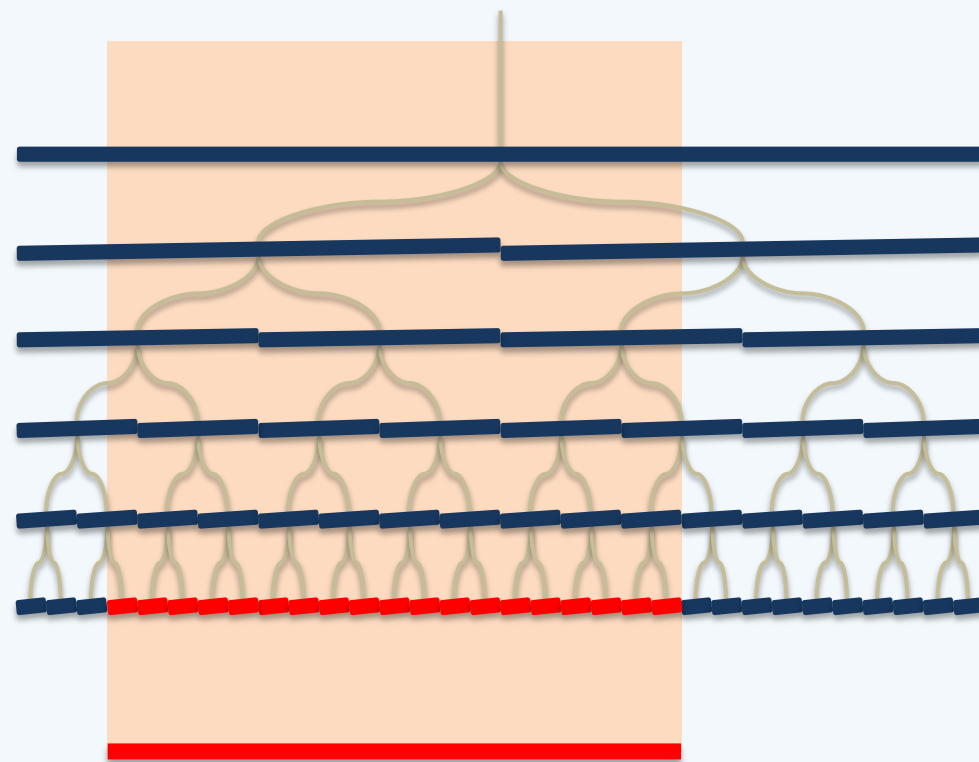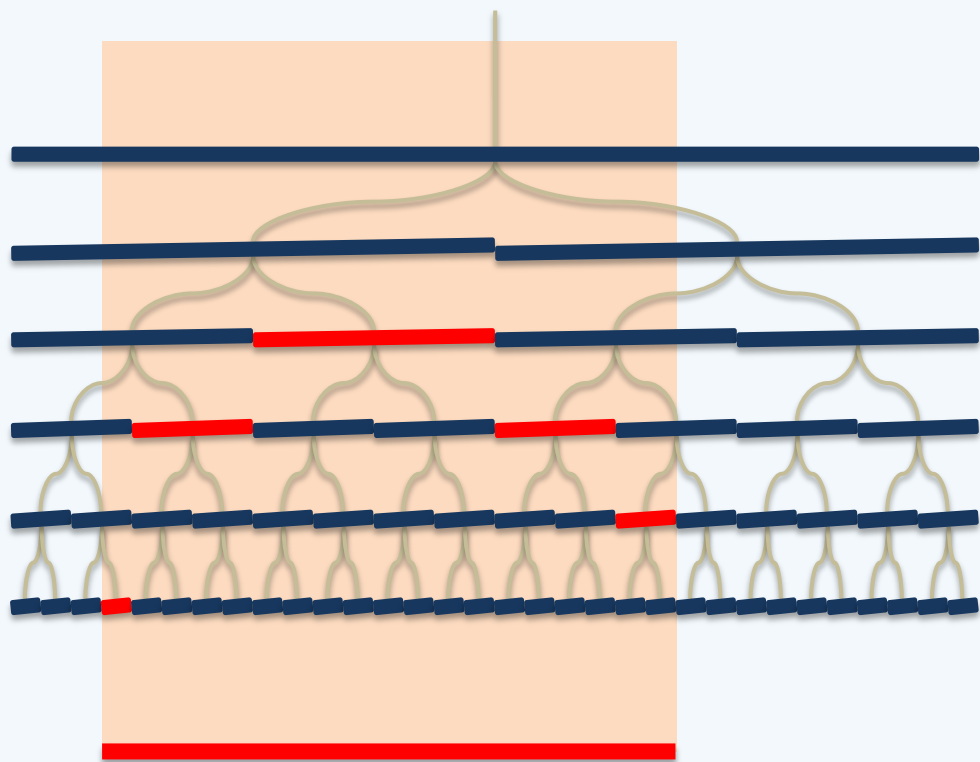

∴ So, instead, why not just store a single copy at the CA?

