

Point Location


Path Copying

- Strategy

Junhui DENG

deng@tsinghua.edu.cn

- ❖ Each time a next slab is reached, rather than copying the entire tree, we
- **copy** the path from root to the "dirty" node and
 - **modify** the $O(\log)$ copied nodes

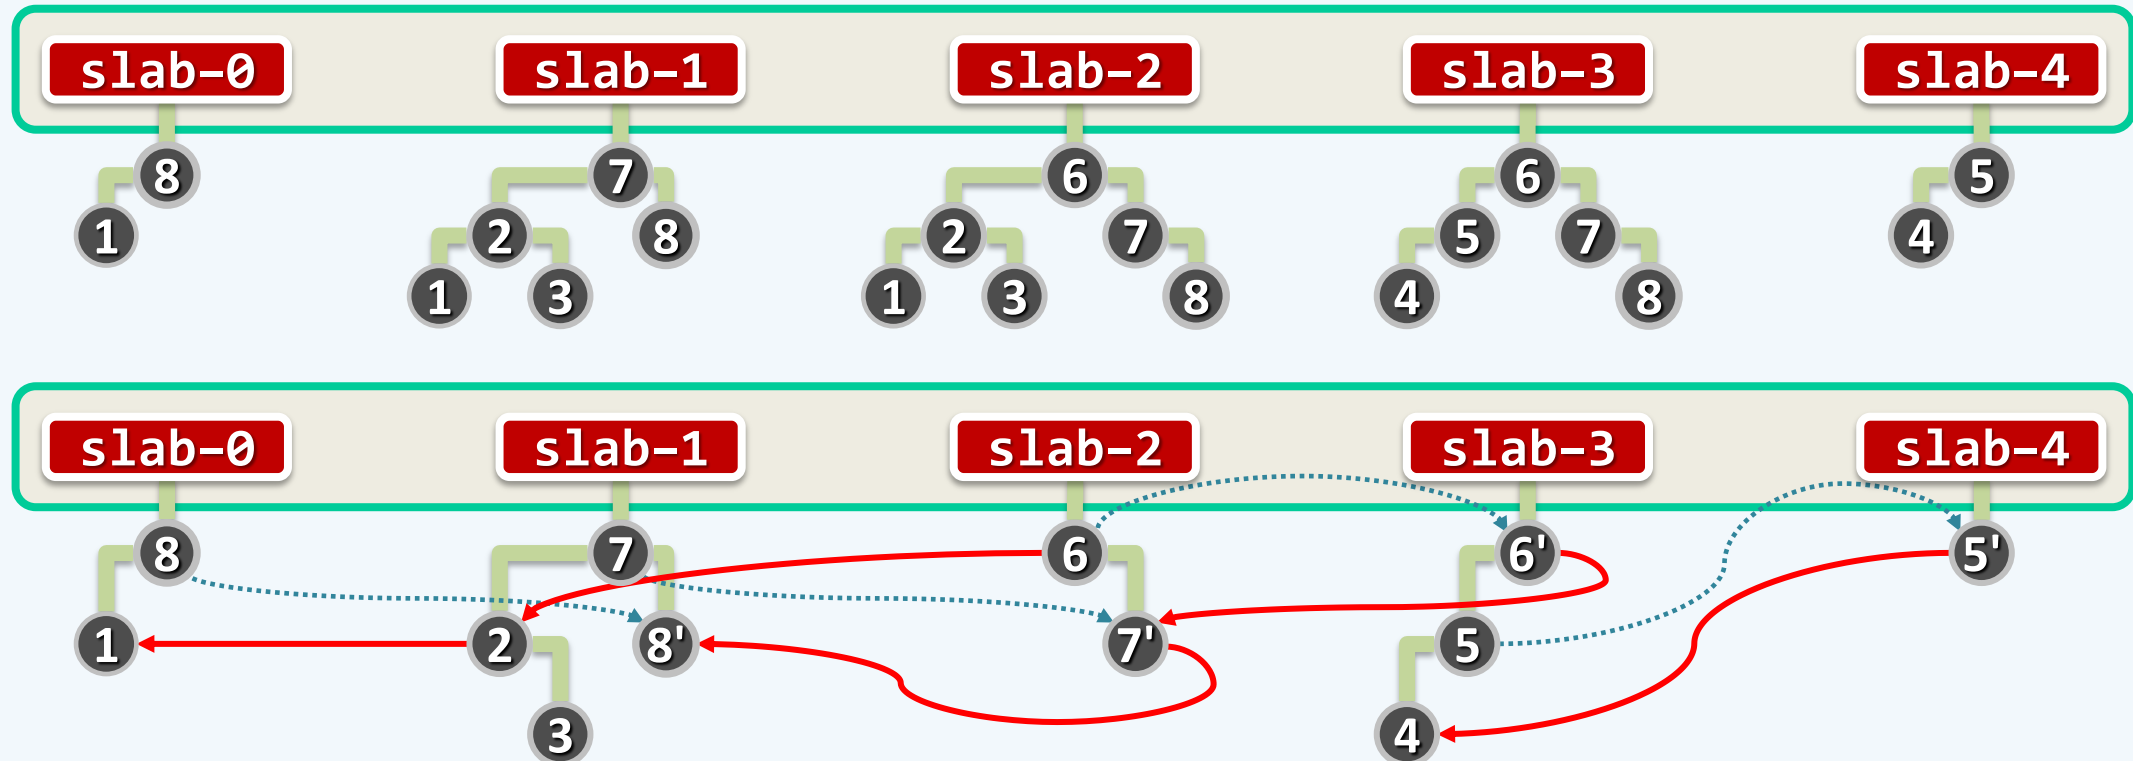

Effect

- ❖ This method creates a set of search trees, one per slab, having **different roots** but sharing **common subtrees**

