🚀 **CHALLENGE COMPLETED**   **View successful submissions**

∨ Jump to code   — Collapse text

The False Proof   **500 points**

Backstory

Trine's Designs is very community-oriented, and customers like to write letters to the staff to get help with a variety of issues. A mysterious person has sent a non-sensical mathematical proof about complex numbers. No one at the company is good at complex analysis, but Zenda and Reece set out to use a quantum circuit to prove the anonymous customer wrong.

One-shot proof

In the 17th century, a nice custom spread among intellectuals: challenging each other to solve numerical problems and puzzles. These challenges were sent through letters and, thanks to this, mathematics expanded and gained a lot of popularity.

It seems that this tradition is making a comeback because the other day Reece received the following letter at the office:

"Hello Trine team, I have just come to a discovery of great importance, I have just proved that $\frac{2\pi}{3} = \frac{4\pi}{3}$. I attach a simple proof. If you think I'm wrong, prove it!*"
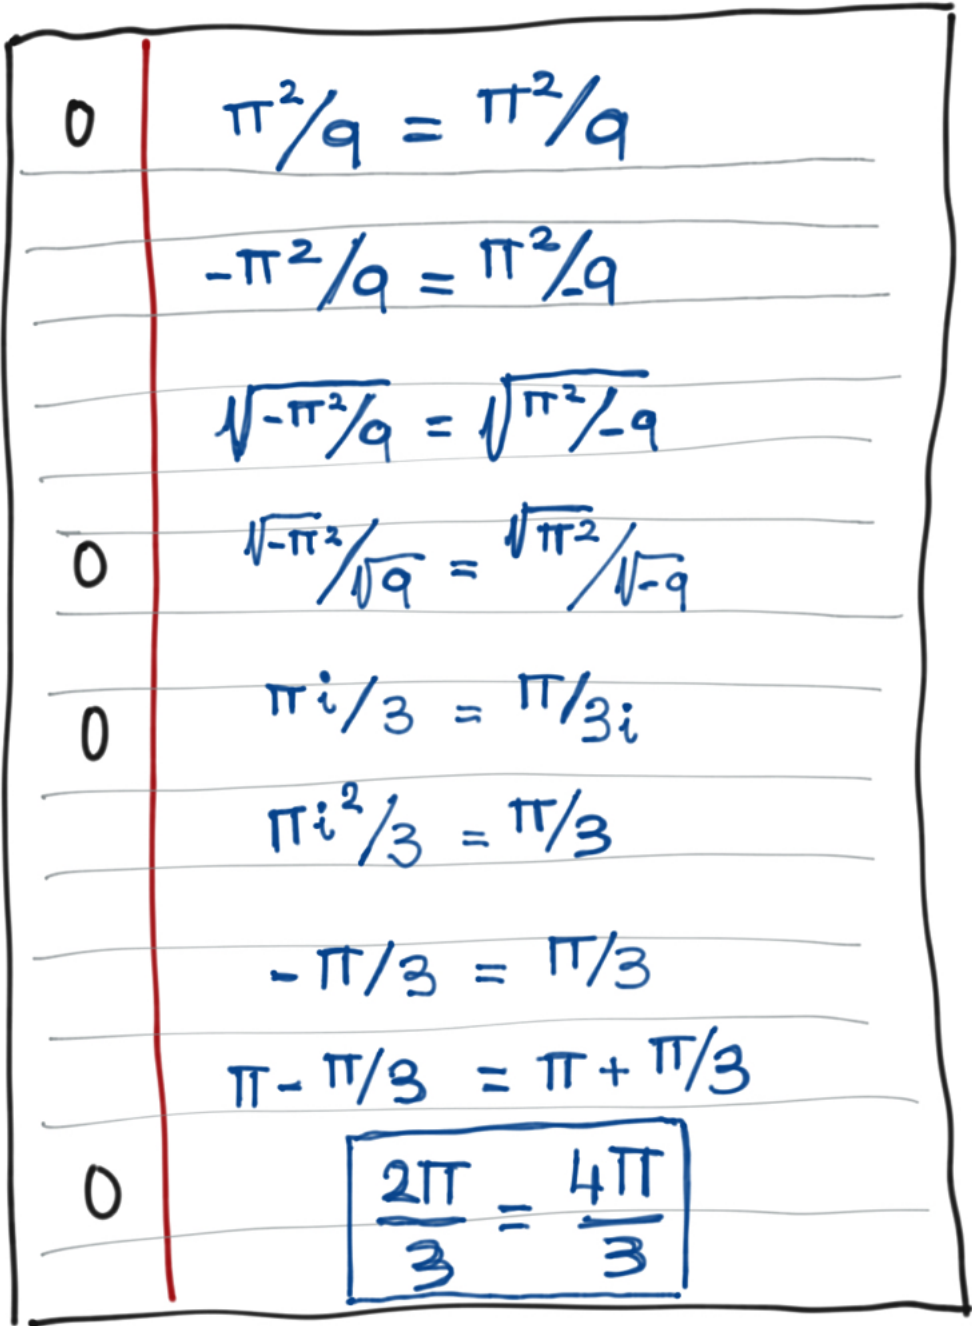
Actually, the proof is very convincing, but Reece turns to quantum computing to show that this is not so (for fun, if you like math: find the line where the mistake is!). To do this, Reece manages to show that $R_Y(\frac{2\pi}{3})$ is different from $R_Y(\frac{4\pi}{3})$. In fact, they are so different that a single shot is enough to distinguish them!

This will be your objetive for this challenge! We are going to give you a gate U, which you know is either $R_Y(\frac{2\pi}{3})$ or $R_Y(\frac{4\pi}{3})$. Your task will be to build a quantum circuit containing U to unambiguously determine which of the two gates it is using only *one shot*.

To do this, you will have access to a two-qubit circuit. You can use U as many times as you want, but one thing is important: the solution must guarantee with **100% probability** which of the two options it is.

Note: even if you do not know U, you are allowed to use `qml.ctrl` over U if necessary.

▶ Epilogue

Challenge code

On one hand you are asked to complete `circuit` (you only need to apply gates). On the other hand you must complete `process_output`, which will take the output of `circuit` (a vector of dimension two where each term can take the value 0 or 1) and will return 2 if $U = RY(2\pi/3)$ or 4 if $U = RY(4\pi/3)$.

Output

The circuit function will receive the gate U that you are asked to determine. To judge whether your circuit works as expected, we will randomly send 5000 different examples and check that they always classified correctly. Therefore, in this question there are no public or private test cases. They are randomly generated. Good luck!