

Muhamad Assem Ahmed

Lab 17

Part A

LAB 18 — Lab ID: 27 | CHIP_YEAR = 4 | CHIP_LABEL = Final

Model means one Student here because this file's own @model Student directive says so — Index.cshtml declares @model List<Student> instead

Part B


The first screenshot shows the 'Year 2 Students' page. It displays a table with columns: Id, Full Name, Year, and GPA. The data row shows Id 1, Full Name 'Yara Adel edit for part E', Year 2, and GPA '3.10 - Second'. Below the table is a link 'Back to all students' and a footer '© 2026 - StudentPortalWeb - Privacy'.

The second screenshot shows the 'Band: first' page. It displays a table with columns: Id, Full Name, Year, and GPA. The data row shows Id 3, Full Name 'Nada Samir', Year 1, and GPA '3.60 - First'. Below the table is a link 'Back to all students' and a footer '© 2026 - StudentPortalWeb - Privacy'.


The third screenshot shows the 'Search Results' page. It displays a table with columns: Id, Full Name, Year, and GPA. The data rows are: Id 4, Full Name 'Kareem Fouad', Year 4, GPA '3.20 - Second'; Id 3, Full Name 'Nada Samir', Year 1, GPA '3.60 - First'; Id 2, Full Name 'Omar Hesham', Year 3, GPA '2.80 - Pass'; and Id 1, Full Name 'Yara Adel edit for part E', Year 2, GPA '3.10 - Second'. Below the table is a link 'Back to all students' and a footer '© 2026 - StudentPortalWeb - Privacy'.

If `<partial name="_StudentRow" />` were called here with no model attribute, it would inherit this page's Model — which inside this foreach is the whole `List<Student>`, not a single Student

```
Find all "@student.YearOfStudy", Include miscellaneous files, Entire solution, Additional files might be excluded. Manage exclusions
Code
D:\ITI .net\New folder\lab 18\Views\Home (1)
  Index.cshtml (1)
    <td>@student.YearOfStudy</td>
Index.cshtml 38 21
Matching lines: 1 Matching files: 1 Total files searched: 93
Find "@student.YearOfStudy" Package Manager Console Output Error List
```

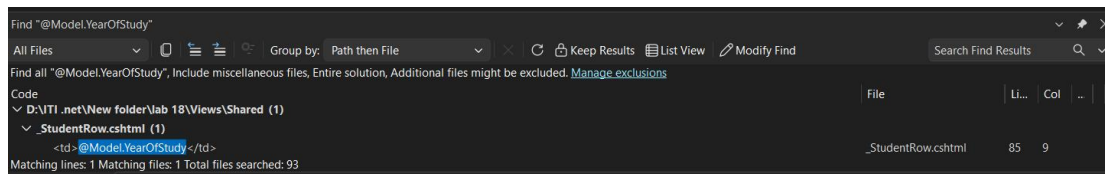


Part C

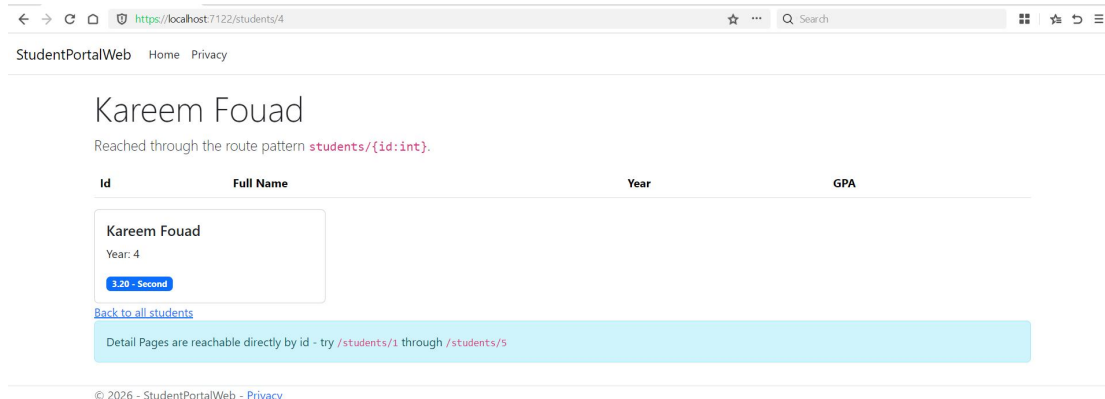

This partial and `_StudentRow.cshtml` are both handed one Student. A page CAN use both at once each `<partial>` call passes its own model independently and neither partial knows the other exists

Part D

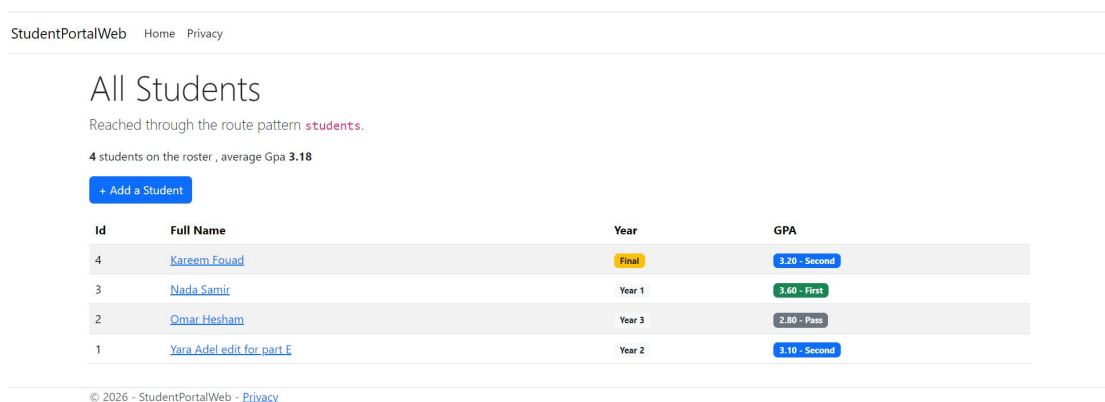

Part E

WHAT THE BROWSER RECEIVED: `<td><span class="badge bg-warning text-dark" title="rendered by muhamad Assem">Final</span></td>`
 Or `<td><span class="badge bg-light text-dark" title="rendered by muhamad Assem">Year I (I refer to year)</span></td>`

A) removed `@addTagHelper *`, `Lab_18` from `_ViewImports`: both `<gpa-badge>` and `<year-chip>` lose their meaning at once

B) the output defaults to self-closing too — an empty `<span class="badge bg-warning text-dark">` with no visible text

C) renamed the element to yearchip (no hyphen) everywhere: Razor no longer recognises it as a custom element at all, so it is passed through as a literal unknown HTML tag

D) All three failures are silent

Part F

LAB 18 — Lab ID: 27 | CHIP_YEAR = 4 | CHIP_LABEL = Final

The table of showing the students it was solved using partial view

A route constraint, a validation attribute, and a tag helper are all the same extension shape: inherit a base class or implement an interface defined

`<gpa-badge>` contains a rule — the GPA thresholds that decide who counts as "first" and "Second" and pass `<year-chip>` contains a label it just names whichever year is being highlighted