+

William Stallings
Computer Organization and Architecture
10th Edition

Chapter 1

+

Basic Concepts and Computer Evolution

Computer Architecture

Computer Organization

Computer Architecture

- Attributes of a system visible to the programmer
- Have a direct impact on the logical execution of a program

Architectural attributes include:

- Instruction set, number of bits used to represent various data types, I/O mechanisms, techniques for addressing memory

Computer Organization

- The operational units and their interconnections that realize the architectural specifications

Organizational attributes include:

- Hardware details transparent to the programmer, control signals, interfaces between the computer and peripherals, memory technology used

IBM System 370 Architecture

- IBM System/370 architecture
  - Was introduced in 1970
  - Included a number of models
  - Could upgrade to a more expensive, faster model without having to abandon original software
  - New models are introduced with improved technology, but retain the same architecture so that the customer's software investment is protected
  - Architecture has survived to this day as the architecture of IBM's mainframe product line

Structure and Function

- Hierarchical system
  - Set of interrelated subsystems
- Hierarchical nature of complex systems is essential to both their design and their description
- Designer need only deal with a particular level of the system at a time
  - Concerned with structure and function at each level

- Structure
  - The way in which components relate to each other
- Function
  - The operation of individual components as part of the structure

Function

- There are four basic functions that a computer can perform:
  - Data processing
    - Data may take a wide variety of forms and the range of processing requirements is broad
  - Data storage
    - Short-term
    - Long-term
  - Data movement
    - Input-output (I/O) - when data are received from or delivered to a device (peripheral) that is directly connected to the computer
    - Data communications – when data are moved over longer distances, to or from a remote device
  - Control
    - A control unit manages the computer's resources and orchestrates the performance of its functional parts in response to instructions

Structure

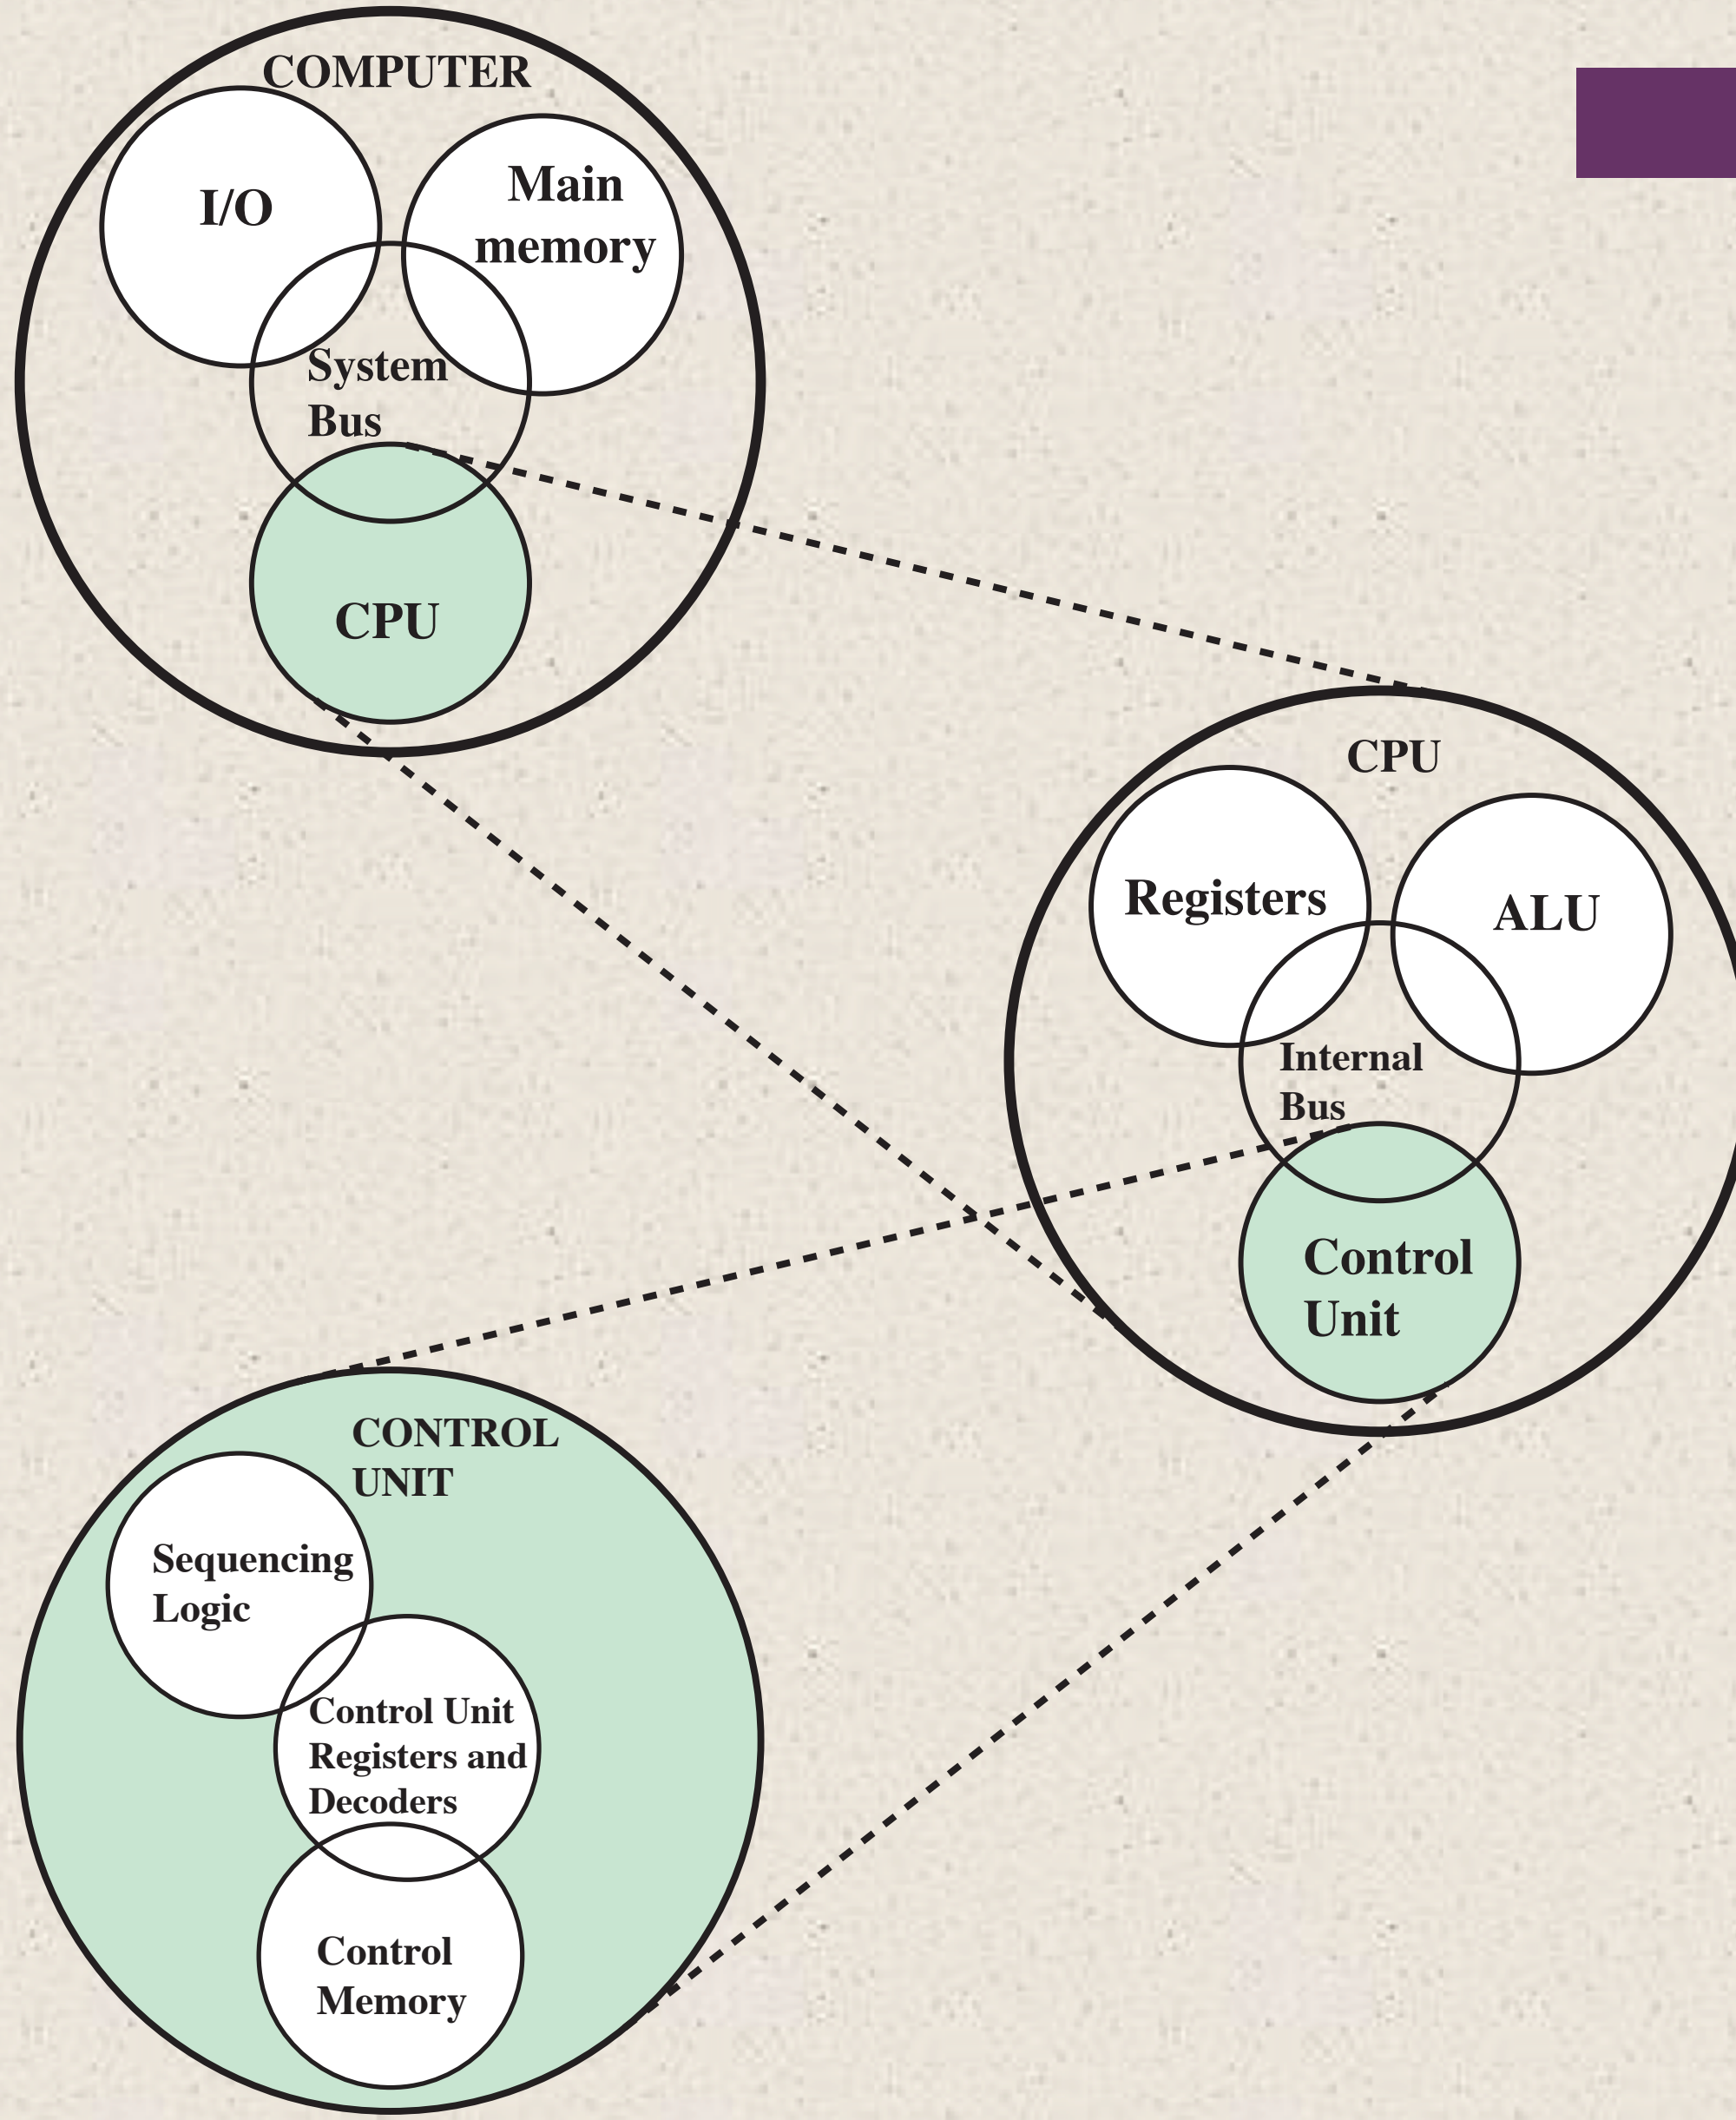

Figure 1.1 A Top-Down View of a Computer

There are four main structural components of the computer:

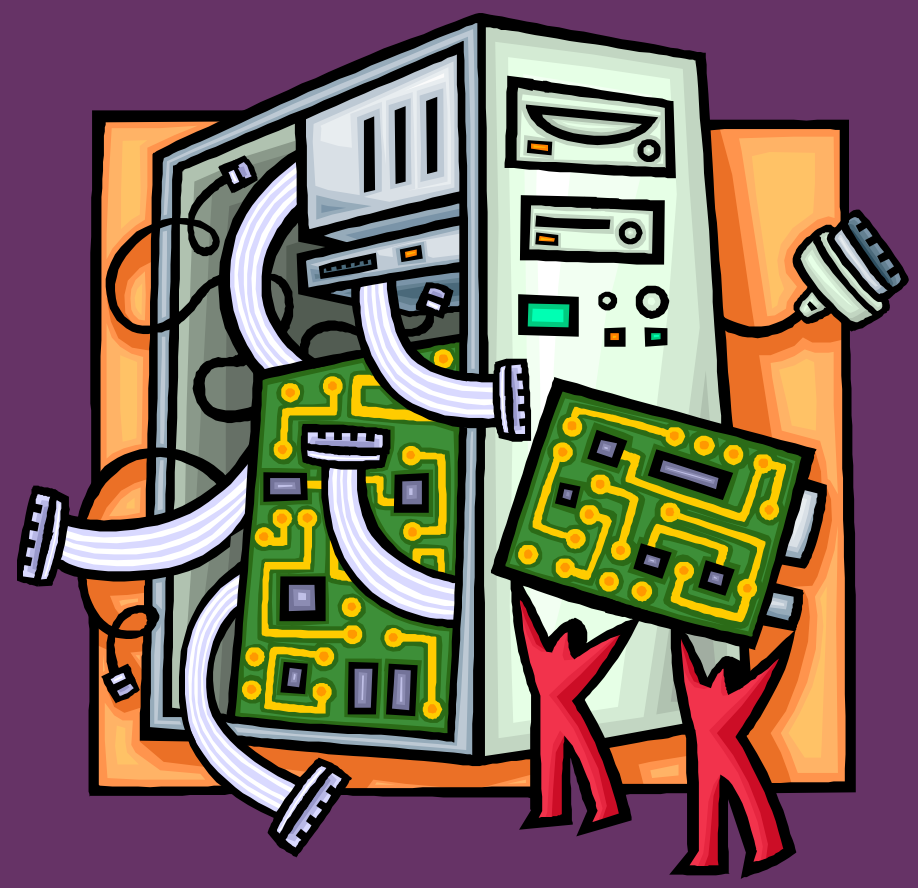

- **CPU** – controls the operation of the computer and performs its data processing functions
- **Main Memory** – stores data
- **I/O** – moves data between the computer and its external environment
- **System Interconnection** – some mechanism that provides for communication among CPU, main memory, and I/O

+

CPU

Major structural components:

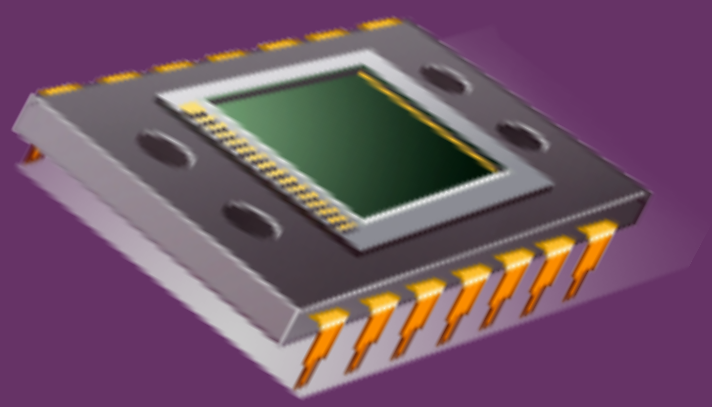



- Control Unit
  - Controls the operation of the CPU and hence the computer
- Arithmetic and Logic Unit (ALU)
  - Performs the computer's data processing function
- Registers
  - Provide storage internal to the CPU
- CPU Interconnection
  - Some mechanism that provides for communication among the control unit, ALU, and registers

+ Multicore Computer Structure

- Central processing unit (CPU)
  - Portion of the computer that fetches and executes instructions
  - Consists of an ALU, a control unit, and registers
  - Referred to as a processor in a system with a single processing unit
- Core
  - An individual processing unit on a processor chip
  - May be equivalent in functionality to a CPU on a single-CPU system
  - Specialized processing units are also referred to as cores
- Processor
  - A physical piece of silicon containing one or more cores
  - Is the computer component that interprets and executes instructions
  - Referred to as a *multicore processor* if it contains multiple cores

Cache Memory

- Multiple layers of memory between the processor and main memory
- Is smaller and faster than main memory
- Used to speed up memory access by placing in the cache data from main memory that is likely to be used in the near future
- A greater performance improvement may be obtained by using multiple levels of cache, with level 1 (L1) closest to the core and additional levels (L2, L3, etc.) progressively farther from the core

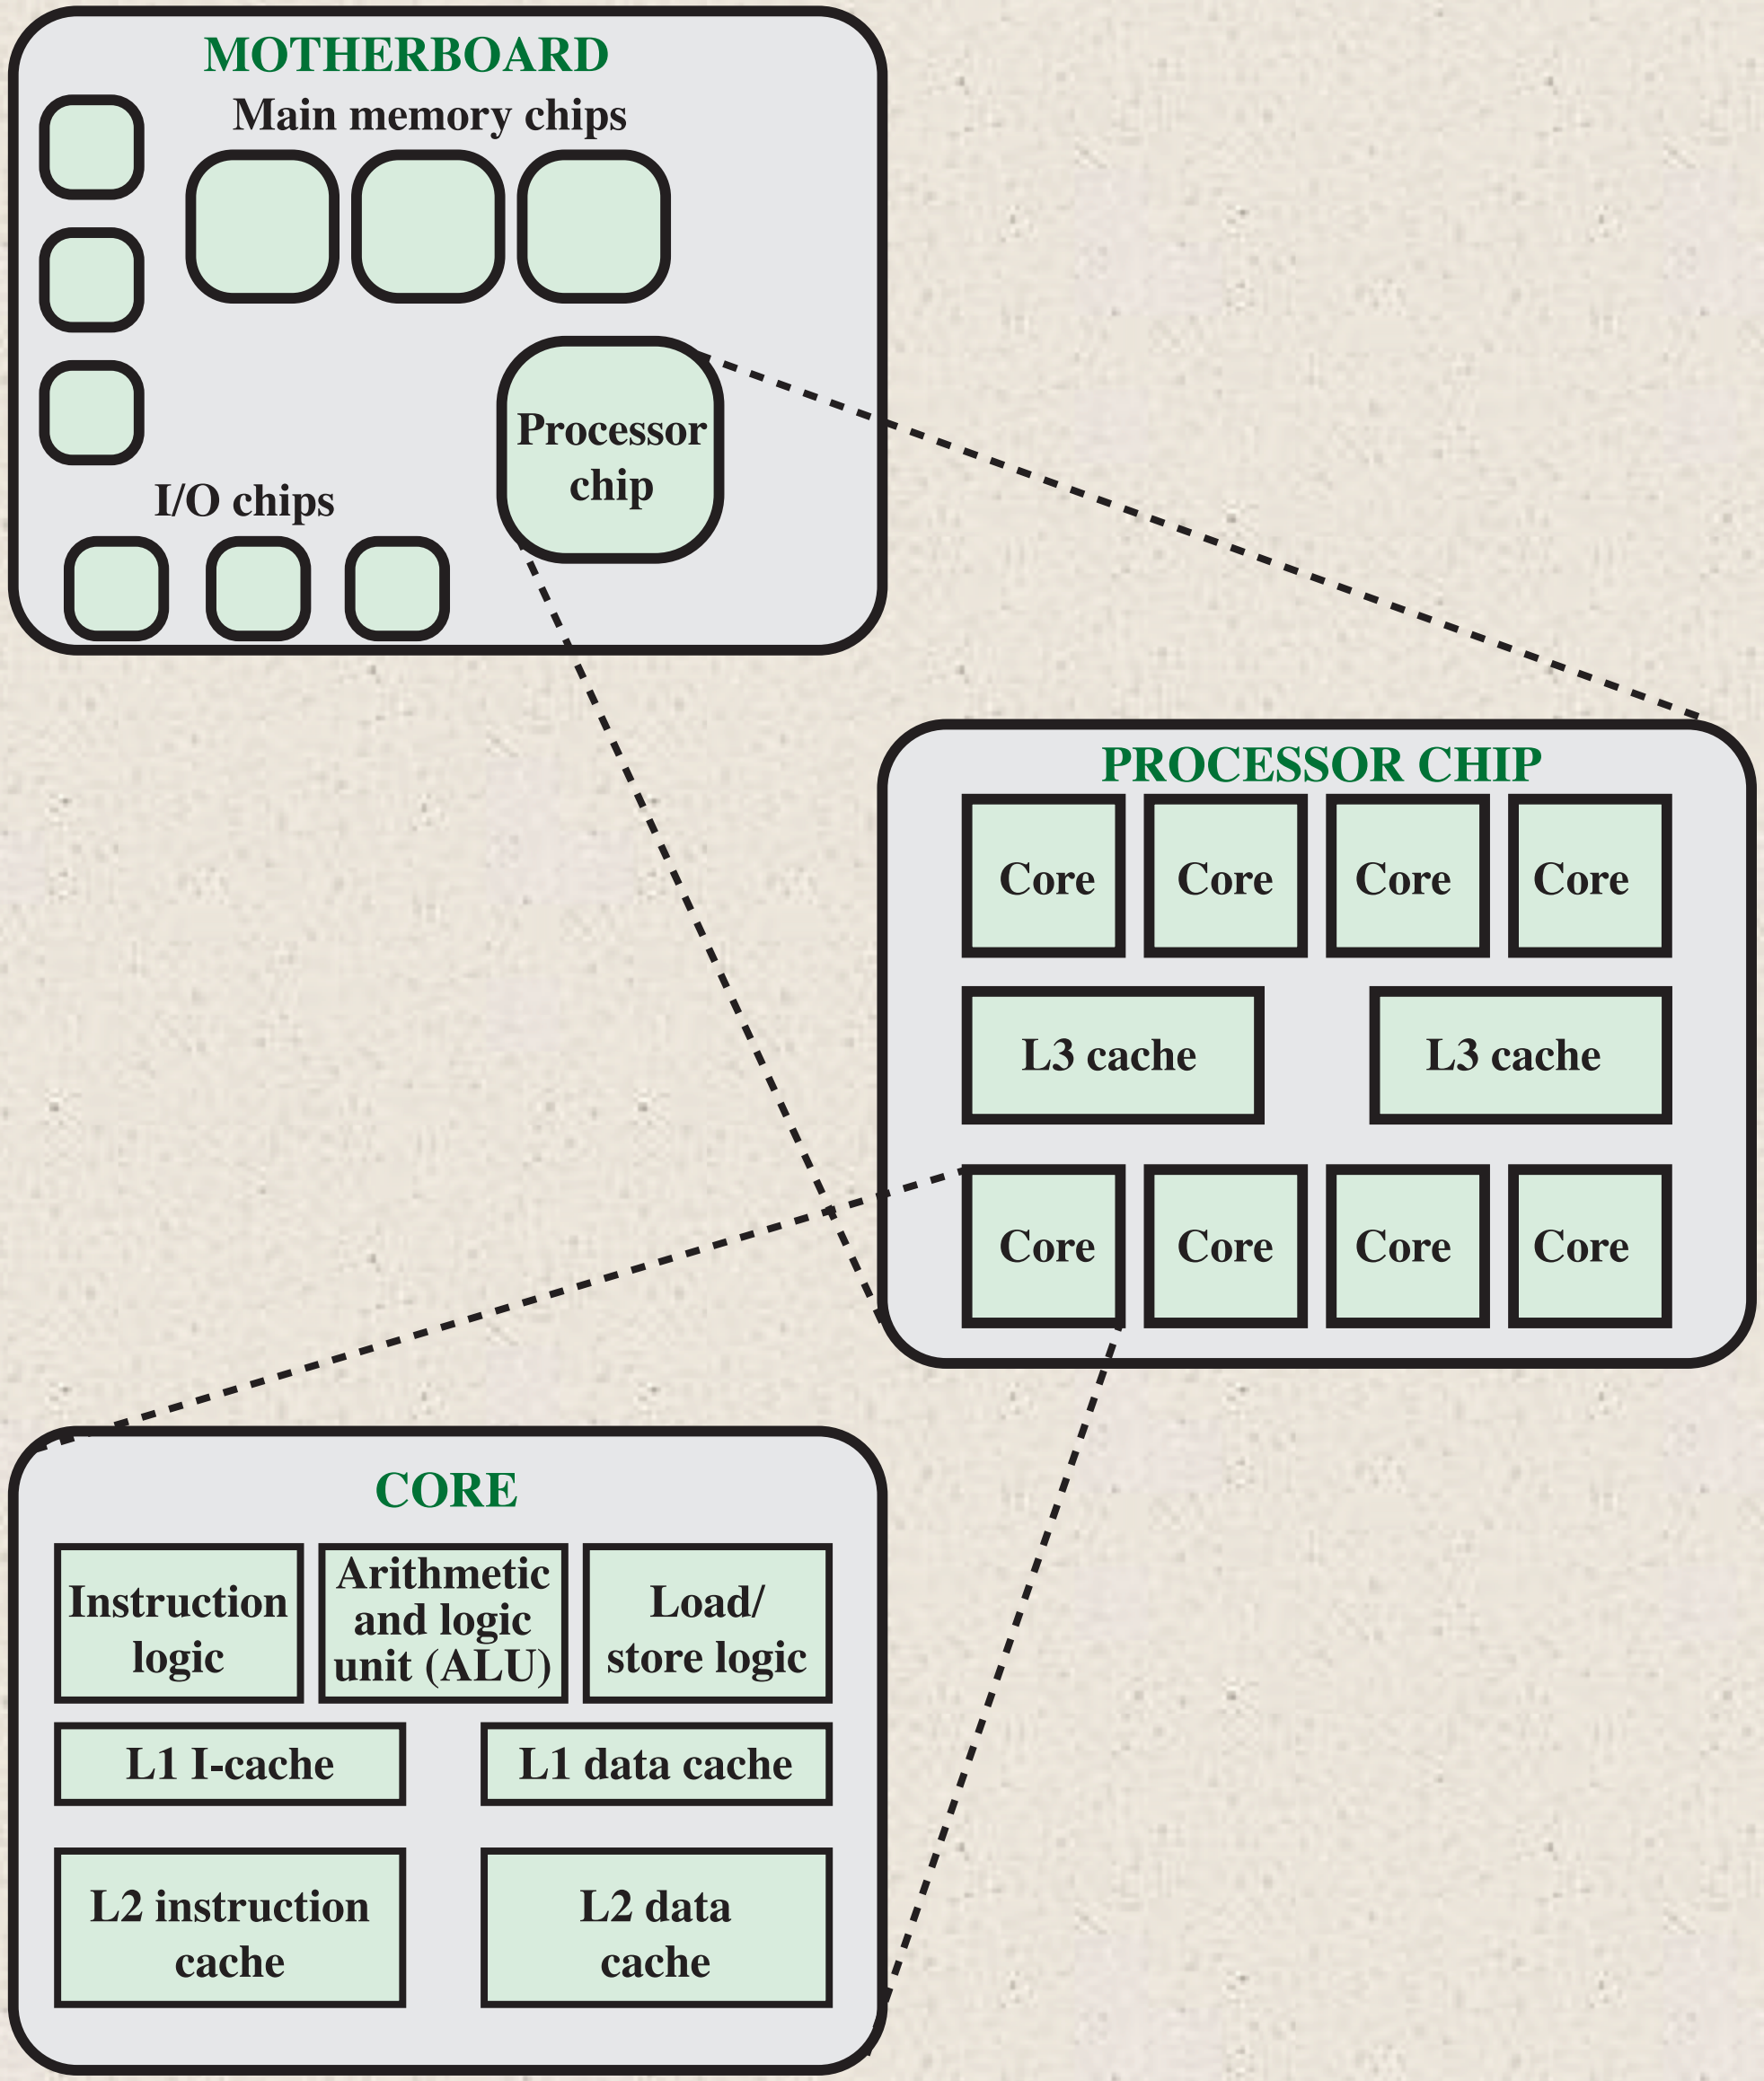

Figure 1.2 Simplified View of Major Elements of a Multicore Computer

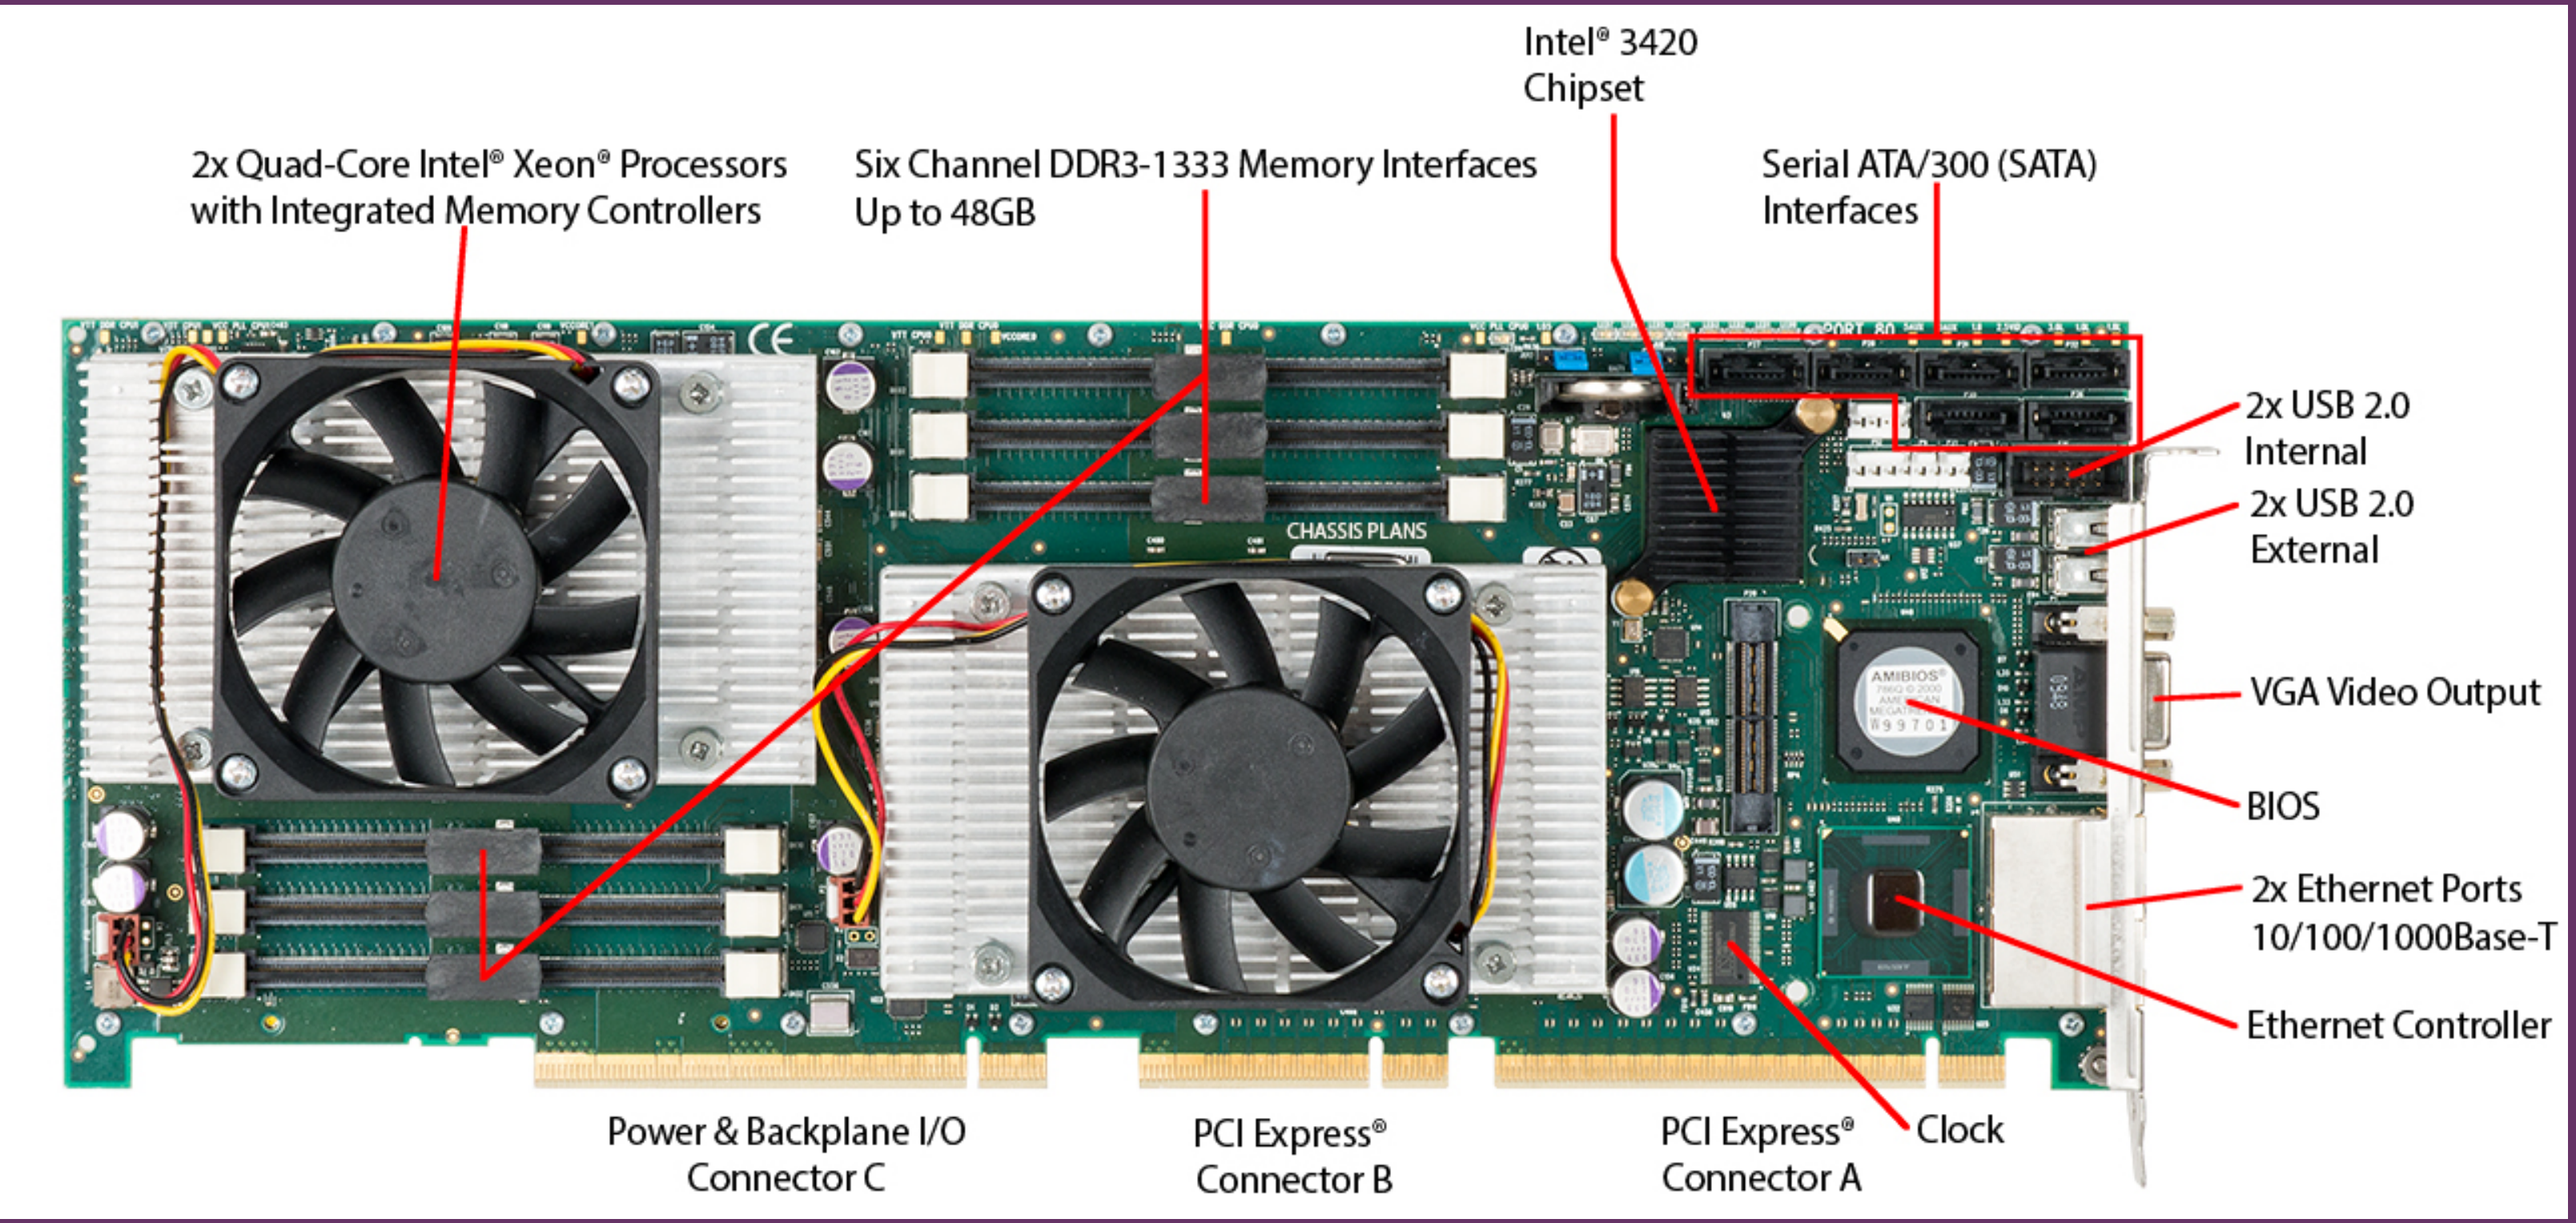

Figure 1.3

Motherboard with Two Intel Quad-Core Xeon Processors

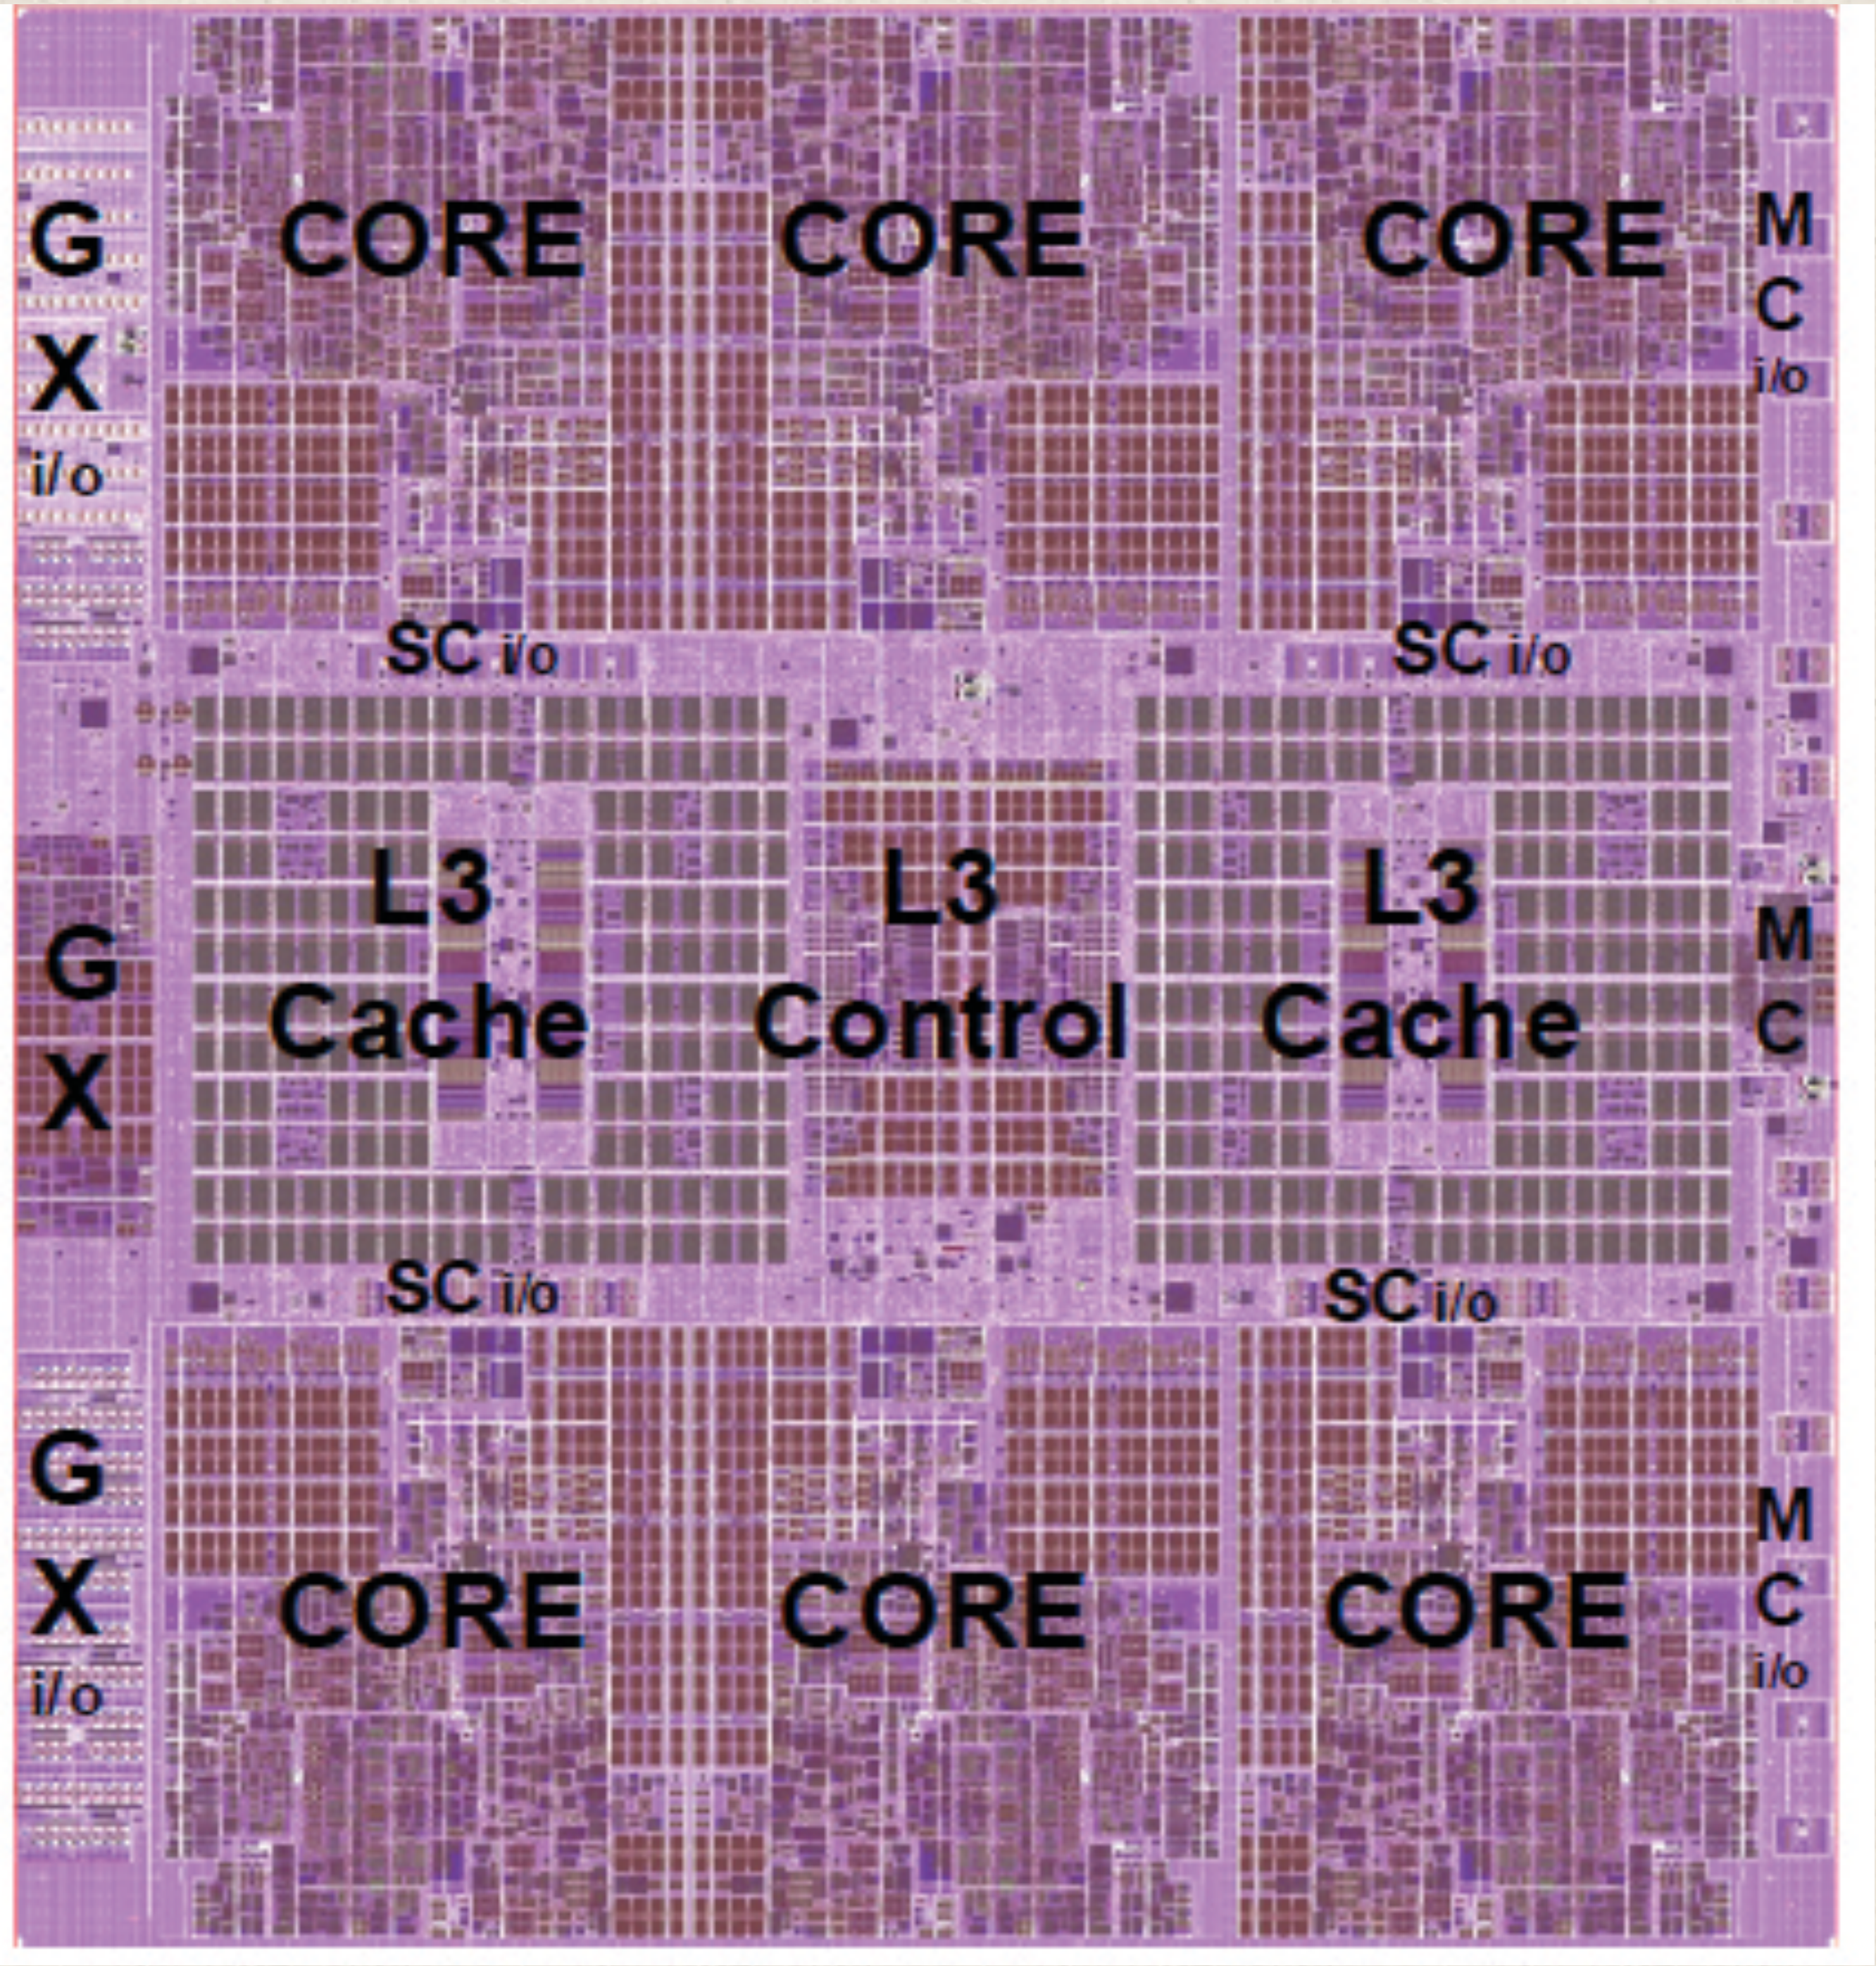

Figure 1.4

zEnterprise EC12 Processor Unit (PU) Chip Diagram

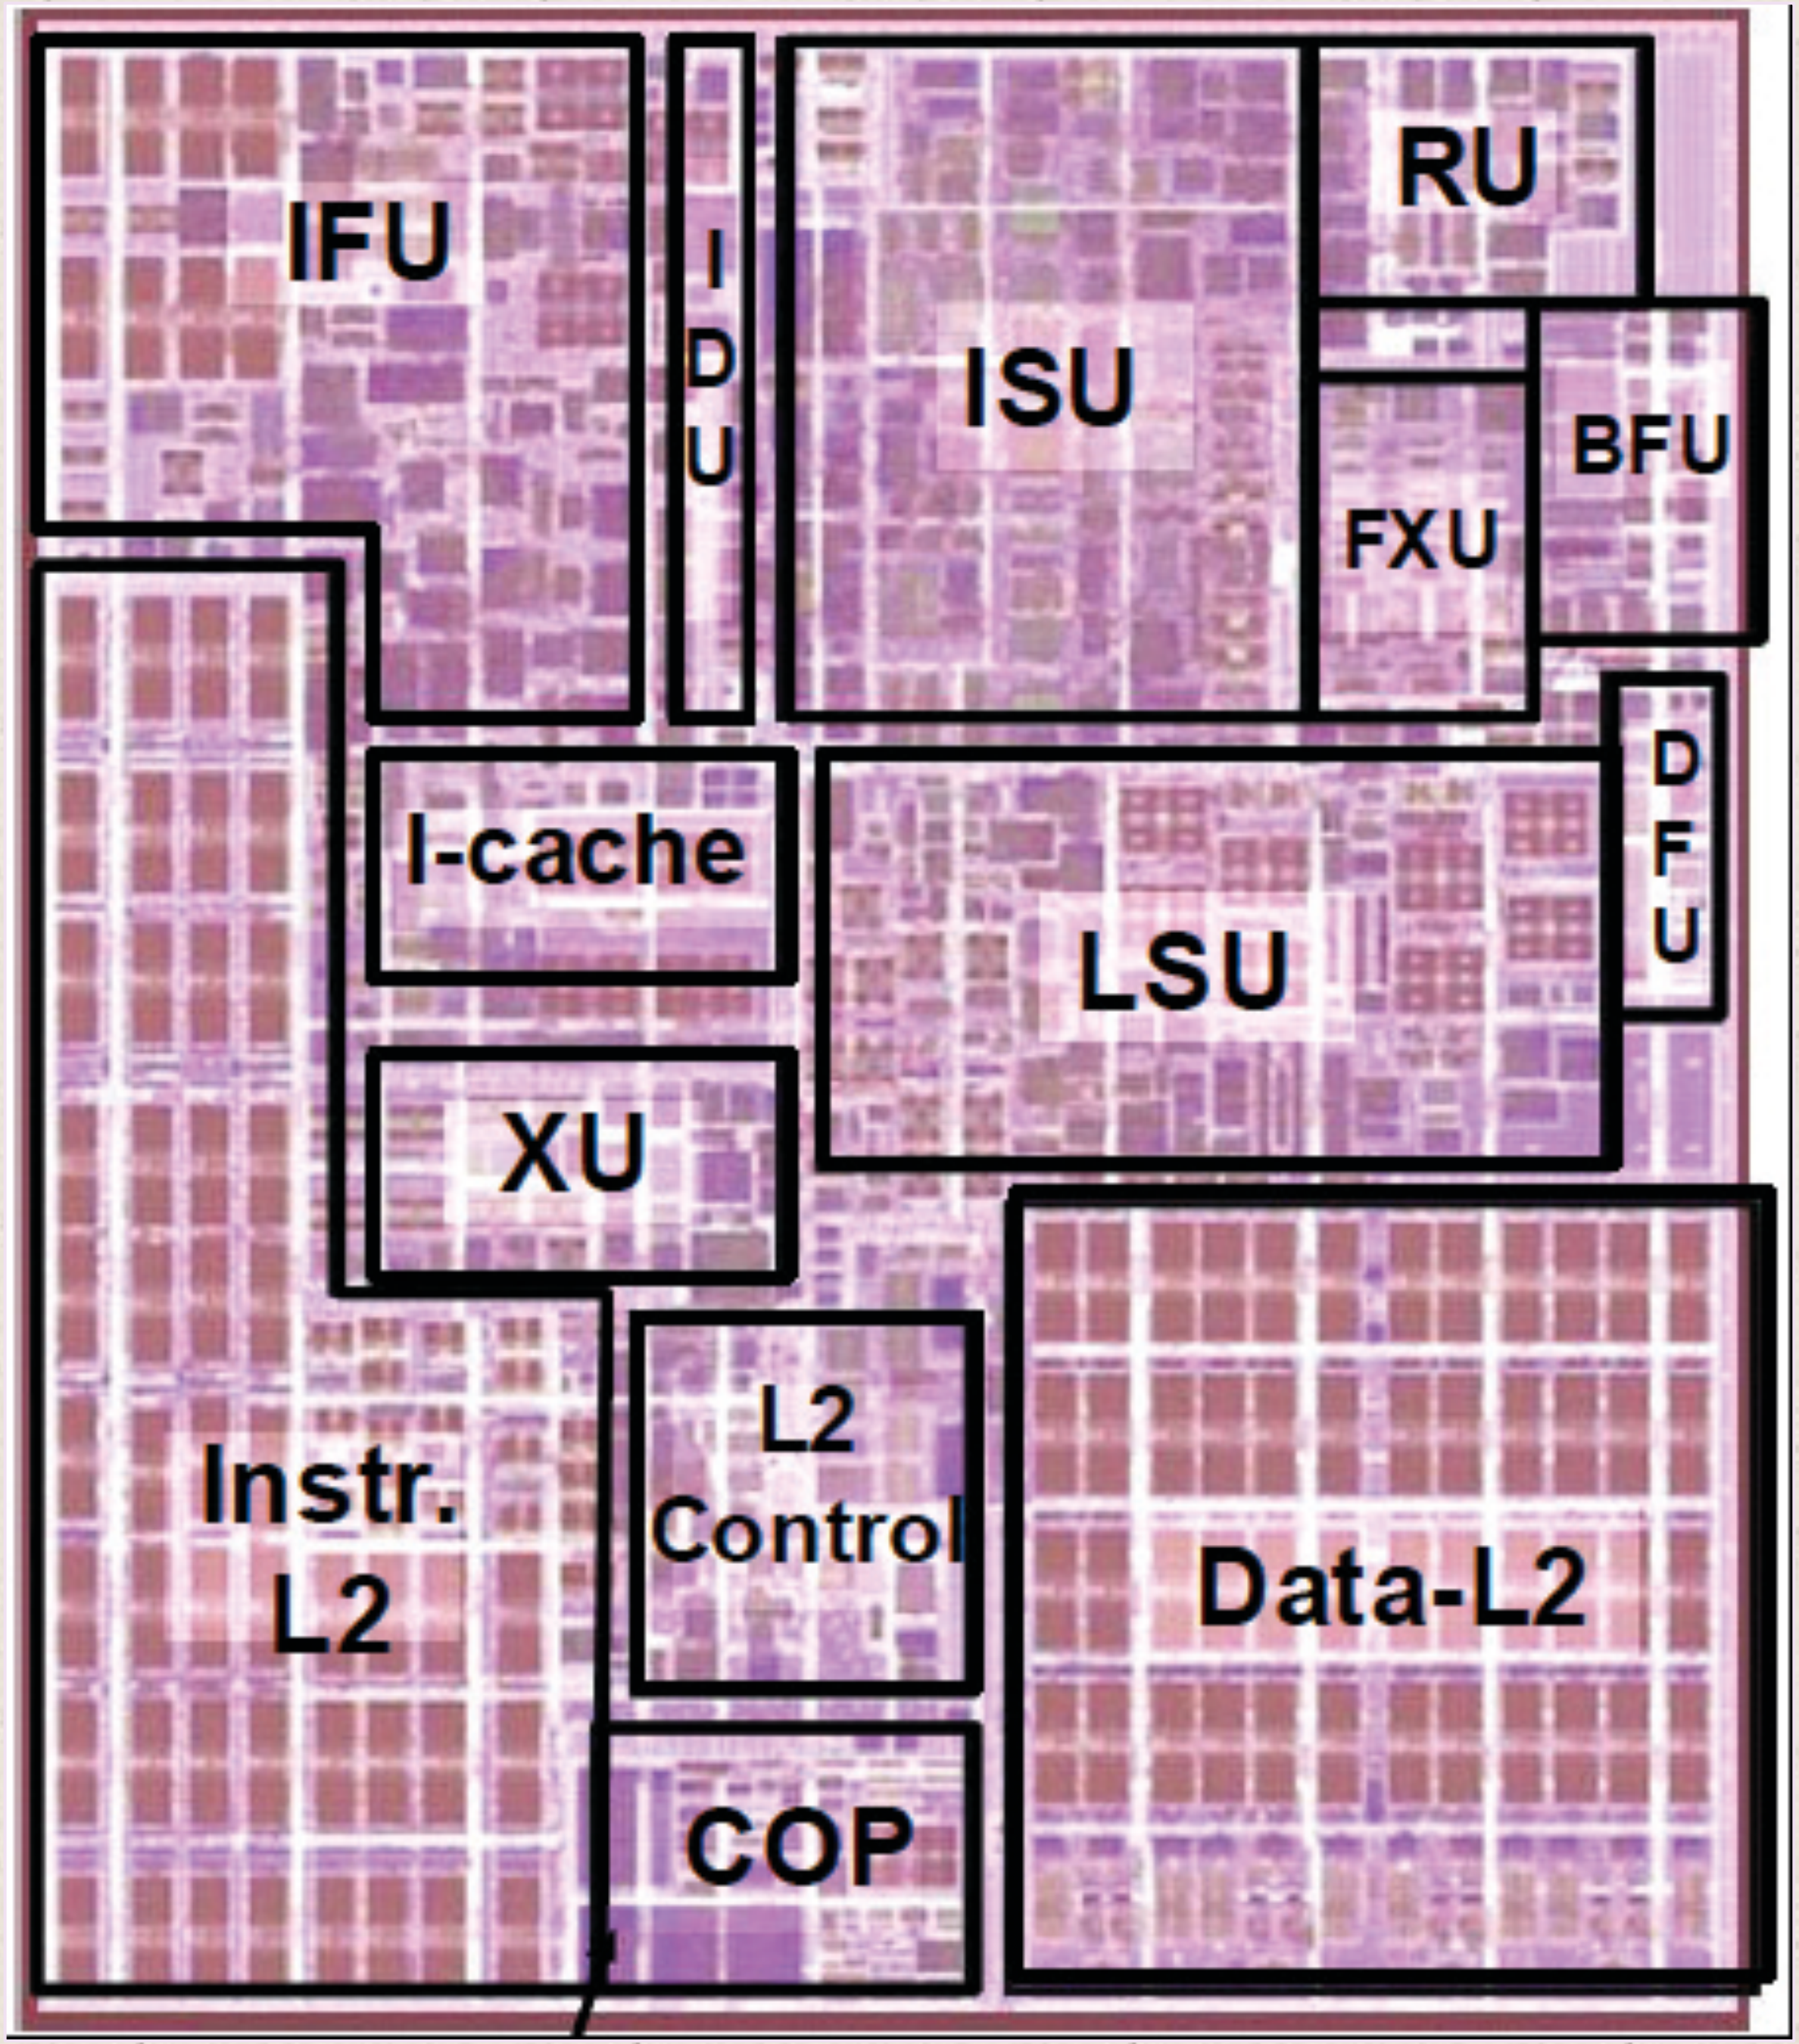

Figure 1.5

zEnterprise EC12 Core Layout

+ History of Computers

First Generation: Vacuum Tubes

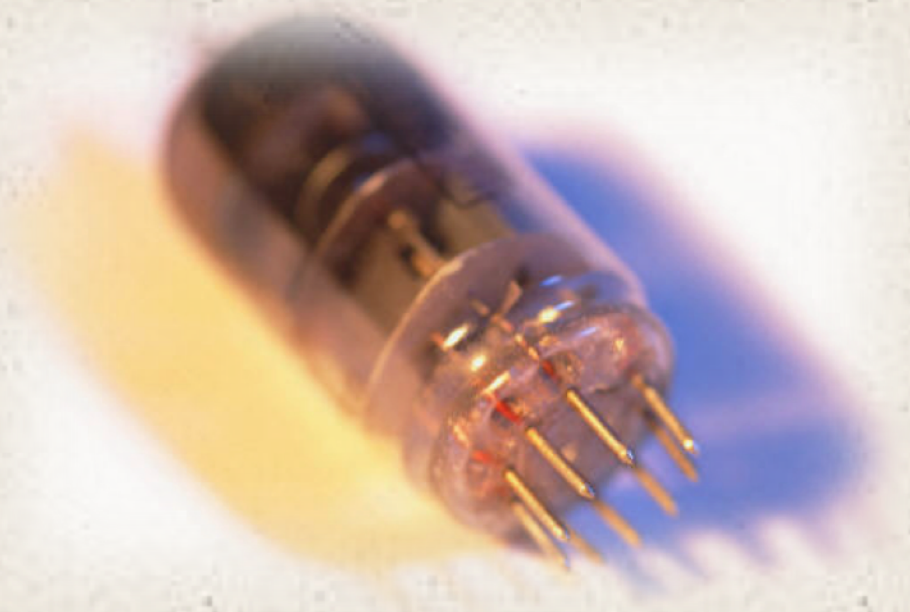

- Vacuum tubes were used for digital logic elements and memory
- IAS computer
  - Fundamental design approach was the stored program concept
    - Attributed to the mathematician John von Neumann
    - First publication of the idea was in 1945 for the EDVAC
  - Design began at the Princeton Institute for Advanced Studies
  - Completed in 1952
  - Prototype of all subsequent general-purpose computers

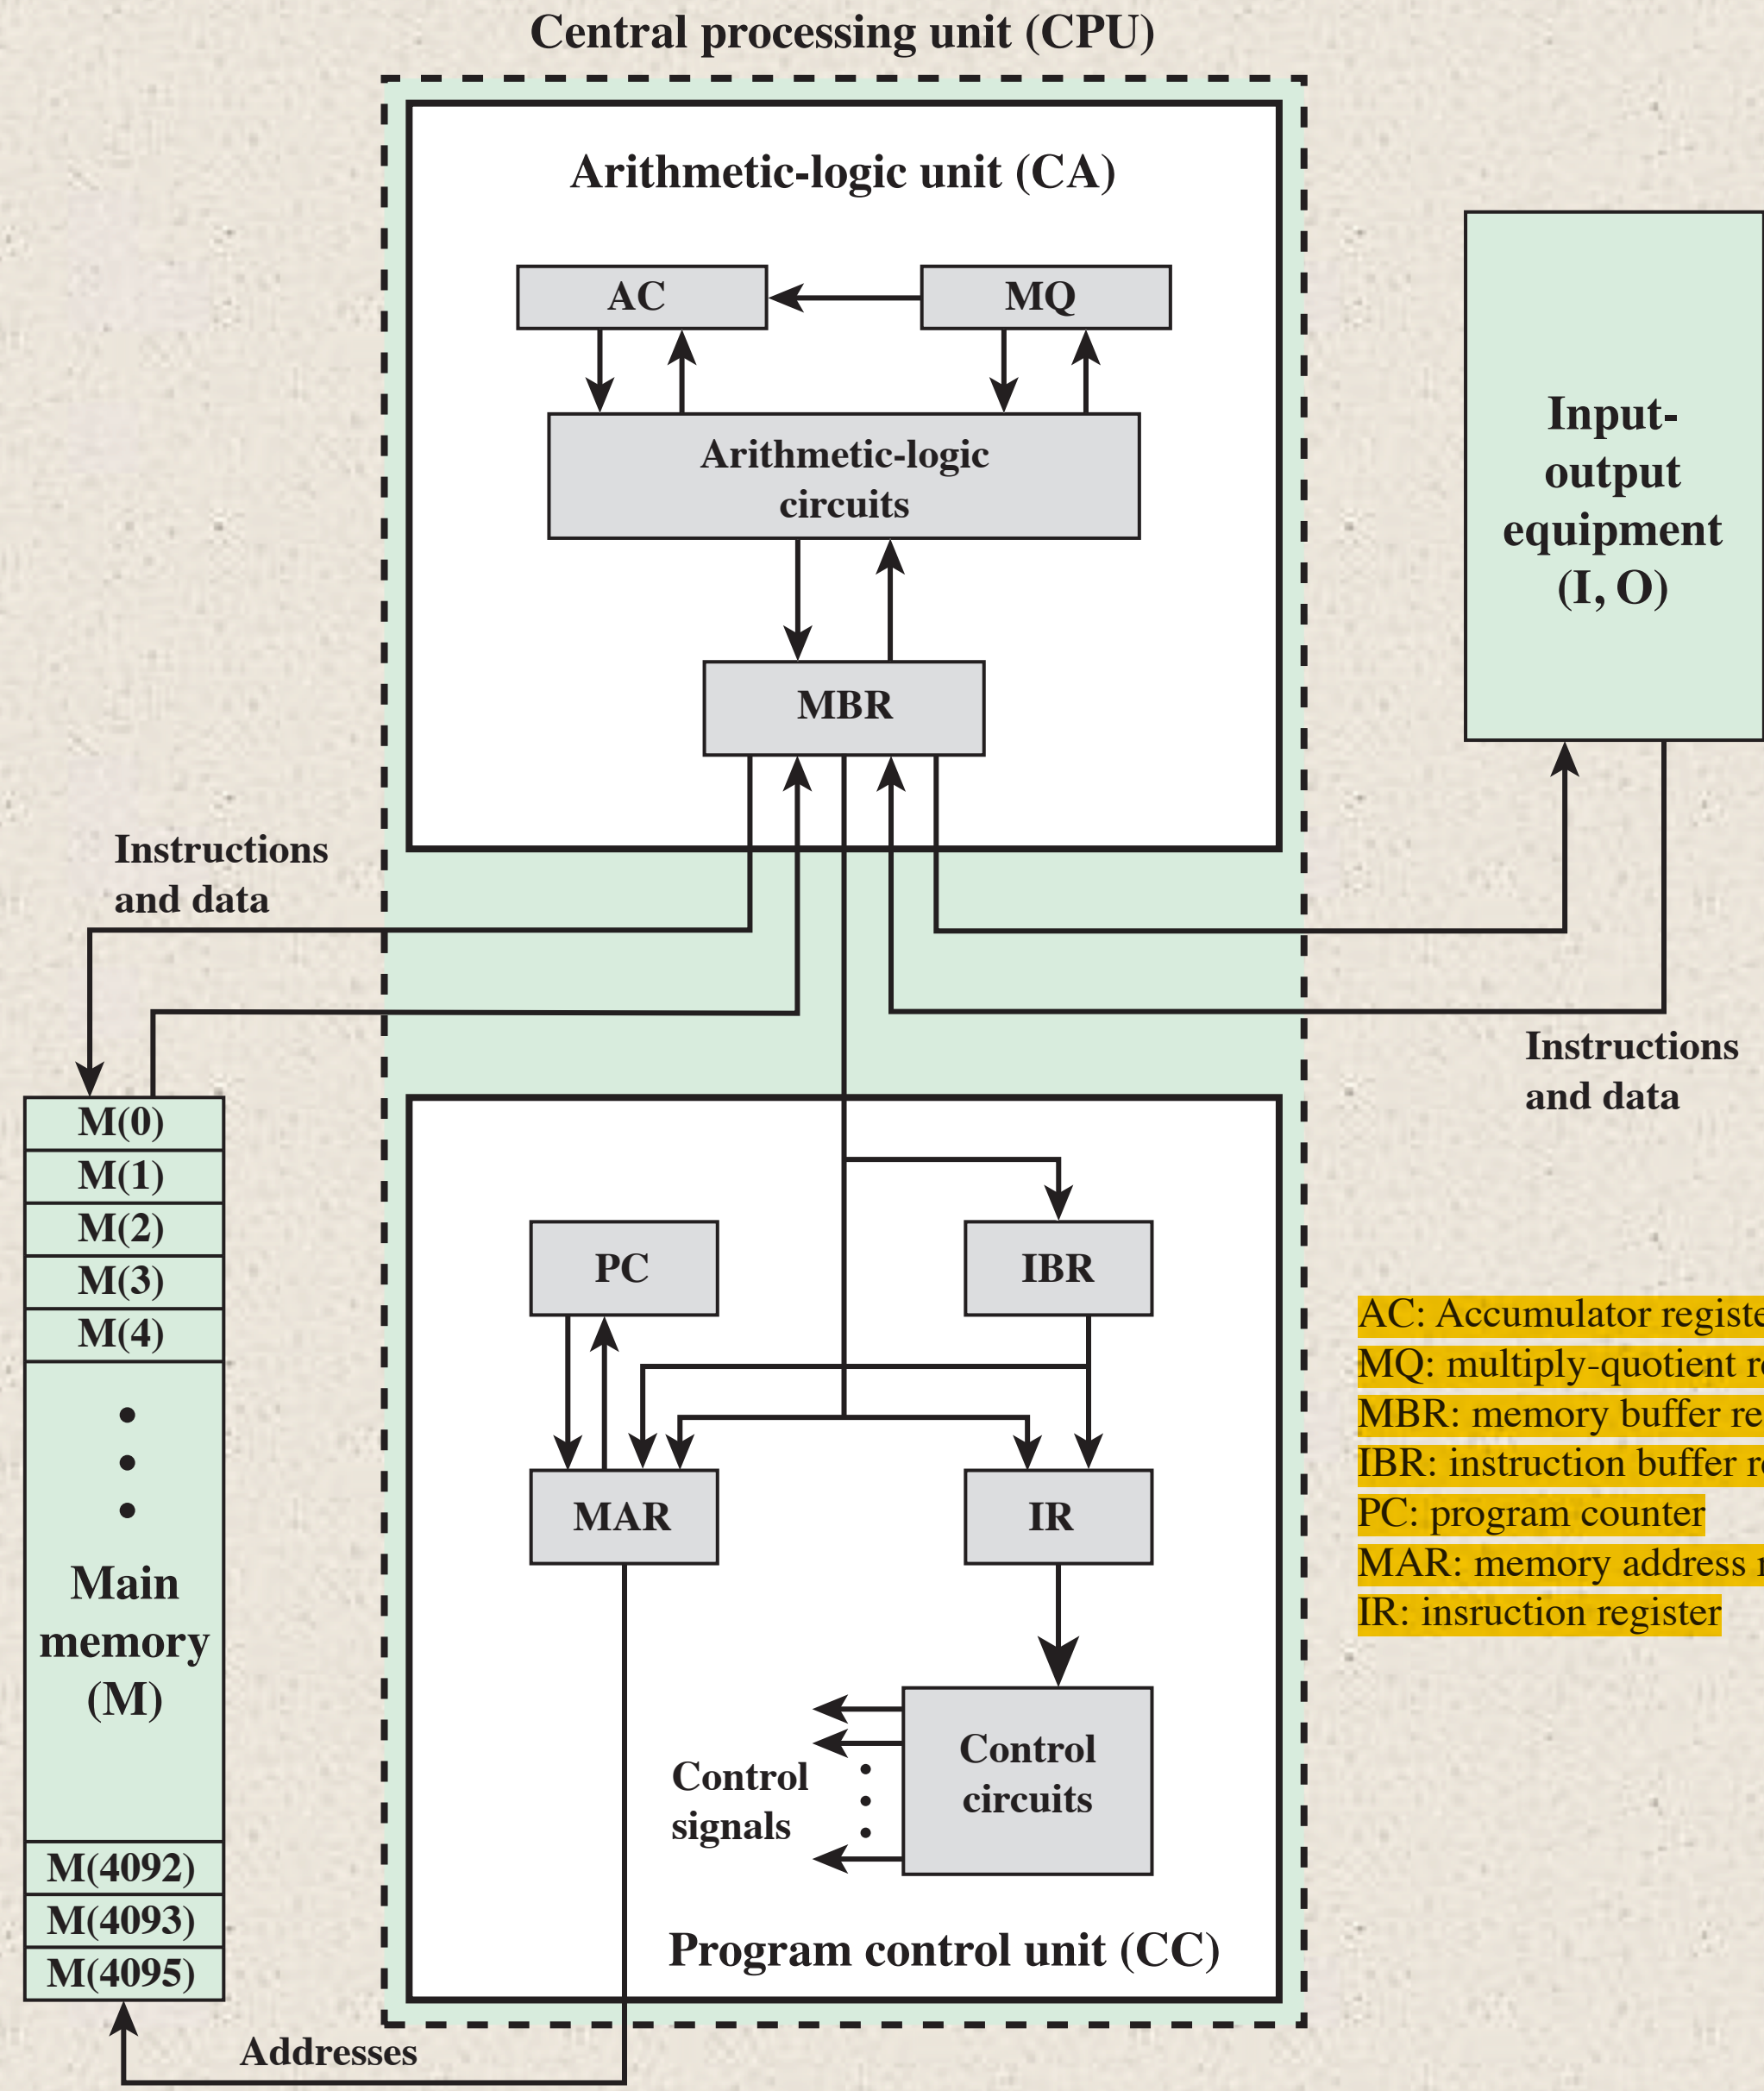

AC: Accumulator register
MQ: multiply-quotient register
MBR: memory buffer register
IBR: instruction buffer register
PC: program counter
MAR: memory address register
IR: insruction register

Figure 1.6 IAS Structure

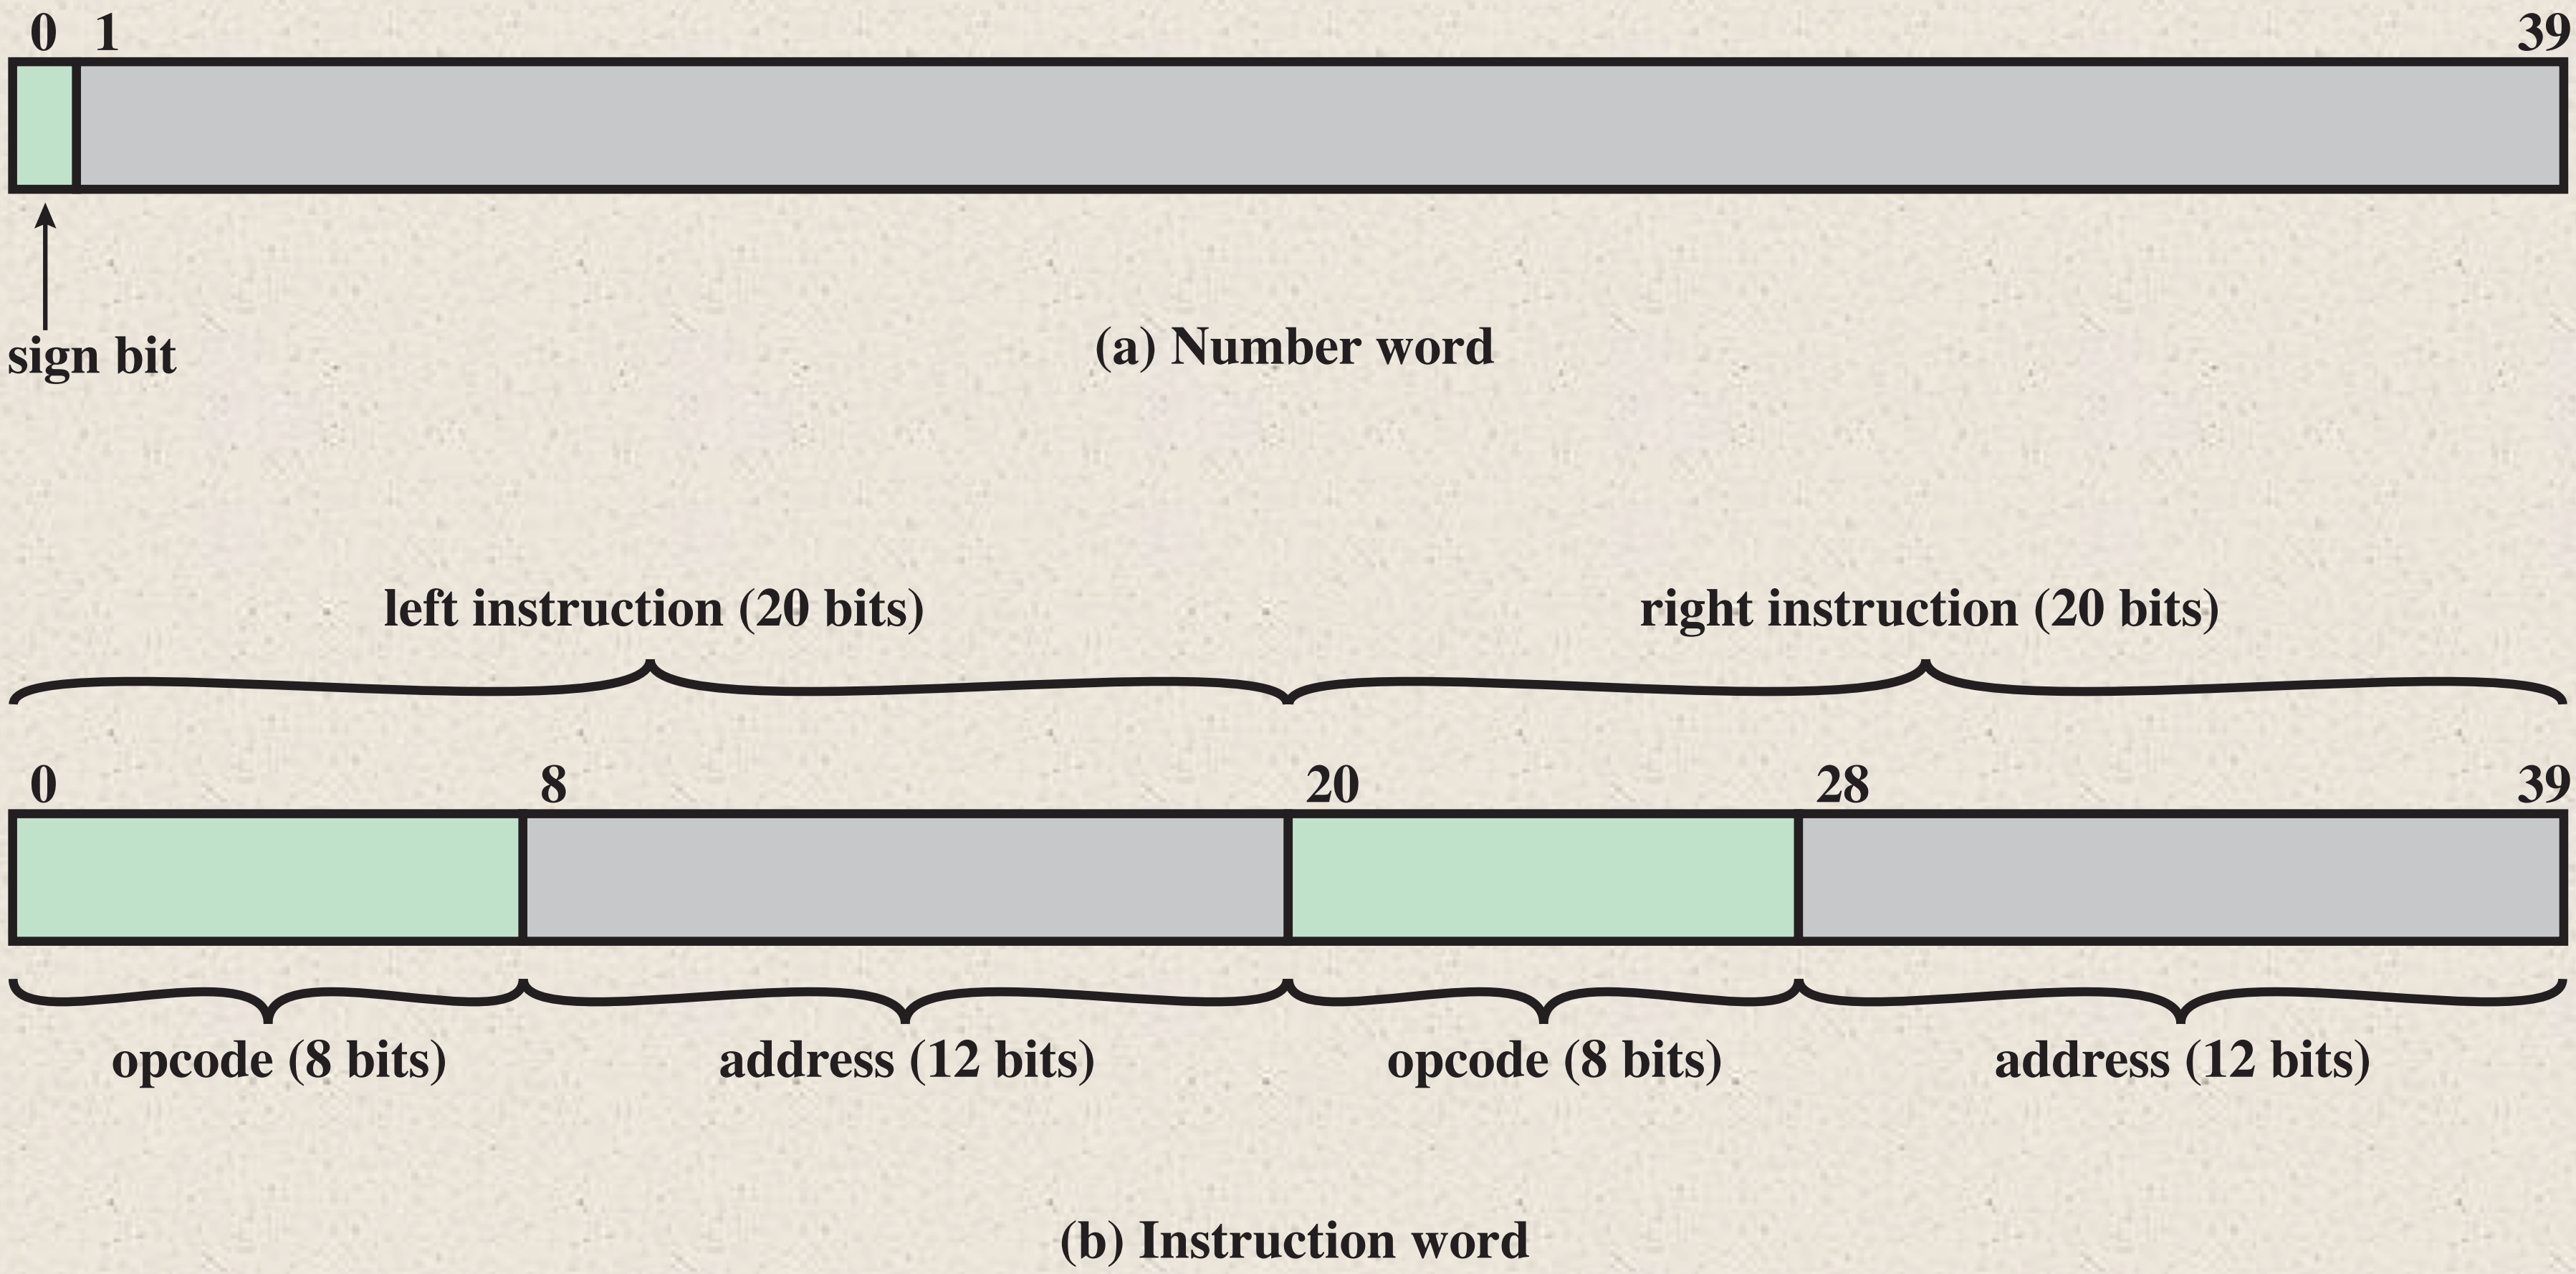

Figure 1.7 IAS Memory Formats

Registers

Memory buffer register (MBR)	• Contains a word to be stored in memory or sent to the I/O unit • Or is used to receive a word from memory or from the I/O unit
Memory address register (MAR)	• Specifies the address in memory of the word to be written from or read into the MBR
Instruction register (IR)	• Contains the 8-bit opcode instruction being executed
Instruction buffer register (IBR)	• Employed to temporarily hold the right-hand instruction from a word in memory
Program counter (PC)	• Contains the address of the next instruction pair to be fetched from memory
Accumulator (AC) and multiplier quotient (MQ)	• Employed to temporarily hold operands and results of ALU operations

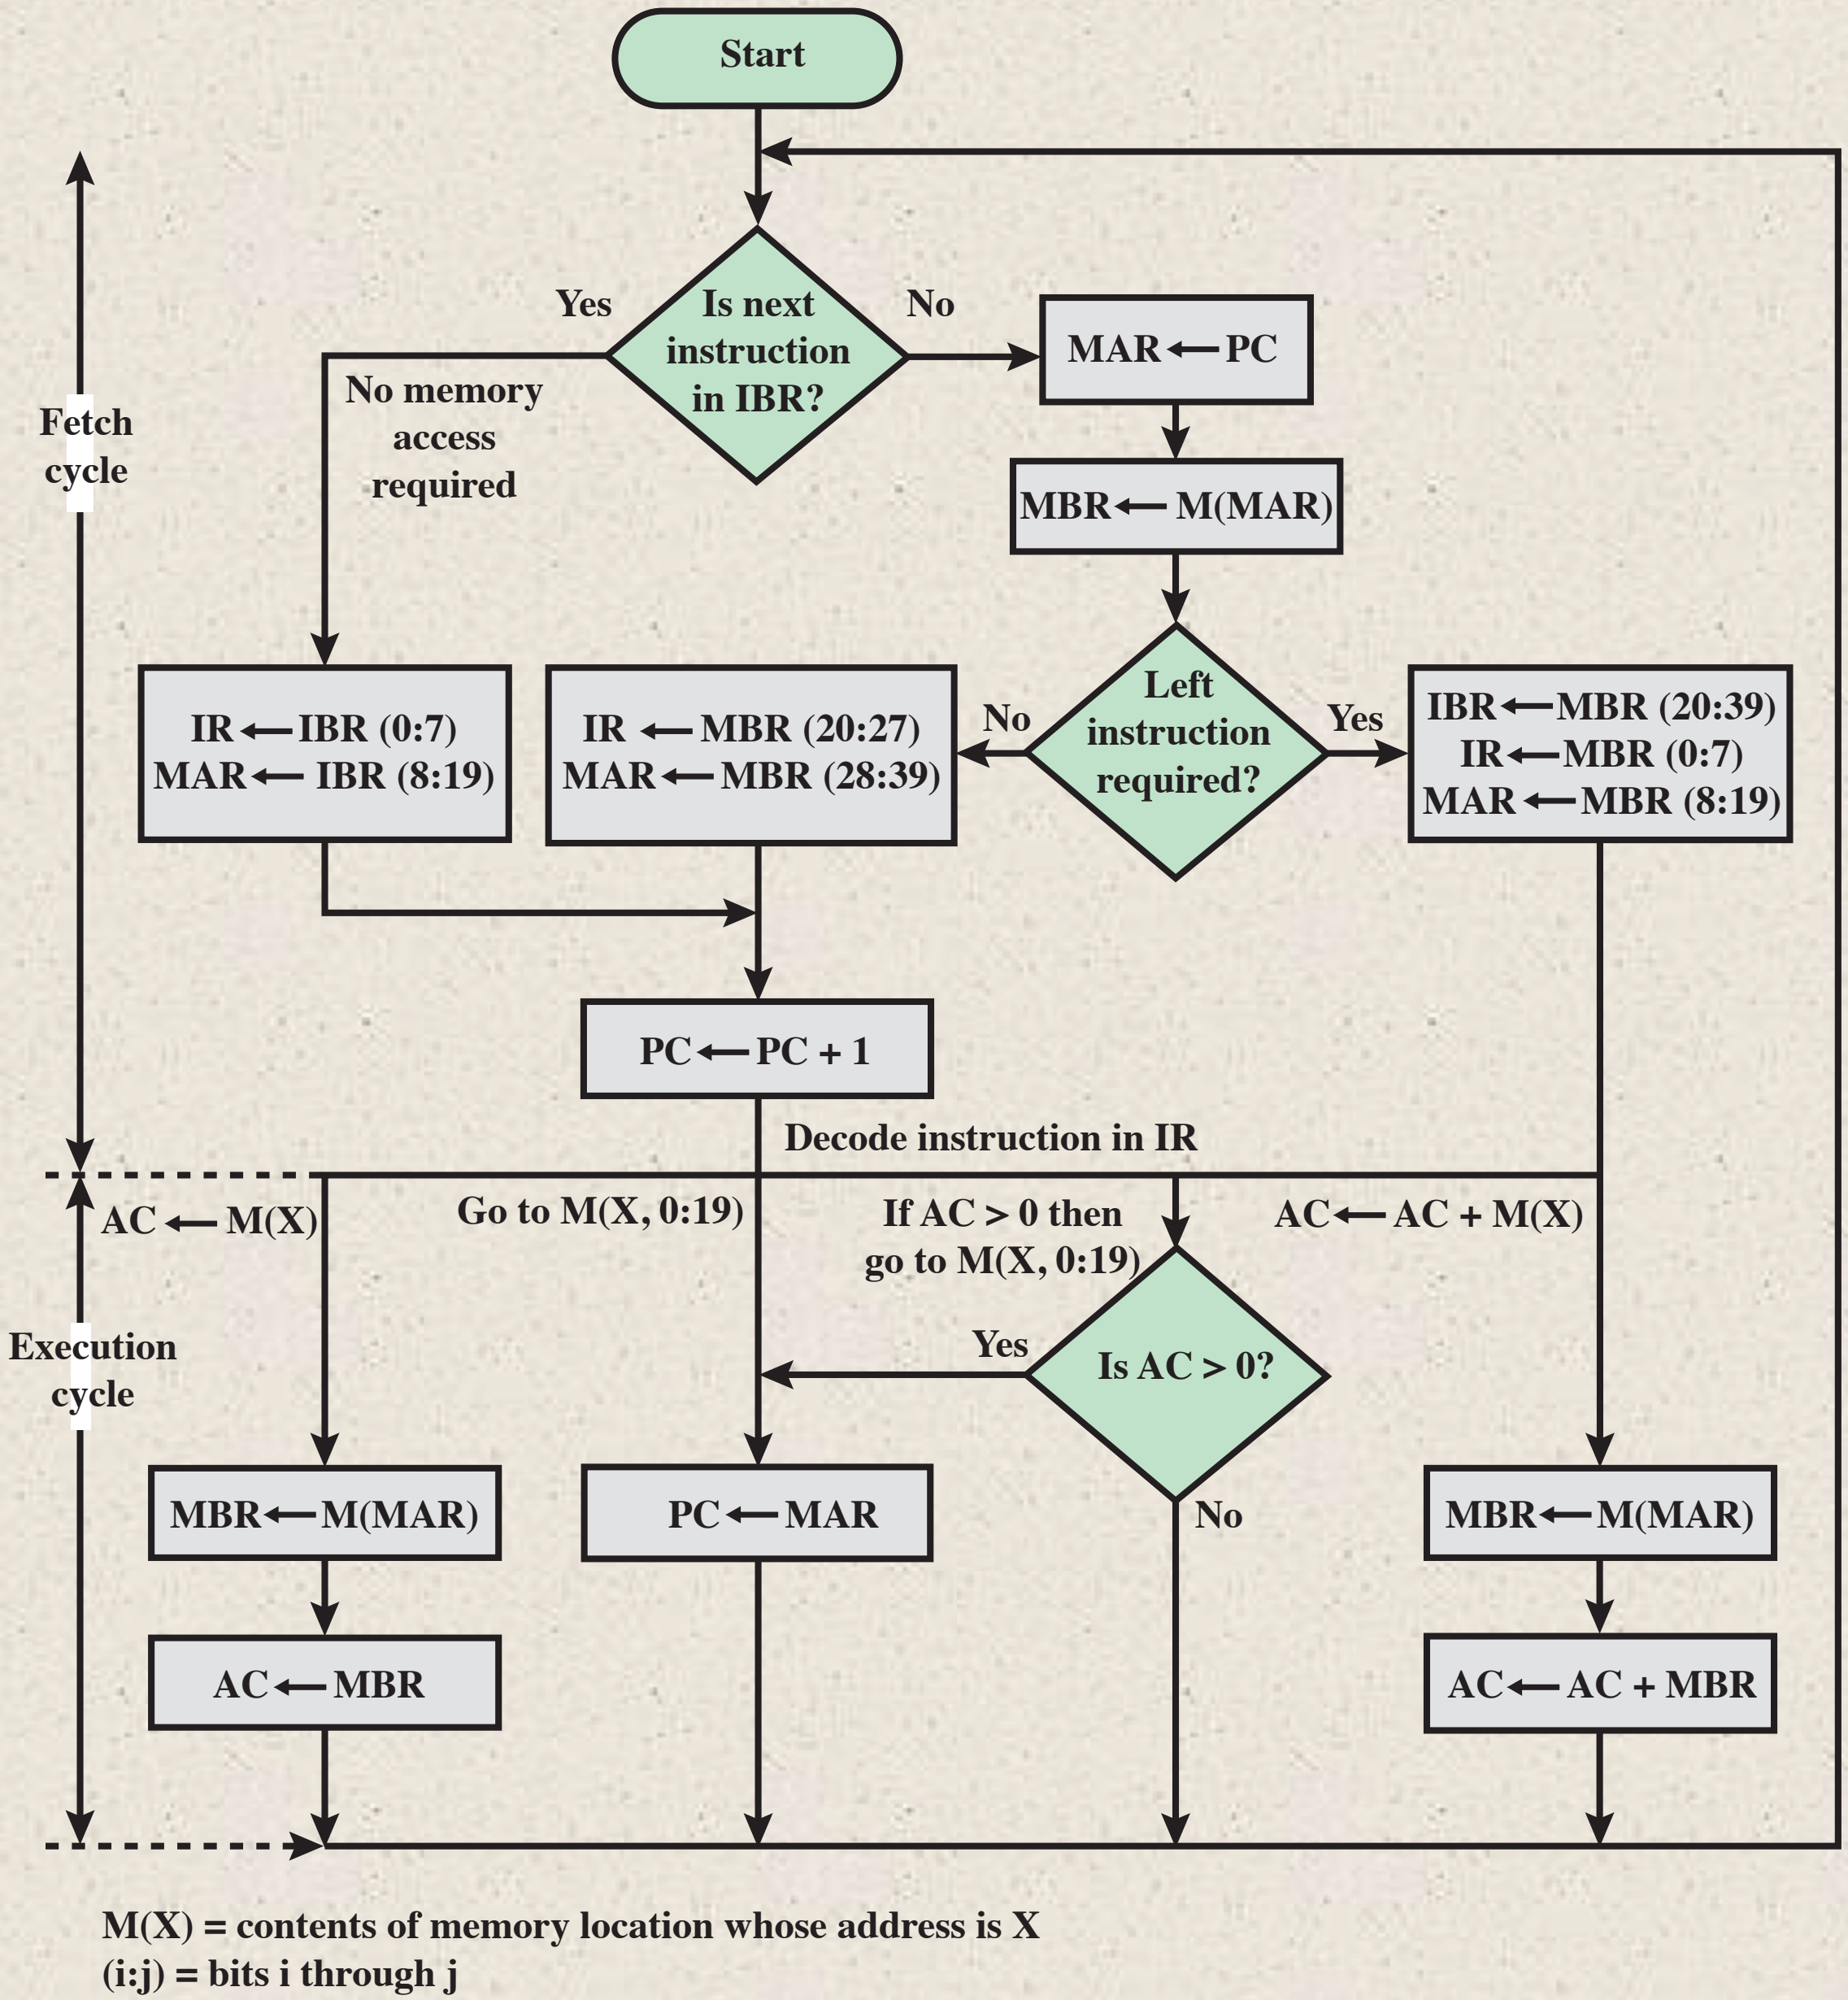

Figure 1.8 Partial Flowchart of IAS Operation

Table 1.1

The IAS Instruction Set

Instruction Type	Opcode	Symbolic Representation	Description
Data transfer	00001010	LOAD MQ	Transfer contents of register MQ to the accumulator AC
	00001001	LOAD MQ,M(X)	Transfer contents of memory location X to MQ
	00100001	STOR M(X)	Transfer contents of accumulator to memory location X
	00000001	LOAD M(X)	Transfer M(X) to the accumulator
	00000010	LOAD –M(X)	Transfer –M(X) to the accumulator
	00000011	LOAD |M(X)|	Transfer absolute value of M(X) to the accumulator
	00000100	LOAD –|M(X)|	Transfer –|M(X)| to the accumulator
Unconditional branch	00001101	JUMP M(X,0:19)	Take next instruction from left half of M(X)
	00001110	JUMP M(X,20:39)	Take next instruction from right half of M(X)
Conditional branch	00001111	JUMP+ M(X,0:19)	If number in the accumulator is nonnegative, take next instruction from left half of M(X)
		JUMP + M(X,20:39)	*If number in the accumulator is nonnegative, take next instruction from right half of M(X)*
Arithmetic	00000101	ADD M(X)	Add M(X) to AC; put the result in AC
	00000111	ADD |M(X)|	Add |M(X)| to AC; put the result in AC
	00000110	SUB M(X)	Subtract M(X) from AC; put the result in AC
	00001000	SUB |M(X)|	Subtract |M(X)| from AC; put the remainder in AC
	00001011	MUL M(X)	Multiply M(X) by MQ; put most significant bits of result in AC, put least significant bits in MQ
	00001100	DIV M(X)	Divide AC by M(X); put the quotient in MQ and the remainder in AC
	00010100	LSH	Multiply accumulator by 2; i.e., shift left one bit position
	00010101	RSH	Divide accumulator by 2; i.e., shift right one position
Address modify	00010010	STOR M(X,8:19)	Replace left address field at M(X) by 12 rightmost bits of AC
	00010011	STOR M(X,28:39)	Replace right address field at M(X) by 12 rightmost bits of AC

(Table can be found on page 17 in the textbook.)

History of Computers

Second Generation: Transistors

- Smaller
- Cheaper
- Dissipates less heat than a vacuum tube
- Is a *solid state device* made from silicon
- Was invented at Bell Labs in 1947
- It was not until the late 1950's that fully transistorized computers were commercially available

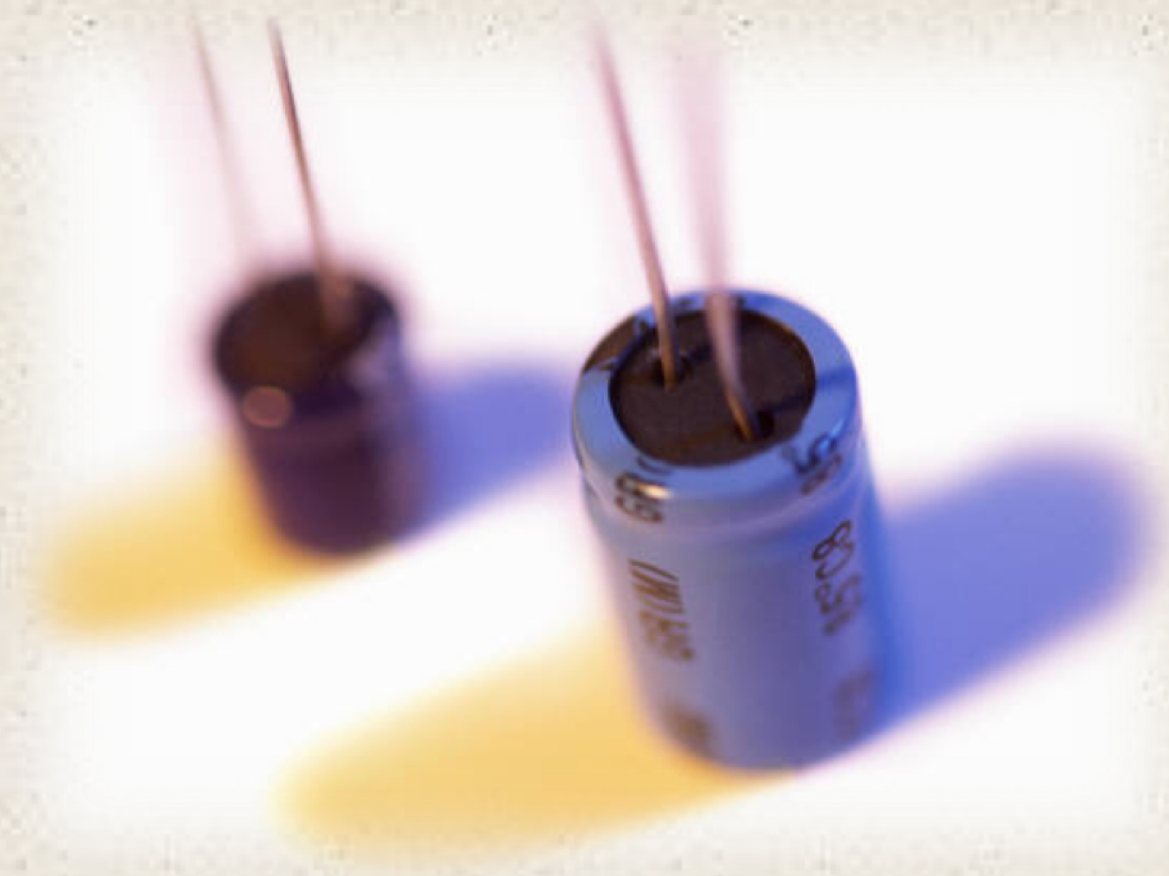

+

Table 1.2
Computer Generations

Generation	Approximate Dates	Technology	Typical Speed (operations per second)
1	1946–1957	Vacuum tube	40,000
2	1957–1964	Transistor	200,000
3	1965–1971	Small and medium scale integration	1,000,000
4	1972–1977	Large scale integration	10,000,000
5	1978–1991	Very large scale integration	100,000,000
6	1991-	Ultra large scale integration	>1,000,000,000

+

Second Generation Computers

- Introduced:
  - More complex arithmetic and logic units and control units
  - The use of high-level programming languages
  - Provision of *system software* which provided the ability to:
    - Load programs
    - Move data to peripherals
    - Libraries perform common computations

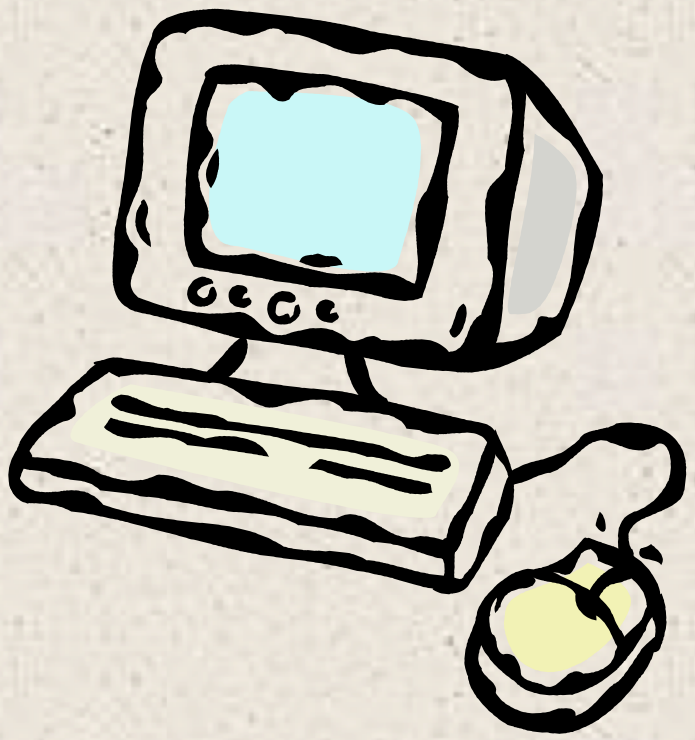

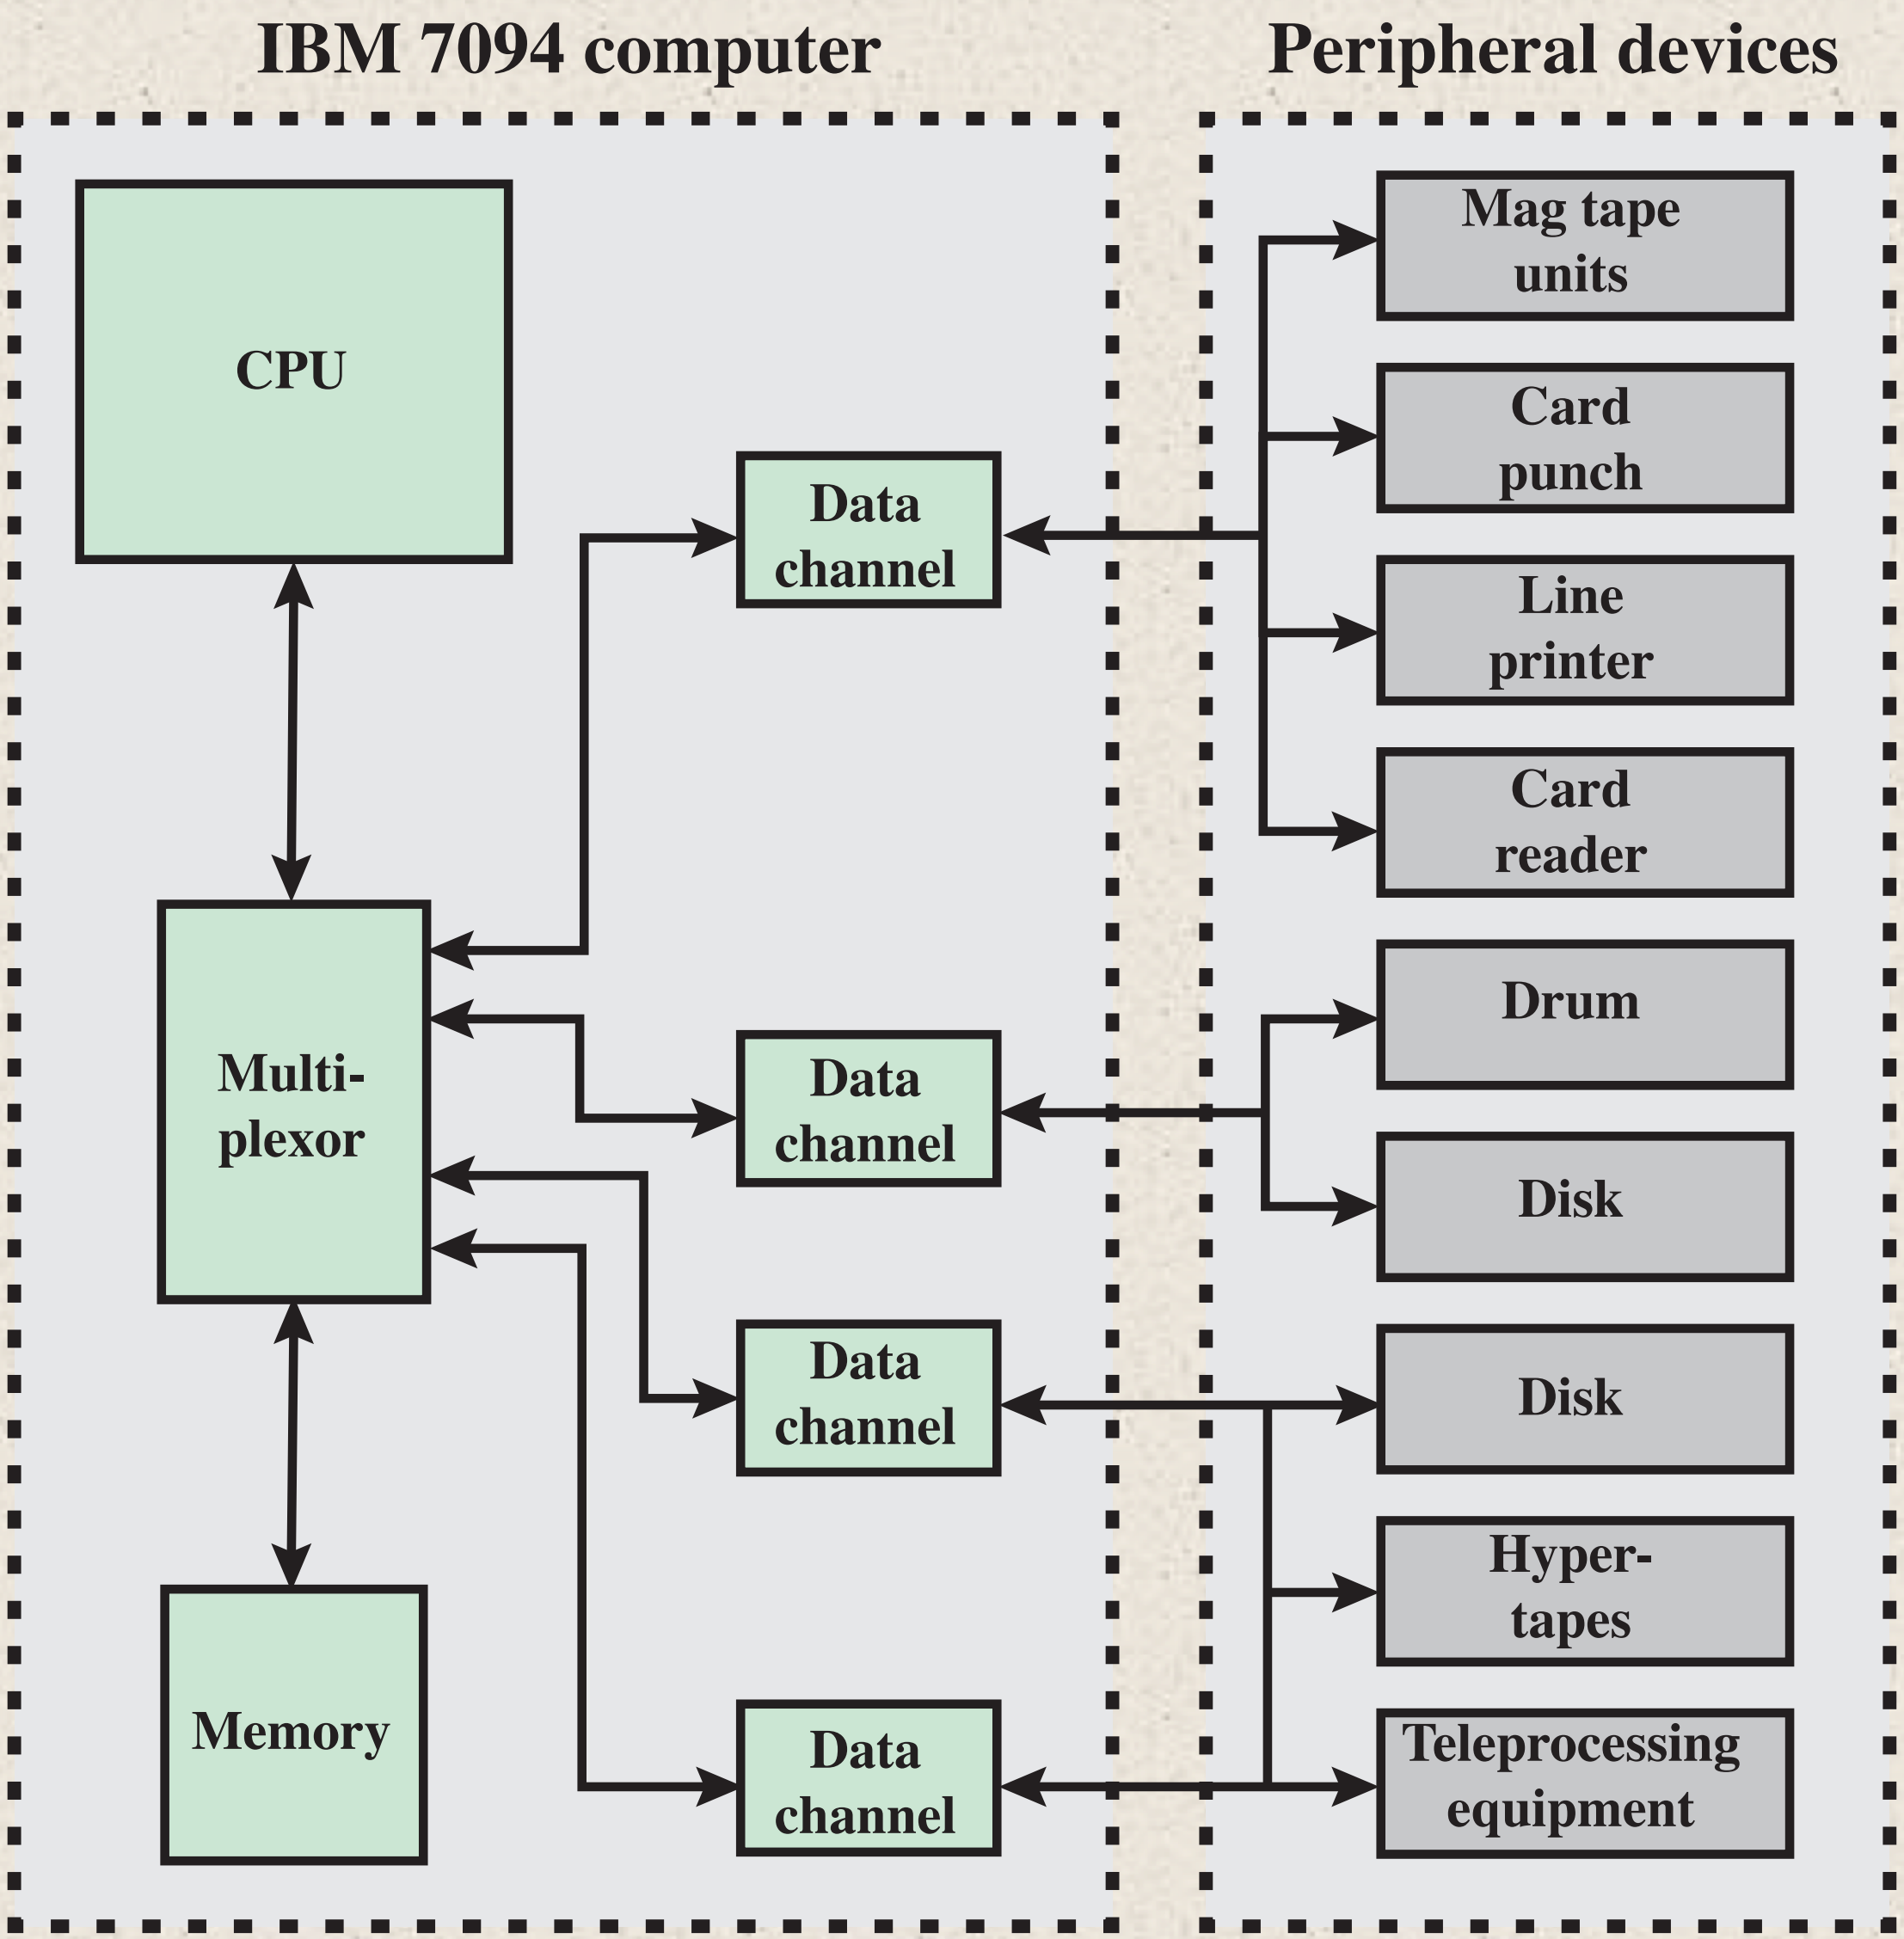

Figure 1.9 An IBM 7094 Configuration

History of Computers

Third Generation: Integrated Circuits

- 1958 – the invention of the integrated circuit
- *Discrete component*
  - Single, self-contained transistor
  - Manufactured separately, packaged in their own containers, and soldered or wired together onto masonite-like circuit boards
  - Manufacturing process was expensive and cumbersome
- The two most important members of the third generation were the IBM System/360 and the DEC PDP-8

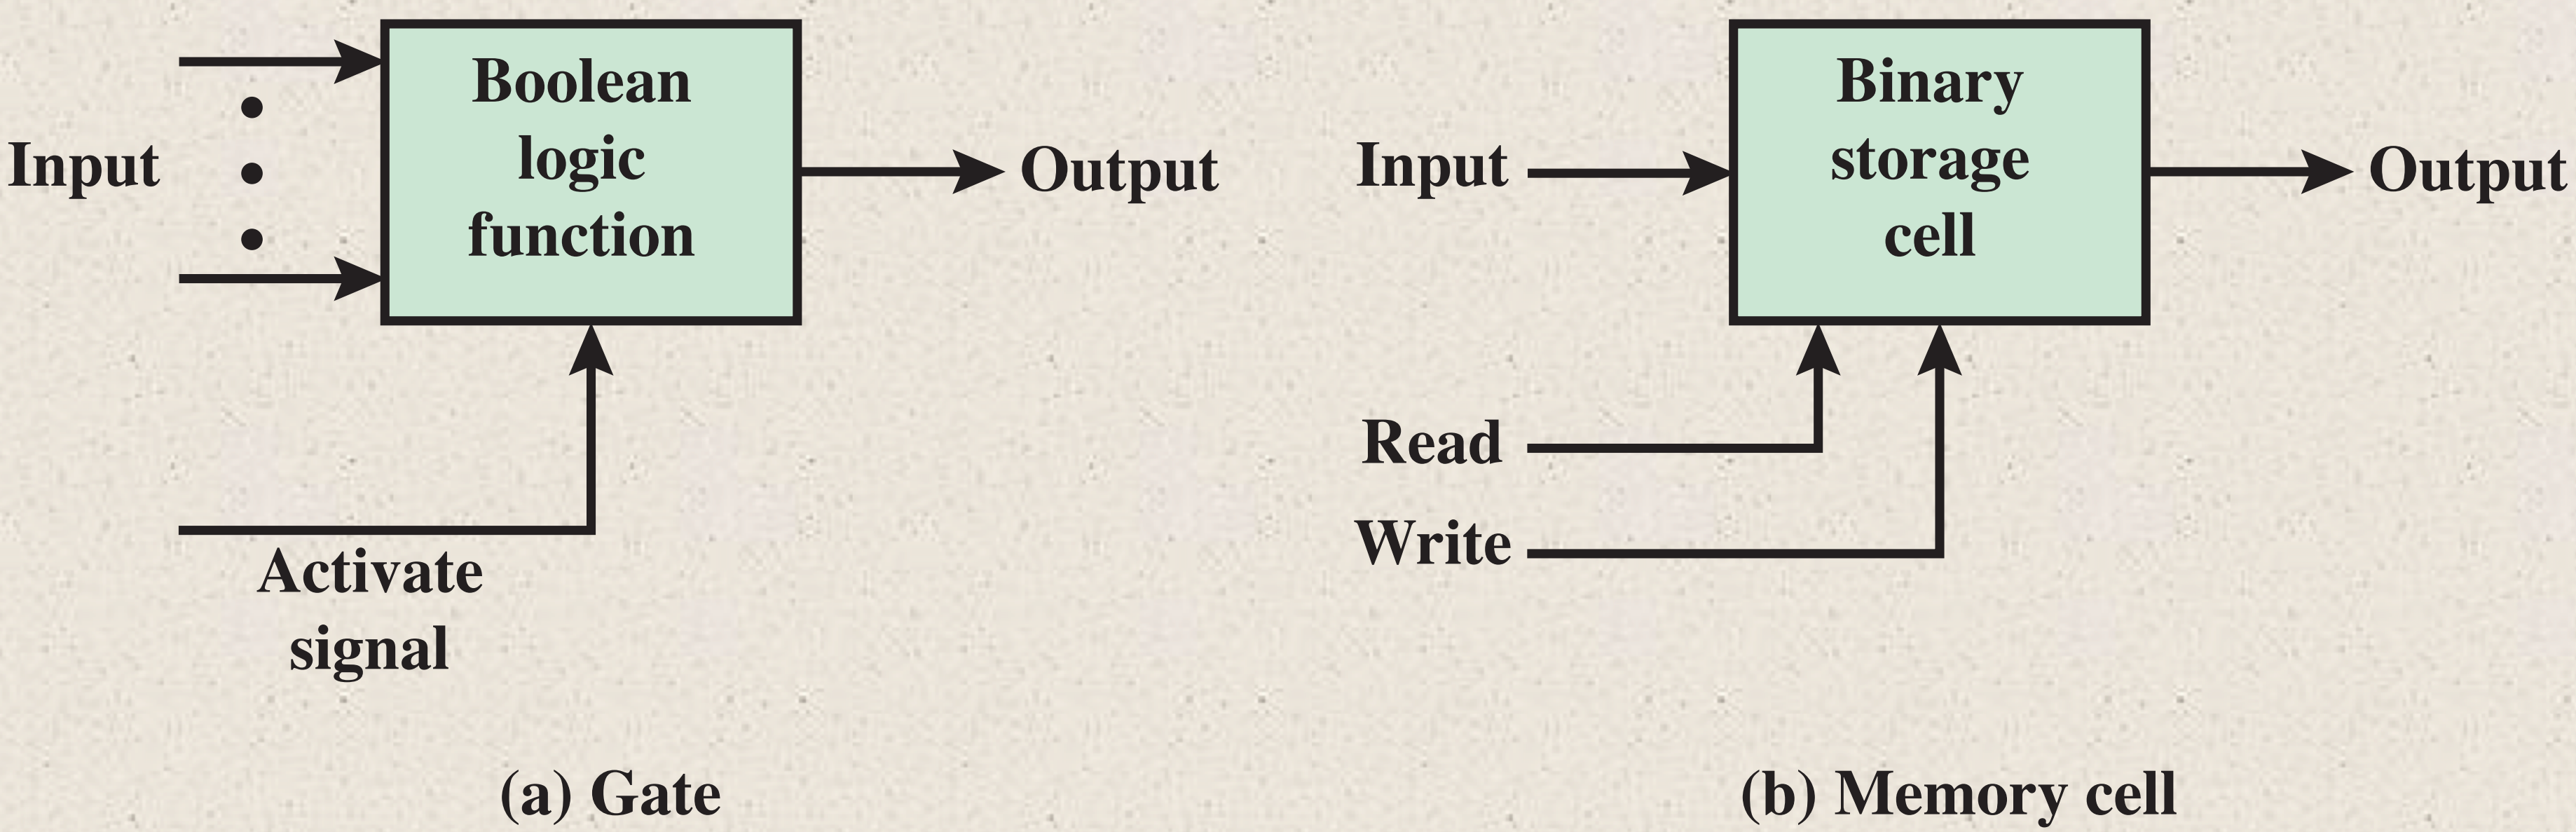

Figure 1.10 Fundamental Computer Elements

Integrated Circuits

- Data storage – provided by memory cells
- Data processing – provided by gates
- Data movement – the paths among components are used to move data from memory to memory and from memory through gates to memory
- Control – the paths among components can carry control signals

- A computer consists of gates, memory cells, and interconnections among these elements
- The gates and memory cells are constructed of simple digital electronic components
- Exploits the fact that such components as transistors, resistors, and conductors can be fabricated from a semiconductor such as silicon
- Many transistors can be produced at the same time on a single wafer of silicon
- Transistors can be connected with a processor metallization to form circuits

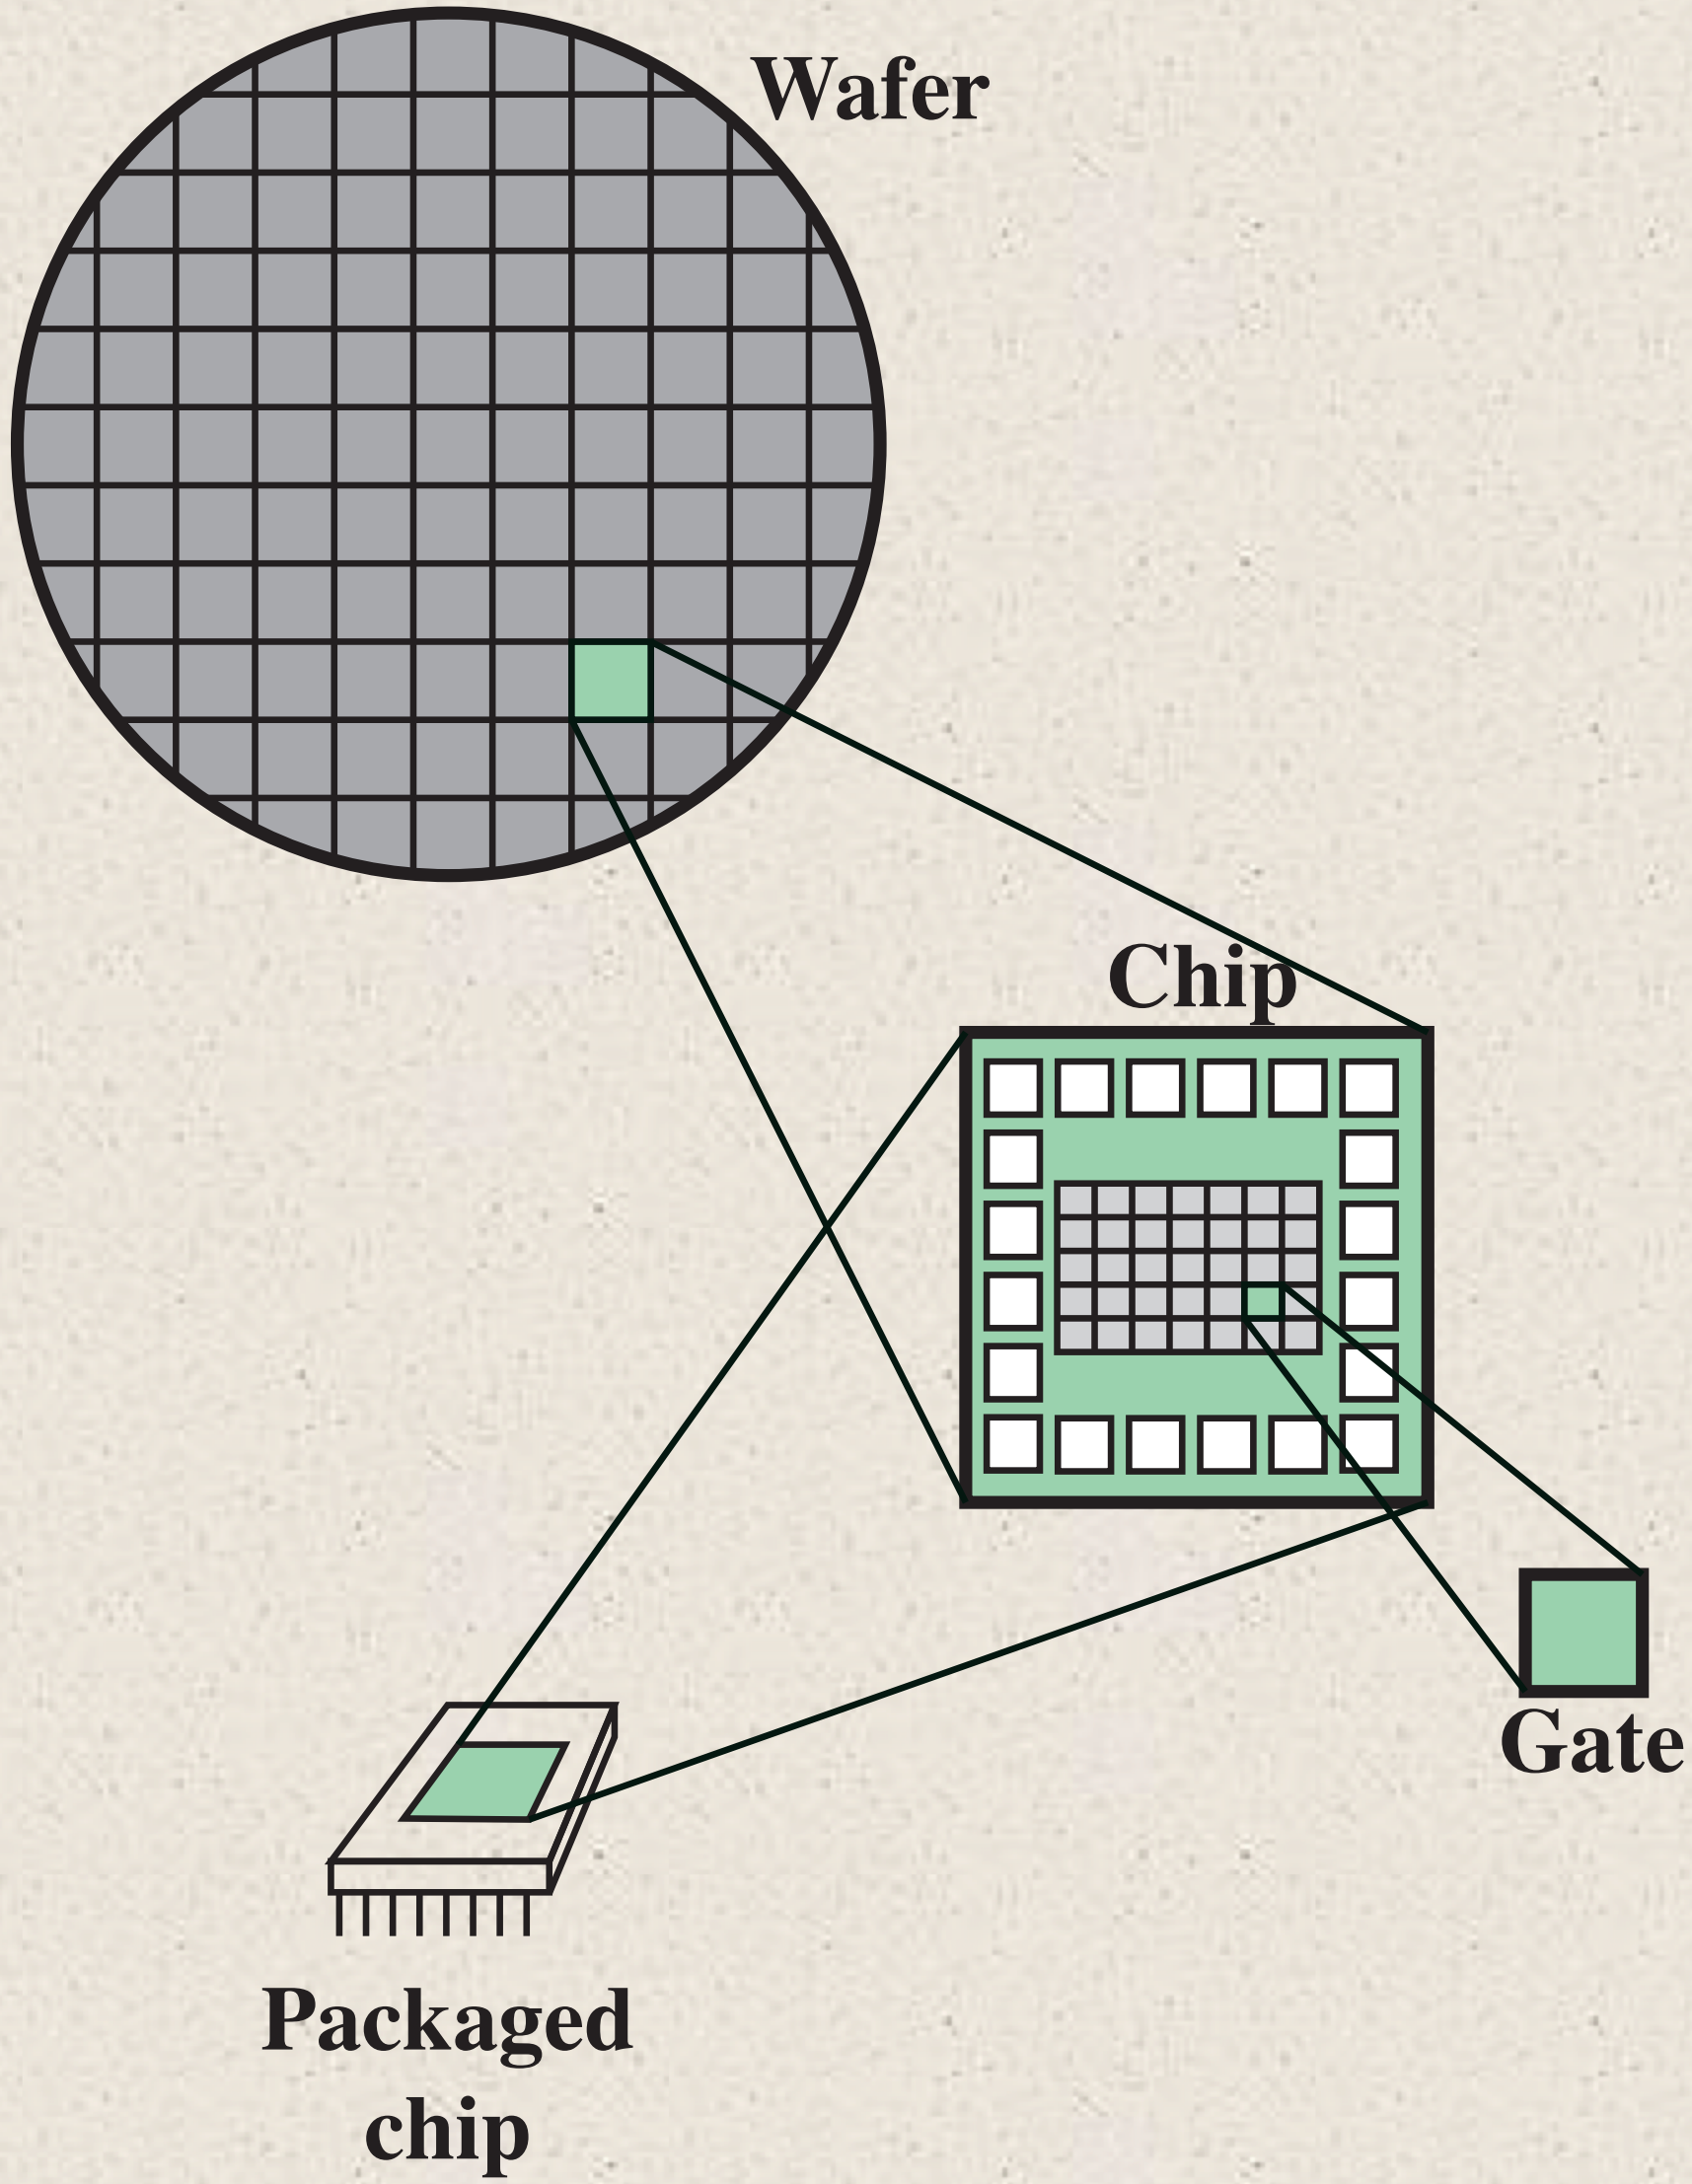

Figure 1.11 Relationship Among Wafer, Chip, and Gate

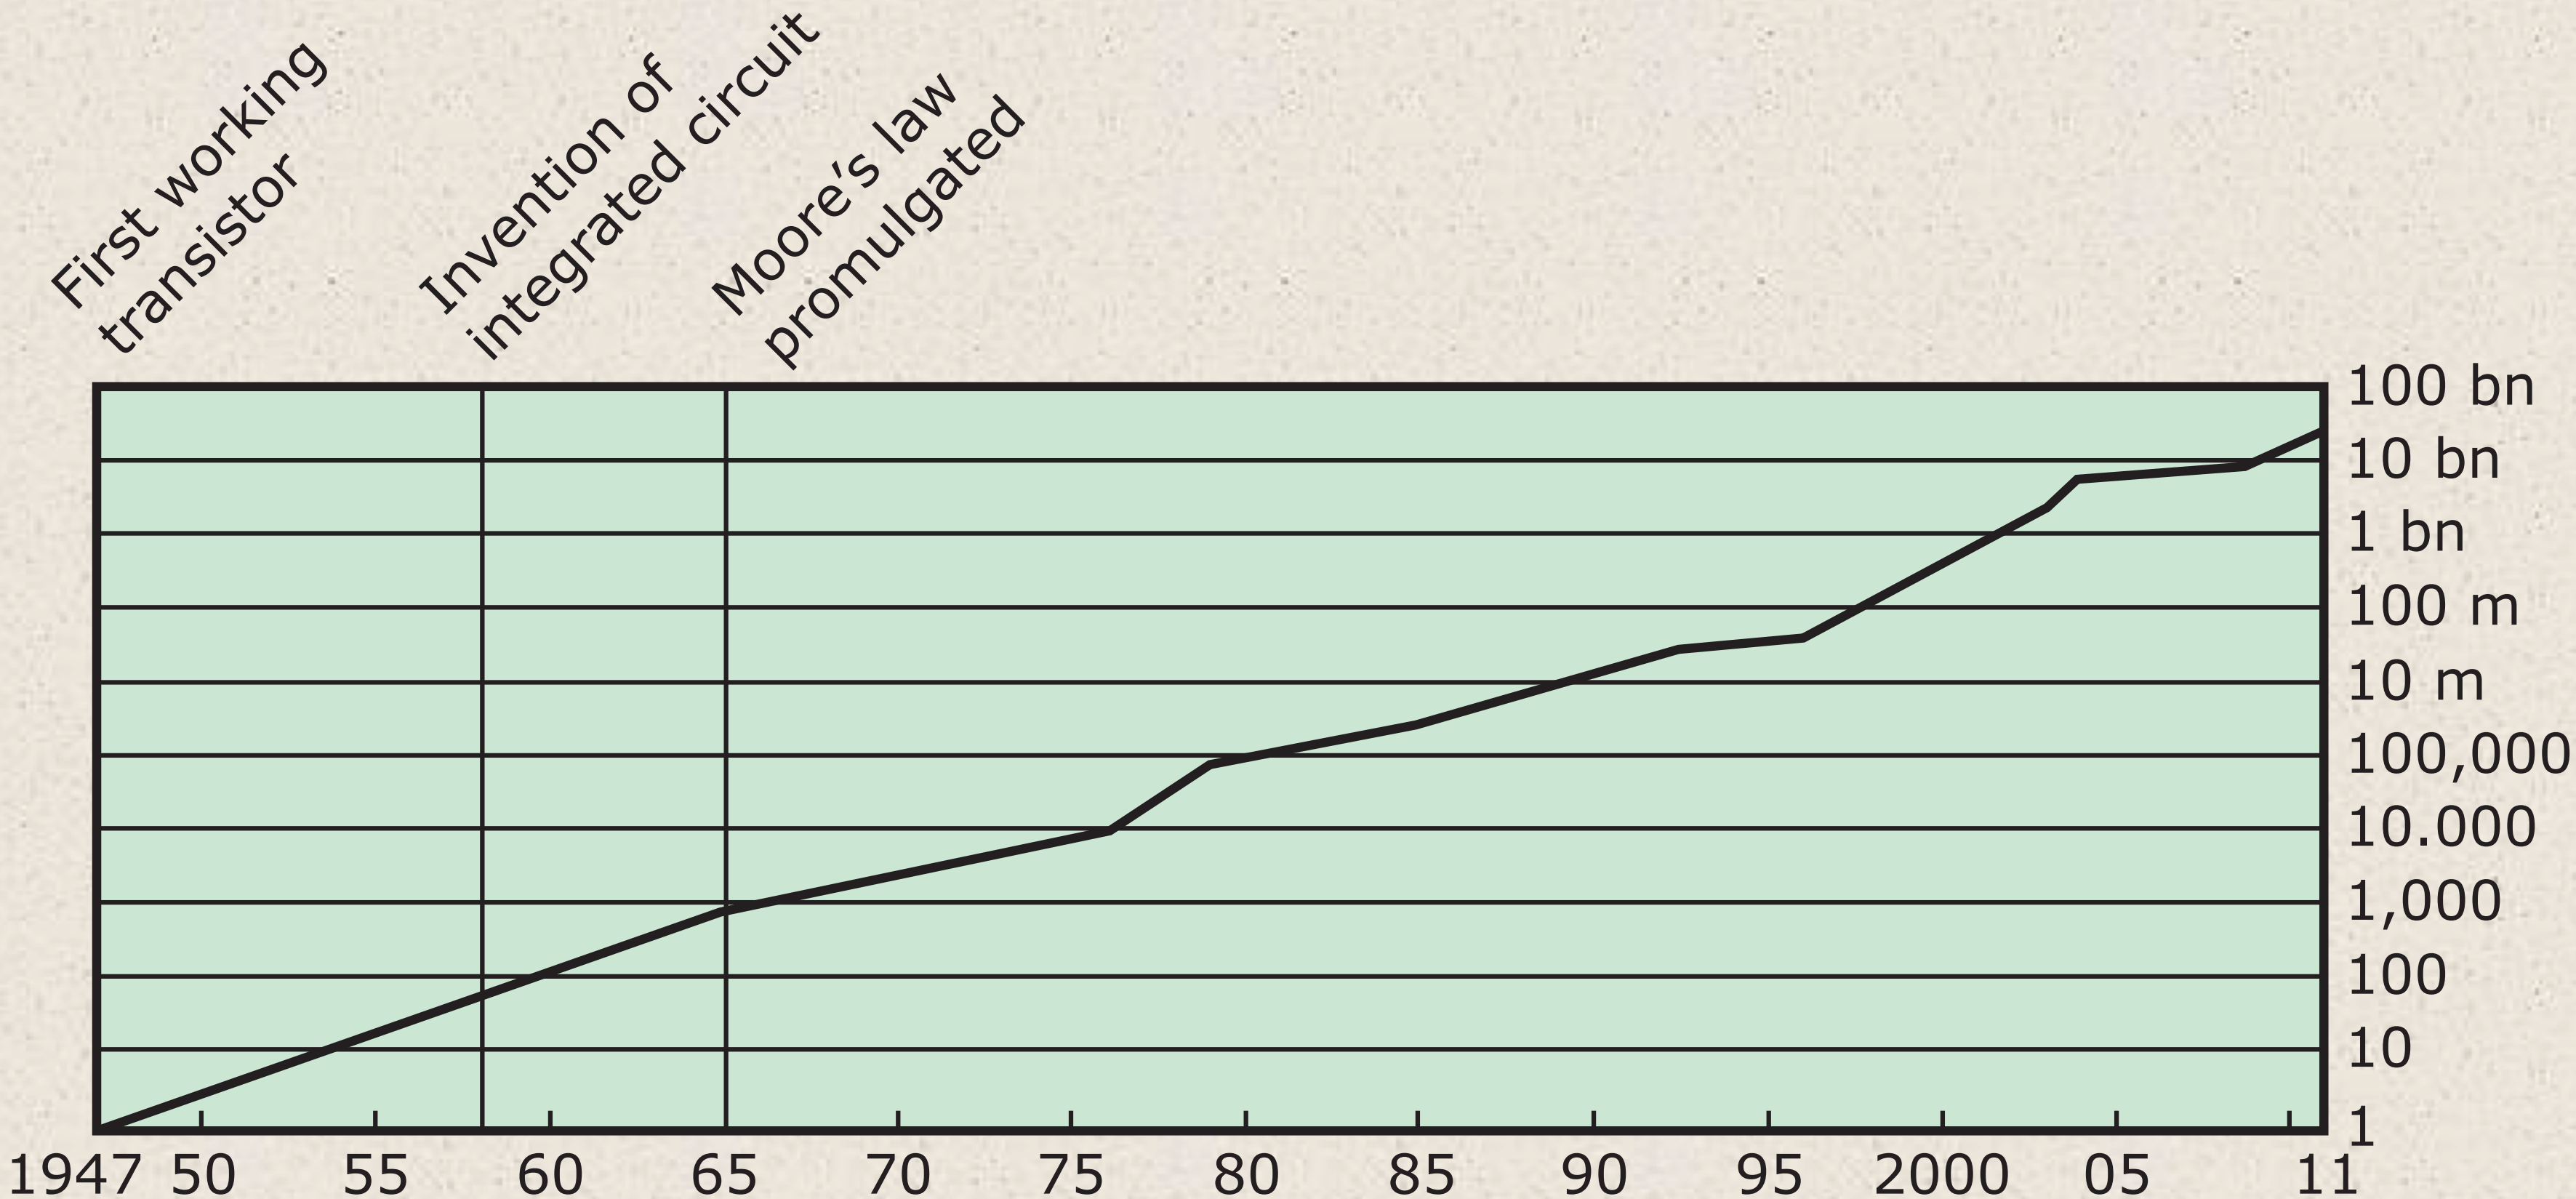

Figure 1.12 Growth in Transistor Count on Integrated Circuits (DRAM memory)

Moore's Law

1965; Gordon Moore – co-founder of Intel

Observed number of transistors that could be put on a single chip was doubling every year

The pace slowed to a doubling every 18 months in the 1970's but has sustained that rate ever since

Consequences of Moore's law:

- **The cost of computer logic and memory circuitry has fallen at a dramatic rate**
- **The electrical path length is shortened, increasing operating speed**
- **Computer becomes smaller and is more convenient to use in a variety of environments**
- **Reduction in power and cooling requirements**
- **Fewer interchip connections**

+

IBM System/360

- Announced in 1964
- Product line was incompatible with older IBM machines
- Was the success of the decade and cemented IBM as the overwhelmingly dominant computer vendor
- The architecture remains to this day the architecture of IBM's mainframe computers
- Was the industry's first planned family of computers
  - Models were compatible in the sense that a program written for one model should be capable of being executed by another model in the series

Later Generations

LSI
Large
Scale
Integration

VLSI
Very Large
Scale
Integration

ULSI
Ultra Large
Scale
Integration



Semiconductor Memory
Microprocessors

+ Summary

Chapter 1

Basic Concepts and Computer Evolution

- Organization and architecture
- Structure and function
- Brief history of computers
  - The First Generation: Vacuum tubes
  - The Second Generation: Transistors
  - The Third Generation: Integrated Circuits
  - Later generations