


Script 1: Accuweather

Uses the normal Accuweather web page. It can provide info for current conditions, a forecast for 10 days and hourly weather for the next 16 hours.

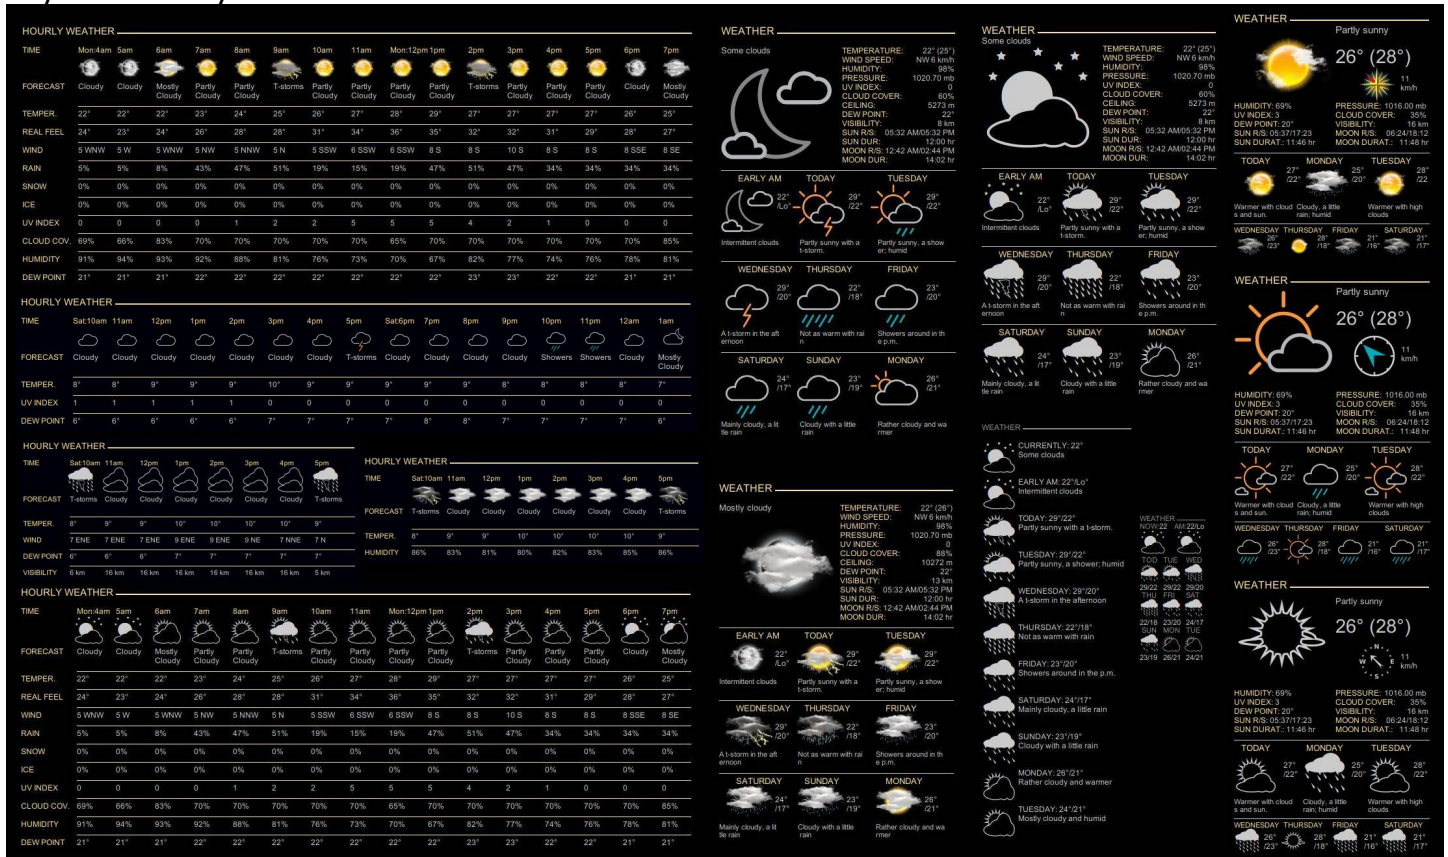

Go to

www.accuweather.com

type in your location and press enter. If your location is found and you can see a forecast, copy and keep the web address somewhere.

If you want to use a weatfont conkyrc, put **MY** ConkyWeather.ttf file in your ~/fonts folder (create it if you don't have one).

If you want to use a weatfont conkyrc that shows the wind direction, put the ConkyWindNESW.otf file in there as well.

Put the 1_accuweather folder in your home folder.
Navigate inside the folder and make the script executable:
Either by right clicking it or by

```
chmod +x ~/1_accuweather/1_accuweather
```

Open the script with your favourite text editor and replace my location's address at the address variable with yours.

The script can take up to 15 arguments, which can be

-f	10 days forecast-no images, just the weatherfont
-f2015	10 days forecast with the old Accuweather images
-f2016	10 days forecast with the new Accuweather images
-h	hourly forecast without any images, just the weatherfont
-h2015	hourly forecast with the old Accuweather images
-h2016	hourly forecast with the new Accuweather images
-h_8h	if an hourly forecast has been chosen, make it only for 8 hours instead of 16
-h_no_real	if an hourly forecast has been chosen, ignore the real feel values
-h_no_wind	if an hourly forecast has been chosen, ignore the wind values
-h_no_rain	if an hourly forecast has been chosen, ignore the rain values
-h_no_snow	if an hourly forecast has been chosen, ignore the snow values
-h_no_ice	if an hourly forecast has been chosen, ignore the ice values
-h_no_uv	if an hourly forecast has been chosen, ignore the uv values
-h_no_cloud	if an hourly forecast has been chosen, ignore the cloudiness values
-h_no_humid	if an hourly forecast has been chosen, ignore the humidity values
-h_no_dew	if an hourly forecast has been chosen, ignore the dew point values
-h_no_visib	if an hourly forecast has been chosen, ignore the visibility values

or any combination of them.

The usage of -f cancels out the -f2015 and -f2016 parameters.

Accordingly, the usage of -h cancels out the -h2015 and -h2016 parameters.

The -h_* arguments take effect only if an hourly forecast has been selected (-h, -h2015 or -h2016)

Some examples:

1_accuweather -f

Get the 10 days' forecast without copying any images.

1_accuweather -f -f2016 -f2015

Same as above.

1_accuweather -f -h2016

Get the 10 days' forecast without copying any images and the hourly forecast using the 2016 images.

1_accuweather -f -h

Get the 10 days' forecast and the hourly forecast without copying any images (only altogether16 file will be created).

1_accuweather -f2015 -h2016

Get the 10 days' forecast using the 2015 images and the hourly forecast using the 2016 images.

1_accuweather -f2015 -f2016

Get the 10 days' forecast using both the 2015 images and the 2016 images (images will be saved in both forecast_2015 and forecast_2016 folders)

1_accuweather -h2015 -h2016

Get the hourly forecast using both the 2015 images and the 2016 images (images will be saved in both hourly_2015 and hourly_2016 folders, both altogether16_2015 and altogether16_2016 files will be created)

1_accuweather -h2015 -h2016 -h_8h -h_no_ice -h_no_dew -h_no_humid

Same as above, but make it only for 8 hours and ignore ice, dew point and humidity info.

1_accuweather -f2015 -f2016 -h2015 -h2016

Get everything using all available images.

If you pass more than 15 arguments or no arguments at all to the script, it will exit without doing anything.

When the images' parameters are used (-f2015, -f2016, -h2015, -h2016), the forecast images will be saved in separate folders, ie. forecast_2015, forecast_2016, hourly_2015 or hourly_2016

If you pass the -h argument, the script will create a file called altogether16, ready to be called by a single execpi command. Accordingly, if you pass -h2015 you'll have the altogether16_2015 file and if you pass -h2016 you'll have the altogether16_2016 one.

A few .conkyrc files are provided; you can use them as they are or create your own ones.

conky -c ~/1_accuweather/.conkyrc_1_images_2016

conky -c ~/1_accuweather/.conkyrc_1_weatherfont_wind

etc.