

Example manuscript demonstrating the use of the papaja template

Frederik Aust

University of Cologne

Currently, a development version of `papaja` is available at <https://github.com/crsh/papaja>.

## Abstract

This example manuscript demonstrates how to use RStudio and RMarkdown to produce an APA conform manuscript. Using pandoc your RMarkdown can be converted to PDF or Word documents.

*Keywords:* APA, knitr, R, RMarkdown, papaja

Example manuscript demonstrating the use of the papaja template

## What is papaja?

As you may have heard, recently, interest in reproducible research has been growing. Reproducible data analysis is an easy to implement and important aspect of the strive towards reproducibility. For *R* users, RMarkdown has been suggested as one possible framework for reproducible analyses. **papaja** is a R-package in the making including a RMarkdown template that can be used with RStudio (or without) to produce complete manuscripts (PDF and Word documents), which conform to the American Psychological Association (APA) manuscript guidelines (6th Edition). To do so, papaja uses the L<sup>A</sup>T<sub>E</sub>Xdocument class **apa6** and a **.docx**-reference file. The supplied R-functions are ment to facilitate the reporting of statistics in accordance with APA guidelines.

Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents (among others). In the following I will assume you have hoped onto the band wagon and know how to use RMarkdown to conduct and comment your analyses. If this is not the case, I recommend you get to grips with [RMarkdown](#) first. I use [RStudio](#) (which makes use of [pandoc](#)) to create my documents, but the general process should work using any other R-editor.

## How do I use papaja?

Once you have installed **papaja** and all other [required software](#) you can select the APA template when creating a new Markdown file through the menus in RStudio. When you click RStudio's *Knit* button, **papaja**, **rmarkdown**, and **knitr** together create an APA conform manuscript that includes both your text and the output of any embedded R code chunks within the manuscript. Don't worry about the first chunk of R code at the beginning of the document. It sets the stage for the creation of your document.

```
require("papaja")
apa_prepare_doc() # Prepare document for rendering
```

## 34 Printing R output

35 Any output from R is included as you usually would using RMarkdown. By default the  
 36 R code will not be displayed in the final documents. If you wish to show off your code you  
 37 need to set `echo = TRUE` in the chunk options.

```
summary(cars)
```

```
38  speed          dist
39  Min.   : 4.0 Min.   : 2.00
40  1st Qu.:12.0 1st Qu.: 26.00
41  Median :15.0 Median : 36.00
42  Mean   :15.4 Mean   : 42.98
43  3rd Qu.:19.0 3rd Qu.: 56.00
44  Max.   :25.0 Max.   :120.00
```

45 But, surely, this is not what you want your submission to look like. I think we can do  
 46 better.

47 **Print tables.** For prettier tables, I suggest you have a look at `apa_table()`. Of  
 48 course, e.g, the popular `xtable` or `tables` packages can also be used to create tables when  
 49 knitting PDF documents. Unfortunately, `xtable()` captions are [set to the left page margin](#).  
 50 More importantly, these packages cannot be used when you want to create Microsoft Word  
 51 documents because they rely on L<sup>A</sup>T<sub>E</sub>X for typesetting. `apa_table()` creates tables that  
 52 conform to APA guidelines and are correctly rendered in PDF and Word documents. But

53 don't fool yourself. Table formatting is somewhat limited in Word documents due to missing  
54 functionality in pandoc (e.g., it is not possible to have cells span across multiple columns).

55 As required by the APA guidelines, in manuscripts tables are pushed to the final pages  
56 of the document when creating a PDF. Again, this is not the case in Word documents due to  
57 limited pandoc functionality.

```
my_table <- apply(cars, 2, function(x) round(
  c(Mean = mean(x), SD = sd(x), Min = min(x), Max = max(x)), 2)
)

apa_table(
  my_table
  , align = c("l", "r", "r")
  , caption = "A summary table of the cars dataset."
  , note = "This table was created using apa\\_table()"
  , added_colnames = "Descriptives"
)
```

58 The bottom line is, Word documents will be less polished than PDF. The resulting  
59 documents should suffice to enable collaboration with Wordy colleagues and prepare a  
60 journal submission.

61 **Plots.** You can also embed plots, for example:

```
plot(cars)
```

62 Again, as required by the APA guidelines, figures are pushed to the final pages of the  
63 document.

**Report statistical analyses.** `apa_stat()` will help you report the results of your statistical analyses. The function will format your input to produce readily reportable text.

```
my_regression <- lm(dist ~ speed, cars)
my_confint <- confint(my_regression)
my_results <- apa_stat(summary(my_regression), ci = my_confint)
```

In this case speed is a significant predictor of the distance taken to stop,  $b = 3.93$  [3.10, 4.77],  $t(48) = 9.46$ ,  $p < .001$ . The regression explains  $R^2 = .65$  variance, which is of course statistically significant,  $F(1, 48) = 89.57$ ,  $p < .001$ .

The previous paragraph was produced by the following text:

```
In this case speed is a significant predictor of the distance taken to stop,
`r my_results["speed"]`. The regression explains `r my_results["R2"]`
variance, which is of course statistically significant,
`r my_results["F-test"]`.
```

## Citations

You can insert citations like this:

[e.g., @bauer\_2014; @bem\_2011] → (e.g., Baumer, Cetinkaya-Rundel, Bray, Loi, & Horton, 2014; Bem, 2011).

Citing without parentheses is, of course, also possible:

@bauer\_2014 → Baumer et al. (2014).

The citation style is set in the header of this document with the `cs1` parameter. The relevant references will, of course, be added to the document's references automatically. In order for citations to work, you need to supply a .bib-file to the `bibliography` parameter in

the document header. See the [RMarkdown documentation](#) and [Citation Style Language](#) for further details.

## Document options

This text is set as manuscript. If you want a thesis-like document you can change the `classoption` in the document header from `man` to `doc`. You can also preview a polished journal typesetting by changing the `classoption` to `jou`.

When creating PDF documents, line numbering can be activated by setting the `lineno` argument in the header of this document to `true`. This option has no effect on Word documents.

## Last words

That's all I have. Enjoy writing your manuscript. If you have any trouble or ideas for improvements, open an [issue](#) on GitHub or make a pull request with the fix. ;)

## References

Baumer, B., Cetinkaya-Rundel, M., Bray, A., Loi, L., & Horton, N. J. (2014). R Markdown: Integrating A Reproducible Analysis Tool into Introductory Statistics. *ArXiv E-Prints*. Retrieved from <http://adsabs.harvard.edu/abs/2014arXiv1402.1894B>

Bem, D. J. (2011). Feeling the future: experimental evidence for anomalous retroactive influences on cognition and affect. *Journal of Personality and Social Psychology*, 100(3), 407—425. doi:[10.1037/a0021524](https://doi.org/10.1037/a0021524)

Table 1

*A summary table of the cars dataset.*

Descriptives	speed	dist
Mean	15.4	42.98
SD	5.29	25.77
Min	4	2
Max	25	120

*Note.* This table was created using `apa_table()`



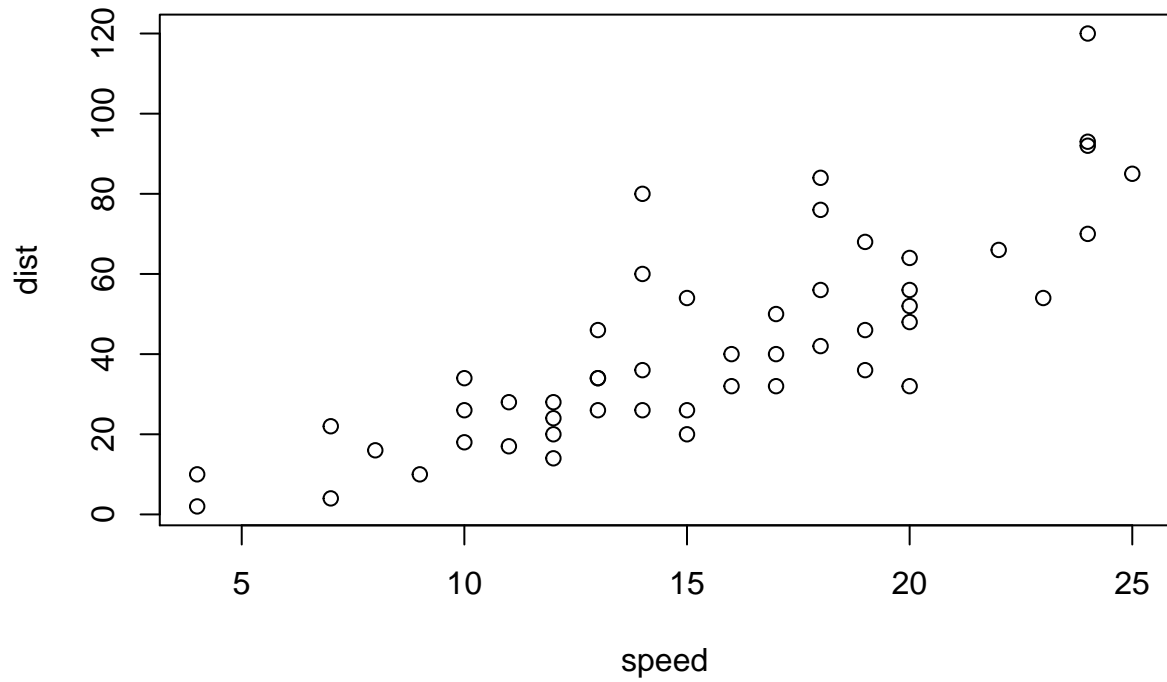


Figure 1. Exmple figure created by in-document R code.