

Configuration

Voici notre interface de firewall :

```
FreeBSD/amd64 (pfsense.home.arpa) (ttyv0)

VMware Virtual Machine - Netgate Device ID: f9388f6b2809a329ce6f


*** Welcome to pfSense 2.7.0-RELEASE (amd64) on pfsense ***

WAN (wan)      -> vmx2      -> v4: 192.168.0.2/24
LAN (lan)      -> vmx5      -> v4: 192.168.10.1/24
SERVEURS_SOC (opt1) -> vmx7      -> v4: 192.168.20.1/24
MACHINES_CLIENTS (opt2) -> vmx8      -> v4: 192.168.30.1/24
DUWA (opt3)    -> vmx3      -> v4: 192.168.40.1/24

0) Logout (SSH only)          9) pfTop
1) Assign Interfaces          10) Filter Logs
2) Set interface(s) IP address 11) Restart webConfigurator
3) Reset webConfigurator password 12) PHP shell + pfSense tools
4) Reset to factory defaults  13) Update from console
5) Reboot system              14) Enable Secure Shell (sshd)
6) Halt system                 15) Restore recent configuration
7) Ping host                   16) Restart PHP-FPM
8) Shell

Enter an option: █
```

Nous avons créé des alias afin de les utiliser efficacement pour les règles après :

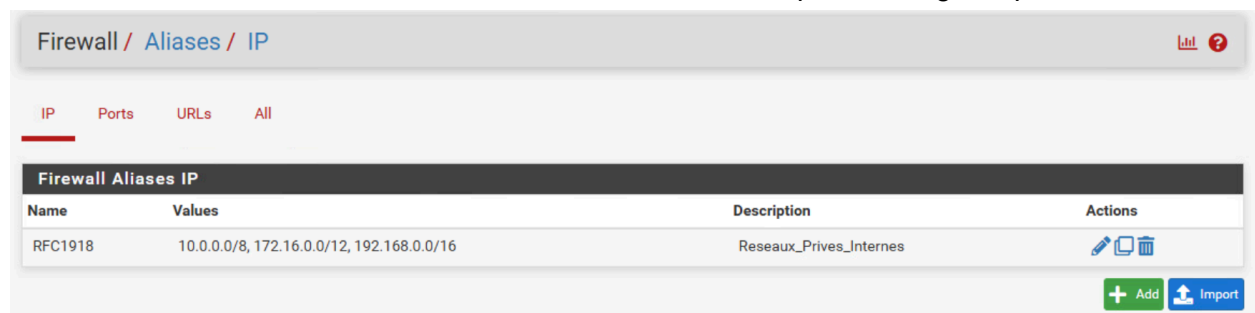

IP Ports URLs All

Firewall Aliases Ports			
Name	Values	Description	Actions
interface_servers	443, 5678, 8443, 9000, 9002	connexion interfaces web	  
internet_ports	80, 443, 53	connexion internet	  
irplatform_ports	8443, 9000, 9002	connexion hivecortexmisp	  
wazuh_ports	1514, 1515, 55000	connexion wazuh	  

 Add  Import

Règles pour l'interface LAN (où se trouve l'admin Windows):

Firewall / Rules / LAN											
Floating WAN LAN SERVEURS_SOC MACHINES_CLIENTS DVWA											
Rules (Drag to Change Order)											
☐	States	Protocol	Source	Port	Destination	Port	Gateway	Queue	Schedule	Description	Actions
☒	5/53.23 MiB	*	*	*	LAN Address	443 80	*	*		Anti-Lockout Rule	
☐	0/8.61 MiB	IPv4 TCP	192.168.10.2	*	SERVEURS_SOC net	interface_servers	*	none		connexion serveurs	
☐	0/4 KiB	IPv4 TCP	*	*	*	*	*	none			
Add Add Delete Toggle Copy Save Separator											

Cette machine a donc uniquement le droit d'accéder aux interfaces de nos applications sans pouvoir recevoir et envoyer de flux internet et externes.


Firewall / Rules / SERVEURS_SOC											
Floating WAN LAN SERVEURS_SOC MACHINES_CLIENTS DVWA											
Rules (Drag to Change Order)											
☐	States	Protocol	Source	Port	Destination	Port	Gateway	Queue	Schedule	Description	Actions
☐	0/0 B	IPv4 TCP/UDP	192.168.20.3	*	*	53 (DNS)	*	none		discord	
☐	0/0 B	IPv4 TCP/UDP	192.168.20.4	*	*	53 (DNS)	*	none		feeds	
☐	0/0 B	IPv4 TCP	192.168.20.3	*	192.168.20.4	irplatform_ports	*	none		n8n => irports	
☐	0/0 B	IPv4 TCP	SERVEURS_SOC net	*	192.168.20.2	wazuh_ports	*	none		envoi logs	
☐	0/0 B	IPv4 TCP	SERVEURS_SOC net	*	RFC1918	*	*	none		interdiction serveurs d'attaquer autres VLANs	
☐	0/0 B	IPv4 TCP	192.168.20.3	*	*	443 (HTTPS)	*	none		discord	
☐	0/0 B	IPv4 TCP	192.168.20.4	*	*	443 (HTTPS)	*	none		feeds	
☐	0/9 KiB	IPv4 TCP/UDP	*	*	*	*	*	none			
Add Add Delete Toggle Copy Save Separator											

DNS (Port 53) : Autorisé en TCP/UDP pour permettre la résolution de noms (ex: Discord, mises à jour).

Flux Internes : n8n (.3) peut parler à la plateforme IR (.4) et les deux envoient leurs logs à Wazuh (.2).

Le Verrou (RFC1918) : Une règle Block interdit toute connexion vers les autres VLANs privés. C'est la protection contre les mouvements latéraux.

Sortie Web (Port 443) : Autorisée vers Any pour les flux de menaces (feeds) et les webhooks uniquement

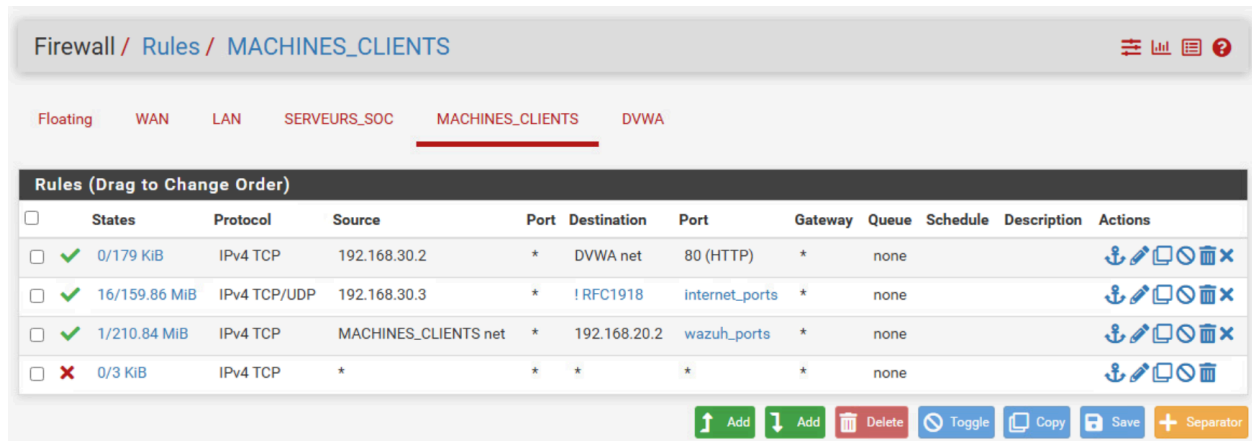

Firewall / Rules / MACHINES_CLIENTS

Floating WAN LAN SERVEURS_SOC **MACHINES_CLIENTS** DVWA

Rules (Drag to Change Order)

☐	States	Protocol	Source	Port	Destination	Port	Gateway	Queue	Schedule	Description	Actions
☐	✓ 0/179 KiB	IPv4 TCP	192.168.30.2	*	DVWA net	80 (HTTP)	*	none			
☐	✓ 16/159.86 MiB	IPv4 TCP/UDP	192.168.30.3	*	! RFC1918	internet_ports	*	none			
☐	✓ 1/210.84 MiB	IPv4 TCP	MACHINES_CLIENTS net	*	192.168.20.2	wazuh_ports	*	none			
☐	✗ 0/3 KiB	IPv4 TCP	*	*	*	*	*	none			


Add Add Delete Toggle Copy Save Separator

Audit Web (Kali vers DVWA) : La machine .30.2 est la seule autorisée à joindre l'interface web de la DVWA sur le port 80.

Accès Internet Restreint (!RFC1918) : La machine .30.3 (Windows) peut accéder au Web via l'alias internet_ports, mais uniquement vers des destinations qui ne sont pas privées. Cela empêche Windows de scanner les serveurs ou d'accéder à la DVWA.

Remontée de Logs : Tout le réseau client est autorisé à envoyer ses événements de sécurité vers le serveur Wazuh (.20.2).

Sécurité Default-Deny : La règle finale bloque tout autre flux non spécifié.

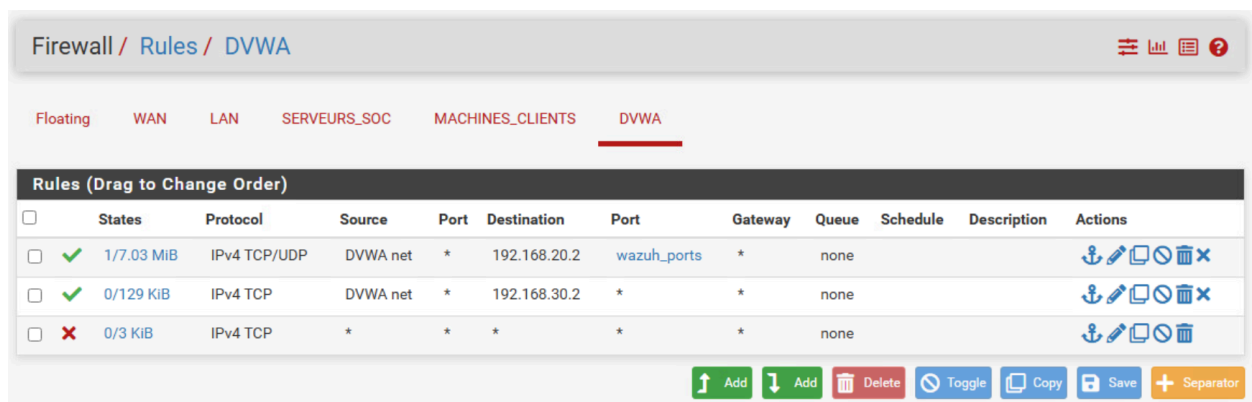

Firewall / Rules / DVWA

Floating WAN LAN SERVEURS_SOC MACHINES_CLIENTS **DVWA**

Rules (Drag to Change Order)

☐	States	Protocol	Source	Port	Destination	Port	Gateway	Queue	Schedule	Description	Actions
☐	✓ 1/7.03 MiB	IPv4 TCP/UDP	DVWA net	*	192.168.20.2	wazuh_ports	*	none			
☐	✓ 0/129 KiB	IPv4 TCP	DVWA net	*	192.168.30.2	*	*	none			
☐	✗ 0/3 KiB	IPv4 TCP	*	*	*	*	*	none			

Add Add Delete Toggle Copy Save Separator

Visibilité SOC : La priorité est l'envoi des logs vers Wazuh via l'alias wazuh_ports pour surveiller les tentatives d'exploitation en temps réel.

Autorisation du Reverse Shell : La règle cruciale autorise la DVWA à initier une connexion vers la Kali (.30.2) sur n'importe quel port (*). C'est cette règle qui permet au shell de "revenir" vers l'attaquant.


Isolation Hermétique : Une règle de blocage totale (* * *) assure que la DVWA ne peut absolument rien faire d'autre sur le réseau, protégeant ainsi l'infrastructure pfSense et SOC.

Mise en place de Suricata

Installation :

Se rendre sur l'interface web de Pfsense

Aller vers : System>Package Manager>Available Packages et installer la dernière version de suricata.

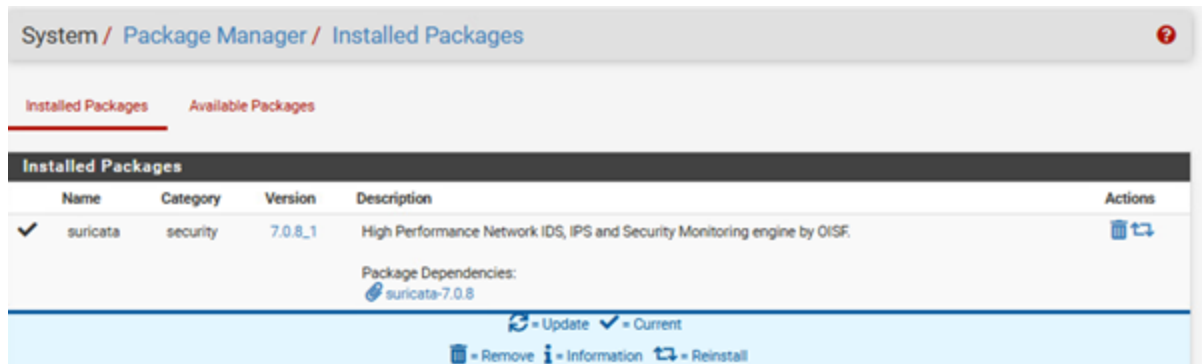

Configuration :

1. Désactiver Hardware Offloading

Se rendre dans System>Advanced>Networking

Activer ou Désactiver ces options :

Network Interfaces	
Hardware Checksum Offloading	☒ Disable hardware checksum offload Checking this option will disable hardware checksum offloading. Checksum offloading is broken in some hardware, particularly some Realtek cards. Rarely, drivers may have problems with checksum offloading and some specific NICs. This will take effect after a machine reboot or re-configure of each interface.
Hardware TCP Segmentation Offloading	☒ Disable hardware TCP segmentation offload Checking this option will disable hardware TCP segmentation offloading (TSO, TSO4, TSO6). This offloading is broken in some hardware drivers, and may impact performance with some specific NICs. This will take effect after a machine reboot or re-configure of each interface.
Hardware Large Receive Offloading	☒ Disable hardware large receive offload Checking this option will disable hardware large receive offloading (LRO). This offloading is broken in some hardware drivers, and may impact performance with some specific NICs. This will take effect after a machine reboot or re-configure of each interface.
hn ALTQ support	☒ Enable the ALTQ support for hn NICs. Checking this option will enable the ALTQ support for hn NICs. The ALTQ support disables the multiqueue API and may reduce the system capability to handle traffic. This will take effect after a machine reboot.
ARP Handling	☐ Suppress ARP messages This option will suppress ARP log messages when multiple interfaces reside on the same broadcast domain.
Reset All States	☐ Reset all states if WAN IP Address changes This option resets all states when a WAN IP Address changes instead of only states associated with the previous IP Address.

Puis redémarrer Pfsense après ces modifications.

2. Configuration Globale Suricata

Se rendre dans Services>Suricata>Global Settings

Modifier les paramètres suivants :

Please Choose The Type Of Rules You Wish To Download		
Install ETOpen Emerging Threats rules	☒ ETOpen is a free open source set of Suricata rules whose coverage is more limited than ETPro. Enabling the custom URL option will force the use of a custom user-supplied URL when downloading ETOpen rules.	☐ Use a custom URL for ETOpen downloads
Install ETPro Emerging Threats rules	☐ ETPro for Suricata offers daily updates and extensive coverage of current malware threats. The ETPro rules contain all of the ETOpen rules, so the ETOpen rules are not required and are disabled when the ETPro rules are selected. Sign Up for an ETPro Account . Enabling the custom URL option will force the use of a custom user-supplied URL when downloading ETPro rules.	☐ Use a custom URL for ETPro rule downloads
Install Snort rules	☐ Snort free Registered User or paid Subscriber rules Sign Up for a free Registered User Rules Account Sign Up for paid Snort Subscriber Rule Set (by Talos) Enabling the custom URL option will force the use of a custom user-supplied URL when downloading Snort Subscriber rules.	☐ Use a custom URL for Snort rule downloads
Install Snort GPLv2 Community rules	☒ The Snort Community Ruleset is a GPLv2 Talos-certified ruleset that is distributed free of charge without any Snort Subscriber License restrictions. This ruleset is updated daily and is a subset of the subscriber ruleset. If you are a Snort Subscriber Rules customer (paid subscriber), the community ruleset is already built into your download of the Snort Subscriber rules, and there is no benefit in adding this rule set separately.	☐ Use a custom URL for Snort GPLv2 rule downloads
Install Feodo Tracker Botnet C2 IP rules	☒ The Feodo Botnet C2 IP Ruleset contains Dridex and Emotet/Heodo botnet command and control servers (C&Cs) tracked by Feodo Tracker.	
Install ABUSE.ch SSL Blacklist rules	☒ The ABUSE.ch SSL Blacklist Ruleset contains the SSL cert fingerprints of all SSL certs blacklisted by ABUSE.ch.	
Hide Deprecated Rules Categories	☒ Hide deprecated rules categories in the GUI and remove them from the configuration. Default is Not Checked.	
Download Extra Rules	☐ Download Extra Rules Download extra rules file or tar.gz archive with rules. If "Check MD5" is set, the code will assume a matching filename exists at the same URL with an additional extension of ".md5".	

Install ETOpen Emerging Threats rules / Description : Règles gratuites open source

Install Snort GPLv2 Community rules / Description : Règles gratuites certifiées Talos

Install Feodo Tracker Botnet C2 IP rules / Description : Détection botnets Dridex/Emotet

Install ABUSE.ch SSL Blacklist rules / Description : Certificats SSL malveillants

Hide Deprecated Rules Categories / Description : Masque règles obsolètes

Rules Update Settings	
Update Interval	12 HOURS Please select the interval for rule updates. Choosing NEVER disables auto-updates. Hint: In most cases, every 12 hours is a good choice.
Update Start Time	02:15 Enter the rule update start time in 24-hour format (HH:MM). Default is 00 hours with a randomly chosen minutes value. Rules will update at the interval chosen above starting at the time specified here. For example, using a start time of 00:08 and choosing 12 Hours for the interval, the rules will update at 00:08 and 12:08 each day. The randomized minutes value should be retained to minimize the impact to the rules update site from large numbers of simultaneous requests.
Live Rule Swap on Update	☒ Enable "Live Swap" reload of rules after downloading an update. Default is Not Checked When enabled, Suricata will perform a live load of the new rules following an update instead of a hard restart. If issues are encountered with live load, uncheck this option to perform a hard restart of all Suricata instances following an update.
GeoLite2 DB Update	☐ Enable downloading of free GeoLite2 Country IP Database updates. Default is Not Checked When enabled, Suricata will automatically download updates for the free GeoLite2 country IP database. If you have a subscription for more current GeoIP2 updates, uncheck this option and instead create your own process to place the required database file in /usr/local/share/suricata/GeoLite2/.

Live Rule Swap on Update (évite redémarrages)

General Settings	
Remove Blocked Hosts Interval	1 HOUR Please select the amount of time you would like hosts to be blocked. Note this setting is only applicable when using Legacy Mode blocking! This setting is ignored when using Inline IPS Mode. Hint: in most cases, 1 hour is a good choice.
Log to System Log	☒ Copy Suricata messages to the firewall system log.
Log Facility	LOCAL1 Select system log facility to use for reporting. Default is LOCAL1.
Log Priority	NOTICE Select system log Priority (Level) to use for reporting. Default is NOTICE.
Keep Suricata Settings After Deinstall	☒ Settings will not be removed during package deinstallation.
Clear Blocked Hosts After Deinstall	☒ Click to clear all blocked hosts added by Suricata when removing the package. Default is checked.

Log to System Log (important pour debug)

Keep Suricata Settings After Deinstall (sauvegarde config)

Clear Blocked Hosts After Deinstall (nettoyage)

3. Mise à jour des Règles

Après cela Update les Rules :

Services / Suricata / Updates

[Interfaces](#)
[Global Settings](#)
[Updates](#)
[Alerts](#)
[Blocks](#)
[Files](#)
[Pass Lists](#)
[Suppress](#)
[Logs View](#)
[Logs Mgmt](#)
[SID Mgmt](#)

[Sync](#)
[IP Lists](#)

INSTALLED RULE SET MD5 SIGNATURES

Rule Set Name/Publisher	MD5 Signature Hash	MD5 Signature Date
Emerging Threats Open Rules	a9ef4bbf7e63a7b775f07c76adf1082a	Friday, 23-Jan-26 00:11:37 UTC
Snort Subscriber Rules	Not Enabled	Not Enabled
Snort GPLv2 Community Rules	e9d50fd9c38a5e447698d1e7900a7ea	Friday, 23-Jan-26 00:11:37 UTC
Feodo Tracker Botnet C2 IP Rules	4e27731bfa2a52543b61b72d5afc847e	Friday, 23-Jan-26 14:15:10 UTC
ABUSE.ch SSL Blacklist Rules	e9ee5b3f2c29a3533f9924ca8c287601	Friday, 23-Jan-26 14:15:10 UTC

UPDATE YOUR RULE SET

Last Update: Jan-23 2026 14:15
Result: success




MANAGE RULE SET LOG




The log file is limited to 1024K in size and automatically clears when the limit is exceeded.

4. Configuration des Interfaces

Se rendre dans Services>Suricata et créer nos différentes interfaces réseaux correspondants à nos VLANS :

[Interfaces](#)
[Global Settings](#)
[Updates](#)
[Alerts](#)
[Blocks](#)
[Files](#)
[Pass Lists](#)
[Suppress](#)
[Logs View](#)
[Logs Mgmt](#)
[SID Mgmt](#)

[Sync](#)
[IP Lists](#)

Interface Settings Overview

Interface	Suricata Status	Pattern Match	Blocking Mode	Description	Actions
☐ WAN (vmx2)	 	AUTO	DISABLED	WAN	 
☐ SERVEURS_SOC (vmx7)	 	AUTO	DISABLED	SERVEURS_SOC	 
☐ MACHINES_CLIENTS (vmx0)	 	AUTO	DISABLED	MACHINES_CLIENTS	 
☐ DVWA (vmx3)	 	AUTO	DISABLED	DVWA	 
☐ LAN (vmx5)	 	AUTO	DISABLED	LAN	 



Voici comment les configurer, toutes ces interfaces ont les même paramètre :

(exemple pour WAN)

WAN Settings :

General Settings	
Enable	☒ Checking this box enables Suricata inspection on the interface.
Interface	WAN (vmx2) Choose which interface this Suricata instance applies to. In most cases, you will want to choose LAN here if this is the first Suricata-configured interface.
Description	WAN Enter a meaningful description here for your reference. The default is the pfSense interface friendly description.

Logging Settings	
Send Alerts to System Log	☒ Suricata will send Alerts from this interface to the firewall's system log. NOTE: the FreeBSD syslog daemon will automatically truncate exported messages to 480 bytes max.
Log Facility	LOCAL1 Select system log Facility to use for reporting. Default is LOCAL1.
Log Priority	NOTICE Select system log Priority (Level) to use for reporting. Default is NOTICE.
Enable Stats Collection	☐ Suricata will periodically gather performance statistics for this interface. Default is Not Checked.
Enable HTTP Log	☒ Suricata will log decoded HTTP traffic for the interface. Default is Checked.
HTTP Log File Type	Regular Select "Regular" to log to a conventional file, or choose UNIX "Datagram" or "Stream" Socket to log to an existing UNIX socket. Default is "Regular"
Append HTTP Log	☒ Suricata will append-to instead of clearing HTTP log file when restarting. Default is Checked.
Log Extended HTTP Info	☒ Suricata will log extended HTTP information. Default is Checked.
Enable TLS Log	☐ Suricata will log TLS handshake traffic for the interface. Default is Not Checked.
Enable File-Store	☐ Suricata will extract and store files from application layer streams. Default is Not Checked. WARNING: Enabling file-store will consume a significant amount of disk space on a busy network!
Enable Packet Log	☐ Suricata will log decoded packets for the interface in pcap-format. Default is Not Checked. This can consume a significant amount of disk space when enabled. Use the Packet Log Conditional setting below to select packets for capture.
Enable Verbose Logging	☐ Suricata will log additional information to the suricata.log file when starting up and shutting down. Default is Not Checked.

EVE Output Settings	
EVE JSON Log	☒ Suricata will output selected info in JSON format to a single file or to syslog. Default is Not Checked.
EVE Output Type	SYSLOG Select EVE log output destination. Choosing FILE is suggested and is the default value. "Redis" is used for output to a Redis server, and the UNIX Socket options output to a user-created socket.
EVE Syslog Output Facility	SYSLOG Select EVE syslog output facility.
EVE Syslog Output Priority	NOTICE Select EVE syslog output priority.

Promiscuous Mode	☒ Suricata will place the monitored interface in promiscuous mode when checked. Default is Checked.
------------------	---

Se rendre ensuite dans WAN Categories :

Cocher :

☒ [emerging-botcc.rules](#)

☒ [emerging-malware.rules](#)

Ne pas Cocher :

☐ [emerging-scan.rules](#) - Trop de faux positifs

☐ [emerging-exploit.rules](#) - Peut bloquer un trafic légitime

☐ [emerging-web_server.rules](#)

☐ [emerging-web_specific_apps.rules](#) - Très sensible

5. Vérification du bon fonctionnement

Se rendre dans Alertes :

Services / Suricata / Alerts

Interfaces
Global Settings
Updates
Alerts
Blocks
Files
Pass Lists
Suppress
Logs View
Logs Mgmt
SID Mgmt

Sync
IP Lists

Alert Log View Settings

Instance to View
(WAN) WAN

Choose which instance alerts you want to inspect.

Save or Remove Logs
Download
Clear

All alert log files for selected interface will be downloaded
Clear the currently active Alerts log file

Save Settings
Save
Refresh
250

Save auto-refresh and view settings
Default is ON
Number of alerts to display. Default is 250

Alert Log View Filter

Last 250 Alert Entries. (Most recent entries are listed first)

Date	Action	Pri	Proto	Class	Src	SPort	Dst	DPort	GID:SID	Description
01/23/2026 13:58:43		3	TCP	Generic Protocol Command Decode	34.107.243.93	443	192.168.0.2	30235	1:2210044	SURICATA STREAM Packet with invalid timestamp
01/23/2026 13:16:14		3	TCP	Generic Protocol Command Decode	192.168.0.2	34123	95.101.137.71	443	1:2210054	SURICATA STREAM excessive retransmissions
01/22/2026 10:13:39		3	TCP	Generic Protocol Command Decode	104.93.20.27	443	192.168.0.2	18635	1:2210054	SURICATA STREAM excessive retransmissions
01/22/2026 10:13:39		3	TCP	Generic Protocol Command Decode	104.93.20.11	443	192.168.0.2	1577	1:2210054	SURICATA STREAM excessive retransmissions
01/22/2026 09:40:47		3	TCP	Generic Protocol Command Decode	2.22.251.35	443	192.168.0.2	51233	1:2210054	SURICATA STREAM excessive retransmissions

Nous pouvons voir le bon fonctionnement de suricata.

Services / Suricata / Alerts

Interfaces Global Settings Updates Alerts Blocks Files Pass Lists Suppress Logs View Logs Mgmt SID Mgmt

Sync IP Lists

Alert Log View Settings

Instance to View: (MACHINES_CLIENTS) MACHINES_CLIENTS
Choose which instance alerts you want to inspect.

Save or Remove Logs: [Download](#) [Clear](#)
All alert log files for selected interface will be downloaded. Clear the currently active Alerts log file.

Save Settings: [Save](#) [Refresh](#)
Save auto-refresh and view settings. Default is ON. Number of alerts to display. Default is 250.

Alert Log View Filter

Last 250 Alert Entries. (Most recent entries are listed first)

Date	Action	Pri	Proto	Class	Src	SPort	Dst	DPort	GIID:SID	Description
01/23/2026 14:52:14	⚠	3	TCP	Generic Protocol Command Decode	192.168.30.2	37656	192.168.10.1	80	1-2260002	SURICATA Applayer Detect protocol only one direction
01/23/2026 14:52:13	⚠	3	ICMP	Generic Protocol Command Decode	192.168.30.2	8	192.168.10.1	9	1-2200025	SURICATA ICMPv4 unknown code
01/23/2026 14:52:12	⚠	3	ICMP	Generic Protocol Command Decode	192.168.30.2	8	192.168.10.1	9	1-2200025	SURICATA ICMPv4 unknown code
01/23/2026 14:52:12	⚠	3	ICMP	Generic Protocol Command Decode	192.168.30.2	8	192.168.10.1	9	1-2200025	SURICATA ICMPv4 unknown code

Exemple pour les machines clientes.

6. Envoie des alertes vers Wazuh

Se rendre sur la machine Wazuh :

```
root@siem:/home/templatedebian# _
```

Ensuite modifier le fichier :

```
root@siem:/home/templatedebian# nano /var/ossec/etc/ossec.conf
```

Ajouter la partie en rouge :

```

<remote>
  <connection>secure</connection>
  <port>1514</port>
  <protocol>tcp</protocol>
  <queue_size>131072</queue_size>
</remote>

<remote>
  <connection>syslog</connection>
  <port>514</port>
  <protocol>udp</protocol>
  <allowed-ips>192.168.0.0/16</allowed-ips>
</remote>

```

On configure ensuite le serveur Wazuh pour qu'il écoute et accepte les logs envoyés par pfSense via le protocole Syslog sur le port 514 UDP.

On redémarre ensuite Wazuh et vérifie son status :

```
root@siem:/home/templatedebian# systemctl restart wazuh-manager_
```

```

root@siem:/home/templatedebian# systemctl status wazuh-manager
● wazuh-manager.service - Wazuh manager
   Loaded: loaded (/lib/systemd/system/wazuh-manager.service; enabled; preset: enabled)
   Active: active (running) since Fri 2026-01-23 15:37:10 CET; 2h 53min ago
     Process: 8290 ExecStart=/usr/bin/env /var/ossec/bin/wazuh-control start (code=exited, status=0/SUCCESS)
    Tasks: 234 (limit: 9465)
   Memory: 1.4G
      CPU: 15min 27.274s
   CGroup: /system.slice/wazuh-manager.service
           └─8355 /var/ossec/framework/python/bin/python3 /var/ossec/api/scripts/wazuh_apid.py
              8356 /var/ossec/framework/python/bin/python3 /var/ossec/api/scripts/wazuh_apid.py
              8357 /var/ossec/framework/python/bin/python3 /var/ossec/api/scripts/wazuh_apid.py
              8360 /var/ossec/framework/python/bin/python3 /var/ossec/api/scripts/wazuh_apid.py
              8363 /var/ossec/framework/python/bin/python3 /var/ossec/api/scripts/wazuh_apid.py
              8386 /var/ossec/bin/wazuh-integratord
              8407 /var/ossec/bin/wazuh-authd
              8422 /var/ossec/bin/wazuh-db
              8457 /var/ossec/bin/wazuh-execd
              8471 /var/ossec/bin/wazuh-analysisd
              8488 /var/ossec/bin/wazuh-syscheckd
              8506 /var/ossec/bin/wazuh-remoted
              8507 /var/ossec/bin/wazuh-remoted
              8591 /var/ossec/bin/wazuh-logcollector
              8609 /var/ossec/bin/wazuh-monitord
              8642 /var/ossec/bin/wazuh-modulesd

Janv. 23 15:37:03 siem env[8290]: Started wazuh-syscheckd...
Janv. 23 15:37:04 siem env[8290]: Started wazuh-remoted...
Janv. 23 15:37:06 siem env[8290]: Started wazuh-logcollector...
Janv. 23 15:37:07 siem env[8290]: Started wazuh-monitord...
Janv. 23 15:37:07 siem env[8638]: 2026/01/23 15:37:07 wazuh-modulesd:router: INFO: Loaded router module.
Janv. 23 15:37:07 siem env[8638]: 2026/01/23 15:37:07 wazuh-modulesd:content_manager: INFO: Loaded content_manager module.
Janv. 23 15:37:07 siem env[8638]: 2026/01/23 15:37:07 wazuh-modulesd:inventory-harvester: INFO: Loaded inventory harvester module.
Janv. 23 15:37:08 siem env[8290]: Started wazuh-modulesd...
Janv. 23 15:37:10 siem env[8290]: Completed.
Janv. 23 15:37:10 siem systemd[1]: Started wazuh-manager.service - Wazuh manager.

```

On se rend ensuite sur l'interface web de Wazuh :

Discover :



Puisque Pfsense n'a pas d'agent, les alertes Suricata apparaissent dans Discover sous l'identité du Wazuh Manager (Agent 000).

Mise en place de la REST API

```
[2.8.1-RELEASE][root@pfsense.home.arpa]/root: pkg-static add https://github.com/pfrest/pfSense-pkg-RESTAPI/releases/latest/download/pfSense-2.8.1-pkg-RESTAPI.pk
```

System / REST API / Settings



[Settings](#) [Keys](#) [Access List](#) [Updates](#) [Documentation](#)

General

Enabled

☒ Enable

Enables or disables the API. If set to `false`, the API will no longer respond to API requests and can only be re-enabled via webConfigurator.

Keep Backup

☒ Enable

Enables or disables keeping a persistent backup of the API configuration that can be used to restore the API configuration after package and systems updates.

**Authentication
Methods**

Local database
JWT
Key

Sets the API authentication methods allowed to authenticate API calls.

System / REST API / Keys



[Settings](#) [Keys](#) [Access List](#) [Updates](#) [Documentation](#)

Key Settings

**Key Hashing
Algorithm**

SHA256

The hash algorithm used for this API key. It is recommended to increase the strength of the algorithm for keys assigned to privileged users.

Length Bytes

16

The length of the API key (in bytes). Greater key lengths provide greater security, but also increase the number of characters used in the key string.

Description

n8n

Sets a description for this API key. This is used to identify the key's purpose and cannot be changed once created.

Save

The changes have been applied successfully. Store this API key in a secure location. Once you navigate away from this page, this key cannot be recovered!

Your API key is: XXXXXXXXXXXX149364e2bf1a819da2e500e16

Firewall / Aliases / Edit

Properties

Name

n8n_block

The name of the alias may only consist of the characters "a-z, A-Z, 0-9 and _".

Description

blocage automatique n8n

A description may be entered here for administrative reference (not parsed).

Type

Host(s)

Host(s)

Hint

Enter as many hosts as desired. Hosts must be specified by their IP address or fully qualified domain name (FQDN). FQDN hostnames are periodically re-resolved and updated. If multiple IPs are returned by a DNS query, all are used. An IP range such as 192.168.1.1-192.168.1.10 or a small subnet such as 192.168.1.16/28 may also be entered and a list of individual IP addresses will be generated.

IP or FQDN

Address

Description

Save

Add Host

Activate Windows

Rules (Drag to Change Order)										
☐	States	Protocol	Source	Port	Destination	Port	Gateway	Queue	Schedule	Description
☐	✗	0/0 B	IPv4 TCP	*	n8n_block	*	*	none		

Sur le shell : On tape l'option 11 (Restart webConfigurator)