


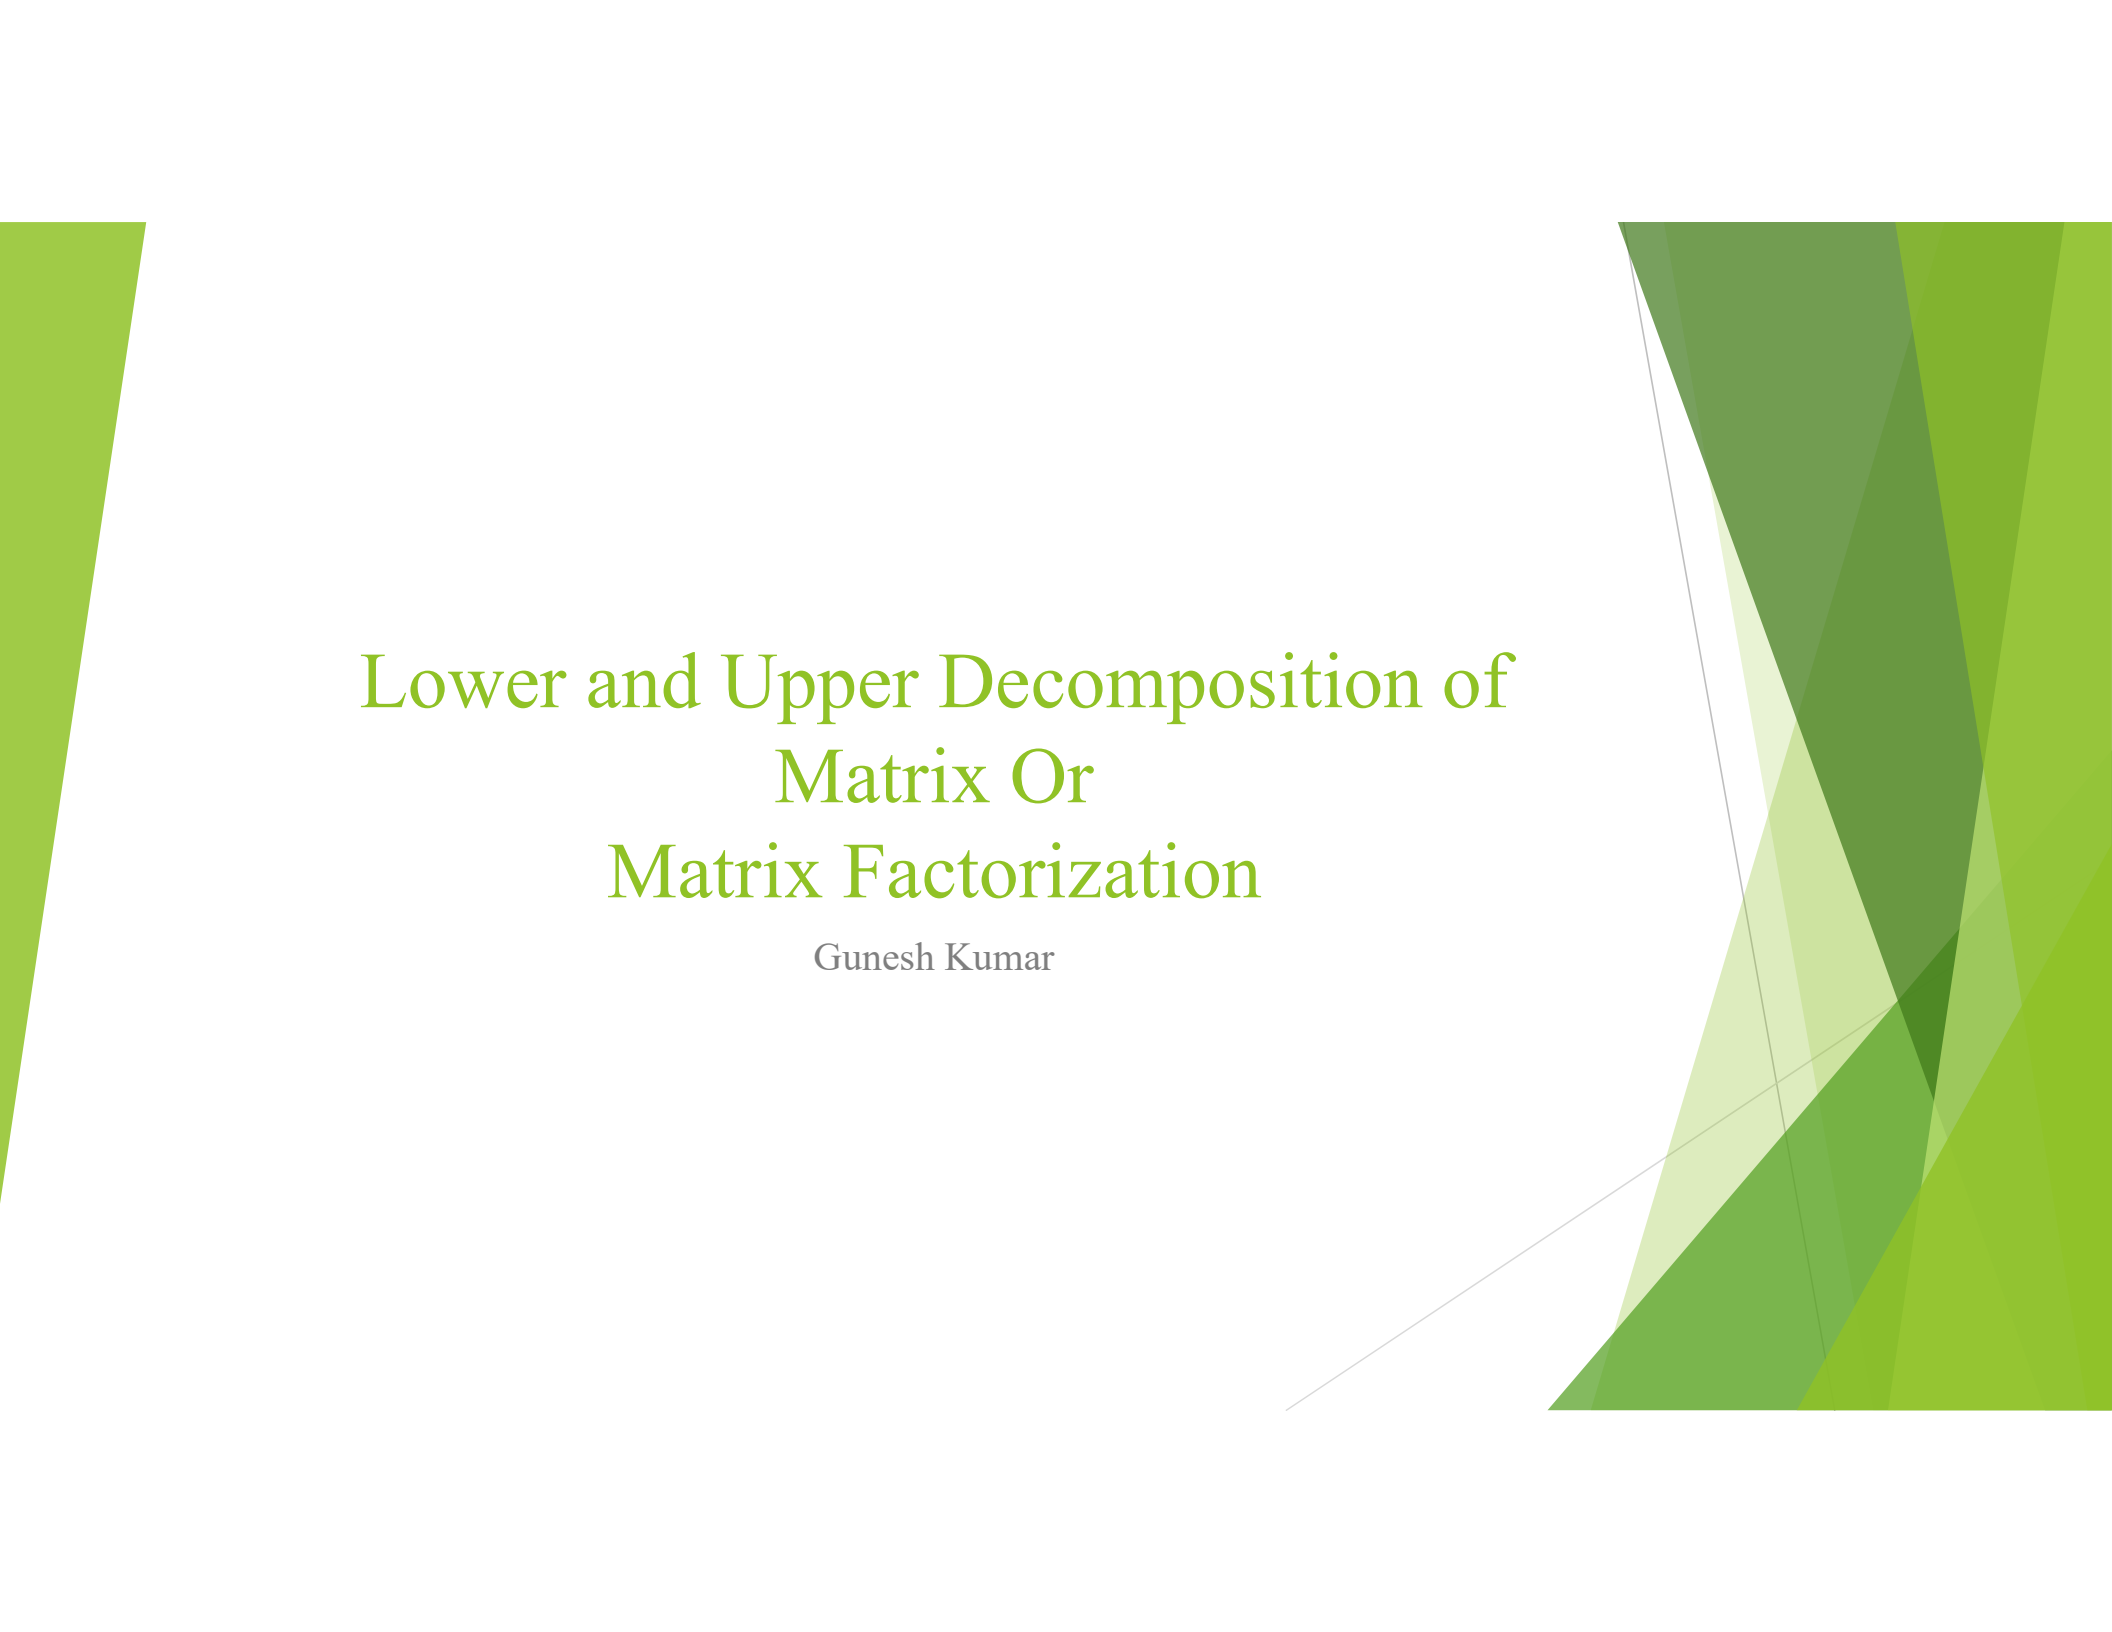

Lower and Upper Decomposition of Matrix Or Matrix Factorization

Gunesh Kumar

Lower and Upper Decomposition of Matrix

This method tells us, the decomposition of only square matrix. The decomposition stated that any square matrix is broken as product of two matrices.

$$A = LU$$

Where A is any square matrix, L is lower triangular matrix, U is upper triangular matrix.

The matrix factorization consists three method.

- (1) Crout's Method
- (2) Doolittle's Method
- (3) Choleskey's Method

How to work the LU Decomposition

Let the system

$$AX = b \rightarrow (i)$$

We decompose A by $A = LU$ put in eq. (i)

$$LUX = b \rightarrow (ii)$$

Suppose $UX = Y \rightarrow (iii)$

Put (iii) in (ii)

$$LY = b \rightarrow (iv)$$

From (iii) we get values of Y and put in (iv), to get the unknown value of X .

(1) Crout's Method

This method decomposes a square matrix into product of two matrices. That composition $A = LU$, where A is square matrix, L is lower triangular matrix, U is the upper triangular matrix.

Mathematically,

$$\begin{bmatrix} a_{11} & a_{12} & a_{13} \\ a_{21} & a_{22} & a_{23} \\ a_{31} & a_{32} & a_{33} \end{bmatrix} = \begin{bmatrix} l_{11} & 0 & 0 \\ l_{21} & l_{22} & 0 \\ l_{31} & l_{32} & l_{33} \end{bmatrix} \begin{bmatrix} 1 & u_{12} & u_{13} \\ 0 & 1 & u_{23} \\ 0 & 0 & 1 \end{bmatrix}$$
$$= \begin{bmatrix} l_{11} & l_{11}u_{12} & l_{11}u_{13} \\ l_{21} & l_{21}u_{12} + l_{22} & l_{21}u_{13} + l_{22}u_{23} \\ l_{31} & l_{31}u_{12} + l_{32} & l_{31}u_{13} + l_{32}u_{23} + l_{33} \end{bmatrix}$$

Note: In Crout's method, upper diagonal matrix has ones diagonally.

(2) Doolittle's Method

This method decomposes a square matrix into the product of two matrices, $A = LU$.

Mathematically

$$\begin{bmatrix} a_{11} & a_{12} & a_{13} \\ a_{21} & a_{22} & a_{23} \\ a_{31} & a_{32} & a_{33} \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 \\ l_{21} & 1 & 0 \\ l_{31} & l_{32} & 1 \end{bmatrix} \begin{bmatrix} u_{11} & u_{12} & u_{13} \\ 0 & u_{22} & u_{23} \\ 0 & 0 & u_{33} \end{bmatrix}$$
$$= \begin{bmatrix} u_{11} & u_{12} & u_{13} \\ l_{21}u_{11} & l_{21}u_{12} + u_{22} & l_{21}u_{13} + u_{23} \\ l_{31}u_{11} & l_{31}u_{12} + l_{32}u_{22} & l_{31}u_{13} + l_{32}u_{23} + u_{33} \end{bmatrix}$$

Note: In Doolittle's method, lower diagonal matrix has ones diagonally.

(3) Choleskey's Method

This method decomposes a square matrix into the product of two matrices, $A = LU$. If main diagonal in L and U are not taken unity is called Choleskey's Method.

Mathematically,

$$\begin{bmatrix} a_{11} & a_{12} & a_{13} \\ a_{21} & a_{22} & a_{23} \\ a_{31} & a_{32} & a_{33} \end{bmatrix} = \begin{bmatrix} l_{11} & 0 & 0 \\ l_{21} & l_{22} & 0 \\ l_{31} & l_{32} & l_{33} \end{bmatrix} \begin{bmatrix} u_{11} & u_{12} & u_{13} \\ 0 & u_{22} & u_{23} \\ 0 & 0 & u_{33} \end{bmatrix}$$
$$= \begin{bmatrix} l_{11}u_{11} & l_{11}u_{12} & l_{11}u_{13} \\ l_{21}u_{11} & l_{21}u_{12} + l_{22}u_{22} & l_{21}u_{13} + l_{22}u_{23} \\ l_{31}u_{11} & l_{31}u_{12} + l_{32}u_{22} & l_{31}u_{13} + l_{32}u_{23} + l_{33}u_{33} \end{bmatrix}$$

Q#1: Solve the system of linear equations using Crout's Method.

$$2x_1 - 2x_2 + 4x_3 = 0$$

$$x_1 - 3x_2 + x_3 = -5$$


$$3x_1 + 7x_2 + 5x_3 = 7$$

Sol:

$$\begin{bmatrix} 2 & -2 & 4 \\ 1 & -3 & 1 \\ 3 & 7 & 5 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} = \begin{bmatrix} 0 \\ -5 \\ 7 \end{bmatrix}$$

$$A = \begin{bmatrix} 2 & -2 & 4 \\ 1 & -3 & 1 \\ 3 & 7 & 5 \end{bmatrix}$$
$$A = LU$$

$$\begin{bmatrix} 2 & -2 & 4 \\ 1 & -3 & 1 \\ 3 & 7 & 5 \end{bmatrix} = \begin{bmatrix} l_{11} & l_{11}u_{12} & l_{11}u_{13} \\ l_{21} & l_{21}u_{12} + l_{22} & l_{21}u_{13} + l_{22}u_{23} \\ l_{31} & l_{31}u_{12} + l_{32} & l_{31}u_{13} + l_{32}u_{23} + l_{33} \end{bmatrix}$$

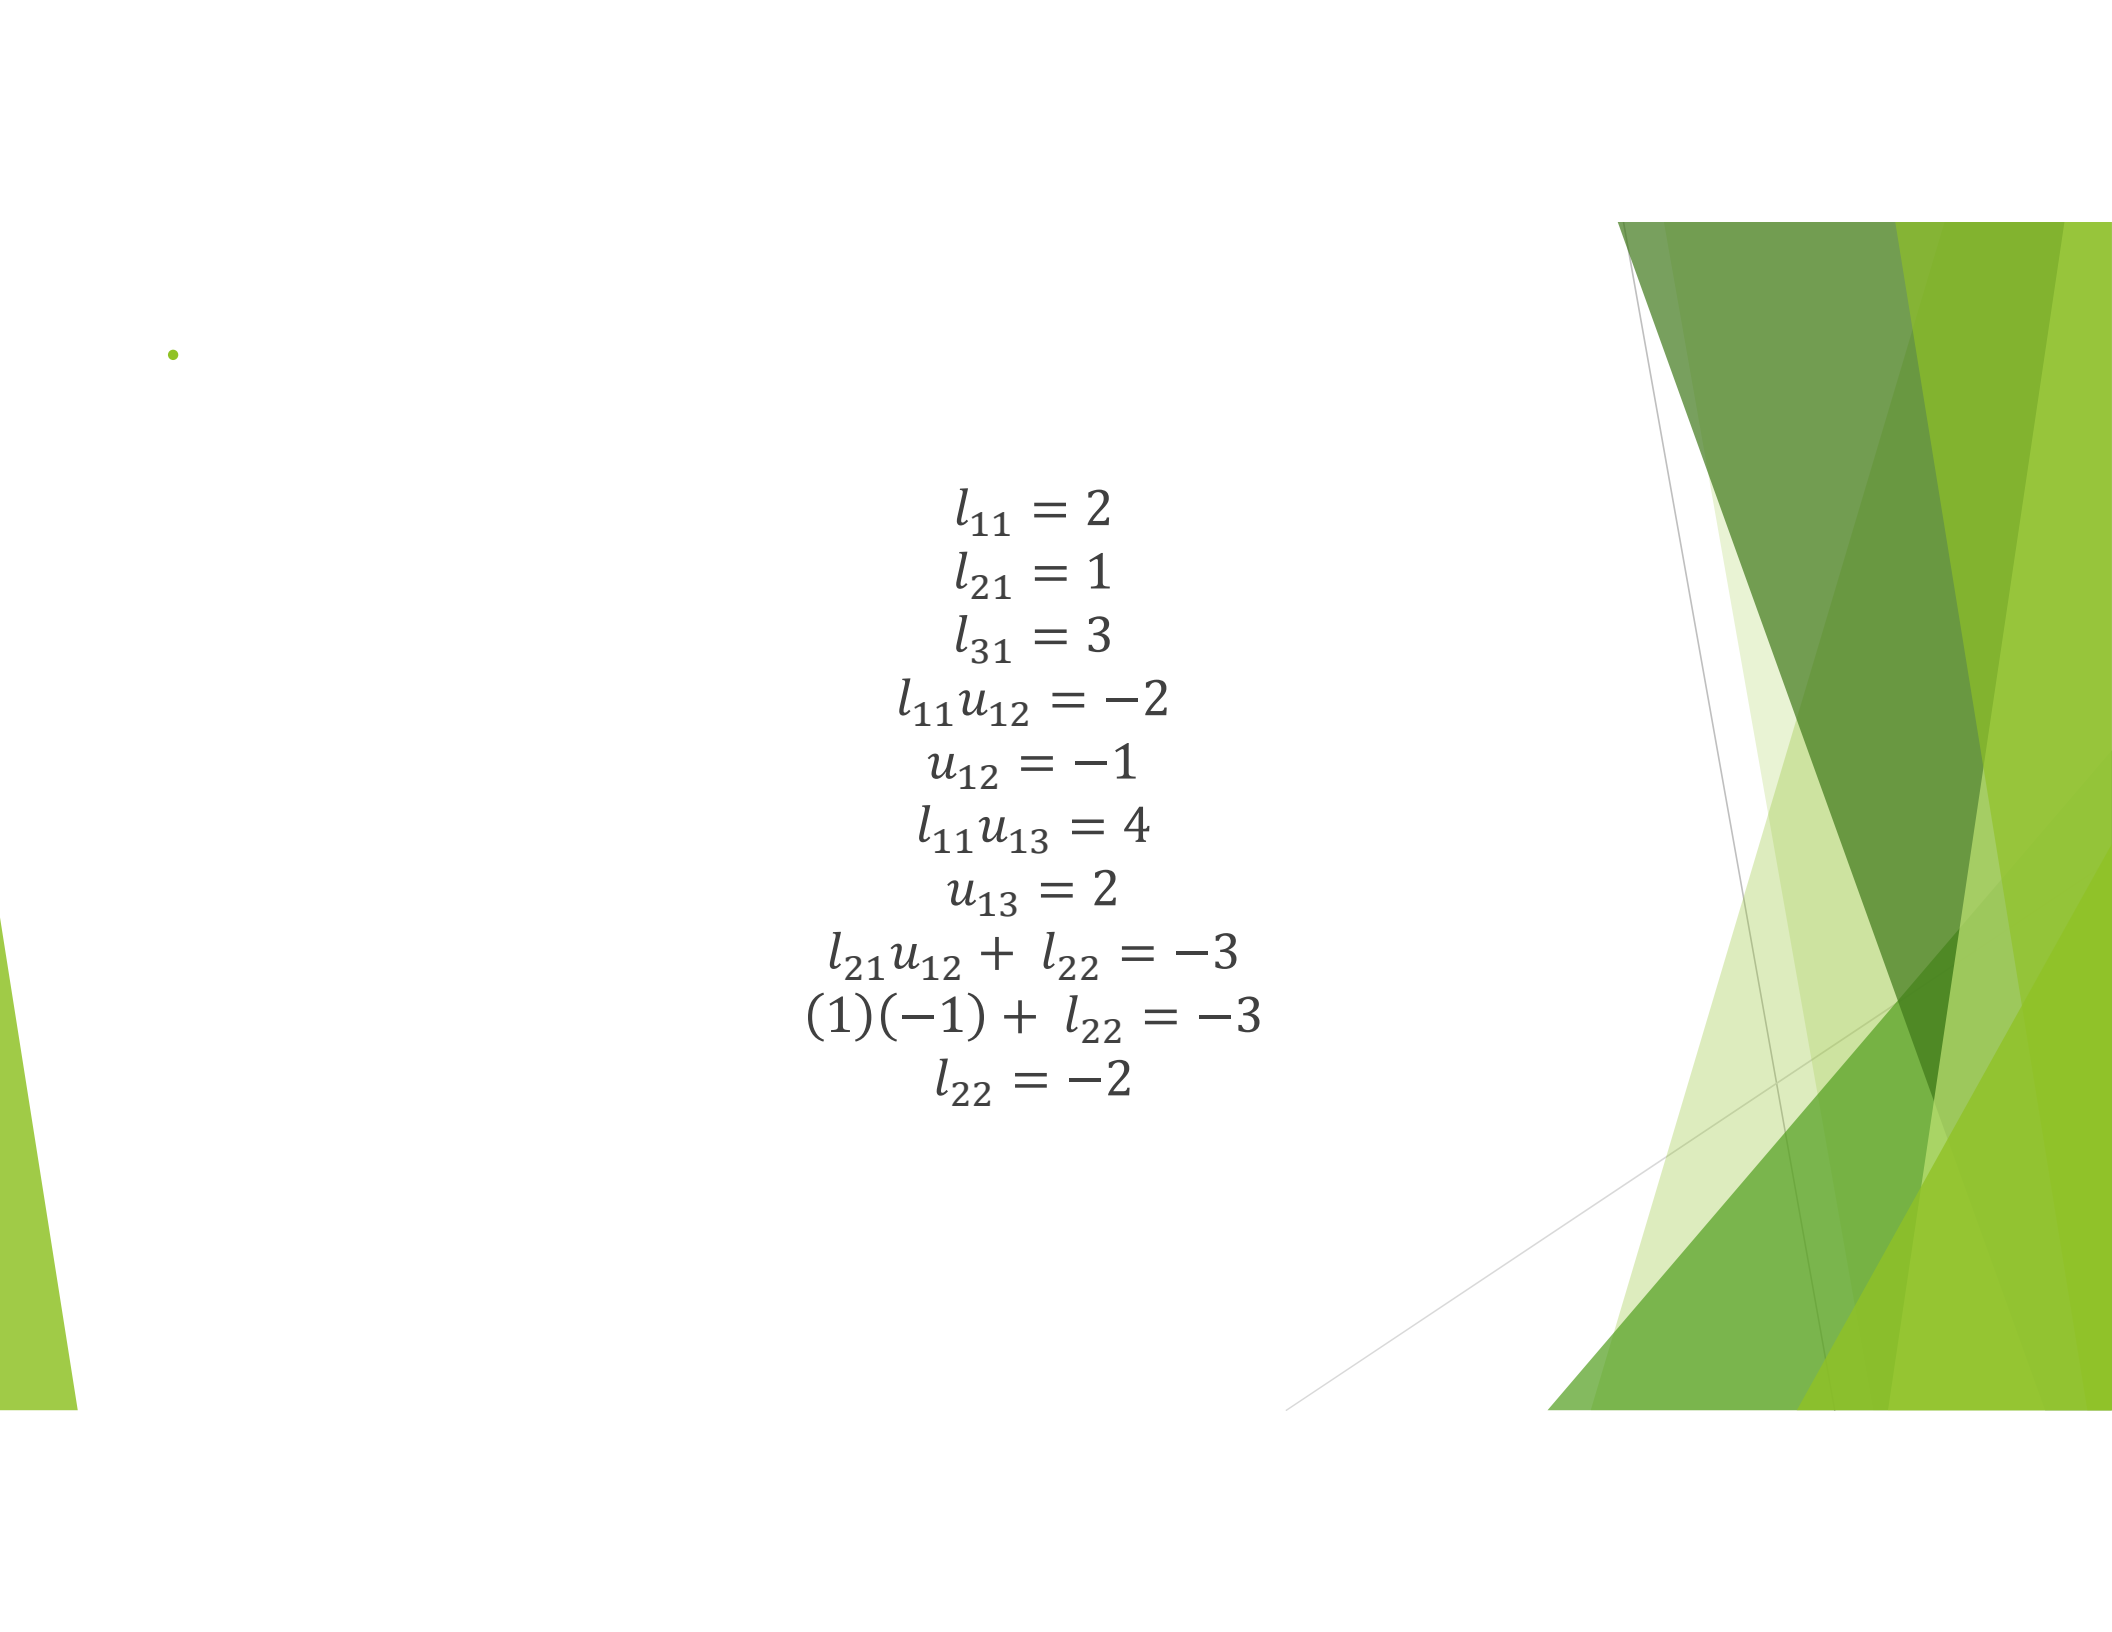
$$l_{11} = 2$$

$$l_{21} = 1$$

$$l_{31} = 3$$

$$l_{11}u_{12} = -2$$

$$u_{12} = -1$$

$$l_{11}u_{13} = 4$$

$$u_{13} = 2$$

$$l_{21}u_{12} + l_{22} = -3$$

$$(1)(-1) + l_{22} = -3$$

$$l_{22} = -2$$


$$l_{21}u_{13} + l_{22}u_{23} = 1$$
$$(1)(2) + (-2)u_{23} = 1$$

$$u_{23} = \frac{1}{2}$$

$$l_{31}u_{12} + l_{32} = 7$$
$$(3)(-1) + l_{32} = 7$$

$$l_{32} = 10$$

$$l_{31}u_{13} + l_{32}u_{23} + l_{33} = 5$$
$$(3)(2) + (10)\left(\frac{1}{2}\right) + l_{33} = 5$$

$$l_{33} = -6$$

Here $L = \begin{bmatrix} 2 & 0 & 0 \\ 1 & -2 & 0 \\ 3 & 10 & -6 \end{bmatrix}$ and $U = \begin{bmatrix} 1 & -1 & 2 \\ 0 & 1 & \frac{1}{2} \\ 0 & 0 & 1 \end{bmatrix}$

$$AX = LUX = b$$

So $UX = Y$ then $LY = b$

$$LY = b$$

$$\begin{bmatrix} 2 & 0 & 0 \\ 1 & -2 & 0 \\ 3 & 10 & -6 \end{bmatrix} \begin{bmatrix} y_1 \\ y_2 \\ y_3 \end{bmatrix} = \begin{bmatrix} 0 \\ -5 \\ 7 \end{bmatrix}$$

$$2y_1 = 0 \rightarrow (i)$$

$$y_1 - 2y_2 = -5 \rightarrow (ii)$$

$$3y_1 + 10y_2 - 6y_3 = 7 \rightarrow (iii)$$

From (i) $y_1 = 0$ put in (ii)

$$0 - 2y_2 = -5 \Rightarrow y_2 = \frac{5}{2}$$

Put $y_1 = 0$ and $y_2 = \frac{5}{2}$ in (iii)

$$3(0) + 10\left(\frac{5}{2}\right) - 6y_3 = 7$$

$$-6y_3 = -18$$

$$y_3 = 3$$

Now $UX = Y$

•

$$\begin{bmatrix} 1 & -1 & 2 \\ 0 & 1 & \frac{1}{2} \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} = \begin{bmatrix} 0 \\ \frac{5}{2} \\ 3 \end{bmatrix}$$
$$x_1 - x_2 + 2x_3 = 0 \rightarrow (iv)$$
$$x_2 + \frac{1}{2}x_3 = \frac{5}{2} \rightarrow (v)$$
$$x_3 = 3 \rightarrow (vi)$$

Put $x_3 = 3$ in (v)

$$x_2 + \frac{1}{2}(3) = \frac{5}{2}$$
$$x_2 = \frac{5}{2} - \frac{3}{2} = \frac{2}{2} = 1$$

Put $x_3 = 3$ and $x_2 = 1$ in (iv)

$$x_1 - 1 + 2(3) = 0$$
$$x_1 = -5$$

The solution set is $X = (-5, 1, 3)$.

Q#2: Solve the system of linear equations using Crout's Method.

$$\begin{aligned}4x_1 + 3x_2 - 5x_3 &= 2 \\ -4x_1 - 5x_2 + 7x_3 &= -4 \\ 8x_1 + 6x_2 - 8x_3 &= 6\end{aligned}$$

Sol:

$$\begin{bmatrix} 4 & 3 & -5 \\ -4 & -5 & 7 \\ 8 & 6 & -8 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} = \begin{bmatrix} 2 \\ -4 \\ 6 \end{bmatrix}$$

$$A = \begin{bmatrix} 4 & 3 & -5 \\ -4 & -5 & 7 \\ 8 & 6 & -8 \end{bmatrix}$$
$$A = LU$$

$$\begin{bmatrix} 4 & 3 & -5 \\ -4 & -5 & 7 \\ 8 & 6 & -8 \end{bmatrix} = \begin{bmatrix} l_{11} & l_{11}u_{12} & l_{11}u_{13} \\ l_{21} & l_{21}u_{12} + l_{22} & l_{21}u_{13} + l_{22}u_{23} \\ l_{31} & l_{31}u_{12} + l_{32} & l_{31}u_{13} + l_{32}u_{23} + l_{33} \end{bmatrix}$$

•

$$l_{11} = 4$$

$$l_{21} = -4$$

$$l_{31} = 8$$

$$l_{11}u_{12} = 3$$

$$u_{12} = \frac{3}{4}$$

$$l_{11}u_{13} = -5$$

$$u_{13} = -\frac{5}{4}$$

$$l_{21}u_{12} + l_{22} = -5$$

$$(-4)\left(\frac{3}{4}\right) + l_{22} = -5$$

$$l_{22} = -2$$

$$l_{21}u_{13} + l_{22}u_{23} = 7$$
$$(-4)\left(-\frac{5}{4}\right) + (-2)u_{23} = 7$$

$$u_{23} = -1$$

$$l_{31}u_{12} + l_{32} = 6$$

$$(8)\left(\frac{3}{4}\right) + l_{32} = 6$$

$$l_{32} = 0$$

$$l_{31}u_{13} + l_{32}u_{23} + l_{33} = -8$$

$$(8)\left(-\frac{5}{4}\right) + (0)(-1) + l_{33} = -8$$

$$l_{33} = 2$$

Here $L = \begin{bmatrix} 1 & 0 & 0 \\ -4 & -2 & 0 \\ 8 & 0 & 2 \end{bmatrix}$ and $U = \begin{bmatrix} 1 & \frac{1}{4} & -\frac{1}{4} \\ 0 & 1 & -1 \\ 0 & 0 & 1 \end{bmatrix}$

$$AX = b$$

$$LUX = b$$

So $UX = Y$ then $LY = b$

$$LY = b$$

$$\begin{bmatrix} 4 & 0 & 0 \\ -4 & -2 & 0 \\ 8 & 0 & 2 \end{bmatrix} \begin{bmatrix} y_1 \\ y_2 \\ y_3 \end{bmatrix} = \begin{bmatrix} 2 \\ -4 \\ 6 \end{bmatrix}$$

$$4y_1 = 2 \rightarrow (i)$$

$$-4y_1 - 2y_2 = -4 \rightarrow (ii)$$

$$8y_1 + 2y_3 = 6 \rightarrow (iii)$$

From (i) $y_1 = \frac{1}{2}$ put in (ii)

$$-4\left(\frac{1}{2}\right) - 2y_2 = -4 \Rightarrow y_2 = 1$$

Put $y_1 = \frac{1}{2}$ and $y_2 = 1$ in (iii)

$$8\left(\frac{1}{2}\right) + 2y_3 = 6$$

$$2y_3 = 2$$

$$y_3 = 1$$

$$Y = \begin{bmatrix} \frac{1}{2} \\ 1 \\ 1 \end{bmatrix}$$

Now $UX = Y$

•

$$\begin{bmatrix} 1 & \frac{3}{4} & -\frac{5}{4} \\ 0 & 1 & -1 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} = \begin{bmatrix} \frac{1}{2} \\ 1 \\ 1 \end{bmatrix}$$
$$x_1 + \frac{3}{4}x_2 - \frac{5}{4}x_3 = \frac{1}{2} \rightarrow (iv)$$
$$x_2 - x_3 = 1 \rightarrow (v)$$
$$x_3 = 1 \rightarrow (vi)$$

Put $x_3 = 1$ in (v)

$$x_2 - (1) = 1$$
$$x_2 = 2$$

Put $x_3 = 1$ and $x_2 = 2$ in (iv)

$$x_1 + \frac{3}{4}(2) - \frac{5}{4}(1) = \frac{1}{2}$$
$$x_1 = \frac{1}{4}$$

The solution set is $X = \left(\frac{1}{4}, 2, 1\right)$.