

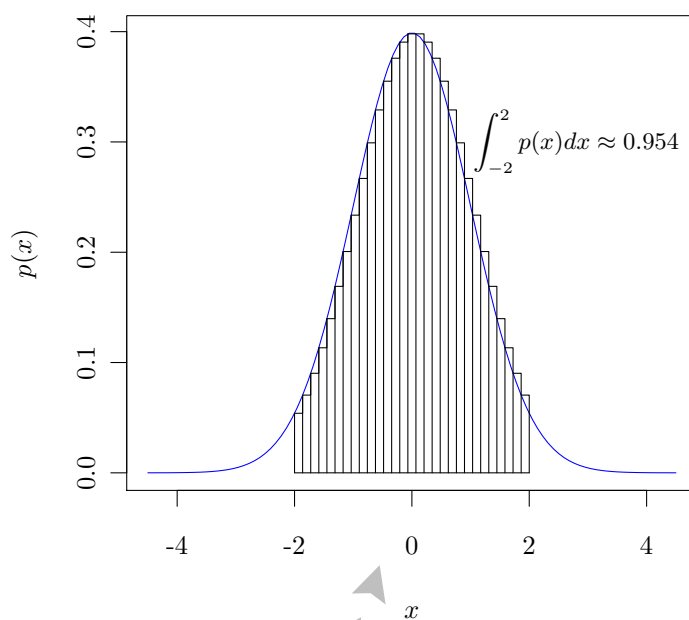


$$p(x) = \frac{1}{\sqrt{2\pi}} e^{-\frac{1}{2-x^2}}$$

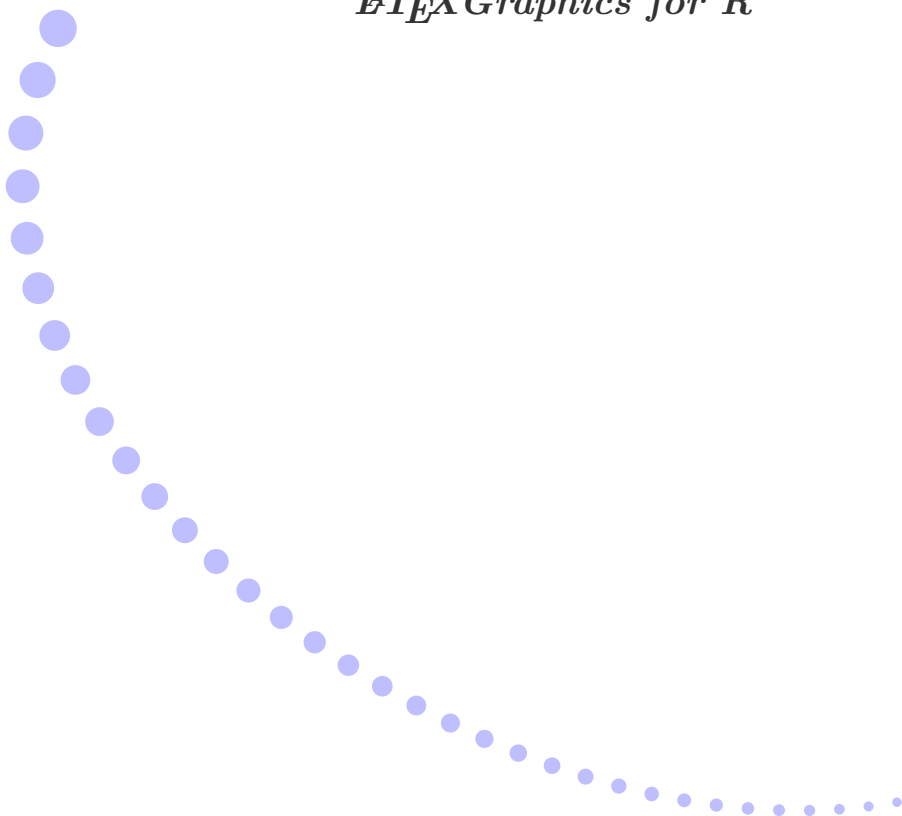

TikZ Device

LaTeX Graphics for R



The **tikzDevice** Package

<http://r-forge.r-project.org/projects/tikzdevice>

Charlie Sharpsteen and Cameron Bracken

Version 0.4-**Beta** July 21, 2009

Contents

1	Introduction	1
I	Usage and Examples	1
2	Loading the Package	1
2.1	R Options That Affect Package Behavior	2
3	The <code>tikz()</code> Function	4
3.1	Description	4
3.2	Usage	4
3.3	Examples	4
3.3.1	Default Mode	4
3.3.2	<code>bareBones</code> Mode	6
3.3.3	<code>standAlone</code> Mode	8
4	The <code>getLatexCharMetrics()</code> and <code>getLatexStrWidth()</code> Functions	9
4.1	Description	9
4.2	Usage	9
4.3	Examples	9
II	Installation Guide	11
5	Installing \LaTeX	11
6	Installing <i>TikZ</i>	11
III	Package Internals	12
7	Background	12
8	System Requirements	12
9	Character Metrics and String Width	12
9.1	Dictionaries	12
9.2	What the Heck are Acent, Decent and Width	12
10	On the Importance of Font and Style Consistency in Reports	12

Caveat Utilitor

This is a friendly reminder that the **tikzDevice** package is currently considered by its designers to be a **beta work**. This package has been released in the hopes that it will help users produce exceptional graphics, leading to an increase in the quality of reports and other materials using those graphics.

However, the package has not been tested in an extensive variety of situations beyond those that have been dreamed up by the designers. Therefore, it is very likely that this package will help produce exceptional crashes, leading to an increase in the quantity of swearing by R and users affected by those crashes.

We hope this package will improve with time and attain a level of usability and trustability at which it may be labeled “stable”. Until then the package, including this documentation, may undergo significant changes in form and function. During the beta period the actual implementation of the package may differ significantly from what is described in this documentation.

In fact, the documentation may differ significantly from what is described in the documentation.

Thanks for giving it a try!

-The tikzDevice Team

1 Introduction

The **tikzDevice** package allows for R graphics output in a native \LaTeX format. That is, the output of the `tikz()` function is plain-text files that can be interpreted using *TikZ*, a package for \LaTeX . These files can be directly included in \LaTeX documents by way of the `\input{}` statement. Allowing \LaTeX to handle both typesetting and figure composition bestows the resulting document with a clean, unified look as there are no discontinuities in the size and selection of fonts used in the output.

This document is divided into three parts. The first part describes the functions that the package makes available to the R user and provides examples of their capabilities. Besides the R environment, use of the *TikZ* device device requires the user to have a working \LaTeX compiler along with an installed version of the *TikZ* package. The second part of this documentation offers suggestions on how to get these tools working properly.

The third part of the documentation is intended for those who are curious as to the details of how this package has been implemented. It attempts to explain how the *TikZ* package does the things that it does and why it chooses to do them that way. The authors have attempted to write this part of the documentation in a way that is accessible to users as well as developers. This has been done in the hope that this project may serve as a case study in creating an R graphics device. This part of the documentation may also help those considering undertaking the transition from casual package-building to full-on hacking of the R internals.

Part I

Usage and Examples

2 Loading the Package

The functions in the **tikzDevice** package are made accessible in the R environment by using either the `library()` or `require()` functions like so:

```
require(tikzDevice)
```

Upon loading, the package will search for a usable \LaTeX compiler. Access to \LaTeX is essential for the device to produce correct output as the compiler is queried for font metrics several times during device output. For more information on why communication between the device and \LaTeX is necessary, see [Part III](#). If the search for a compiler is successful the package startup message should look similar to the following:

```
filehash: Simple key-value database (2.0-1 2008-12-19)
tikzDevice: A Device for R Graphics Output in PGF/TikZ Format (v0.3.5)
Checking for a LaTeX compiler...

pdfTeX 3.1415926-1.40.9-2.2 (Web2C 7.5.7)
kpathsea version 3.5.7
...

A working LaTeX compiler was found in:
    The R environment variable R_LATEXCMD

Global option tikzLatex set to:
    /usr/texbin/latex
```

If a working \LaTeX compiler cannot be found, the **tikzDevice** package will fail to load and a warning message will be displayed:

```
An appropriate LaTeX compiler could not be found.
Access to LaTeX is currently required in order for the
TikZ device to produce output.

The following places were tested for a valid LaTeX compiler:

    A pre-existing value of the global option tikzLatex
    The R environment variable R_LATEXCMD
    The R environment variable R_PDFLATEXCMD
    The global option latexcmd
    The PATH using the command latex
    The PATH using the command pdflatex
...

Error : .onLoad failed in 'loadNamespace' for 'tikzDevice'
Error: package/namespace load failed for 'tikzDevice'
```

In this case, **tikzDevice** has done its very best to locate a working compiler and came up empty. If you have a working \LaTeX compiler, the next section describes how to inform the **tikzDevice** package of its location. For suggestions on how to obtain a \LaTeX compiler, see [Part II](#).

2.1 R Options That Affect Package Behavior

The **tikzDevice** package is currently influenced by two global options that may be set in a **.Rprofile** file. The first is called **tikzLatex** and specifies the location of the \LaTeX compiler to be used by **tikzDevice**. Setting this option may help the package locate a missing compiler. This option may be set in **.Rprofile** as follows:

```
options( tikzLatex = '/path/to/latex/compiler' )
```

The second, and perhaps most important, global options that affects **tikzDevice** is the option **tikzMetricsDictionary**. When using the graphics device provided by **tikzDevice**, you may notice that R appears to “lag” or “hang” when commands such as **plot()** are executed. This is because the device must query the **L^AT_EX** compiler for string widths and font metrics. For a normal plot, this may happen dozens or hundreds of times- hence R becomes unresponsive for a while. The good news is that the **tikz()** code is designed to cache the results of these computations so they need only be performed once for each string or character. By default, these values are stored in a temporary cache file which is deleted when R is shut down. A location for a permanent cache file may be specified by setting the value of **tikzMetricsDictionary** in **.Rprofile**:

```
options( tikzMetricsDictionary = '/path/to/dictionary/location' )
```

A number of global options are provided by **tikzDevice**. These options allow for the use of custom **documentclass** declarations, **L^AT_EX** packages, and typesetting engines (e.g. **XeLaTeX**). The global options are:

tikzDocumentDeclaration The documentclass declaration

Default

```
1 options( tikzDocumentDeclaration = "\\documentclass{article}" )
```

tikzFooter The footer to be used only when **standAlone==TRUE**

Default

```
1 options( tikzFooterDefault = c( "\\end{document}" ) )
```

tikzLatex The default is searched for when the package is loaded, otherwise it can be set manually.

tikzLatexPackages These are the packages which are included when using the **standAlone** option as well as when font metric are calculated.

Default

```
1 options( tikzLatexPackagesDefault = c(
2   "\\usepackage{tikz}",
3   "\\usepackage[active,tightpage]{preview}",
4   "\\PreviewEnvironment{pgfpicture}",
5   "\\setlength\\PreviewBorder{0pt}" ) )
```

tikzMetricPackages A character vector. These are the packages which are additionally loaded when doing font metric calculations

Default

```
1 options( tikzMetricPackages = c(
2   "\\usepackage[utf8]{inputenc}",
3   "\\usepackage[T1]{fontenc}",
4   "\\usetikzlibrary{calc}" ) )
```

tikzMetricsDictionary The path to the global **TikZ** font metric dictionary, we recommend setting this your **.Rprofile** file

All of the options can be set by using **options(<option> = <value>)**.

For convenience the function **setTikzDefaults()** is provided which sets all the global options back to their original values.

The proper placement of a `.Rprofile` file is explained in `?Startup`. For the details of why calling the \LaTeX compiler is necessary, see [Part III](#).

3 The `tikz()` Function

3.1 Description

The `tikz()` function provides most of the functionality of the **`tikzDevice`** package. This function is responsible for creating new R graphics devices that translate the output of graphics functions to the *TikZ* format. The device supports many levels of output that range from stand-alone \LaTeX documents that may be compiled directly to code chunks that must be incorporated into existing \LaTeX documents using the `\include{}` function.

3.2 Usage

The `tikz()` function opens a new graphics device and may be called with the following arguments:

```
tikz(file = "Rplots.tex", width = 7, height = 7,  
      bg="white", fg="black", standAlone = FALSE, bareBones = FALSE )
```

file A character string indicating the desired path to the output file. It is recommended, but not required, that the filename end in `.tex`.

width The width of the output figure, in **inches**.

height The height of the output figure, in **inches**.

bg The starting background color for the plot.

fg The starting foreground color for the plot.

standAlone A logical value indicating whether the resulting file should be suitable for direct processing by \LaTeX .

bareBones A logical value indicating whether the resulting *TikZ* code produced without being placed within a \LaTeX `tikzpicture` environment.

The first five options should be familiar to anyone who has used the default graphics devices shipped with R. The options **file**, **width**, **height**, **bg** and **fg** represent the standard graphics parameters currently implemented by **`tikzDevice`**. The last two options, **standAlone** and **bareBones**, are specific to the `tikz()` graphics device and affect the structure the output file. Using these options `tikz()` supports three modes of output:

- Graphics production as complete \LaTeX files suitable for compilation.
- Graphics production as complete figures suitable for inclusion in \LaTeX files.
- Graphics production as raw figure code suitable for inclusion in an enclosing `tikzpicture` environment in a \LaTeX file.

The next section provides examples of how to use each type of output.

3.3 Examples

3.3.1 Default Mode

The most common use of the `tikz()` function is to produce a plot that will be included in another \LaTeX document, such as a report. Running the following example in `langR` will produce a very simple graphic using the `plot()` function.

```
1 require(tikzDevice)
2 tikz("simpleEx.tex", width = 3.5, height = 3.5)
3 plot(1, main = "Hello World!")
4 dev.off()
```

A simple \LaTeX document is then required to display the output of the basic `tikz()` command. This document must include the `TikZ` as one of the packages that it loads. The `TikZ` package provides several optional libraries that provide additional functionality, however none of these libraries are currently required to use the output of `tikz()`. Inside the \LaTeX document, the contents of the file `simpleEx.tex` are imported using the `\include{}` command.

Example \LaTeX Document

```
1 \documentclass{article}
3 % All LaTeX documents including
4 % tikz() output must use this
5 % package!
6 \usepackage{tikz}
8 \begin{document}
9   \begin{figure}[!h]
10     \centering
12     % The output from tikz()
13     % is imported here.
14     \input{simpleEx.tex}
16     \caption{Simple Example}
17   \end{figure}
18 \end{document}
```

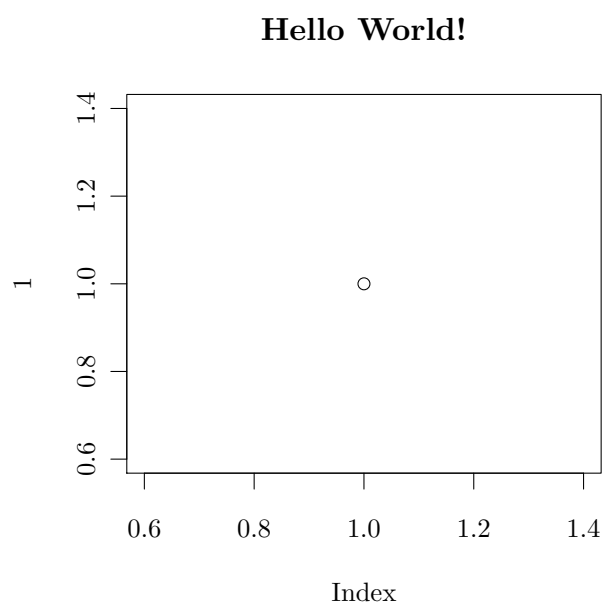


Figure 1: Example of simple `tikz()` usage.

One of the most exciting aspects of the `tikz()` function is that it allows the inclusion of arbitrary \LaTeX code in plotting commands. An important issue to note is that many \LaTeX commands are prefixed by the backslash, `\`, character. This character has a special meaning as an escape character in many computing applications, including R. Therefore, it is necessary to place two backslashes, `\\`, in the input to R commands in order to cause one to appear in the output. The next example demonstrates how to use \LaTeX commands in plot annotation.


```

1 require(tikzDevice)
2 tikz('latexEx.tex',
3     width=3.5,height=3.5)
4 x ← rnorm(5)
5 y ← x + rnorm(5,sd=0.25)
6 model ← lm(y ~ x)
7 rsq ← summary( model )$r.squared
8 rsq ← signif(rsq,4)
9 plot(x,y,main='Hello \LaTeX!')
10 abline(model,col='red')
11 mtext(paste("Linear model:  $R^2$ =",
12     rsq,"$"),line=0.5)
13 dev.off()

```

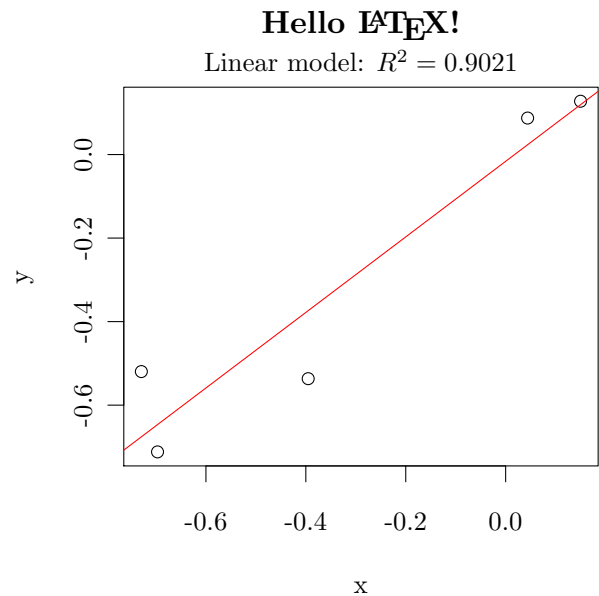


Figure 2: A more complicated example of `tikz()` usage incorporating natively rendered \LaTeX commands.

3.3.2 bareBones Mode

The `barBones` is designed to facilitate inclusion of `tikz()` output as part of a larger graphic. Normally `tikz()` packages the commands it produces as a self-contained figure. This is done by placing the `\begin{tikzpicture}` and `\end{tikzpicture}` commands at the beginning and end of the output file. When `bareBones` is invoked, the `tikzpicture` environment is omitted which allows the output to be embedded inside a `tikzpicture` of the users own construction.

```

1 require(tikzDevice)
2 tikz('bareBonesExample.tex',width=4,height=4,bareBones=T)
3 x ← c(0,cumsum(rnorm(25)))
4 y ← c(0,cumsum(rnorm(25)))
5 plot(x, y, type="l")
6 title("A Brownian Motion")
7 dev.off()

```

The resulting code may then be used inside a `tikzpicture` environment using the `\include{}` command. The included code must be wrapped in a `scope` environment that contains the options `x=1pt` and `y=1pt`. This informs TikZ of the units being used in the coordinates of the plot output. The options `xshift` and `yshift` may also be applied to the `scope` in order to position the plot. The following code demonstrates how to embed `bareBones` output in a `tikzpicture`

Example of a TikZ environment with included `bareBones` output

```
1 \begin{tikzpicture}
3   \draw[clip] (-0.25,-0.25) rectangle (4.25in,4.25in);
5   \begin{scope}[x=1pt,y=1pt,yshift=0.25in]
6     \input{figs/bareBonesExample}
7   \end{scope}
9   \node[anchor=south west,draw,rounded corners] (start) at (0,0)
10    {TikZ can draw Brownian Motions as Well!};
12   \coordinate (current point) at (start.east);
13   \coordinate (old velocity) at (0,-5);
14   \coordinate (new velocity) at (rand,rand);
16   \foreach \i in {25,26,...,50} {
18     \draw[blue!\i,ultra thick,line cap=round,x=1cm,y=1cm]
19       (current point) .. controls ++([scale=-1]old velocity)
20       and ++(new velocity) ..
21       ++(rand,rand) coordinate(current point);
23     \coordinate(old velocity) at (new velocity);
24     \coordinate(new velocity) at (rand,rand);
26   }
28 \end{tikzpicture}
```

this is the footer.

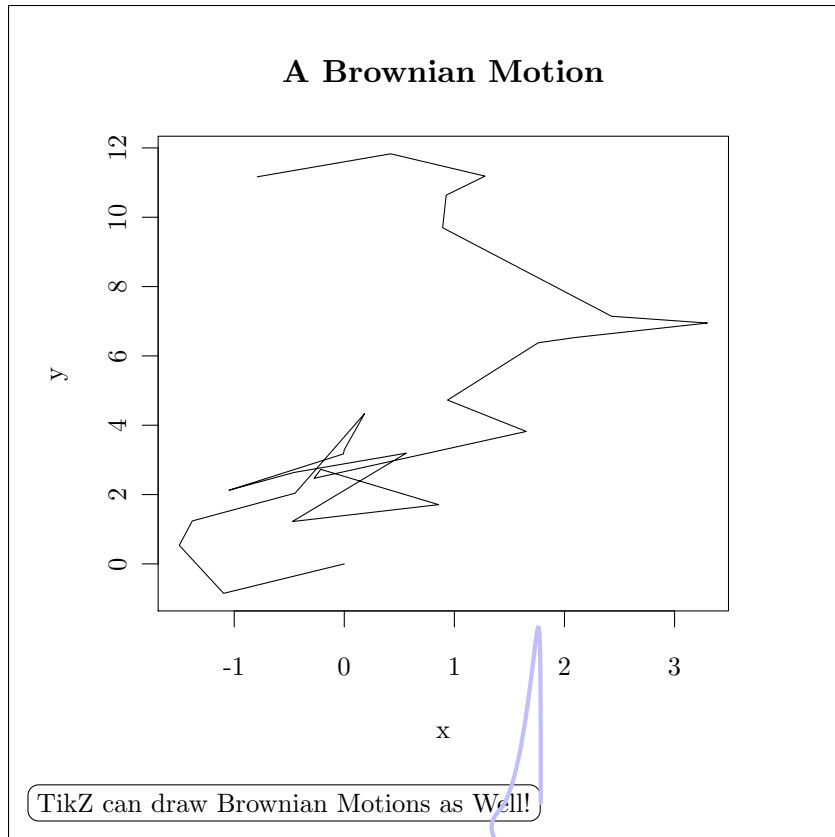


Figure 3: A TikZ drawing with embedded output from `tikz(bareBones=T)`.

3.3.3 standAlone Mode

When the `standAlone` option is passed to `tikz()`, the resulting `.tex` file will be a complete \LaTeX document designed to be compiled on its own. This means that in addition to `\begin{tikzpicture}` and `\end{tikzpicture}` the file will also contain `\begin{document}`, `\end{document}` and a \LaTeX preamble. The `preview` package is also used in files produced by `standAlone` and is used to crop the pages in the resulting document to the bounding boxes of the figures that it contains. Stand-alone output may be produced in the following manner:

```

1 require(tikzDevice)
2 tikz('standAloneExample.tex',standAlone=T)
3 plot(sin,-pi,2*pi,main="A Stand Alone TikZ Plot")
4 dev.off()

```

Note that files produced using the `standAlone` option should not be included in \LaTeX documents using the `\input{}` command! Use `\includegraphics{}` or load the `pdfpages` package and use `\includepdf{}`.

4 The getLatexCharMetrics() and getLatexStrWidth() Functions

4.1 Description

These two functions may be used to retrieve font metrics through the interface provided by the **tikzDevice** package. Cached values of the metrics are returned if they have been calculated by the **tikzDevice** before. If no cached values exist, the L^AT_EX compiler will be invoked to generate them.

4.2 Usage

The font metric functions are called as follows:

```
getLatexStrWidth( texString, cex = 1, face= 1)
getLatexCharMetrics( charCode, cex = 1, face = 1 )
```

texString A string for which to compute the width. L^AT_EX commands may be used in the string, however all backslashes will need to be doubled.

charCode An integer between 32 and 126 which indicates a printable character in the ASCII symbol table using the T1 font encoding.

cex The character expansion factor to be used when determining metrics.

face An integer specifying the R font face to use during metric calculations. The accepted values are as follows:

- 1: Text should be set in normal font face.
- 2: Text should be set in **bold font face**.
- 3: Text should be set in *italic font face*.
- 4: Text should be set in ***bold italic font face***.
- 5: Text should be interpreted as **plotmath** symbol characters. Requests for font face 5 are currently ignored.

4.3 Examples

The `getLatexStrWidth()` function may be used to calculate the width of strings containing fairly arbitrary L^AT_EX commands. For example, consider the following calculations:

```
1 getLatexStrWidth("The symbol: alpha")
2 [1] 82.5354
4 getLatexStrWidth("The symbol: $\alpha$")
5 [1] 65.08636
```

For the first calculation, the word “alpha” was interpreted as just a word and the widths of the characters ‘a’, ‘l’, ‘p’, ‘h’ and ‘a’ were included in the string width. For the second string, `\alpha` was interpreted as a mathematical symbol and only the width of the symbol ‘ α ’ was included in the string width.

The `getLatexCharWidth()` function must be passed an integer corresponding to an ASCII character code and returns three values:

- The **ascent** of the character- the distance between the baseline and the highest point of the character's glyph.
- The **descent** of the character- the distance between the baseline and the lowest point of the character's glyph.
- The width of the character.

The character 'y' has an ASCII symbol code of 121 and possesses a tail that descends below the text line. Therefore a non-zero value will be returned for the descent of 'y'. The character 'x', ASCII code 120, has no descenders, so its descent will be returned as zero.

```

1  # Get metrics for 'y'
2  getLatexCharMetrics(121)
3  [1] 4.30450 1.94397 5.27649

5  # Get metrics for 'x' – the second value is the descent
6  # and should be zero or very close to zero.
7  getLatexCharMetrics(120)
8  [1] 4.30450 0.00000 5.27649

```

Note that characters, along with numbers outside the range of [32-126], may not be passed to the `getLatexCharMetrics()` function. If for some reason a floating point number is passed, it will be floored through conversion by `as.integer()`.

```

1  getLatexCharMetrics('y')
2  NULL

4  getLatexCharMetrics(20)
5  NULL

7  # Will return metrics for 'y'
8  getLatexCharMetrics(121.99)
9  [1] 4.30450 1.94397 5.27649

```

Part II

Installation Guide

5 Installing \LaTeX

6 Installing *TikZ*

Part III

Package Internals

7 Background

About TikZ, the PicTeX device and the story of two fortran programmers with a dream.

8 System Requirements

9 Character Metrics and String Width

9.1 Dictionaries

9.2 What the Heck are Acent, Decent and Width

10 On the Importance of Font and Style Consistency in Reports

11 The pgfSweave Package and Automatic Report Generation