SECTION 2 · SUBSECTION 2.1
SOUND RETRIEVAL AND AUDITION SUBSYSTEM

2.1.1 INTRODUCTION.

WaveSearch locates sound effects through a local catalog while original audio remains in its library folders. The native macOS station searches, auditions and supplies media references to an editor (figure 2.1-1).

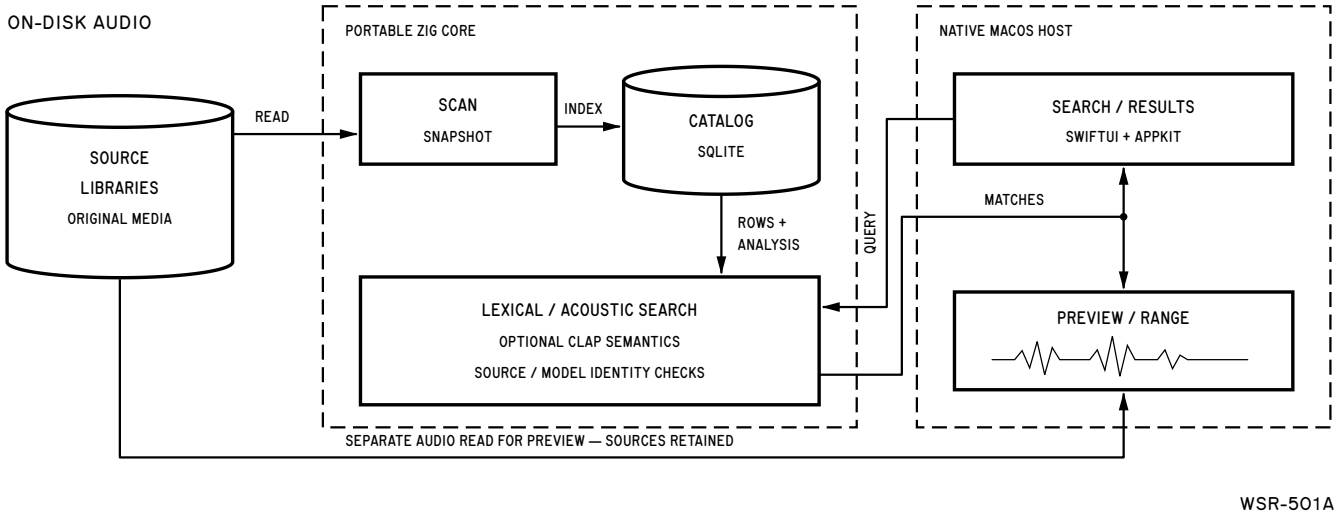


Figure 2.1-1. Catalog and Original-Media Paths

2.1.2 FUNCTIONAL DESCRIPTION.

A scan publishes a searchable snapshot. Lexical search uses filenames and metadata; acoustic search uses an example. Optional CLAP adds semantic matches. Selection prepares preview audio off the interface thread. Background refinement yields to foreground work.

2.1.2.1 Media Reference Rule.

"Keep the files in place" supplies the full original URL, even for a selected range. "Copy files to Exports" copies whole files or renders ranges (figure 2.1-2).

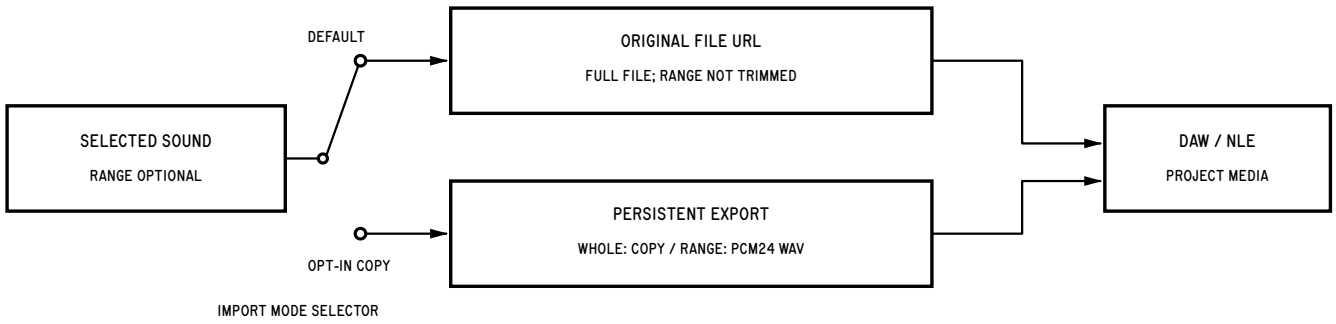


Figure 2.1-2. Editor Import Routing

2.1.3 PERFORMANCE AND DESIGN DATA.

Table 2.1-1. Operating Limits

Parameter	Value
macOS minimum	14.0
Preview rate	0.5×–2×
Preview pitch range*	−12 to +12 semitones
Duration "=" tolerance	±250 ms
Host-decoded example duration	≤60 s
Host-decoded example PCM	≤64 MiB, Float32
Copied partial selection	PCM24 WAV

* Pitch requires a supported native processing path.

CAUTION

Editor projects may reference originals or Exports. Referenced media must remain available.

SOUND ACQUISITION	OPR
1 LIBRARY - add folder	
2 SEARCH - enter terms	
3 RESULT - select sound	
4 SPACE - audition; results focus	
5 I / O - set preview range	
√ IMPORT MODE - verify first	
6 DRAG - deliver to editor	

WSR