

Process Mining

Chiara Di Francescomarino

a.y. 2025/2026

University of Trento

Davide Donà

Andrea Blushi

January 2026

Notes Repository

These notes are for the course “Process Mining” taught by professor Chiara Di Francescomarino.

They are not official materials; rather, they were created based on the lecture slides solely to help students prepare for the exam. The goal of these notes is to provide a simple and clear summary of the main concepts discussed during the course.

To facilitate exam preparation, we have grouped together several examples and exercises (along with their solutions) taken from the slides. Please note that these notes do not cover all topics discussed during the lectures, nor do they go into the same depth as the official material. We strongly recommend attending the lectures and studying the official slides in addition to these notes.

The up-to-date L^AT_EX source code for this document can be found in the GitHub repository linked on the title page. You are free to clone the project, modify it, or contribute by opening an issue or submitting a pull request; all contributions are greatly appreciated.

We hope that this document will be helpful in the study of this interesting and important subject. Happy studying!

The authors.

Contents

1	Business Process Model and Notation (BPMN)	1
1.1	BPMN Syntax	1
1.1.1	Core Elements	1
1.1.2	Naming conventions	3
1.1.3	Rework Loops	3
1.1.4	Data Objects	3
1.1.5	Data Store	4
1.1.6	Text Annotations	4
1.1.7	Pools and Lanes	4
1.1.8	Message Flow	5
1.2	Advanced BPMN Constructs	5
1.2.1	Sub-processes	5
1.2.2	Block-structured repetition	6
1.2.3	Parallel repetition: multi instance activity	6
1.2.4	Events	7
1.2.5	Event-based decision	8
1.2.6	Exception Handling	9
2	Process Analysis	12
2.1	Process Qualitative Analysis	12
2.1.1	Value-added analysis	12
2.2	Process Quantitative Analysis	13
2.2.1	Time Measures	13
2.2.2	Cost Measures	15
2.2.3	Work-In-Progress (WIP)	15
3	Petri Nets	16
3.1	Unformal introduction to Petri Nets	16
3.2	Formal Definition of Petri Nets	16
3.3	Mapping Petri Nets to Transition Systems	18
3.4	Properties of Petri Nets	20
4	Process Discovery	22
4.1	Event Logs	22
4.2	Discovery challenges	22
4.3	Process Mining algorithms	22
4.3.1	Alpha Miner	23
4.3.2	Heuristic Miner	24
4.3.3	Region-based mining	25
4.3.4	Inductive Miner	27

5	Conformance Checking	31
5.1	Replay-based Conformance Checking	31
5.2	Alignment-based Conformance Checking	32
A	Business Process Modelling	35
B	Process Analysis	46
B.1	Quantitative Analysis	46
B.2	Work In Progress (WIP) Analysis	49
C	Petri Nets	50
C.1	Modeling with Petri Nets	50
C.2	Petri Net Properties	51
D	Process Discovery	53
D.1	Alpha Miner	53
D.2	Heuristic Miner	58
D.3	Region Based Miner	62
D.4	Inductive Miner	67
E	Conformance Checking	71
E.1	Replay-based Conformance Checking	71
E.2	Alignment-based Conformance Checking	77

1 Business Process Model and Notation (BPMN)

1.1 BPMN Syntax

BPMN is a graphical representation for specifying business processes in a business process model. It provides a standard notation that is readily understandable by all business stakeholders, including business analysts, technical developers, and business managers.

1.1.1 Core Elements

The core elements of BPMN can be categorized into four main groups:

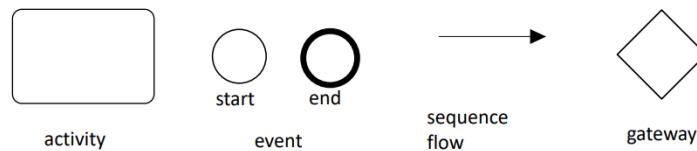


Figure 1: Core Elements of BPMN

1. **Activities:** represent work that is performed within a business process.
2. **Events:** represent something that happens during the course of a business process. The core types of events are:
 - **Start Event:** trigger a new process instance, by generating a token to start the process;
 - **End Event:** signals that a process instance has completed its execution, by consuming a token.
3. **Sequence Flows:** represent the order in which activities and events are executed within a business process.
4. **Gateways:** represent decision points in a process where the flow can diverge or converge based on certain conditions. The core types of gateways are:
 - **XOR Gateway (Exclusive Gateway):** represents a decision point where only one of the outgoing paths can be taken based on conditions. The **XOR-split** takes one outgoing branch, while the **XOR-join** proceeds when one incoming branch completes.



Figure 2: XOR-split and XOR-join Gateways

- **AND Gateway (Parallel Gateway):** provides a mechanisms to create and synchronize parallel paths in the process flow. The **AND-split** creates multiple concurrent paths (all outgoing branches are taken), while the **AND-join** synchronizes multiple incoming paths (waits for all incoming branches to complete before proceeding).



Figure 3: AND-split and AND-join Gateways

- **OR Gateway:** provide a mechanism to create and synchronize m out of n paths in the process flow. The **OR-split** can take one or more outgoing branches, while the **OR-join** waits for all the active incoming branches to complete before proceeding.



Figure 4: OR-split and OR-join Gateways

1.1.2 Naming conventions

It is important to follow naming conventions for clarity:

- **Event:** Use noun + past participle (e.g., "Order Received").
- **Activity:** Use verb + noun (e.g., "Approve Invoice").
- **Split Gateway:** Use descriptive labels with conditions(e.g., "Is Payment Approved?").

1.1.3 Rework Loops

Rework loops are used to model situations where an activity may need to be repeated based on certain conditions. A rework loop is represented using:

- A **XOR-JOIN gateway**: signals the entry point of the loop;
- A **XOR-SPLIT gateway**: signals the exit point of the loop. It needs to specify both the condition to re-enter the loop and the condition to exit the loop.

1.1.4 Data Objects

A **Data Object** captures an artifact required (input - the arrow pointing towards the activity) or produced (output - the arrow pointing away from the activity) by activities within a process. The **status** of the business object can be denoted inside square brackets (e.g., [approved], [pending]).

An **association link** (dashed line with open arrowheads) is used to connect data objects to activities or events of business processes. All occurrences of a Data Object represent the same underlying data.

It's important to note that **input data objects** represent a blocking condition for the activity to start (the activity cannot start until the input data object is available).




Figure 5: Data Object in BPMN

1.1.5 Data Store

A Data Store is a place containing data objects that is persistent beyond the lifetime of a process instance.




Figure 6: Data Store in BPMN

1.1.6 Text Annotations

A Text Annotation is used to add descriptive information to a BPMN diagram. It provides additional context or explanations about specific elements or the overall process flow. Doesn't affect the process flow.




Figure 7: Text Annotation in BPMN

1.1.7 Pools and Lanes

Pools captures a resource class. Generally used to model a business party (e.g., a whole company, clients or suppliers).

Lanes are subdivisions within a pool that represent specific roles, departments, or functions within the business party. They can be seen as a resource subclass, within a pool.

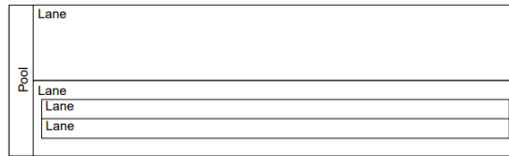


Figure 8: Pools and Lanes in BPMN

Activity that are placed within a lane indicates that it must be performed by the role or department represented by that lane.

1.1.8 Message Flow

A Message Flow represents the flow of messages between two separate process participants (pools). It indicates communication or interaction between different entities in a business process. A Message Flow can connect:

- directly the boundary of a pool (from a party to another party)
- to a specific activity or event within a pool (from a party to an activity/event or vice versa)




Figure 9: Message Flow in BPMN

These elements have some syntactic rules:

- A **sequence flow** (solid line) cannot cross pool boundaries; it can only connect elements within the same pool;
- Both **sequence** and **message flows** can cross the boundaries of lanes within a pool;
- A **message flow** cannot connect two flow elements within the same pool;

An **incoming message flow** may lead to the creation of the data object by the activity receiving the message.

1.2 Advanced BPMN Constructs

1.2.1 Sub-processes

In BPMN, a sub-process is a compound activity that encapsulates a set of related tasks or activities within a larger process. It **requires** a **start event** and an **end event** to **define** its boundaries.

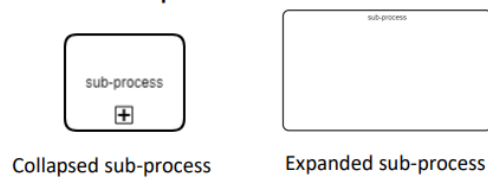


Figure 10: Sub-process in BPMN

It can also delimit parts of the process that can be repeated or interrupted as a whole.

1.2.2 Block-structured repetition

Activity loop markers can be used to denote that an activity or sub-process can be repeated multiple times, based on certain conditions. It can be used when we have a single entry and a single exit point for the repeated section of the process. Then the completion condition is explicitly defined with a **textual annotation** (1.1.6).



Figure 11: Activity Loop Marker in BPMN

1.2.3 Parallel repetition: multi instance activity

The multi-instance marker indicates that an activity or sub-process can be executed multiple times concurrently. Useful when the same activity need to be performed for multiple instances of a data object (e.g., processing multiple orders).





Figure 12: Multi-instance Marker in BPMN

We can also use a textual annotation to specify the number of instances or the conditions for creating new instances. Then we can use this notation also for pools and lanes to indicate that multiple instances of a resource class are involved in the process.

1.2.4 Events

Events in BPMN represent something instantaneous that happens during the execution of a process. They are classified as follows:

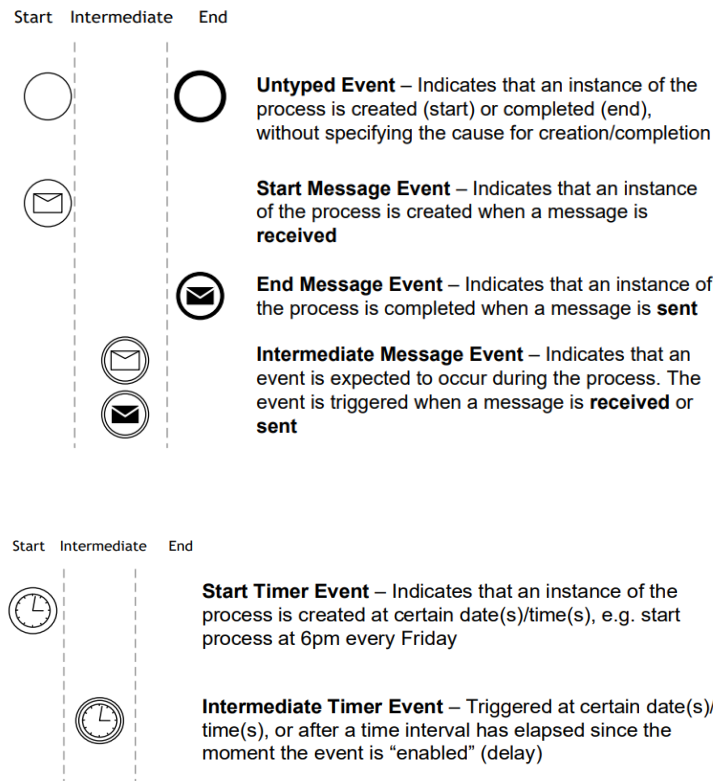

Untyped events: they are the default events (start and end), already introduced in the core elements.

Message events: represent the sending or receiving of a message between two process participants (pools).

- **Message Start Event:** triggers a new process instance upon receiving a message;
- **Message End Event:** indicates that a message is sent when the process instance completes;
- **Message Intermediate:** can be used to send (black envelope) or receive (white envelope) messages during the execution of a process instance.

It's important to use message events only when the corresponding activity would simply send or receive a message without any additional processing. Message receive events should be used to model the receipt of messages that trigger the start of a process or an intermediate event within a process, and not to model the receipt of messages that are part of the normal flow of activities within a process.

Temporal events: represent time-based triggers or delays within a process.

- **Timer Start Event:** triggers a new process instance based on a specific time or date. This is usually used for process that need to start at specific times (e.g., 6pm every friday);
- **Timer Intermediate Event:** can be used to introduce delays or wait for a specific time during the execution of a process instance. Usually used to model timeouts or waiting periods within a process flow.

1.2.5 Event-based decision

Sometimes, a decision point in a process is based on the occurrence of specific events rather than conditions evaluated on data. In such cases, an event-based gateway is used to model the decision point. It works similarly to an XOR gateway (only one branch can be taken), but instead of evaluating conditions on data, it waits for one of the specified events to occur before proceeding along the corresponding path.



Figure 13: Event-based Gateway in BPMN

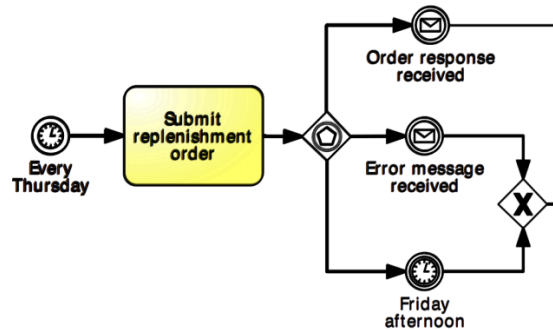


Figure 14: Example of Event-based Gateway in BPMN

1.2.6 Exception Handling

In BPMN, exception handling is used to manage unexpected events or errors that may occur during the execution of a business process. BPMN provides several constructs to model exception handling, allowing processes to gracefully handle errors and continue execution or terminate as needed.

Abortion: The simplest way to handle exceptions is to abort the process instance when an exception occurs. This can be done via the Terminate End Event, which immediately ends the process instance regardless of its current state. This causes the abortion of all ongoing activities and the termination of the process instance.



Figure 15: Abortion of a Process Instance in BPMN

We can use more sophisticated exception handling mechanisms, in order to recover from exceptions and continue the process flow.

Boundary Events Through boundary events, we catch intermediate events on the boundary of an activity or sub-process. When the boundary event is triggered, the normal flow of the process is interrupted, and the exception handling flow is initiated. There

- **External boundary events:** triggered by events external to the process, the execution of the current activity must be interrupted. Handled with intermediate message events;

- **Internal boundary events:** something goes wrong inside an activity, whose execution must be interrupted. Handled with intermediate error events;




Figure 16: Internal Boundary Event in BPMN

- **Timeout boundary events:** an activity takes too long to complete, and its execution must be interrupted. Handled with intermediate timer events.

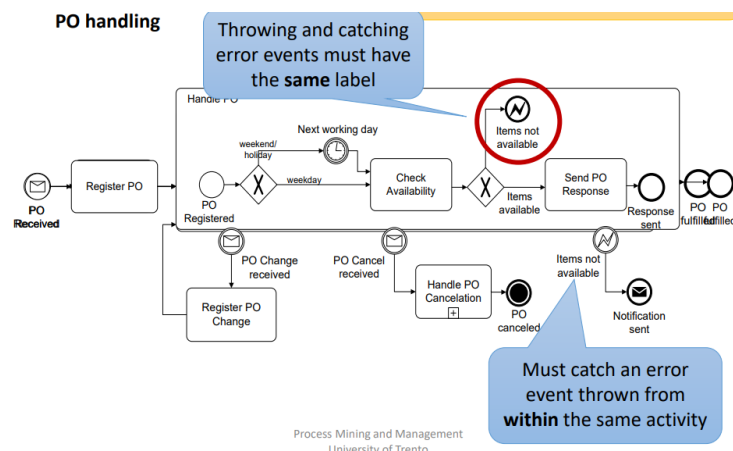


Figure 17: Example of Boundary Events in BPMN

Non-interrupting Boundary Events Sometimes, we want to handle exceptions without interrupting the normal flow of the process. In such cases, we can use non-interrupting boundary events. When a non-interrupting boundary event is triggered, the exception handling flow is initiated, but the normal flow of the process continues concurrently.



Figure 18: Non-interrupting Boundary Event in BPMN

Compensation Events Compensation events are used to handle situations where an activity needs to be undone or compensated for after it has been completed. A compensation event is typically associated with a specific activity or sub-process, and it defines the actions that need to be taken to reverse or mitigate the effects of that activity.

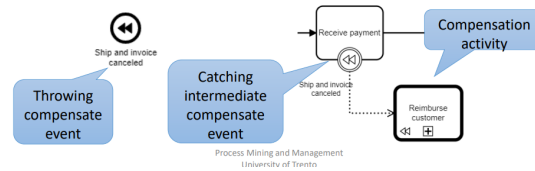


Figure 19: Compensation Event in BPMN

2 Process Analysis

Process analysis aims to evaluate the performance and efficiency of business processes, to guide process improvement initiatives. Taking as input a *as-is* process model, it provides insights on weaknesses and their impact. We can distinguish between two main types of analysis:

- **Qualitative Analysis:** focuses on identifying inefficiencies, bottlenecks, and areas for improvement within a process.
- **Quantitative Analysis:** focuses on measuring and evaluating the performance of a process using various metrics.

2.1 Process Qualitative Analysis

2.1.1 Value-added analysis

This kind of analysis focuses on **identifying and categorizing** activities within a business process based on their contribution to the overall value delivered to customers or stakeholders. After that we can optimize the process by **eliminating** non-value-adding activities.

Identification We break down the process into atomic steps, examining each one of them to determine its category among the following:

- **Value-added activities:** directly contribute to delivering value or satisfaction to the customer
 - Is the customer willing to pay for this activity?
 - Would the customer agree that this step is necessary to achieve their goals?
 - If the step were eliminated, would the customer notice a difference in the final product or service?
- **Business value-added activities:** necessary for the business operation but do not directly add value from the customer's perspective
 - Is this step required in order to collect revenue, to improve or grow the business?
 - Would the business potentially suffer if this step were eliminated?
 - Does it reduce risk of business losses?
 - Is this step required to comply with regulations or legal requirements?
- **Non-value-adding activities:** do not add value and are not necessary for the business (everything that is not VA or BVA). This usually includes handovers, delays, rework, etc.

Waste Elimination After identifying and categorizing the activities, we can remove NVA activities and carefully evaluate BVA activities to see if they can be optimized or eliminated without negatively impacting the business. We have different sources of waste:

- **Move:**
 - **Transportation:** send or receive materials or document taken as input or output of an activity;
 - **Motion:** movement of resources (people, materials) internally within the process.
- **Hold:**
 - **Inventory:** accumulation of materials or documents waiting to be processed (Work in Progress - WIP);
 - **Waiting:** task waiting for input data or resource availability, or resources waiting for task assignment.
- **Over-do:**
 - **Defects:** correcting or compensating for errors or mistakes in the process (rework loops);
 - **Over-processing:** tasks performed unnecessarily given the outcome required by the customer;
 - **Over-production:** unnecessary process instances are performed, producing outcomes that do not add value upon the completion of the process.

2.2 Process Quantitative Analysis

The process performance can be measured through different dimensions:

- **Time:** how long it takes to complete a process or specific activities within the process;
- **Cost:** the expenses incurred to execute the process, including labor, materials, and overhead costs;
- **Quality:** the degree to which the process meets customer requirements and expectations.

2.2.1 Time Measures

Cycle (throughput) time : the time between start and completion of a process instance. It can be measured as:

$$\text{Cycle throughput time} = \text{Processing Time (PT)} + \text{Waiting Time (WT)} \quad (2.1)$$

where:

- **Processing Time (PT)**: time taken by value-adding activities
- **Waiting Time (WT)**: time spent in non-value-adding activities

The result can be different from a simply sum, depending on the process structure (e.g., parallel paths, loops, etc.).

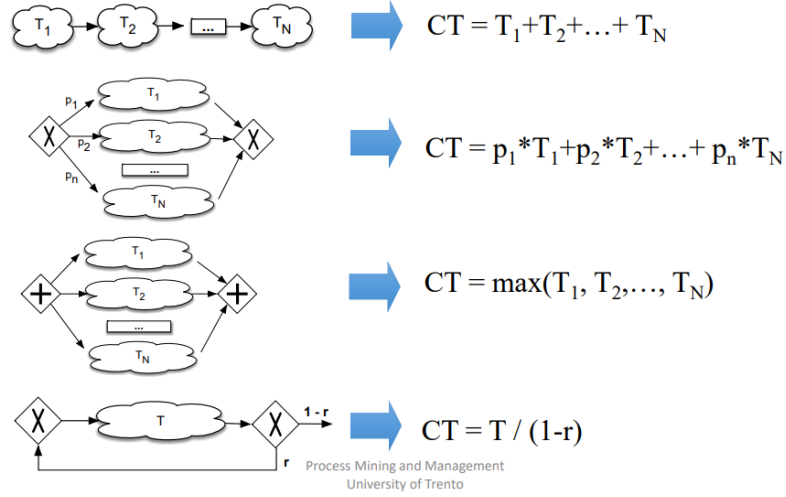


Figure 20: Cycle Time Calculation Table

- In case of **sequential** activities, the cycle time is the sum of the cycle times of each activity;
- In case of **exclusive choices** (XOR), the cycle time is the weighted average of the cycle times of each branch, using the branching probabilities as weights;
- In case of **parallel** activities, the cycle time is the maximum cycle time among the parallel branches;
- In case of **loops**, the cycle time is the sum of the cycle time of the activities inside the loop, divided by the probability of exiting the loop.

Cycle Time Efficiency Given the cycle time, we can calculate the efficiency of the process. The Cycle Time Efficiency (CTE) is a measure of how efficiently a process is executed, focusing on the proportion of time spent on value-adding activities compared to the total cycle time. It is calculated as:

$$\text{CTE} = \frac{\text{Processing Time (PT)}}{\text{Cycle throughput time}} \quad (2.2)$$

2.2.2 Cost Measures

Per-instance Cost The per-instance cost of a process measures the total cost incurred to complete a single instance of the process. It is calculated as:

$$\text{Per-instance Cost} = \text{Processing cost} + \text{Cost of waste} \quad (2.3)$$

where:

- **Processing cost:** cost associated with value-adding activities
- **Cost of waste:** cost associated with non-value-adding activities

2.2.3 Work-In-Progress (WIP)

Work-In-Progress (WIP) refers to the number of process instances that are currently being executed but have not yet been completed. WIP is a form of waste. Using Little's Law, we can relate WIP to the arrival rate and cycle time:

$$\text{WIP} = \lambda \times \text{Cycle Time} \quad (2.4)$$

where λ is the arrival rate (number of cases arriving per time unit). Its limitation is that we can't estimate waiting times or queue lengths.

3 Petri Nets

A Petri Net is a business process modeling notation, based on some strong mathematical foundations. They offer a formal way to represent processes, allowing for rigorous analysis and verification of process properties.

3.1 Unformal introduction to Petri Nets

Elements of a Petri Net: A Petri Net consists of the following elements:

- **Places:** represent the states or conditions of the system;
- **Transitions:** represent the events that can change the state of the system;
- **Tokens:** represent the presence of a condition or the resources required for a transition to occur;
- **Arcs:** connect places to transitions and transitions to places, indicating the flow of tokens.



Figure 21: Basic Petri Net Structure

Syntactic Rules: A Petri net can be defined as a **bipartite directed graph** with two types of nodes: places and transitions. The arcs between these nodes indicate the flow of tokens and define the behavior of the system.

The **state** of a Petri net (**marking**) is represented by the distribution of tokens across its places.

- A transition is **enabled** if all its input places contain the required number of tokens;
- When an enabled transition **fires**, it consumes tokens from its input places and produces tokens in its output places.

3.2 Formal Definition of Petri Nets

A Petri net is formally defined as a **triple** $PN = (P, T, F)$ where:

- P is a finite set of places;
- T is a finite set of transitions;

- $F \subseteq (P \times T) \cup (T \times P)$ is a set of directed arcs (flow relation). They connect places to transitions and transitions to places.

Any diagram can be mapped onto such triple and vice versa.




Figure 22: Formal Definition of a Petri Net

Preset and Postset

For a given transition $t \in T$:

- The **preset** of t is the set of places that have arcs leading to t :

$$\bullet t = \{p \in P \mid (p, t) \in F\}$$

- The **postset** of t is the set of places that have arcs leading from t :

$$t\bullet = \{p \in P \mid (t, p) \in F\}$$

Marking

A **marking** of a Petri net is a function $M : P \rightarrow \mathbb{N}$ that assigns to each place $p \in P$ the number of tokens $M(p)$ present in that place. For example, given the Petri net in the figure 3.2, it's marking can be represented as:

$$M(p1) = 1, M(p2) = 2, M(p3) = 0$$

or alternatively as the multi-set:

$$M = [1 \cdot p1, 2 \cdot p2]$$

Enabling and Firing

A transition $t \in T$ is **enabled** under a marking M if for every place $p \in \bullet t$, $M(p) > 0$. In other words, there is at least one token in each of its input places.

When an enabled transition t **fires**, it produces a new marking M' defined as follows:

$$M'(p) = M(p) - W(p, t) + W(t, p)$$

where $W(x, y)$ is the weight of the arc from x to y (default is 1 if not specified). This means that firing t consumes tokens from its input places and produces tokens in its output places.

Petri Net System

A **Petri net system** is a pair $S = (PN, M_0)$ where:

- PN is a Petri net (P, T, F) ;
- M_0 is the initial marking of the Petri net.

3.3 Mapping Petri Nets to Transition Systems

To introduce the relationship between Petri nets and transition systems, we first need to define a few concepts.

Case: a case of a Petri net is a sequence of valid transition firings that starts from the initial marking:

$$m_0 \xrightarrow{t_1} m_1 \xrightarrow{t_2} m_2 \xrightarrow{t_3} \dots \xrightarrow{t_k} m_k$$

where each m_i is a marking and each t_i is a transition, m_0 is the initial marking.

Reachability Graph algorithm:

1. Label the initial marking m_0 as the root and tag it as new;
2. While there are new markings:
 - Select a new marking m ;
 - If no transition are enabled in m , tag m as dead;
 - For each transition t enabled in m :
 - **Obtain** the new marking m' by firing t in m ;
 - **If** m' doesn't appear in the graph yet, add it as a new marking;
 - **Add** an arc from m to m' , labeled with t if not already present;
 - Tag m as old;

For example, given the Petri net in figure 3.3, the reachability graph can be obtained by:

- Create the node for the initial marking $m_0 = (p_1, free, p_4)$ and tag it as new;
- Since transition t_1 and t_4 are enabled in m_0 , we can fire them:
 - Firing t_1 produces the new marking $m_1 = (p_2, free, p_4)$, we add it to the graph with the corresponding arc from m_0 to m_1 labeled t_1 ;
 - Firing t_4 produces the new marking $m_2 = (p_1, free, p_5)$, we add it to the graph with the corresponding arc from m_0 to m_2 labeled t_4 ;
- We tag m_0 as dead, since no other transitions are enabled in it;

- We select one of the new markings;
- ...

Continuing this process until no new markings are left, we obtain the reachability graph shown in figure 3.3.

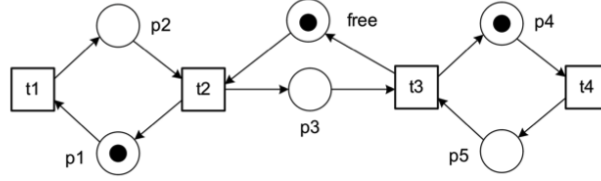


Figure 23: Petri Net Structure

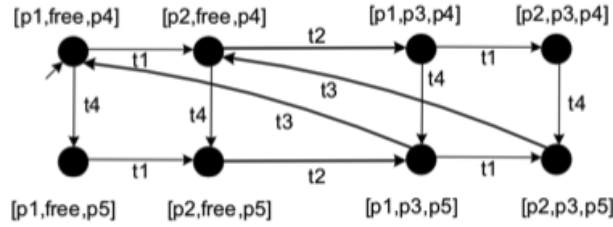


Figure 24: Reachability Graph derived from the Petri Net

State As we have seen in the example, each state in the transition graph corresponds to a marking in the Petri net. Therefore, we can derive that each state can be represented as a multi-set of places that contain tokens.

Terminal Marking It's a reachable marking in which no transition is enabled. Intuitively, it represents a dead-end state of the system: once it is reached, the execution cannot continue because there are no outgoing transitions in the transition system.

Reachable markings

Reachable Marking

A marking m is **reachable** if there exists a case that leads from m_0 to m .

3.4 Properties of Petri Nets

Given the representation of a Petri net as a transition system, we can define and analyze some important properties of Petri nets:

Boundedness Intuitively, a Petri net is bounded if there is a limit to the number of tokens that can accumulate in each place.

Boundedness

A Petri net is **k-bounded** if and only if no place p can contain more than k tokens for any reachable marking. If a Petri net is 1-bounded, it is also called **safe**.

We can derive that a Bounded Petri net has a finite number of reachable markings.

Terminating Intuitively, a Petri net is terminating if it always reach a terminal marking. This implies that every run is finite.

Terminating

A Petri net is **terminating** if and only its reachability graph is finite and has no cycles.

Deadlock-freedom Intuitively, a Petri net is deadlock-free if it is always possible to fire a transition from any reachable marking.

Deadlock-freedom

A Petri net is **deadlock-free** if and only if there is at least one transition enabled in every reachable marking, except for terminal markings.

Dead transition

Dead Transition

A transition t is **dead** if it is not enabled in any reachable marking.

Liveness Intuitively, a transition is live if it can always be fired in the future, regardless of the current marking.

Liveness of a Transition

A transition t is **live** if and only if from every reachable marking m , there exists a case that leads to a marking m' where t is enabled.

A Petri net is **live** if and only if all its transitions $t \in T$ are live. Liveness implies deadlock-freedom, but the opposite is not necessarily true.

Home-marking

Home-marking

A marking m is a **home-marking** if it is reachable from every reachable marking.

A petri net is **reversible** if and only if its initial marking m_0 is a home-marking. This is true if and only if the reachability graph is strongly connected.

Workflow nets A Petri net is a **workflow net** (WF-net) if and only if:

- It has a single source place start (no incoming transitions) and a single sink place end (no outgoing transitions);
- Every transition is on a path from start to end.

A workflow net is **sound** if and only if its short-circuit net (where start and end are connected by a transition) is live and bounded.

Soundness ensures that the modeled process can always complete properly, starting from the initial state and reaching the final state without getting stuck or running indefinitely.

4 Process Discovery

Process discovery is a key aspect of process mining that focuses on extracting process models from event logs.

4.1 Event Logs

An event log is a collection of *cases*. Each case represents as a sequence of *events* that have occurred during the execution of a process instance. Each event typically contains attributes such as:

- **Case ID:** A unique identifier for the case. Allows to group events belonging to the same process instance.
- **Activity:** The name of the activity that was performed.
- **Timestamp:** The time at which the event occurred.
- **Additional attributes:** Such as resource, cost, etc.

4.2 Discovery challenges

Process discovery faces several challenges. The event logs may contain noise, incomplete information, or infrequent behavior that can complicate the discovery process. The discovered models need to balance between:

- **Fitness:** the discovered model should be able to replicate all the behavior observed in the event log;
- **Precision:** the discovered model should not allow for behavior that is not observed in the event log;
- **Generalization:** the discovered model should be able to generalize beyond the specific cases observed in the event log, allowing for similar but unseen behavior;
- **Simplicity:** the discovered model should be as simple as possible.

4.3 Process Mining algorithms

Several algorithms have been developed for process discovery. In this section, we will discuss some of the most prominent ones. They can be categorized into:

- **Direct algorithmic approaches:** These algorithms directly construct a process model from the event log without intermediate steps. Examples include the Alpha Miner;

- **Two-phase approaches:** these algorithms first extract a representation of the process behavior from the event log, and then use this representation to construct a process model. Examples include the Heuristic Miner;
- **Divide and conquer approaches:** these algorithms divide the event log into smaller segments, discover process models for each segment, and then combine these models into a single process model. Examples include the Inductive Miner.
- **Computational intelligence approaches:** these algorithms use techniques from artificial intelligence, such as genetic algorithms or neural networks, to discover process models from event logs. Examples include Genetic Process Mining.

4.3.1 Alpha Miner

The Alpha Miner is one of the earliest and most well-known algorithms for process discovery. It constructs a Petri net from an event log by identifying different types of relations between activities, such as:

- **Direct succession** (directly follows): If activity A is directly followed by activity B in the event log, we denote this as $A >_L B$.
- **Causality:** If activity A is directly followed by activity B, but B is never directly followed by A, we denote this as $A \rightarrow_L B$. Formally, $A \rightarrow_L B$ if $A >_L B$ and not $B >_L A$.
- **Parallelism:** If activities A and B can occur independently and in parallel, we denote this as $A \parallel_L B$. Formally, $A \parallel_L B$ if $A >_L B$ and $B >_L A$.
- **Choice:** If an event log shows that either activity A or activity B can occur next, we denote this as $A \#_L B$. Formally, $A \#_L B$ if neither $A >_L B$ nor $B >_L A$.

To learn this relations, the Alpha Miner first constructs a footprint matrix.

Footprint Matrix: The footprint matrix is a square matrix where both the rows and columns represent the activities in the event log. The entries in the matrix indicate the relations between activities based on their occurrences in the event log. As an example, consider the following footprint matrix of the log containing activities A, B, C, D and E:

$$L_1 = [\langle a, b, c, d \rangle^2, \langle a, c, b, d \rangle^2, \langle a, e, d \rangle^2,]$$

	A	B	C	D	E
A	#	$\rightarrow$	$\rightarrow$	#	$\rightarrow$
B		#	$\parallel$	$\rightarrow$	#
C			#	$\rightarrow$	#
D				#	$\leftarrow$
E					#

Table 1: Example of a Footprint Matrix

Only the upper triangular part of the matrix is filled, as the relations are symmetric. From the footprint matrix, the Alpha Miner identifies *causal relations* and constructs places in the Petri net accordingly.

Steps of the Alpha Miner Algorithm:

1. Identify all unique activities in the event log T_L ;
2. Build the set of start activities T_I and end activities T_O . They should contain all activities that appear as the first and last activity in any trace of the log, respectively;
3. Compute pairs of activity sets (A, B) such that:
 - For every activity $a \in A$ and $b \in B$, $a \rightarrow_L b$;
 - For every pair of activities $a_1, a_2 \in A$, $a_1 \#_L a_2$;
 - For every pair of activities $b_1, b_2 \in B$, $b_1 \#_L b_2$.

In smaller terms, all activities in set A are in causal relation with all activities in set B, and there is no direct succession between any pair of activities within the same set.

4. Try to maximize the pairs found in the previous step, i.e., if $(\{A\}, \{B\})$ is found and there exists $(\{A\}, \{C\})$, then we can merge them into $(\{A\}, \{B, C\})$ iff for every $b \in B$ and $c \in C$, $b \#_L c$; If this is possible, we replace the two pairs with the merged one;
5. For each maximal set found, create a place in the Petri net. Also, create a source place connected to all start activities in T_I and a sink place connected from all end activities in T_O .
6. For each pair (A, B) , connect all activities in A to the place created for the pair, and connect that place to all activities in B.

4.3.2 Heuristic Miner

The Heuristic Miner is an extension of the Alpha Miner that aims to address some of its limitations, particularly in dealing with noise and infrequent behavior in event logs. Since it is a two-phase approach, it first constructs a *dependency*

graph from the event log, which captures the relationships between activities based on their frequencies. Based on this graph, it then constructs a process model, typically represented as a Petri net or a C-net.

Dependency Graph: The dependency graph is a directed graph where nodes represent activities, and edges represent the dependencies between them. Each edge is assigned a **weight** and a **frequency**.

Compute frequency matrix: To compute the dependency measures, the Heuristic Miner analyzes the event log and extracts the frequencies of direct successions between activities. This information are kept in a *direct succession matrix*, similar to the footprint matrix used in the Alpha Miner. This matrix records how many times each activity is directly followed by another activity in the event log.

Compute dependency measures: Using the direct succession matrix, the Heuristic Miner computes dependency measures for each pair of activities (a, b) using the formula:

$$\begin{cases} |a \Rightarrow_L b| = \frac{|a \rightarrow_L b| - |b \rightarrow_L a|}{|a \rightarrow_L b| + |b \rightarrow_L a| + 1} \\ |a \Rightarrow_L a| = \frac{|a \rightarrow_L a|}{|a \rightarrow_L a| + 1} \end{cases}$$

Where $|a \rightarrow_L b|$ is the frequency of direct succession from activity a to activity b in the event log. The dependency measure can correctly identify parallelism, causality, and choice between activities based on their frequencies.

Dependency Matrix: The dependency matrix can be computed from the frequency matrix, by applying the dependency measure formula to each pair of activities.

Constructing the Dependency Graph: Given the dependency matrix, and a threshold value θ , the Heuristic Miner constructs the dependency graph. For each pair of activities (a, b) , if the dependency measure $|a \Rightarrow_L b|$ exceeds the threshold θ , an edge is created from node a to node b in the dependency graph.

4.3.3 Region-based mining

Region-based mining is a technique used to discover Petri nets from event logs by identifying regions in a transition system derived from the log. Can be used to discover more complex control-flow structures but it has problems dealing with noise and infrequent behavior.

Learning a transition system

A transition system is a directed graph where nodes represent states and edges represent transitions between states. In order to learn a transition system from an event log, we need to define a state representation. We can consider the past or/and future of a trace.

In this context, the **past** of a trace refers to the sequence of activities executed prior to a given current state. We construct a transition system based on the event log's traces, specifically designed to model and replay the observed behavior.

Then, we define the **future** of a trace as the sequence of activities that are expected to occur after the current state. Starting from the event log, we define the initial state as the complete set of observed traces. We then derive the state space by iteratively removing the leading activity from each trace at every transition until the traces are exhausted.

We can also combine both past and future representations to create a more comprehensive transition system.

Other possible approaches include the use of abstractions, such as multisets (keep the frequency, not the order) or sets (only keep the activities, not the frequency nor the order), keeping only the last k activities. This allows for a more compact representation of the state space.

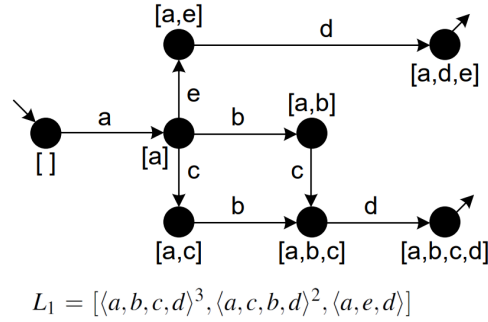


Figure 25: Example of a Past with multiset abstraction Transition System learned

Identifying regions

We assume there is only one initial state and it's convenient to also have one final state. All states need to be reachable.

A **region** is a set of states such that if a transition exits the region, then all equally labeled transitions exit the region, and if a transition enters the region, then all equally labeled transitions enter the region. All events not entering or exiting the region do not cross the region.

We can define some properties of regions:

- **Trivial regions:** regions that contain either all states or no states at all.

- **Complement:** if R is a region, then its complement (the set of states not in R) is also a region.
- **Union and intersection:** if $R1$ and $R2$ are regions, then their union ($R1 \cup R2$) and intersection ($R1 \cap R2$) are also regions.

We want to compute all the **minimal non-trivial regions** (i.e., the smallest possible sets of states that still satisfy the region exit/entry constraints) of the transition system for our algorithm.

Constructing the Petri net

- For each event in the transition system, a transition is created in the Petri net.
- Compute the minimal non-trivial regions of the transition system.
- For each region, a place is created in the Petri net.
- Add corresponding arcs:
 - Pre regions: if an event exits the region r (r is a pre region), an arc is added from the corresponding place to the transition.
 - Post regions: if an event enters the region r (r is a post region), an arc is added from the transition to the corresponding place.
- A token is added to each place corresponding to a region that contains the initial state of the transition system.

It's important to remember, when trying to find the regions, that:

- If an event e exits a region, all equally labeled events must exit the region. This implies that **all arcs** with the same label as e must also exit the region;
- If an event enters a region, all equally labeled events must enter the region. All arcs with the same label as e must also enter the region;
- Events that do not enter or exit the region do not cross the region. All arcs with the same label as e must also not cross the region.

4.3.4 Inductive Miner

The Inductive Miner is a divide-and-conquer algorithm for process discovery that constructs process models by recursively splitting the event log into smaller segments based on identified patterns. The first step of the algorithm is to analyze the event log and compute the **directly-follows graph** (each activity is connected to the activities that directly follow it).

Partition activities

The idea is to recursively partition the set of activities in the log into subsets of the form $\langle x \rangle^k$. We can apply different **cuts** to partition the activities in the log:

- **Sequence cut** ($\rightarrow$): cutting arcs all going in the same direction.

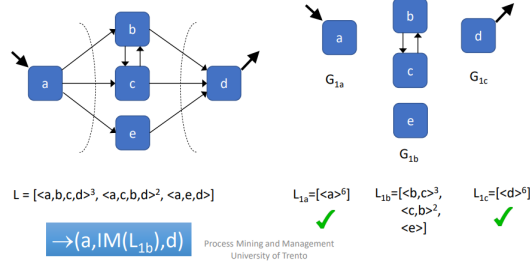


Figure 26: Example of Sequence Cut

For each of the two subsets of activities obtained from the cut, we create the sublog containing only the traces that involve activities from that subset, as shown in the figure above.

- **Exclusive choice cut** ($\times$): no arcs going one set to another

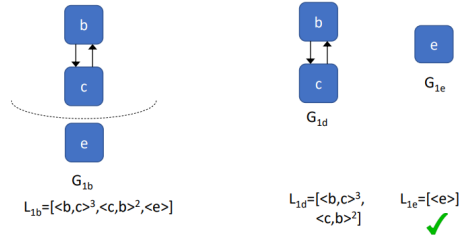


Figure 27: Example of Exclusive Choice Cut

- **Parallel cut** ($\wedge$ or $+$): each activity in one subset is connected to each activity in the other subset

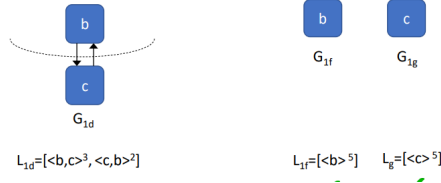


Figure 28: Example of Parallel Cut

- **Redo-loop cut** ($\odot$): one subset is the *body* of the loop, the other subset contains the *redo* part and possibly the *exit* part.

The Inductive Miner recursively applies these cuts, trying to compute in the following order:

1. a non trivial exclusive choice cut;
2. if it is not possible, a non trivial sequence cut;
3. if it is not possible, a non trivial parallel cut;
4. if it is not possible, a redo-loop cut;
5. if none of the previous cuts is possible, it falls back to the *flower model*, which allows for any behavior.

In this way we can create a process tree representing the structure of the process, by combining the subtrees obtained from each segment of the log. Finally, the process tree is converted into a Petri net for further analysis and visualization.

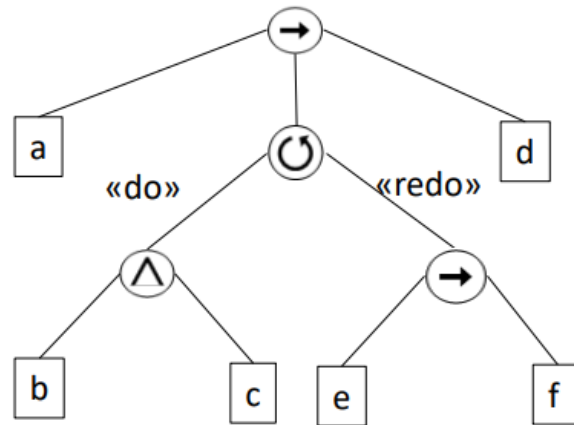


Figure 29: Example of Process Tree

5 Conformance Checking

Conformance check tries to verify if the behavior of a process model is in line with the behavior recorded in an event log. It identifies execution traces in the event log that deviate from the process model and vice versa. There are several techniques to perform conformance checking.

5.1 Replay-based Conformance Checking

Replay-based conformance checking techniques try to replay the traces recorded in an event log on a process model. During the replay, information about deviations are collected:

- **Produced Tokens p :** the count of tokens produced during the replay of a trace. In the beginning, a token will be produced for the source place. Each time a transition is fired, tokens will be produced for each output place of the transition;
- **Consumed Tokens c :** the count of tokens consumed during the replay of a trace. At the end, a token will be consumed for the sink place (if not present, a token is artificially added). Each time a transition is fired, tokens will be consumed from each input place of the transition;
- **Missing Tokens m :** When an activity is executed in the event log, but the corresponding transition in the process model cannot be fired due to missing tokens, tokens are artificially added to enable the firing of the transition. Note that these tokens are not considered in the produced tokens count;
- **Remaining Tokens r :** After replaying a trace, the tokens that are left in the process model.

Always the following equation holds:

$$p + m = c + r \quad (5.1)$$

Using these statistics, we can define the fitness of a trace as follows:

$$Fitness = \frac{1}{2} \left(1 - \frac{m}{c}\right) + \frac{1}{2} \left(1 - \frac{r}{p}\right) \quad (5.2)$$

This measure yields a value between 0 and 1, that can be interpreted as the percentage of behavior in the event log that can be explained by the process model.

Fitness of an Event Log The fitness equation 5.2 can be used to calculate the fitness of a single trace. We can extend this to calculate the fitness of an entire event log by summing the statistics over all traces in the log (we can

compute the statistics for each unique trace and then weight them by their frequency in the log):

$$Fitness_{Log} = \frac{1}{2} \left(1 - \frac{\sum_{t \in L} m(t)}{\sum_{t \in L} c(t)} \right) + \frac{1}{2} \left(1 - \frac{\sum_{t \in L} r(t)}{\sum_{t \in L} p(t)} \right) \quad (5.3)$$

Pros and Cons: Replay-based conformance allows for a simple and intuitive way to differentiate between fitting and non-fitting traces. However, it has some limitations:

- Fitness is too high for problematic event logs;
- Only defined for Petri nets;
- No information about where the deviations occur in the process model;

5.2 Alignment-based Conformance Checking

Alignment-based conformance checking is built upon the weaknesses of replay-based conformance checking. In fact, replay-based techniques cannot provide a corresponding path in the process model.

The idea of alignment-based conformance checking is to find the best possible alignment between a trace in the event log and a corresponding path in the process model. An alignment is a sequence of steps that map events in the trace to transitions in the process model. Each step in the alignment can be one of the following:

- **Synchronous Move:** an event in the trace matches a transition in the process model;
- **Log Move:** an event in the trace does not have a corresponding transition in the process model. We move in the log, while the model remains in the same state;
- **Model Move:** a transition in the process model is executed without a corresponding event in the trace. We move in the model, while the log remains in the same state;

It's an **illegal** move to two different events between the log and the model.

Then we define a **standard cost** function to assign costs to each type of move:

- **Synchronous Move:** cost 0;
- **Log Move:** cost 1;
- **Model Move:** cost 1;
- **Illegal Move:** cost ∞ ;

The goal of alignment-based conformance checking is to find the alignment with the lowest total cost, which is defined as the **optimal alignment**.

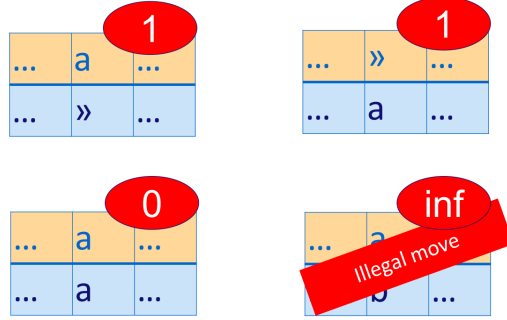


Figure 30: Example of an alignments

It's possible to define various cost functions depending on the specific application or domain, or to assign different weights to different types of moves. For example, if we want to penalize non-compliant behavior in the log, we can assign a higher cost to log moves compared to model moves.

Computing Fitness

The idea is to compare the cost of an optimal alignment with the cost of a worst-case alignment. In formula:

$$fitness(\sigma, N) = 1 - \frac{\delta(\lambda_{opt}(\sigma, N))}{\delta(\lambda_{worst}(\sigma, N))} \quad (5.4)$$

Where:

- σ is the trace in the event log;
- N is the process model;
- δ is the cost function;
- $\lambda_{opt}(\sigma, N)$ is the optimal alignment between the trace and the process model;
- $\lambda_{worst}(\sigma, N)$ is the worst-case alignment between the trace and the process model;

The **worst-case** alignment can be easily calculated by performing a complete sequence of log moves to represent the entire trace, followed by a series of model moves to traverse the shortest path from the initial state to the final state.

In order to compute the fitness of an entire event log, we can extend the previous

formula by summing the fitness of each trace, weighted by the number of times the trace appears in the event log:

$$fitness(L, N) = 1 - \frac{\sum_{\sigma \in L} L(\sigma) \times \delta(\lambda_{opt}(\sigma, N))}{\sum_{\sigma \in L} L(\sigma) \times \delta(\lambda_{worst}(\sigma, N))} \quad (5.5)$$

where $L(\sigma)$ is the frequency of σ on the log L . Otherwise you can also use this formula, computing the fitness of each trace and then averaging it:

$$fitness(L, N) = \frac{\sum_{\sigma \in L} L(\sigma) \times fitness(\sigma, N)}{|L|} \quad (5.6)$$

Where $|L|$ is the total number of traces in the event log.

A Business Process Modelling

Exercise 1

Using only the base BPMN elements (activities, gateways and sequence flows), model the following process:

An order-to-cash process is triggered by the receipt of a purchase order from a customer. Upon receipt, the purchase order has to be checked against the stock to determine if the requested item(s) are available. Depending on stock availability the purchase order may be confirmed or rejected. If the purchase order is rejected, the process completes. If the purchase order is confirmed, an invoice is emitted, and the goods requested are shipped.

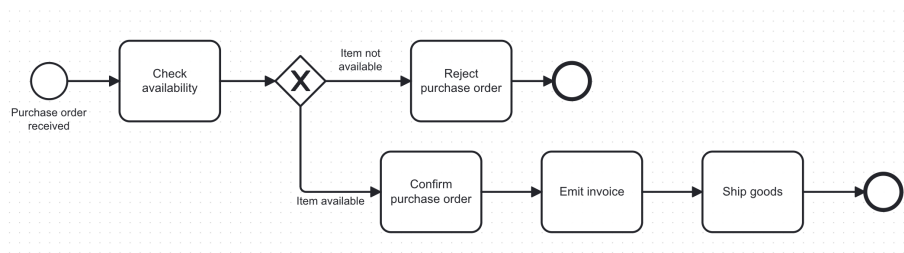


Figure 31: Solution for Exercise 1

Solution: The solution here is pretty straightforward:

- A process instance starts with the receipt of a purchase order from a customer (start event);
- The purchase order is checked against the stock (activity);
- A gateway checks if the items are available in stock:
 - If the items are not available, the purchase order is rejected (activity) and the process ends (end event);
 - If the items are available, the purchase order is confirmed (activity), an invoice is emitted (activity), and the goods requested are shipped (activity), then the process ends (end event).

Exercise 2

Using only the base BPMN elements (activities, gateways and sequence flows), model the following process:

Once a loan application has been approved, an acceptance pack is prepared and sent to the customer. The acceptance pack includes a repayment schedule, which the customer needs to agree upon. The payment documents are received back by the loan provider. The latter then verifies the repayment agreement: if the applicant disagreed with the repayment schedule, the loan provider cancels the application; if the applicant agreed, the loan provider approves the application. In either case, the loan completes with the loan provider notifying the applicant of the application status.

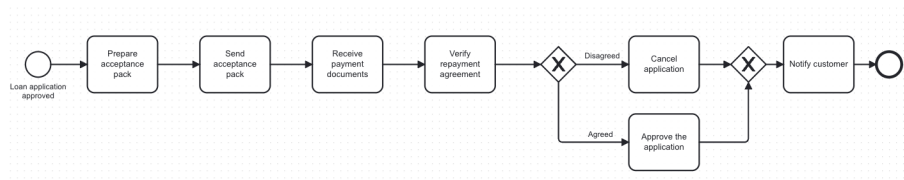


Figure 32: Solution for Exercise 2

Solution: The solution here is as follows:

- A process instance starts with the approval of a loan application (start event);
- An acceptance pack is prepared and sent to the customer (activity);
- The payment documents are received back by the loan provider (activity) and the repayment agreement is verified (activity);
- A XOR split gateway checks if the applicant agreed with the repayment schedule:
 - If the applicant disagreed, the loan application is cancelled (activity);
 - If the applicant agreed, the loan application is approved (activity).
- In either case (XOR JOIN) the loan completes with the notification of the applicant of the application status (activity).

Exercise 3

Using only the base BPMN elements (activities, gateways and sequence flows), model the following process:

In the minister's office, when a ministerial inquiry has been received, it is assigned to be registered into the system. Then the inquiry is investigated so that a ministerial response can be prepared.

The finalization of a response includes the preparation of the response itself by the cabinet officer and the review of the response by the principal registrar. If the registrar does not approve the response, the latter needs to be prepared again by the cabinet officer for review. The process finishes only once the response has been approved.

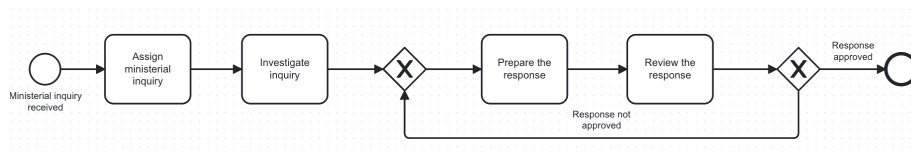


Figure 33: Solution for Exercise 3

Solution: The solution here is as follows:

- A process instance starts with the receipt of a ministerial inquiry (start event);
- The inquiry is assigned to be registered (activity) and then investigated (activity);
- Since if the response is not approved it needs to be prepared again, we have a rework loop here:
 - A XOR JOIN gateway signals the entry point of the loop;
 - The response is prepared by the cabinet officer (activity);
 - The response is reviewed by the principal registrar (activity);
 - A XOR split gateway checks if the registrar approves the response:
 - * If it is approved, the process ends (end event);
 - * If it is not approved, the flow goes back to the XOR JOIN gateway to re-enter the loop.

Exercise 4

Using only the base BPMN elements (activities, gateways and sequence flows), model the following process:

Once received, a loan application is approved if it passes two checks:

1. the applicant's loan risk assessment;
2. the appraisal of the property for which the loan has been asked.

The risk assessment requires a credit history check on the applicant. Once both the loan risk assessment and the process appraisal have been performed, the applicant's eligibility can be assessed. If the applicant is not eligible, the application is rejected, otherwise the acceptance pack is prepared and sent to the applicant.

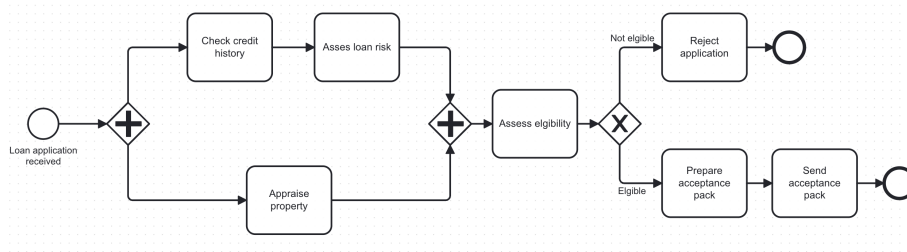


Figure 34: Solution for Exercise 4

Solution: The solution here is as follows:

- A process instance starts with the receipt of a loan application (start event);
- A process instance starts with the receipt of a loan application (start event);
- because not specified otherwise, we assume that the two checks can be performed in parallel (AND split gateway):
 - One branch performs the credit history check (activity) and then the loan risk assessment (activity);
 - The other branch performs the appraisal of the property (activity).
- An AND JOIN gateway synchronizes the two branches once both checks are completed;
- The applicant's eligibility is assessed (activity);

- A XOR split gateway checks if the applicant is eligible:
 - If the applicant is not eligible, the application is rejected (activity) and the process ends (end event);
 - If the applicant is eligible, the acceptance pack is prepared and sent to the applicant (activity) and the process ends (end event).

Exercise 5

Using only the base BPMN elements (activities, gateways and sequence flows) and pools/lanes, model the following process:

The order-to-cash process is carried out by a **Seller's organization** which includes two departments: the **Sales department** and the **Warehouse & Distribution department**. The purchase order received by the Seller has to be checked against the stock. This is done automatically by an **ERP system**, which is part of the **Warehouse & Distribution department** together with the **Warehouse Staff**. If the product is in stock, the **Sales department** confirms the order. If it is not in the stock, the **Sales department** rejects the order. If the purchase order is confirmed, the **Warehouse Staff** in the **Warehouse & Distribution department** ships the goods. Meantime, the **Sales department** emits the invoice. The process concludes with the order being archived by the **Sales department**.

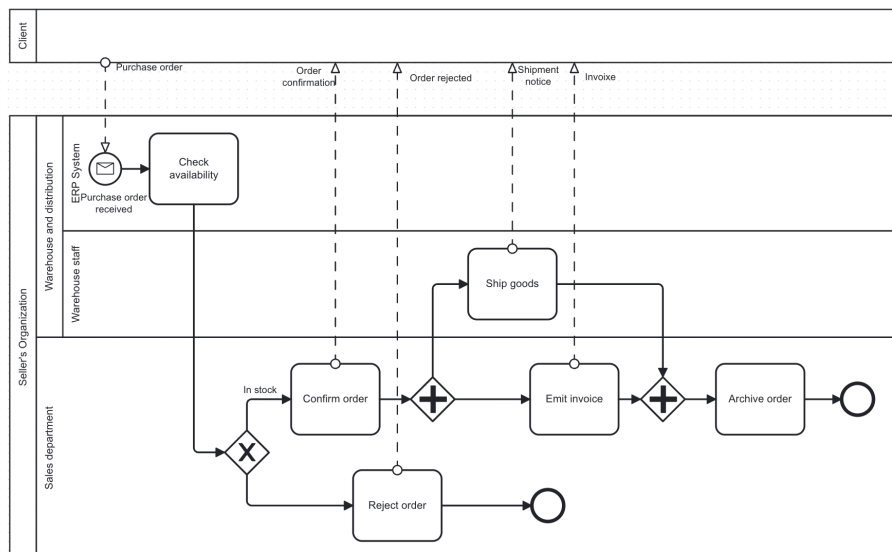


Figure 35: Solution for Exercise 5

Solution: The solution here is as follows:

- For this kind of exercise, it's advised to first identify the basic process flow. Only then, identify the different participants (pools/lanes) and assign the activities to them.
- In this case, we have two main pools:
 - The **Seller's organization** pool, which contains two lanes:
 - * The **Sales department** lane;
 - * The **Warehouse & Distribution department** lane, which contains the **Warehouse Staff** and **ERP system** sub-lanes.
 - The **Client** pool, which represents the customer making the purchase order.
- We can then add all the message flows between the two pools (dashed lines with empty arrowheads).

Exercise 6

Given the following process description, create a BPMN model that captures all the details:

In the context of a claim handling process, it is sometimes necessary to send a questionnaire to the claimant to gather additional information. The claimant is expected to return the questionnaire within five days. If no response is received after five days, a reminder is sent to the claimant. If after another five days there is still no response, another reminder is sent and so on until the completed questionnaire is received. Once the questionnaire is received, it is assessed.

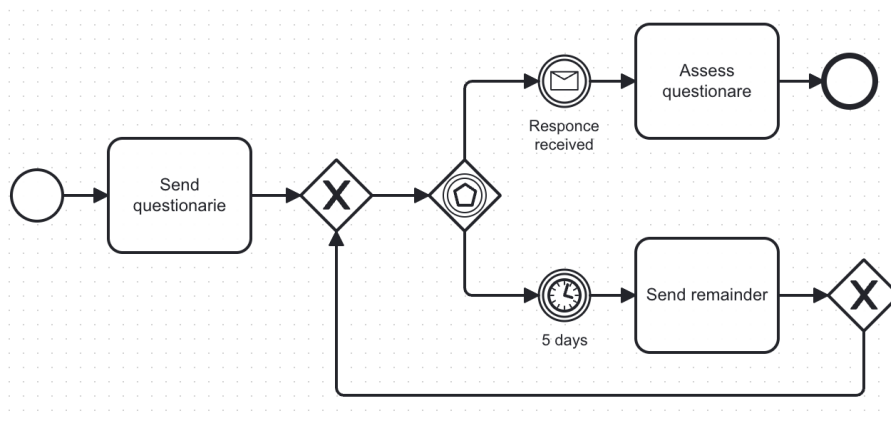


Figure 36: Solution for Exercise 6

Solution: The notable aspect of this solution are:

- The use of a block structured loop to allow any number of reminders to be sent until the questionnaire is received;
- The use of an event-based gateway to model the waiting for either receive the questionnaire or the timeout of five days. In particular:
 - The intermediate timer event models the timeout of five days;
 - The intermediate message receive event models the reception of the completed questionnaire;

Exercise 7

Given the following process description, create a BPMN model that captures all the details:

The clients of the IT helpdesk are employees of a company. A request may be an IT- related problem that a client has, or an access request (e.g., requesting rights to access an IT system). Requests need to be handled according to their type and their priority. A client makes a request to the help desk. The help desk staffed with “Level-1” support staff registers the request. Level-1 support staff typically are junior people with less than 12 months experience, but are capable of resolving simple requests. When the Level-1 employee knows how to resolve a request, she resolves it, notifies the resolution to the client and closes the simple request. When the Level-1 employee does not know how to resolve a request, the request is forwarded to a more experienced “Level-2” support staff. When a Level-2 employee receives a request, the request is evaluated, a resolution is developed and sent back to the Level-1 employee. Eventually, the Level-1 employee forwards the resolution to the client who can test the resolution and notify the outcome to the IT helpdesk. The client notifies the outcome of the test to the Level-1 employee via e-mail. If the client states that the request is fixed, the request is closed successfully, and the process ends. If the request is not fixed, it is resent to Level-2 support for further action and goes through the process again. If, instead, after the client notification, no test outcome is received back for a month, the Level-1 employee closes the request for timeout and the process ends.

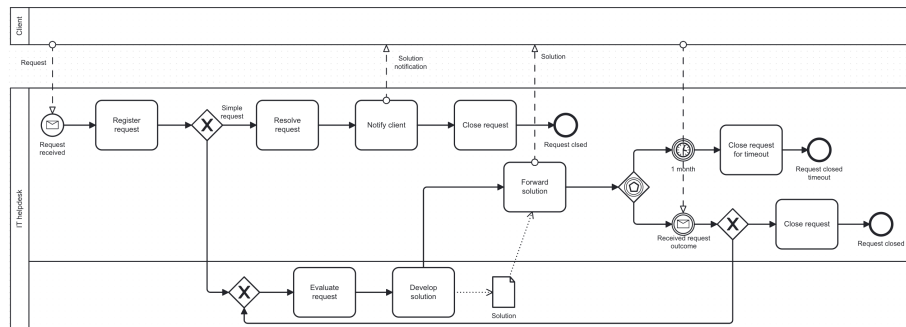


Figure 37: Solution for Exercise 7

Solution: The important aspects of this solution are:

- The process is modelled using 2 pools: the **Client** pool and the **IT Helpdesk** pool, with two lanes: **Level-1 support** and **Level-2 support**;
- The internal forwards of the request between Level-1 and Level-2 can be modelled using simple sequence flows;
- After forwarding the resolution to the client, the Level-1 support waits for an event to happen:
 - Either the client notifies that the request is fixed (intermediate message event);
 - Or a timeout of one month occurs (intermediate timer event).

This is modelled using an event-based gateway, with the two intermediate events as outgoing branches;

- Before the evaluation of the request by Level-2 support, a **XOR JOIN** gateway is used, to allow repetition of the process.

Exercise 8

Given the following process description, create a BPMN model that captures all the details:

After an expense report is received from an employee, the report is then reviewed for the approval. If the amount is lower than 1000 euros, it is automatically approved. If the amount is equal or higher than 1000 euros, then a manual check is required. In case the report is not ok, it is rejected and the employee has to be notified via email. In case it is fine, it is approved, the reimbursement is deposited to the employee's bank account and the documentation properly archived in parallel.

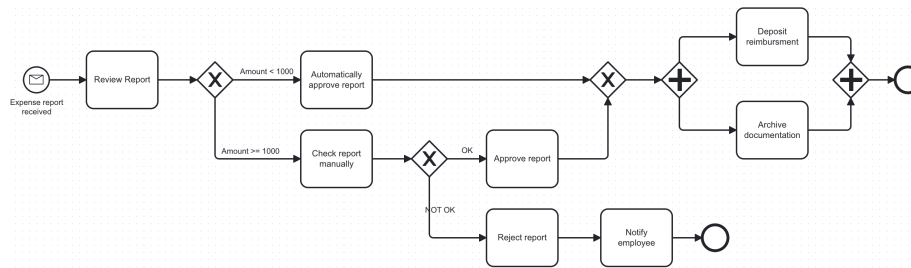


Figure 38: Solution for Exercise 8

Exercise 9

Given the following process description, create a BPMN model that captures all the details:

When a new credit request from the customer is received by the credit assessor, the risk level is checked. If the risk is above a threshold, an advanced risk assessment has to be carried out, otherwise a simple risk assessment will suffice. Once the assessment has been completed, the customer is notified with the result of the assessment and meantime, the disbursement is organized. For simplicity we assume that the result of an assessment is always positive.

Solution:

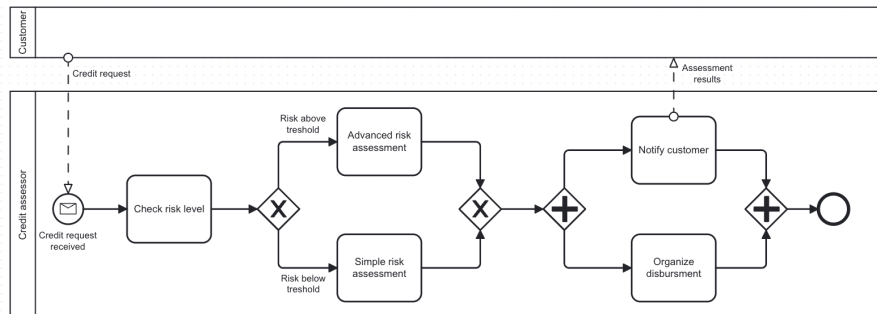


Figure 39: Solution for Exercise 9

Solution: The important aspects of this solution are:

- Since the text of the request mention both the customer and the credit assessor, we model them as two separate pools;
- A process instance starts with the receipt of a new credit request by the

credit assessor (start message event). We also need to model the message flow from the customer the start event;

- Since it's mentioned that the customer notification and the disbursement organization happen in parallel, we use an AND split gateway to model this;
- **OPTIONALLY**, we can add the data objects (credit request and assessment result) to the model to improve its understandability.

Exercise 10

Given the following process description, create a BPMN model that captures all the details:

When a claim is received, it is registered. After registration, the claim is classified leading to two possible outcomes: simple or complex. If the claim is simple, the policy is checked. For complex claims, both the policy and the damage are checked independently. A possible outcome of the policy check is that the insurance is invalid. In this case, any processing is cancelled and a letter is sent to the customer. In the case of a complex claim, this implies that the damage checking is cancelled if it has not yet been completed. If, instead, the insurance is valid, an assessment is performed and, in case of positive outcome the financial office is notified. Both in case of positive and negative outcome, the customer is notified.

The proposed solution is as follows:

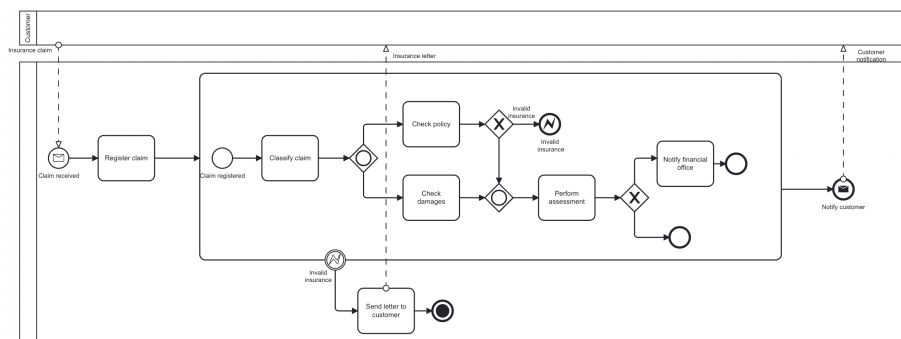


Figure 40: Solution for Exercise 10

The important aspects of this solution are:

- Part of the process is included in a sub-process. This allows to generate the exception for invalid insurance in a clean way. In particular:

-
- When the insurance is invalid, the sub-process generates an internal boundary error event;
 - It is caught by an error event handler attached to the sub-process, which leads to the sending of a letter to the customer;
 - This way, any ongoing activity in the sub-process are cancelled automatically, as requested;
 - We use an abort end event in the error handler to signal the termination of the process instance.
- Since the check insurance activity is common to both simple and complex claims, we can use an OR SPLIT gateway to model this;
 - Also for the customer notification, which is common to both positive and negative outcomes, we can place it after the end of the sub-process.

B Process Analysis

Usually, in this type of exercises, you are given a process model, enriched with branching probabilities, along with a table containing the cycle time and processing time measures for each activity.

B.1 Quantitative Analysis

Exercise 1

Figure 41: Example Process for Quantitative Analysis Exercises

and the following table:

Activity	Cycle Time (CT)	Processing Time (PT)
Assign ministerial inquiry	2 days	30 min
Investigate ministerial inquiry	8 days	12 hours
Prepare ministerial response	4 days	4 hours
Review ministerial response	4 days	2 hours

Using the information provided, compute the CTE (Cycle Time Efficiency) of the process.

Solution: To compute the CTE, we first need to compute the Cycle Time (CT) and Processing Time (PT) of the process.

$$CT = 2 + 8 + \frac{4 + 4}{0.8} + 4 = 20 \text{ days}$$

Remember that, if we have a structured loop with probability p , the formula to compute the cycle time of that is:

$$\text{Cycle Time}_{\text{loop}} = \frac{CT_{\text{body}}}{p_{\text{exit}}}$$

Similarly, we can compute the Processing Time (PT) using the same approach:

$$PT = 0.5 + 12 + \frac{4 + 2}{0.8} = 20 \text{ hours}$$

Finally, we can compute the Cycle Time Efficiency (CTE) as:

$$CTE = \frac{PT}{CT} = \frac{20}{20 \times 8} = \frac{20}{160} = 12.5\%$$

Exercise 2

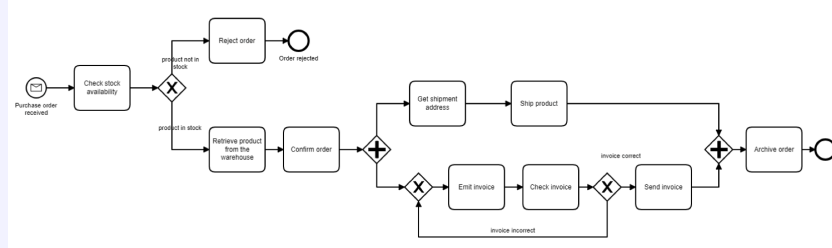


Figure 42: Example Process for Quantitative Analysis Exercises

- 20% of the orders are rejected for product not in stock;
- 10% of the orders have an incorrect invoice;

and the following table:

Activity	Cycle Time (CT)	Processing Time (PT)
Check stock availability	1 day	30 min
Reject order	7 days	1 hour
Retrieve product from the warehouse	3 days	4 hours
Confirm order	4 days	2 hours
Get shipment address	1 day	30 min
Ship product	10 days	24 hours
Emit invoice	1 day	1 hour
Check invoice	1 day	30 min
Send invoice	2 days	30 min
Archive order	4 days	1 hour

Using the information provided, compute the following:

1. The **Cycle Throughput Time** of the process;
2. The **Cycle Time** of the process;
3. The **Cycle Time Efficiency (CTE)** of the process;

Solution:

1. The Cycle Throughput Time can be computed with the rules provided in the 2.2.1. The resulting equation is:

$$\begin{aligned}
 CT &= 1 + (7 \times 0.2) + \left[\left(3 + 4 + \max \left(1 + 10, \frac{(1 + 1)}{0.9} + 2 \right) + 4 \right) \times 0.8 \right] \\
 &= 1 + 1.4 + [(3 + 4 + 11 + 4) \times 0.8] = 2.4 + 17.6 = 20 \text{ days}
 \end{aligned}$$

2. The Processing Time can be computed similarly, simply substituting the

cycle times with processing times:

$$PT = 0.5 + (1 \times 0.2) + \left[\left(4 + 2 + \max \left(0.5 + 24, \frac{(1 + 0.5)}{0.9} + 0.5 \right) + 1 \right) \times 0.8 \right]$$

$$= 0.5 + 0.2 + [(4 + 2 + 24.5 + 1) \times 0.8] = 0.7 + 6 \times 0.8 = 0.7 + 25.2 = 25.9 \text{ hours}$$

3. Finally, we can compute the Cycle Time Efficiency as:

$$CTE = \frac{PT}{CT} = \frac{25.9 \text{ hours}}{20 \text{ days}} = \frac{25.9}{20 \times 8} = 16\%$$

Exercise 3

Given the following process:

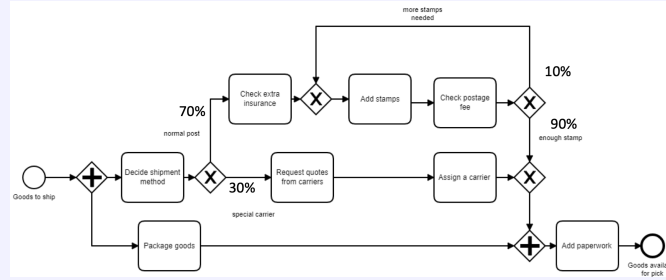


Figure 43: Example Process for Quantitative Analysis Exercise 2

and the following table:

Activity	Cycle Time (CT)	Processing Time (PT)
Decide shipment method	1 day	30 min
Check extra insurance	6 days	14 hours
Add stamps	3.5 days	6 hours
Check postage fee	1 day	3 hours
Request quotes from carriers	6 days	30 min
Assign a carrier	5 days	8.5 hours
Package goods	2 days	10 hours
Add paperwork	3 days	4 hours

Compute the Cycle Time Efficiency (CTE) of the process.

Solution: The Cycle Time (CT) can be computed as:

$$CT = \max \left(2, \left[1 + 0.7 \times \left(6 + \frac{3.5 + 1}{0.9} \right) + 0.3 \times (6 + 5) \right] \right) + 3$$

$$= 1 + 0.7 \times (11) + 0.3 \times 11 + 3 = 1 + 7.7 + 3.3 + 3 = 15 \text{ days}$$

Similarly, the Processing Time (PT) can be computed as:

$$CT = \max \left(10, \left[0.5 + 0.7 \times \left(14 + \frac{6 + 13}{0.9} \right) + 0.3 \times (0.5 + 8.5) \right] \right) + 4$$

$$= 24 \text{ hours}$$

Finally, we can compute the Cycle Time Efficiency (CTE) as:

$$CTE = \frac{PT}{CT} = \frac{24}{15 \times 8} = \frac{24}{120} = 20\%$$

B.2 Work In Progress (WIP) Analysis

Exercise 1

Suppose that a fast food restaurant processes on average 1200 customers per day, between 10:00 and 22:00 (12 hours). During peak hours (6 hrs per day), the restaurant receives around 900 customers in total and 90 customers (WIP) can be found waiting in line. At non peak times, the restaurant receives 300 customers in total and 30 customers (WIP) can be found waiting in line.

1. Calculate the average time that a customer spends in the restaurant during peak hours (cycle time);
2. Calculate the average time that a customer spends in the restaurant during non-peak hours;
3. Knowing that the restaurant expects to have more customers during peak hours, and the restaurant capacity is limited, what can the restaurant do to address this?

Solution: Using Little's Law, we can calculate the cycle time as:

$$CT_{\text{peak}} = \frac{WIP_{\text{peak}}}{\lambda_{\text{peak}}} = \frac{90 \text{ customers}}{900 \text{ customers}/6 \text{ hours}} = 0.6 \text{ hours} = 36 \text{ minutes}$$

Using the same formula, we can calculate the cycle time during non-peak hours:

$$CT_{\text{non-peak}} = \frac{WIP_{\text{non-peak}}}{\lambda_{\text{non-peak}}} = \frac{30 \text{ customers}}{300 \text{ customers}/6 \text{ hours}} = 0.6 \text{ hours} = 36 \text{ minutes}$$

Since we expect more customers during peak hours (higher arrival rate), but the WIP cannot increase, the only way to keep the cycle time constant is to decrease the cycle time during peak hours, for example by increasing the number of staff during peak hours, or optimizing the process to serve customers faster.

C Petri Nets

C.1 Modeling with Petri Nets

Exercise 1

Given the following process description, model it using a Petri net:

A small bank has 3 employees to serve customers, each can only serve 1 customer at the same time. Due to space limitations, only 20 customers can be in the bank at the same time. After being served a customer can decide to queue again for another service.

Solution: The Petri net can be modeled as follows:

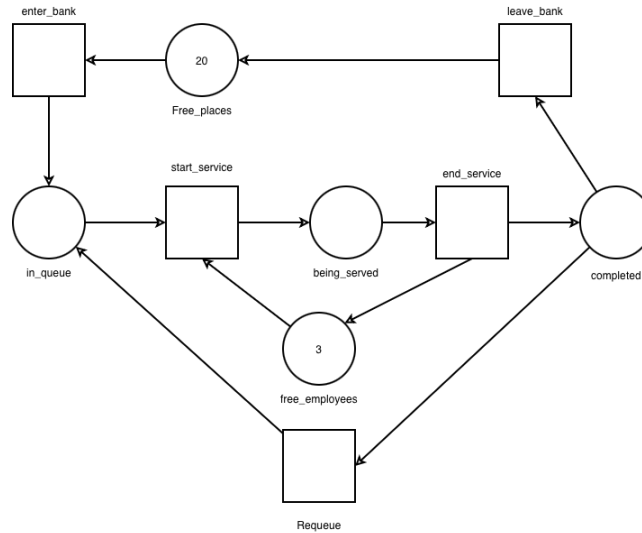


Figure 44: Petri Net Model of the Bank Process

We can see that:


- To model the availability of employees, we use a place $p_{\text{free_employees}}$ with 3 tokens, representing the 3 available employees;
- To start serving a customer, both a token in $p_{\text{free_employees}}$ and a token in $p_{\text{in_queue}}$ are required;
- After being served, a token is added back to $p_{\text{free_employees}}$, representing the employee becoming free again;

- After being served, a customer can decide to queue again, represented by the loop back to $p_{\text{in_queue}}$ or to leave the bank, adding one token to $p_{\text{free_places}}$;
- To model the space limitation, we use a place $p_{\text{free_places}}$ with 20 tokens, representing the maximum number of customers allowed in the bank;

C.2 Petri Net Properties

Exercise 1

Given the following Petri net:

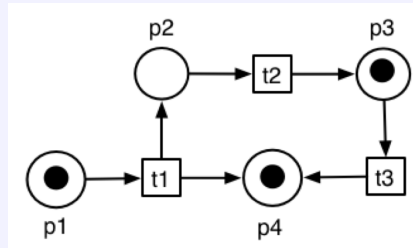

The exercise requires to:

1. Formalize the Petri net as a tuple $PN = (P, T, F, M_0)$;
2. Define the preset and postset of each transition;
3. Find the enabled transitions in the initial marking M_0 ;
4. Draw the reachability graph of the Petri net;
5. Find the reachable terminal markings;
6. Is there a reachable marking where we have a non-deterministic choice between two transitions?

Solution:

1. To formalize the Petri net, we need to define the sets of places, transitions, flow relations (edges) and the initial marking:
 - $P = \{p_1, p_2, p_3, p_4\}$
 - $T = \{t_1, t_2, t_3\}$
 - $F = \{(p_1, t_1), (t_1, p_2), (t_1, p_4), (p_2, t_2), (t_2, p_3), (p_3, t_3), (t_3, p_4)\}$
 - The initial marking M_0 is given by the tokens in the places at the start:

$$M_0(p_1) = 1, M_0(p_2) = 0, M_0(p_3) = 1, M_0(p_4) = 1$$

2. To find the preset and postset of each transition, we look at the incoming and outgoing edges of each transition:

- $\bullet t_1 = \{p_1\}$
- $t_1 \bullet = \{p_2, p_4\}$
- $\bullet t_2 = \{p_2\}$
- $t_2 \bullet = \{p_3\}$
- $\bullet t_3 = \{p_3\}$
- $t_3 \bullet = \{p_4\}$

3. In the initial marking M_0 , we can clearly see that the that the enabled transition (have all the required tokens in its preset) are:

Enabled transitions in $M_0 : \{t_1, t_3\}$

4. The reachability graph can be constructed by firing the enabled transitions from each marking, starting from M_0 :

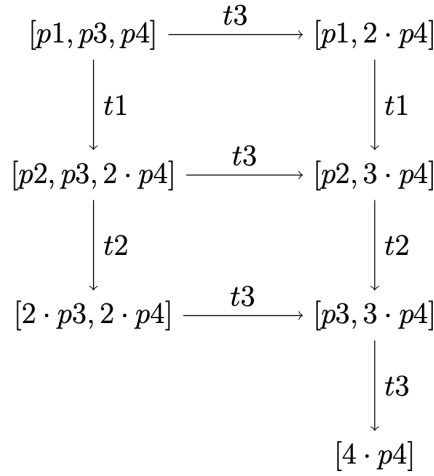


Figure 45: Reachability Graph of the Example Petri Net

5. The reachable terminal markings are the markings where no transitions are enabled. From the reachability graph, we can see that the terminal marking is:

$$M_t : M(p_1) = 0, M(p_2) = 0, M(p_3) = 0, M(p_4) = 4$$

6. Yes, for example the marking M_0 enables both transitions t_1 and t_3 , leading to a non-deterministic choice between them.

D Process Discovery

D.1 Alpha Miner

Exercise 1

Given the following event log:

$$L_1 = [\langle a, b, c, d \rangle^3, \langle a, c, b, d \rangle^2, \langle a, e, d \rangle^1]$$

build the process model using the Alpha Miner algorithm.

Solution

1. First, we need to compute the footprint matrix. We build a matrix, with all activities in the log as both rows and columns. Each cell (x, y) will contain the relation between activity x and activity y :

- $\rightarrow$ if y directly follows x in some trace, but not vice versa;
- $||$ if both x and y directly follow each other in some traces.
- $\#$ if there is no direct relation between x and y .

The table is symmetric along the diagonal, so we only need to compute one half of it:

	A	B	C	D	E
A	#	$\rightarrow$	$\rightarrow$	#	$\rightarrow$
B		#	$ $	$\rightarrow$	#
C			#	$\rightarrow$	#
D				#	$\leftarrow$
E					#

Table 2: Footprint Matrix for the Event Log L_1

2. Next, we identify the sets of all transitions T_L , the set of start activities T_I and the set of end activities T_O :
 - $T_L = \{a, b, c, d, e\}$, always corresponds to the rows/columns of the footprint matrix;
 - $T_I = \{a\}$, since every trace starts with activity a ;
 - $T_O = \{d\}$, since every trace ends with activity d .
3. Then, we identify the pairs of sets of transitions that satisfy the Alpha Miner conditions. To find the first pairs, we look for causality relations in the footprint matrix:

$$\{(\{a\}, \{b\}), (\{a\}, \{c\}), (\{a\}, \{e\}), (\{b\}, \{d\}), (\{c\}, \{d\}), (\{e\}, \{d\})\}$$

4. We can then group these pairs into maximal sets. For example, since we have both $(\{a\}, \{b\})$ and $(\{a\}, \{e\})$, and there is no causality relation between b and e , we can group them into $(\{a\}, \{b, e\})$. Continuing this process, we obtain:

$$\{(\{a\}, \{b, e\}), (\{a\}, \{c, e\}), (\{b, e\}, \{d\}), (\{c, e\}, \{d\})\}$$

We can then remove the non-maximal pairs used to compose them, resulting in:

$$\{(\{a\}, \{b, e\}), (\{a\}, \{c, e\}), (\{b, e\}, \{d\}), (\{c, e\}, \{d\})\}$$

5. Finally, we can construct the Workflow net:
- We create a place p_i as the input place, and connect it to all activities in T_I ;
 - We create a place p_o as the output place, and connect all activities in T_O to it;
 - We create one place for each of the identified maximum sets and connect them to the activities, according to the causality relations:

The resulting Petri net is the following:

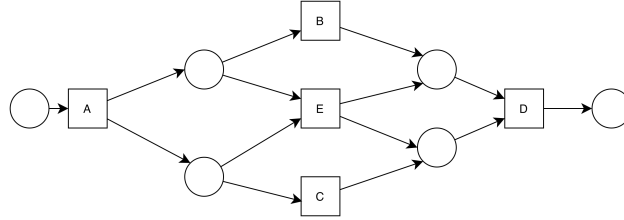


Figure 46: Petri Net Discovered using the Alpha Miner

Exercise 2

Given the following event log:

$$L = [\langle a, b, c, d, e, f, b, d, c, e, g \rangle, \langle a, b, d, c, e, g \rangle^2, \\ \langle a, b, c, d, e, f, b, c, d, e, f, b, d, c, e, g \rangle]$$

Use the Alpha Miner algorithm to discover a Petri net from the event log.

1. First, we need to compute the footprint matrix:

Exercise 3

Given the following event log:

$$L_4 = [\langle a, c, d \rangle^{45}, \langle b, c, d \rangle^{42}, \langle a, c, e \rangle^{38}, \langle b, c, e \rangle^{22}]$$

build the process model using the Alpha Miner algorithm.

Solution:

1. First, we need to compute the footprint matrix:

	A	B	C	D	E
A	#	#	→	#	#
B		#	→	#	#
C			#	→	→
D				#	#
E					#

Table 4: Footprint Matrix for the Event Log L

2. Identify the sets:

$$T_L = \{a, b, c, d, e\}$$

$$T_I = \{a, b\}$$

$$T_O = \{e, d\}$$

3. Identify the maximal pairs:

$$\{(\{a\}, \{c\}), (\{b\}, \{c\}), (\{c\}, \{d\}), (\{c\}, \{e\})\}$$

$$\{(\{a, b\}, \{c\}), (\{c\}, \{d, e\})\}$$

4. Finally, we can construct the Workflow net:




Figure 48: Petri Net Discovered using the Alpha Miner

Exercise 4

Consider the log:

$$L = [\langle a, b, d \rangle^{100}, \langle a, c, b, d \rangle^{80}, \langle a, b, c, d \rangle^2, \langle a, c, d \rangle^{40}, \langle a, d \rangle^1]$$

Use the Alpha Miner algorithm to discover a Petri net from the event log.

- First, we compute the footprint matrix:

	A	B	C	D
A	#	→	→	→
B		#		→
C			#	→
D				#

Table 5: Footprint Matrix for the Event Log L

- Next, we identify the sets:

$$T_L = \{a, b, c, d\}$$

$$T_I = \{a\}$$

$$T_O = \{d\}$$

- We can then identify the maximal pairs:

$$\{(\{a\}, \{b\}), (\{a\}, \{c\}), (\{a\}, \{d\}), (\{b\}, \{d\}), (\{c\}, \{d\})\}$$

No bigger sets can be formed.

- Finally, we can construct the Workflow net:

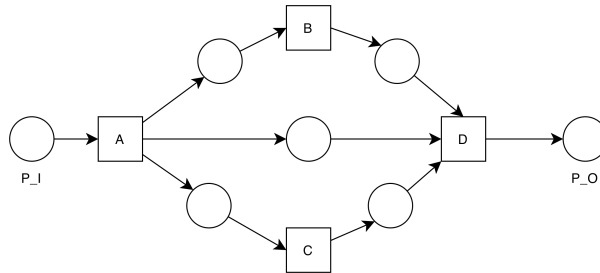


Figure 49: Petri Net Discovered using the Alpha Miner

D.2 Heuristic Miner

Exercise 1

Given the following event log:

$$L = [\langle a, e \rangle^5, \langle a, b, c, e \rangle^{10}, \langle a, c, b, e \rangle^{10}, \langle a, b, e \rangle^1, \langle a, c, e \rangle^1, \\ \langle a, d, e \rangle^{10}, \langle a, d, d, e \rangle^2, \langle a, d, d, d, e \rangle^1]$$

use the Heuristic Miner algorithm to discover a process model from the event log, with a threshold of 0.7.

Solution:

1. First, we need to compute the frequency matrix:

	A	B	C	D	E
A	0	11	11	13	5
B	0	0	10	0	11
C	0	10	0	0	11
D	0	0	0	4	13
E	0	0	0	0	0

Table 6: Frequency Matrix for the Event Log L

Each cell (x, y) contains the number of times activity x is directly followed by activity y in the event log.

2. Next, we compute the dependency matrix, by applying the dependency measure formula to each pair of activities. Remember that the dependency measure is defined as:

$$\begin{cases} \frac{|x \rightarrow y| - |y \rightarrow x|}{|x \rightarrow y| + |y \rightarrow x| + 1} & \text{if } x \neq y \\ \frac{|x \rightarrow x|}{|x \rightarrow x| + 1} & \text{otherwise} \end{cases}$$


Note that:

- Along the diagonal, we apply the second case of the formula;
- We can compute the upper triangle of the matrix, the lower triangle can be derived from it by simply swapping signs.

	A	B	C	D	E
A	0	$\frac{11}{12}$	$\frac{11}{12}$	$\frac{13}{14}$	$\frac{5}{6}$
B		0	$\frac{10-10}{21}$	0	$\frac{11}{12}$
C			0	0	$\frac{11}{12}$
D				$\frac{4}{5}$	$\frac{13}{14}$
E					0

Table 7: Dependency Matrix for the Event Log L

3. We can then build the dependency graph, using the given threshold. We create a node for each activity in the log, and add the directed edges for each pair of activities whose dependency measure is above the threshold:

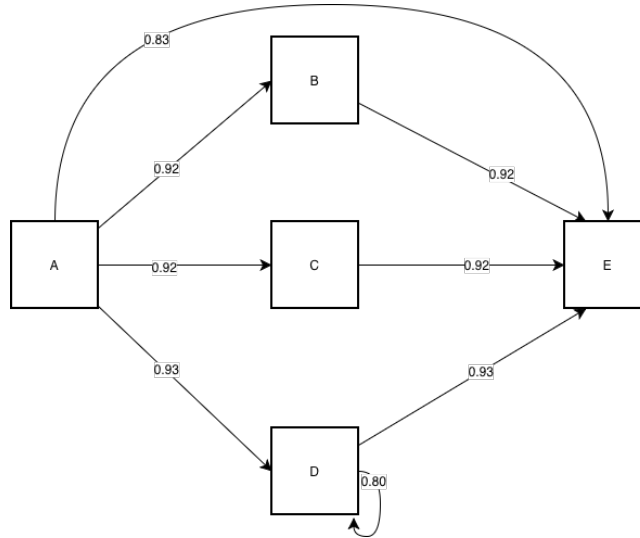Figure 50: Dependency Graph for the Event Log L **Exercise 2**

Given the following event log:

$$L_2 = [\langle a, b, d, e \rangle^{80}, \langle a, d, b, e \rangle^{30}, \langle a, e \rangle^2, \langle a, b, c, d, e \rangle^{10}]$$

use the Heuristic Miner algorithm to discover the dependency matrix from the event log and build the dependency graph with a threshold of 0.9.

Solution:

1. First, we compute the frequency matrix:

	A	B	C	D	E
A	0	90	0	30	2
B	0	0	10	80	30
C	0	0	0	10	0
D	0	30	0	0	90
E	0	0	0	0	0


Table 8: Frequency Matrix for the Event Log L_2

2. Next, we compute the dependency measure matrix:

	A	B	C	D	E
A	0	$\frac{90}{91}$	0	$\frac{30}{31}$	$\frac{2}{3}$
B		0	$\frac{10}{11}$	$\frac{80}{11}$	$\frac{30}{31}$
C			0	$\frac{10}{11}$	0
D				0	$\frac{90}{91}$
E					0

Table 9: Dependency measure Matrix for the Event Log L_2

3. Finally, we can build the dependency graph, using the given threshold.
The resulting graph is the following:

Figure 51: Dependency Graph for the Event Log L_2

Exercise 3

Given the following event log:

$$L_3 = [\langle a, b, d \rangle^{100}, \langle a, c, b, d \rangle^{80}, \langle a, b, c, d \rangle^2, \langle a, c, d \rangle^{40}, \langle a, d \rangle^1]$$

Compute:

- The frequency matrix;
- The dependency matrix;
- The dependency graph with a threshold of 0.9 and a threshold for direct succession of 1.

Solution:

1. First, we compute the frequency matrix:

	A	B	C	D
A	0	102	120	1
B	0	0	2	180
C	0	80	0	42
D	0	0	0	0

Table 10: Frequency Matrix for the Event Log L_3


2. Next, we compute the dependency measure matrix:

	A	B	C	D
A	0	$\frac{102}{103}$	$\frac{120}{121}$	$\frac{1}{2}$
B	-	0	$\frac{-78}{83}$	$\frac{180}{181}$
C	-	-	0	$\frac{42}{43}$
D	-	-	-	0

Table 11: Dependency measure Matrix for the Event Log L_3

The lower triangle can be derived from the upper triangle by swapping signs.

3. Finally, we can build the dependency graph, using the given thresholds. The resulting graph is the following:

Figure 52: Dependency Graph for the Event Log L_3

D.3 Region Based Miner

Exercise 1

Construct a transition system applying the *past with multiset abstraction* for the given log:

$$L = [\langle a, c, b, d \rangle, \langle a, b, c, d \rangle, \langle b, a, c, d \rangle]$$

Solution:

1. We create a starting state q_0 with an empty multiset;
2. We replay each trace in the log, updating the multiset and creating new states as needed. For instance, considering the first trace $\langle a, c, b, d \rangle$:
 - For the event a , we add a transition from q_0 to a new state q_1 with multiset $\{a\}$;
 - For the event c , we add a transition from q_1 to q_2 with multiset $\{a, c\}$;
 - For the event b , we add a transition from q_2 to q_3 with multiset $\{a, b, c\}$;
 - ...

Continuing this process for all traces, we obtain the following transition system:

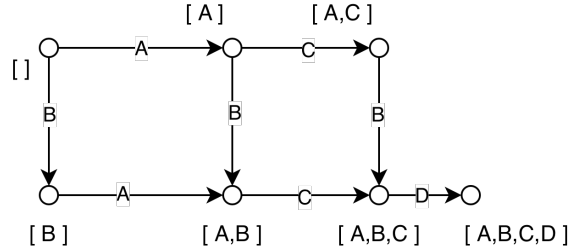


Figure 53: Transition System using Past with Multiset Abstraction

Exercise 2

Given the previous transition system, compute the resulting Petri net.

Solution:

1. We identify the minimal, non-trivial regions in the transition system. In this case, we have:

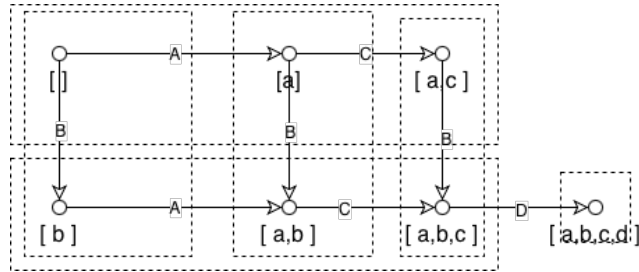


Figure 54: Identified Regions from the Transition System

2. We then create a place for each region. All the transition entering a region will have an arc to the corresponding place, and all transitions leaving the region will have an arc from the place. This results in the following Petri net:

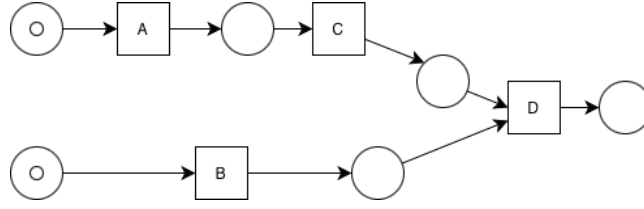


Figure 55: Petri Net Derived from the Transition System

Exercise 3

Given the following event log:

$$L = [\langle a, b, c, d \rangle^3, \langle a, c, b, d \rangle^2, \langle a, e, d \rangle^1]$$

build the process model using the Region Based Miner algorithm with *past with set abstraction*.

Solution:

1. First, we create the transition system using past with set abstraction:

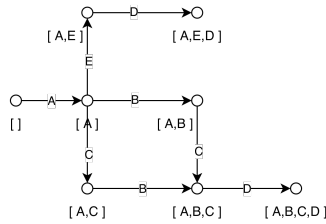


Figure 56: Transition System using Past with Set Abstraction

2. Next, we identify the minimal, non-trivial regions in the transition system:
We have the following regions:
 - **P1:** A enters, B, E leaves;
 - **P2:** B, E enter, D leaves;
 - **P3:** C, E enter, D leaves;
 - **P4:** A enters, C, E leaves.
3. Finally, we create a place for each region and connect them to the transitions according to the entering and leaving activities. We also add the input and output places. The resulting Petri net is the following:

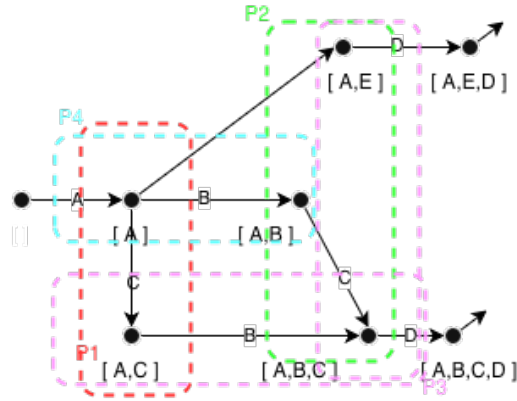


Figure 57: Identified Regions from the Transition System

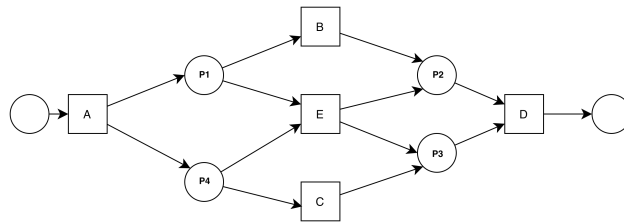


Figure 58: Petri Net Discovered using the Region Based Miner

Exercise 4

Given the following event log:

$$L = [\langle a, b, d \rangle^{100}, \langle a, c, b, d \rangle^{80}, \langle a, b, c, d \rangle^2, \langle a, c, d \rangle^{40}, \langle a, d \rangle^1]$$

Use the Region Based Miner algorithm with *past with set abstraction* to discover a Petri Net.

Solution:

1. We first create the transition system using past with set abstraction:

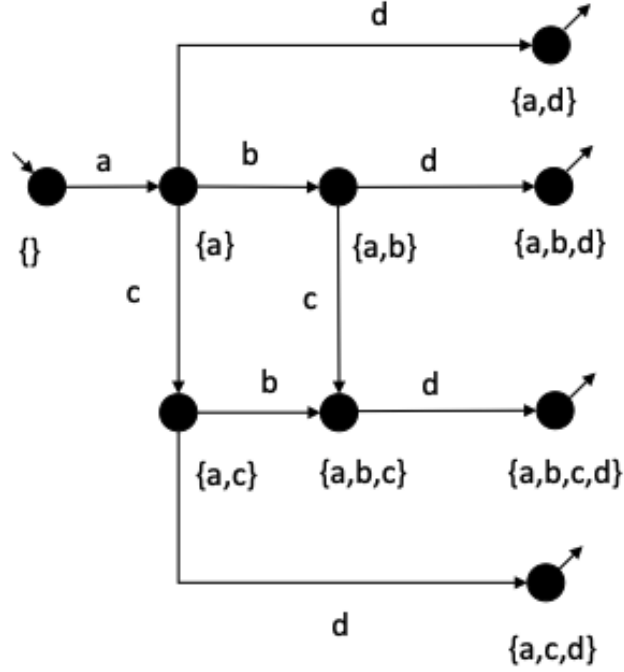


Figure 59: Transition System using Past with Set Abstraction

2. Next, we identify the minimal, non-trivial regions in the transition system:

- First, we can easily identify the easier regions, corresponding to places p_i and p_o :
 - P_I : A leaves, nothing enters;
 - P_O : D enters, nothing leaves.
- Then, we can identify the other regions, remembering that all equally labeled transitions must behave the same way, with respect to the region:
 - P_1 : B enters, nothing leaves;
 - P_2 : C enters, nothing leaves;
 - P_3 : A enters, D exits;
 - P_4 : A enters, B exits. Note that for this region, we have to get a little creative. Since the simplest region that can come to mind is not valid as the top and bottom D transition enter, while the two middle D transitions leave. We can however create a region where A enters, and B exit by going around the D transitions, including in the region the two terminal nodes at the top and bottom.

- P_5 : A enters, C exits. Similarly, also for this region we have to include the two nodes in the top half of the transition system.
3. Finally, we create a place for each region and connect them to the transitions according to the entering and leaving activities.

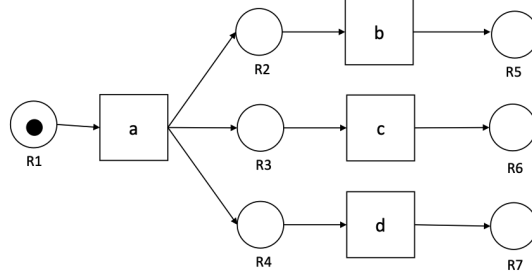


Figure 60: Petri Net Discovered using the Region Based Miner

D.4 Inductive Miner

Exercise 1


Given the following event log:

$$L = [\langle a, b, c, d \rangle^3, \langle a, c, b, d \rangle^4, \langle a, b, c, e, f, b, c, d \rangle^2, \langle a, c, b, e, f, b, c, d \rangle^2, \\ \langle a, b, c, e, f, c, b, d \rangle, \langle a, c, b, e, f, b, c, e, f, c, b, d \rangle]$$

use the Inductive Miner algorithm to discover a process model from the event log.

Solution:

1. To begin, we first need to build the directly-follows graph (DFG) from the event log. We create a node for each activity in the log, and add directed edges between nodes that directly follow each other in any trace. For example if activity a is directly followed by activity b in some trace, we add a directed edge from node a to node b . The resulting DFG is the following:

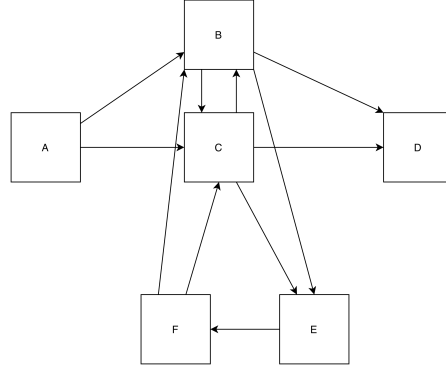Figure 61: Directly-Follows Graph for the Event Log L

2. Next, we analyze the DFG to identify the possible splits:
 - An exclusive cut is clearly not possible;
 - Two sequence cuts are possible: one between a and the rest of the activities, and another between d and the rest of the activities; We end up with terminal nodes a and d .
3. We can now analyze the subgraphs between the identified sequence cuts:




Figure 62: Subgraph between the Sequence Cuts

and the respective traces:

$$L = [\langle b, c \rangle^3, \langle c, b \rangle^4, \langle b, c, e, f, b, c \rangle^2, \langle c, b, e, f, b, c \rangle^2, \\ \langle b, c, e, f, c, b \rangle, \langle c, b, e, f, b, c, e, f, c, b \rangle]$$

Analyzing the log, we can see that it is probable to have a parallel cut between b, c and e, f . All the other cuts are not possible. So, we apply the parallel cut, obtaining the following subgraphs:

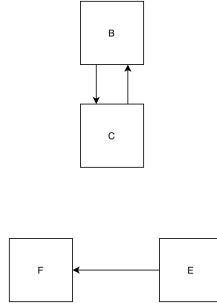


Figure 63: Subgraphs after Applying the Parallel Cut

4. Finally, we can analyze each of the subgraphs:
 - The first subgraph contains activity b and c , interconnected. This means we can do a parallel cut, obtaining two terminal nodes b and c ;
 - The second subgraph contains activity e and f , connected in sequence. We can apply a sequence cut, obtaining two terminal nodes e and f .
5. We can now construct the process model by combining all the identified cuts and terminal nodes:

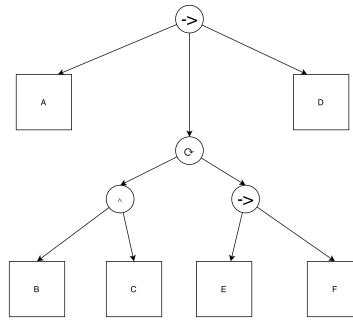


Figure 64: Process Model Discovered using the Inductive Miner

Exercise 2

Given the following event log:

$$L = [\langle a, c, d \rangle^{45}, \langle b, c, d \rangle^{42}, \langle a, c, e \rangle^{38}, \langle b, c, e \rangle^{22}]$$

use the Inductive Miner algorithm to discover a process model from the event log.

Exercise 3

Given the following event log:

$$L = [\langle a, b, d \rangle^{100}, \langle a, c, b, d \rangle^{80}, \langle a, b, c, d \rangle^2, \langle a, c, d \rangle^{40}, \langle a, d \rangle^1]$$

use the Inductive Miner algorithm to discover a process model from the event log.

E Conformance Checking

E.1 Replay-based Conformance Checking

Exercise 2

Given the following Petri net and event log:




Figure 65: Petri net for Exercise 1

$$L = [\langle a, b, c, d \rangle^{10}, \langle a, c, b, d \rangle^{10}, \langle a, e, d \rangle^{10}, \langle a, b, d \rangle^2, \langle a, c, d \rangle^1, \\ \langle a, d \rangle^1, \langle a, b, b, d \rangle^1]$$

Use replay-based conformance checking to compute the fitness of the event log with respect to the Petri net.

Solution:

1. First, we replay each unique trace in the event log on the Petri net and collect the statistics:
 - For trace $\langle a, b, c, d \rangle$:
 - We first produce a token in place *start* ($p = 1$);
 - We then fire transition *a*, consuming the token from place *start* and producing a token in each of the output places of *a* ($c = 1$, $p = 3$);
 - We then fire transition *b*, consuming a token from place p_1 and producing a token in p_3 ($c = 2$, $p = 4$);
 - We then fire transition *c*, consuming a token from place p_2 and producing a token in p_4 ($c = 3$, $p = 5$);
 - We then fire transition *d*, consuming tokens from places p_3 and p_4 and producing a token in place *end* ($c = 5$, $p = 6$);
 - Finally, we consume the token from place *end* ($c = 6$, $p = 6$);
 - For trace $\langle a, c, b, d \rangle$, we have the same statistics as above: $p = 6$, $c = 6$, $m = 0$, $r = 0$;
 - For trace $\langle a, e, d \rangle$, we have $p = 6$, $c = 6$, $m = 0$, $r = 0$;
 - For trace $\langle a, b, b, d \rangle$, we have $p = 5$, $c = 5$, $m = 1$, $r = 1$;

- For trace $\langle a, c, d \rangle$, we have the same statistics as above: $p = 5, c = 5, m = 1, r = 1$;
 - For trace $\langle a, d \rangle$, we have $p = 4, c = 4, m = 2, r = 2$;
 - For trace $\langle a, b, b, d \rangle$, we have $p = 6, c = 6, m = 2, r = 2$;
2. Now, we can sum the statistics weighted by the frequency of each trace in the event log:
- $P_{total} = 10 \times 6 + 10 \times 6 + 10 \times 6 + 2 \times 5 + 1 \times 5 + 1 \times 4 + 1 \times 6 = 205$;
 - $C_{total} = 205$ since every trace has the same number of produced and consumed tokens;
 - $M_{total} = 0 + 0 + 0 + 1 \times 2 + 1 + 2 + 2 = 7$;
 - $R_{total} = 7$ since the remaining tokens are equal to the missing tokens for each trace.

3. Finally, we can compute the fitness of the event log using the formula:

$$\begin{aligned}
 Fitness_{Log} &= \frac{1}{2} \left(1 - \frac{M_{total}}{C_{total}}\right) + \frac{1}{2} \left(1 - \frac{R_{total}}{P_{total}}\right) = \frac{1}{2} \left(1 - \frac{7}{205}\right) + \frac{1}{2} \left(1 - \frac{7}{205}\right) = \\
 &= 1 - \frac{7}{205} = \frac{198}{205} \approx 0.9659
 \end{aligned}$$

Exercise 2

Given the following event log:

$$L = [\langle a, b, d, e, f \rangle^{10}, \langle a, c, e, d, f \rangle^{10}]$$

1. Construct the Petri net using the Alpha Miner algorithm;
2. Use replay-based conformance checking to compute the fitness of the event log with respect to the Petri net.

Solution:

1. First, we need to construct the Petri net using the Alpha Miner algorithm:

- Build the footprint matrix:

	a	b	c	d	e	f
a	#	→	→	#	#	#
b		#	#	→	#	#
c			#	#	→	#
d				#		→
e					#	→
f						#

Trace	(p)	(c)	(m)	(r)
$\langle a, b, d, e, f \rangle$	6	7	1	0
$\langle a, c, e, d, f \rangle$	6	7	1	0

- Identify the sets of input and output transitions:

$$T = \{a, b, c, d, e, f\}$$

$$T_I = \{\{a\}\}$$

$$T_O = \{\{f\}\}$$

- Identify the maximal pairs of sets of transitions:

$$\{(\{a\}, \{b, c\}), (\{b\}, \{d\}), (\{c\}, \{e\}), (\{d\}, \{f\}), (\{e\}, \{f\})\}$$

- Construct the Petri net:

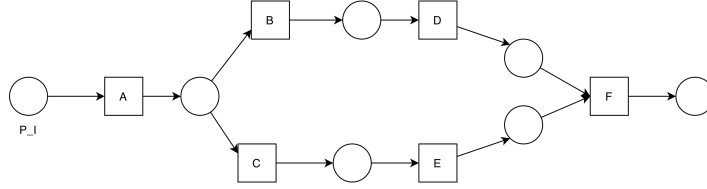


Figure 66: Petri net for Exercise 2

- Now, we can use replay-based conformance checking to compute the fitness of the event log with respect to the Petri net:

- Replay each unique trace, collecting its statistics:
- We can compute the log statistics weighted by the frequency of each trace in the event log:

$$P_{total} = 10 \times 6 + 10 \times 6 = 120$$

$$C_{total} = 10 \times 7 + 10 \times 7 = 140$$

$$M_{total} = 10 \times 1 + 10 \times 1 = 20$$

$$R_{total} = 0$$

- Finally, we can compute the fitness of the event log:

$$\begin{aligned}
 Fitness_L &= \frac{1}{2} \left(1 - \frac{M_{total}}{C_{total}}\right) + \frac{1}{2} \left(1 - \frac{R_{total}}{P_{total}}\right) = \frac{1}{2} \left(1 - \frac{20}{140}\right) + \frac{1}{2} \left(1 - \frac{0}{120}\right) = \\
 &= \left(\frac{1}{2} \frac{120}{140}\right) + \left(\frac{1}{2} 1\right) = \frac{3}{7} + \frac{1}{2} \approx 0.93
 \end{aligned}$$

Exercise 3

Given the following Petri net and event log:




Figure 67: Petri net for Exercise 3

$$L = [\langle a, c, d \rangle^{10}, \langle b, c, e \rangle^{10}, \langle a, c, e \rangle^5, \langle b, c, d \rangle^5, \langle d, c, a \rangle, \\ \langle a, b, d \rangle, \langle d \rangle]$$

Use replay-based conformance checking to compute the fitness of the event log with respect to the Petri net.

Solution:

1. Replay each unique trace, collecting its statistics:

Trace	(p)	(c)	(m)	(r)
$\langle a, c, d \rangle$	5	5	0	0
$\langle b, c, e \rangle$	5	5	0	0
$\langle a, c, e \rangle$	5	5	1	1
$\langle b, c, d \rangle$	5	5	1	1
$\langle d, c, a \rangle$	5	5	3	3
$\langle a, b, d \rangle$	6	5	2	3
$\langle d \rangle$	2	3	2	1

2. We can compute the log statistics weighted by the frequency of each trace in the event log:

$$P_{total} = 10 \times 5 + 10 \times 5 + 5 \times 5 + 5 \times 5 + 1 \times 5 + 1 \times 6 + 1 \times 2 = 163$$

$$C_{total} = 10 \times 5 + 10 \times 5 + 5 \times 5 + 5 \times 5 + 1 \times 5 + 1 \times 5 + 1 \times 3 = 163$$

$$M_{total} = 5 \times 1 + 5 \times 1 + 1 \times 3 + 1 \times 2 + 1 \times 2 = 17$$

$$R_{total} = 5 \times 1 + 5 \times 1 + 1 \times 3 + 1 \times 3 + 1 \times 1 = 17$$

3. Finally, we can compute the fitness of the event log:

$$\begin{aligned} Fitness_L &= \frac{1}{2} \left(1 - \frac{M_{total}}{C_{total}} \right) + \frac{1}{2} \left(1 - \frac{R_{total}}{P_{total}} \right) = \frac{1}{2} \left(1 - \frac{17}{163} \right) + \frac{1}{2} \left(1 - \frac{17}{163} \right) = \\ &= 1 - \frac{17}{163} = \frac{146}{163} \approx 0.89 \end{aligned}$$

Trace	$\langle p \rangle$	$\langle c \rangle$	$\langle m \rangle$	$\langle r \rangle$
$\langle a, b, e, f, c, d \rangle$	9	9	2	2
$\langle a, b, b, e, f, c, c, d \rangle$	11	11	2	2

Exercise 4

Given the following Petri net and event log:




Figure 68: Petri net for Exercise 4

$$L = [\langle a, b, e, f, c, d \rangle^{10}, \langle a, b, b, e, f, c, c, d \rangle^{10}]$$

Compute the fitness of the event log with respect to the Petri net using replay-based conformance checking.

Solution:

1. Replay each unique trace, collecting its statistics:
2. We can check that the equation $p + m = c + r$ holds for both traces, which verifies our calculations.
3. We can compute the log statistics weighted by the frequency of each trace in the event log:

$$P_{total} = 10 \times 9 + 10 \times 11 = 200$$

$$C_{total} = 10 \times 9 + 10 \times 11 = 200$$

$$M_{total} = 10 \times 2 + 10 \times 2 = 40$$

$$R_{total} = 10 \times 2 + 10 \times 2 = 40$$

4. Finally, we can compute the fitness of the event log. Since P and C are equal, we can simplify the formula:

$$Fitness_L = 1 - \frac{M_{total}}{C_{total}} = 1 - \frac{40}{200} = \frac{160}{200} = 0.8$$

Exercise 5

Given the following Petri net and trace:




Figure 69: Petri net for Exercise 5

Trace: $\langle a, b, b \rangle$ Compute the number of produced, consumed, missing, and remaining tokens.

Solution:

1. We first produce a token in place *start* ($p = 1$);
2. We can then fire transition *a*, consuming the token from place *start* and producing a token in p_2 ($c = 1, p = 2$);
3. We can then fire transition *b*, consuming the token from place p_2 and producing a token in p_3 ($c = 2, p = 3$);
4. To fire transition *b* again, we need to add a missing token to place p_2 ($m = 1$);
5. We can then fire transition *b* again, consuming the token from place p_2 and producing a token in p_3 ($c = 3, p = 4$);
6. Since a token is missing in place *end*, we have one remaining token in place p_3 ($r = 2$) and then we consume it ($c = 4$). Thus, we have:

$$p = 4, c = 4, m = 2, r = 2$$

We can also check that the equation $p + m = c + r$ holds to verify our calculations: $4 + 2 = 4 + 2$.

7. Finally, we can compute the fitness of the trace:

$$\begin{aligned}
 Fitness &= \frac{1}{2} \left(1 - \frac{m}{c}\right) + \frac{1}{2} \left(1 - \frac{r}{p}\right) = \frac{1}{2} \left(1 - \frac{2}{4}\right) + \frac{1}{2} \left(1 - \frac{2}{4}\right) = \\
 &= 1 - \frac{1}{2} = 0.5
 \end{aligned}$$

E.2 Alignment-based Conformance Checking

Exercise 1

Given the following Petri net and event log:




Figure 70: Petri net for Exercise 1

$$L = [\langle a, b, c, d, e, g \rangle^{10}, \langle a, b, c, e, f, e, g \rangle^2]$$

Use alignment-based conformance checking to compute the fitness of the event log with respect to the Petri net.

Solution:

1. First, we need to compute the fitness for each unique trace in the event log:
2. For trace $\langle a, b, c, d, e, g \rangle$, suppose it matches perfectly with the process model:
 - Optimal alignment cost = 0;
 - To compute the worst-case alignment cost, we first need to make all log moves, resulting in a cost of 6 (one for each event in the trace);
 - Then, we need to make all model moves in the shortest path from the initial to the final marking, which is 6.

a	b	c	d	e	g	>>	>>	>>	>>	>>	>>
>>	>>	>>	>>	>>	>>	a	b	d	c	e	g

- Worst-case alignment cost = 12;
 - Fitness = $1 - \frac{0}{12} = 1$;
3. For trace $\langle a, b, c, e, f, e, g \rangle$:
 - Optimal alignment cost = 3, 2 log moves (for e and f) and 1 model move (for d);

a	b	c	>>	e	f	e	g
a	b	c	d	>>	>>	e	g

- Worst-case alignment cost = 13, 7 log moves and 6 model moves;
4. Finally, we can compute the fitness of the event log as the weighted average of the fitness of each trace:

$$fitness(L, N) = \frac{10 \times 1 + 2 \times 0.75}{10 + 2} = \frac{11.5}{12} \approx 0.96$$