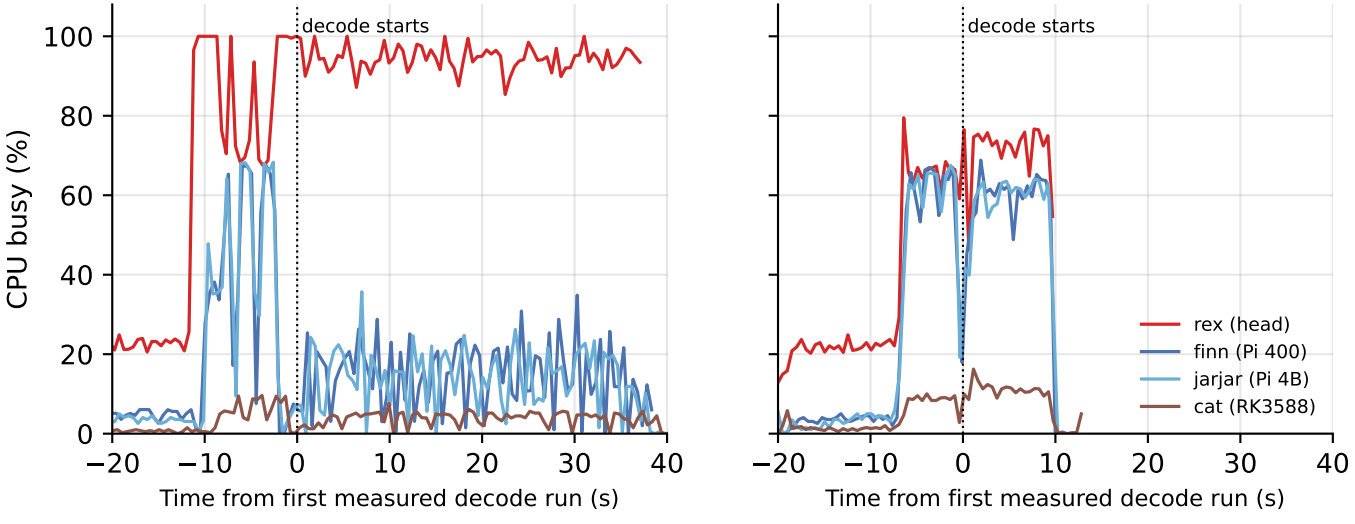
8 nodes, busy-spin (1.62 tok/s)
decode starts
CPU busy (%)
100
80
60
40
20
0
−20
−10
0
10
20
30
40
Time from first measured decode run (s)
8 nodes, no-spin (6.34 tok/s)
decode starts
rex (head)
finn (Pi 400)
jarjar (Pi 4B)
cat (RK3588)
−20
−10
0
10
20
30
40
Time from first measured decode run (s)