


(a) Task hierarchy

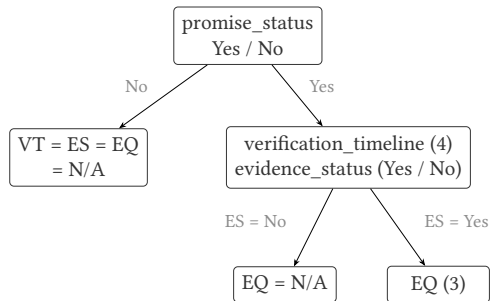

$$1 + 4 \times (1 + 3) = 17 \text{ legal tuples}$$

$$\text{of } 2 \times 5 \times 3 \times 4 = 120 \text{ combinations}$$

the other 103 are invalid

(b) Decision rules: output rule $\times$ calibration

	base probabilities (identical for every method)		
	no calibration	global bias	conditional bias
independent argmax <i>may be invalid</i>	M0	—	—
projection <i>always valid</i>	M1	M2	M3
17-state decoding <i>always valid</i>	M4	M5	M6

*the seven rules are alternatives, not stages:
every cell consumes the same base probabilities*