

Anything User Manual

Thierry Volpiatto

15 février 2011

Table des matières

1	Install	1
2	Config	1
3	General anything commands	2
3.1	All anything bindings	3
4	Overview of preconfigured anything commands	4
5	Anything Find Files	4
5.1	Navigation	4
5.2	Jump with nth commands	5
5.3	Turn in image viewer	5
5.4	Grep	7
5.5	Anything do grep	8
5.6	Grep from anything-find-files	8
5.7	Grep One file	8
5.8	Grep Marked files	8
5.8.1	Grep marked files from differents directories	9
5.9	Grep Directory recursively	9
5.10	Grep Using Wildcard	9
5.11	Grep thing at point	9
5.12	Open Files Externally	9
5.13	Eshell command on files	10
5.14	Why Eshell	10
5.15	Setup Aliases	10
5.16	Problem starting Eshell	10
5.17	Dired Commands	10
5.18	Copy Files	10
5.19	Rename Files	11
5.20	Symlink Files	11
5.21	Hardlink	11

5.22	Follow file after action	11
5.23	In Buffer File Completion	11
5.24	Create File	11
5.25	Create Directory	11
5.26	Ediff files	12
5.27	Ediff merge files	12
5.28	Browse archive with avfs	12
5.29	Display with icons	12
6	Anything write buffer	12
7	Anything insert file	12
8	Anything M-x	12
9	Anything regexp	13
9.1	Query replace regexp	13
9.2	Save regexp as sexp	13
9.3	Save regexp as string	13
10	Anything locate	13
10.1	Search files	13
10.2	Launch grep	14
10.3	Windows specificity	14
11	Anything Etags	14
11.1	Create the tag file	14
11.2	Start anything etags	14
12	Firefox bookmarks	15
13	Other tools	16
14	Usefuls extensions	16
15	Usefuls links	16

1 Install

First get the files from git repo :

Anything git repo is at :

<http://repo.or.cz/w/anything-config.git>

To get it with git :

```
git clone git://repo.or.cz/anything-config.git
```

NOTE : Files are published on Emacswiki, but be aware that it is unsafe to get files from Emacswiki.

You need 2 files :

- anything.el

Contain the anything engine.

- anything-config.el

Contain all the sources and preconfigured functions ready to use.

and optionally :

- anything-match-plugin.el

Allow matching multi pattern search when entering a space in prompt.

Once downloaded these files, put them in your ‘load-path’. If you don’t know what is your load-path do C-h v load-path.

2 Config

Edit your ~/.emacs.el file and add :

```
(require 'anything-config)
```

Optionally, you can add :

```
(require 'anything-match-plugin)
```

Note that if you don’t require anything-match-plugin, you can enable/disable it afterward with :

M-x anything-c-toggle-match-plugin

NOTE : It is not recommended to use the variable ‘anything-sources’, please use instead the preconfigured anything command you will find in anything-config.el or build your own.

Be aware also that making your own anything commands with a lot of sources involved can be very costly and slowdown anything a lot.

3 General anything commands

Anything allow you to have few binding to remember unlike all others Emacs applications.

Anything show you by default in mode-line the most useful bindings, you will see in headers of anything buffer some more specific commands.

So when anything start what you have to remember :

- Access to action menu with

TAB

- Use persistent actions with

C-z

- Mark candidate with

M-<SPACE>

So three bindings to remember and they are anyway documented in mode-line. For more, hitting

C-h m

while in anything session will show you all other bindings.

3.1 All anything bindings

Command	Key
anything-next-line	down or C-n
anything-previous-line	up or C-p
anything-previous-page	prior or M-v
anything-next-page	next or C-v
anything-beginning-of-buffer	M-<
anything-end-of-buffer	M->
anything-next-source	right or C-o
anything-previous-source	left
anything-exit-minibuffer	RET
anything-select-with-digit-shortcut	C-1/9/A/Z
anything-select-action	TAB or C-i
anything-execute-persistent-action	C-z
anything-select-2nd-action-or-end-of-line	C-e
anything-select-3rd-action	C-j
anything-scroll-other-window	M-next or C-M-v
anything-scroll-other-window-down	M-prior or C-M-y
anything-toggle-visible-mark	C-SPACE
anything-prev-visible-mark	M-[
anything-next-visible-mark	M-]
anything-delete-minibuffer-contents	C-k
anything-isearch	C-s
anything-toggle-resplit-window	C-t
anything-quit-and-find-file	C-x C-f
anything-delete-current-selection	C-c C-d
anything-yank-selection	C-c C-y
anything-kill-selection-and-quit	C-c C-k
anything-follow-mode	C-c C-f
anything-force-update	C-c C-u
anything-debug-output	C-c C-x C-d
anything-display-all-visible-marks	C-c C-x C-m
anything-send-bug-report-from-anything	C-c C-x C-b
anything-previous-history-element	M-p
anything-next-history-element	M-n

4 Overview of preconfigured anything commands

For starting with anything, a set of commands have been set for you in anything menu. The bindings of all these commands are prefixed with ‘f5-a’.

To discover more anything commands run from menu anything all commands (anything-execute-anything-command). Or run anything-M-x (f5-a M-x) and type anything.

When you like a command, e.g f5 a M-x you should bind it to something more convenient like M-x to replace the Emacs original keybinding.

5 Anything Find Files

‘anything-find-files’ provide you a way to navigate in your system file easily. All the actions you can do on files from here are described in this section.

It is binded in menu, and in ‘anything-command-map’ to f5-a C-x C-f. We will assume you have binded ‘anything-find-files’ to C-x C-f. To do that put in your .emacs.el :

```
(global-set-key (kbd "C-x C-f") 'anything-find-files)
```

It is well integrated with tramp, you can enter any tramp filename and it will complete. (e.g /su : :, /sudo : :, /ssh :host :, ... etc)

Called with a prefix arg, (C-u) anything-find-files will show you also history of last visited directories.

5.1 Navigation

Anything-find-files is not by default on / but on default-directory or thing-at-point as it use ffap.If you are on a url, a mail adress etc.. it will do the right thing.

So anything-find-files work like find-file (C-x C-f), but if you use it with anything-match-plugin.el, you have to add a space and then the next part of pattern you want to match :

Example :

```
Find Files or url: ~/
That show all ~/ directory.
```

```
Find Files or url: ~/des
will show all what begin with "des"
```

```
Find Files or url: ~/ esk
(Notice the space after ~/) will show all what contain esk.
```

```
Find Files or url: ~/ el$  
Will show all what finish with el
```

You can move in the anything buffer with C-n C-p or arrow keys, when you are on a file, you can hit C-z to show only this file-name in the anything buffer. On a directory, C-z will switch to this directory to continue searching in it. On a symlink C-z will expand to the true name of symlink.(moving your mouse cursor over a symlink will show the true name of it).

So it is quite easy to navigate in your files with anything-find-files.

Forget to mention C-. that go to root of current dir or to precedent level of dir. So for example you can hit C-z and then come back immediatly where you were with C-. instead of erasing minibuffer input with DEL. On non graphic display, it is bound to C-l.

If you like it you can safely bind it to C-x C-f to replace the standard find-file :

```
(global-set-key (kbd "C-x C-f") 'anything-find-files)
```

NOTE : Starting anything-find-files with C-u will show you a little history of the last visited directories.

5.2 Jump with nth commands

Take advantage of the second, third and 4th actions in anything. Instead of opening action menu with TAB, just hit :

C-e for 2th action

C-j for 3th action

You can bind 4th action to some key like this :

```
(define-key anything-map (kbd "<C-tab>") 'anything-select-4th-action)
```


5.3 Turn in image viewer

You can turn anything-find-files in a nice image-viewer.

Navigate to your image directory, then type C-u C-z on first image. Now turn on 'follow-mode' with C-c C-f. You can now navigate in your image directory with arrow up and down or C-n C-p. Don't forget also to use C-t to split you windows vertically if needed.

You will find also two actions to rotate image in action menu. To use these actions whitout quitting, use M-l (rotate left) and M-r (rotate right). Of course M-l and M-r have no effect if candidate is not an image file.

NOTE : It use image-dired in background, so if image-dired don't work for some reason, this will not work too. Be sure to have Imagemagick package installed.

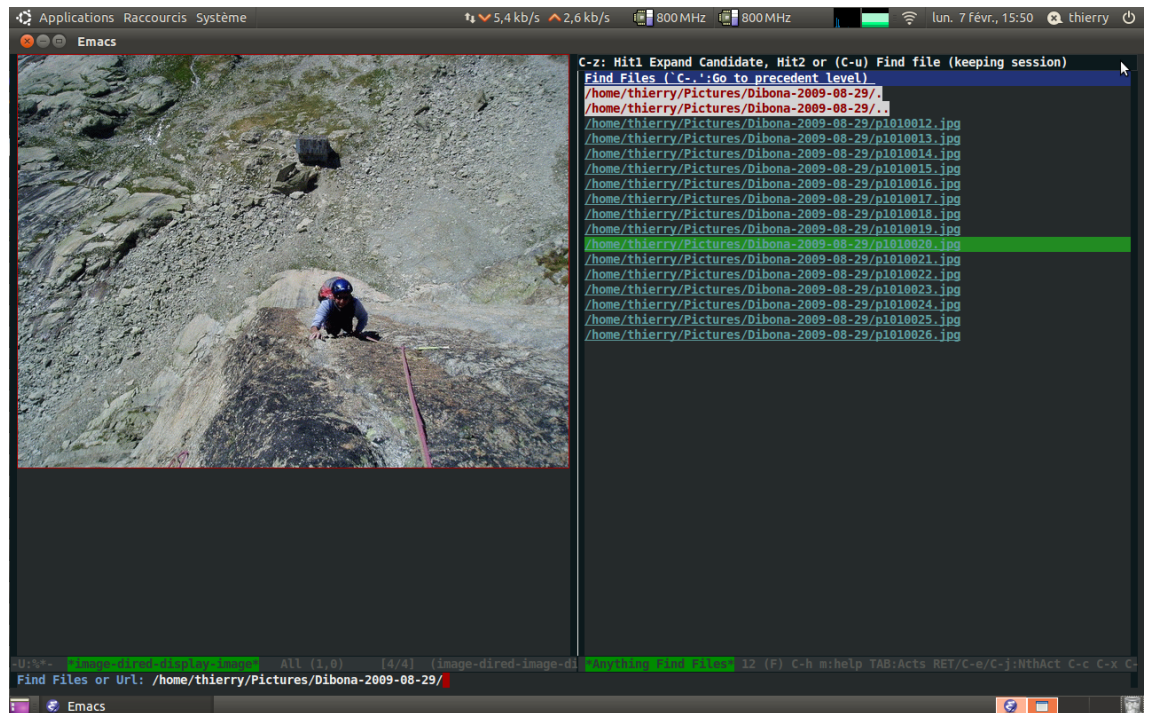

5.4 Grep

We describe here anything-do-grep, an incremental grep. It is really convenient as you can start a search just after finding the place or file(s) you want to search in. By the nature of incremental stuff, it is faster than original Emacs grep for searching.


As you type the display change (like in all other anything commands). This grep is also recursive unlike the emacs implementation that use find/xargs.

It support wildcard and (re)use the variables ‘grep-find-ignored-files’ and ‘grep-find-ignored-directories’.

It have full tramp integration. (you can grep file on a remote host or in su/sudo methods).

- NOTE : You will find a file named anything-grep.el in extensions. It is NOT needed to use with what is described here. It is another implementation of grep but not incremental.
- NOTE : When using it recursively, ‘grep-find-ignored-files’ is not used unless you don’t specify the only extensions of files where you want to search (you will have a prompt). You can now specify more than one extension to search.
e.g *.el *.py *.tex
will search only in files with these extensions.
- NOTE : Windows users need grep version $\geq 2.5.4$ of Gnuwin32 on windoze. This version should accept the `–exclude-dir` option.

Grep in action on current file :

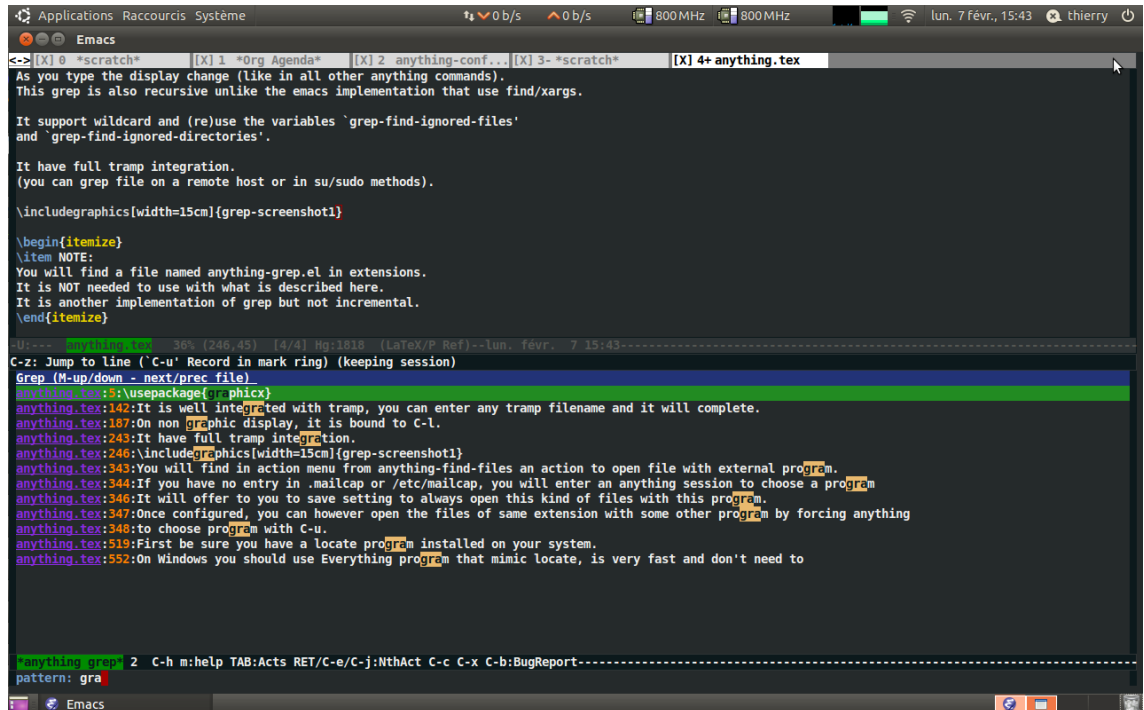

The screenshot shows an Emacs window with a dark theme. The top bar indicates the system is 'Applications Raccourcis Système' and shows various status icons. The Emacs window title is 'Emacs'. The buffer list at the top shows several buffers: '[X] 0 *scratch*', '[X] 1 *Org Agenda*', '[X] 2 anything-conf...', '[X] 3- *scratch*', and '[X] 4+ anything.tex'. The main window displays the content of 'anything.tex'. The text includes a header for 'anything-grep.el', a note about tramp integration, and a section for 'anything-grep'. A recursive grep search has been performed, showing results for the pattern 'gra'. The search results are displayed in a buffer named 'anything-grep' at the bottom of the window. The search results show the following matches:

```
anything.tex:5:\usepackage{graphicx}
anything.tex:142:It is well integrated with tramp, you can enter any tramp filename and it will complete.
anything.tex:187:On non graphic display, it is bound to C-l.
anything.tex:243:It have full tramp integration.
anything.tex:246:\includegraphics[width=15cm]{grep-screenshot1}
anything.tex:343:You will find in action menu from anything-find-files an action to open file with external program.
anything.tex:344:If you have no entry in .mailcap or /etc/mailcap, you will enter an anything session to choose a program
anything.tex:346:It will offer to you to save setting to always open this kind of files with this program.
anything.tex:347:Once configured, you can however open the files of same extension with some other program by forcing anything
anything.tex:348:to choose program with C-u.
anything.tex:519:First be sure you have a locate program installed on your system.
anything.tex:552:On Windows you should use Everything program that mimic locate, is very fast and don't need to
```

5.5 Anything do grep

Start with M-x anything-do-grep bound to f5 a M-g s A prefix arg will launch recursive grep.

5.6 Grep from anything-find-files

From anything-find-files (f5 a C-x C-f) Open the action menu with tab and choose grep. A prefix arg will launch recursive grep.

5.7 Grep One file

Just launch grep, it will search in file at point. if file is a directory, it will search in ALL files of this directory like :

```
grep -nH -e pattern *
```

5.8 Grep Marked files

Just mark some files with

C-<SPACE>

and launch grep.

5.8.1 Grep marked files from different directories

This is a very nice feature of anything grep implementation that allow to search in specific files located not only in current directory but anywhere in your file system.

To use navigate in your file system and mark files with

`C-<SPACE>`

.When you have marked all files, just launch grep in action menu.

NOTE : using recursive search will have no effect of course !

5.9 Grep Directory recursively

From anything-find-files, reach the root of the directory where you want to search in, then hit TAB to open the action menu and choose grep with a prefix arg (i.e C-u RET).

if you want to use grep directly from anything-do-grep, do :

`C-u f5 a M-g s`

You will be prompted for selecting in which category of files to search : Use the wildcard syntax like *.el for example (search in only .el files).

5.10 Grep Using Wildcard

You can use wildcard : From the root of your directory, if you want for example to search files with .el extension : add *.el to prompt

5.11 Grep thing at point

Before launching anything, put your cursor on the start of symbol or sexp you will want to grep. Then launch anything-do-grep or anything-find-files, and when in the grep prompt hit C-w as many time as needed.

5.12 Open Files Externally

You will find in action menu from anything-find-files an action to open file with external program. If you have no entry in .mailcap or /etc/mailcap, you will enter an anything session to choose a program to use with this kind of file. It will offer to you to save setting to always open this kind of files with this program. Once configured, you can however open the files of same extension with some other program by forcing anything to choose program with C-u.

5.13 Eshell command on files

You can run eshell-command on files or marked files, the command you use have to accept one file as argument. The completion is make on your eshell aliases.

5.14 Why Eshell

Because eshell allow you to create aliases. You can like that create personal commands for anything-find-files. All these command should end with \$1. You will have completion against all these aliases once eshell is loaded. (start it once before using anything-find-files).

NOTE : Eshell accept shell commands but also elisp functions :-).

5.15 Setup Aliases

Go in eshell, an enter at prompt :

```
alias my_alias command \"$1
```

NOTE : don't forget to escape the \$.

See the documentation of Eshell for more info.

5.16 Problem starting Eshell

Eshell code is available (autoloaded) only when you have started once eshell. That's annoying like many autoloaded stuff in Emacs.

5.17 Dired Commands

To enable some of the usual commands of dired, put in .emacs.el

```
(anything-dired-bindings 1)
```

Or run interactively :

```
M-x anything-dired-bindings
```

This will replace in dired C, R, S, and H commands. That is copy, rename, symlink, hardlink. When creating a symlink, you will find relsymlink in actions menu.(TAB).

5.18 Copy Files

It is a powerfull feature of anything-find-files as you can mark files in very different places in your file system and copy them in one place.

Dired is not able to do that, you can mark files only in current dired display and copy them somewhere.

So, easy to use, just mark some files, and hit copy files in the action menu. That will open a new anything-find-files where you can choose destination.

5.19 Rename Files

Just mark some files, and hit rename files in the action menu. That will open a new anything-find-files where you can choose destination.

5.20 Symlink Files

Just mark some files, and hit symlink or relsymlink files in the action menu. That will open a new anything-find-files where you can choose destination.

5.21 Hardlink

Just mark some files, and hit hardlink files in the action menu. That will open a new anything-find-files where you can choose destination.

5.22 Follow file after action

A prefix arg on any of the action above, copy, rename, symlink, hardlink, will allow you to follow the file. For example, when you want to copy an elisp file somewhere and you want to compile it in this place, hitting C-u RET will bring you in this place with the file already marked, you have just to go in action menu to compile it.

5.23 In Buffer File Completion

In any buffer and even in minibuffer if you have enable recursive-minibuffer

```
(setq enable-recursive-minibuffers t)
```

You can have completion with C-x C-f and then hit tab to choose action Complete at point
once you have found the filename you want.

5.24 Create File

Navigate to the directory where you want to create your new file, then continue typing the name of your file and type enter.

NOTE : If your filename ends with a / you will be prompt to create a new directory.

5.25 Create Directory

Navigate to the directory where you want to create your new directory, then continue typing the name of new directory - Parents accepted - and end it with / type enter, you will be prompt to create your new directory (possibly with parents).

5.26 Ediff files

Well, that is easy to use, move cursor to a file, hit ediff in action menu, you will jump in another anything-find-files to choose second file.

5.27 Ediff merge files

move cursor to a file, hit ediff merge in action menu, you will jump in another anything-find-files to choose second file.

5.28 Browse archive with avfs

If you have installed avfs (See : <http://sourceforge.net/projects/avf>) you can browse archives in your directory .avfs once it is mounted with “mountavfs”.

Just move on the archive filename and press C-z (persistent action) and you will see in anything buffer the subdirectories of archive, just navigate inside as usual.

5.29 Display with icons

You can have a more fancy display showing icons for files and directories. Just add in .emacs :

```
(setq anything-c-find-files-show-icons t)
```

NOTE : This will slowdown anything-find-files unless you have a fast computer.

6 Anything write buffer

That is a replacement of standard write-buffer Emacs command with anything completion.

7 Anything insert file

That is a replacement of standard insert-file Emacs command with anything completion.

8 Anything M-x

It is binded to f5 a M-x, you should bind it to M-x.

Features :

- You can use prefix arguments before or during M-x session

- C-z is a toggle documentation for this command
- The key binding of command are shown.

9 Anything regexp

This is a replacement of regexp-builder. The groups are shown in a convenient way.

9.1 Query replace regexp

Write your regexp in anything-regexp, when it match what you want, you can run query-replace from action menu. NOTE : Before running anything-regexp, you can select a region to work in, that will narrow this region automatically.

9.2 Save regexp as sexp

When you use this, it will save your regexp for further use in lisp code, with backslash duplicated.

9.3 Save regexp as string

Save the regexp as you wrote it.

10 Anything locate

First be sure you have a locate program installed on your system. Most GNU/Linux distro come with locate included, you update or create the data base with “updatedb” command.

10.1 Search files

To use, just launch

M-x anything-locate (f5 a l)

Then enter filename at prompt. It will search this pattern entered also in directory and subdirectory names, to limit your search to basename, add “-b” after pattern. The search is performed on all files known in database, they maybe not exists anymore, so to limit to really existing files add after pattern “-e”. To limit you search to specific number of results, use “-n” after your pattern with the number of results you want.

Example :

Pattern: emacs -b -e -n 12

10.2 Launch grep

When search is done, you can search in a specific file or directory with grep that you will find in action menu (TAB).

10.3 Windows specificity

On Windows you should use Everything program that mimic locate, is very fast and don't need to update database manually. To use with anything-locate, you will need his command line named "es". Be sure to modify the PATH environment variable, to include path to the directory that contain "es". The arguments are the same than the ones in "locate".

11 Anything Etags

11.1 Create the tag file

To use etags in Emacs you have first to create a TAGS file for your project with the etags shell command. If your directory contains subdirectories use something like :(e.g .el files)

```
etags find . -iregex .*\.el$ | xargs etags
```

Otherwise

```
etags *.el
```

is enough

For more infos see the man page of etags.

11.2 Start anything etags

Now just using f5 a e will show you all entries. If the project is big it take some time to load tag file but when it is done, next search will be very fast. If you modify the TAGS file, use

```
C-u C-u f5 a e
```

to refresh the tag cache.

To search the definition at point use just

```
C-u f5 a e
```


12 Firefox bookmarks

You will have to set firefox to import bookmarks in his html file bookmarks.html.

(only for firefox versions >=3)

To achieve that, open “about :config” in firefox and double click on this line to enable value to true :

```
user_pref("browser.bookmarks.autoExportHTML", false);
```

You should have now :

```
user_pref("browser.bookmarks.autoExportHTML", true);
```

Now you can use

M-x anything-firefox-bookmarks

To see your firefox bookmarks from Emacs. When you are in firefox things are a little more complicated. You will need wmctrl program and a script named ffbookmarks :

```
#!/bin/bash
```

```
wmctrl -xa emacs
```

```
emacsclient -e "(progn (anything-firefox-bookmarks) nil)" > /dev/null
```

```
wmctrl -xa firefox
```

```
exit 0
```

Put this script somewhere in PATH and make it executable :

```
chmod +x ffbookmarks
```

Firefox is not aware about this new protocol, you will have to instruct it. See Firefox documentation or use firefox-protocol.el package you can get here :

<http://mercurial.intuxication.org/hg/emacs-bookmark-extension/>

Install new protocol :

M-x firefox-protocol-installer-install

to install new protocol ffbookmarks Then install a bookmarklet in firefox : Right click on the bookmark toolbar in firefox and add a new bookmark called ffbookmarks. Add this instead of url :

```
javascript:location.href='ffbookmarks://localhost'
```

Now when you click on ffbookmarks it will bring you in Emacs and allow you to browse your bookmarks with anything.

NOTE : emacs server need to be started in the running Emacs, see Emacs documentation.

13 Other tools

In addition of what is described above, you will find a bunch of powerfull tools that come with anything-config.el. Just browse the anything commands availables with anything-M-x.

Not complete.

14 Usefuls extensions

Not complete.

15 Usefuls links

You can have info about anything on Emacswiki (Sometime deprecated).
<http://www.emacswiki.org/emacs/Anything>

You can ask on the anything mailing-list by subscribing at :
<https://groups.google.com/group/emacs-anything?hl=en>