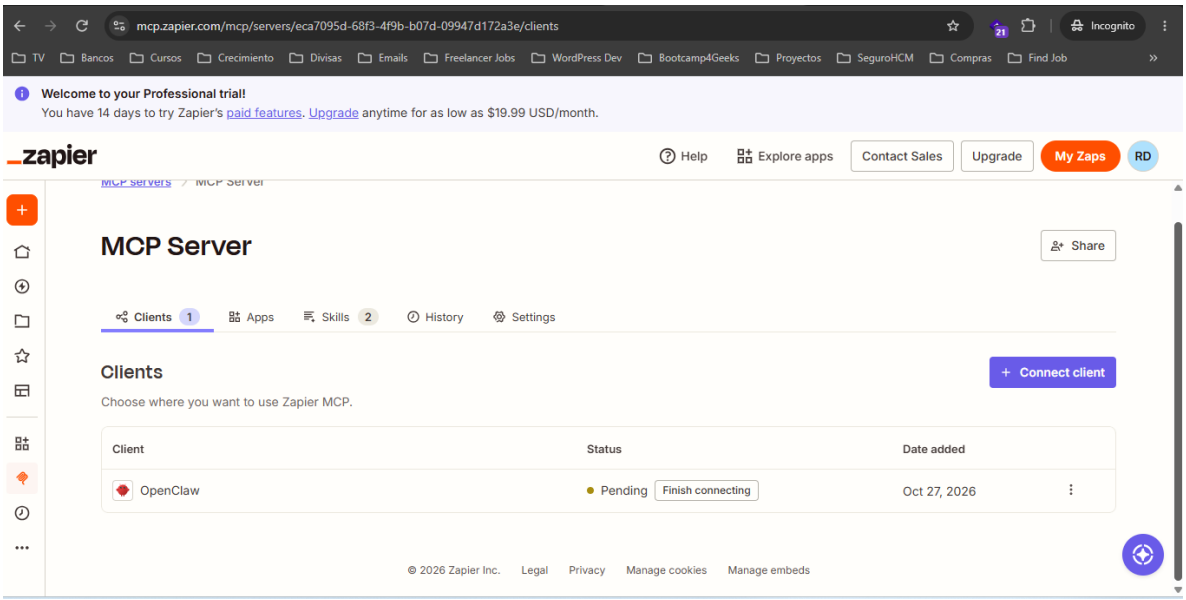
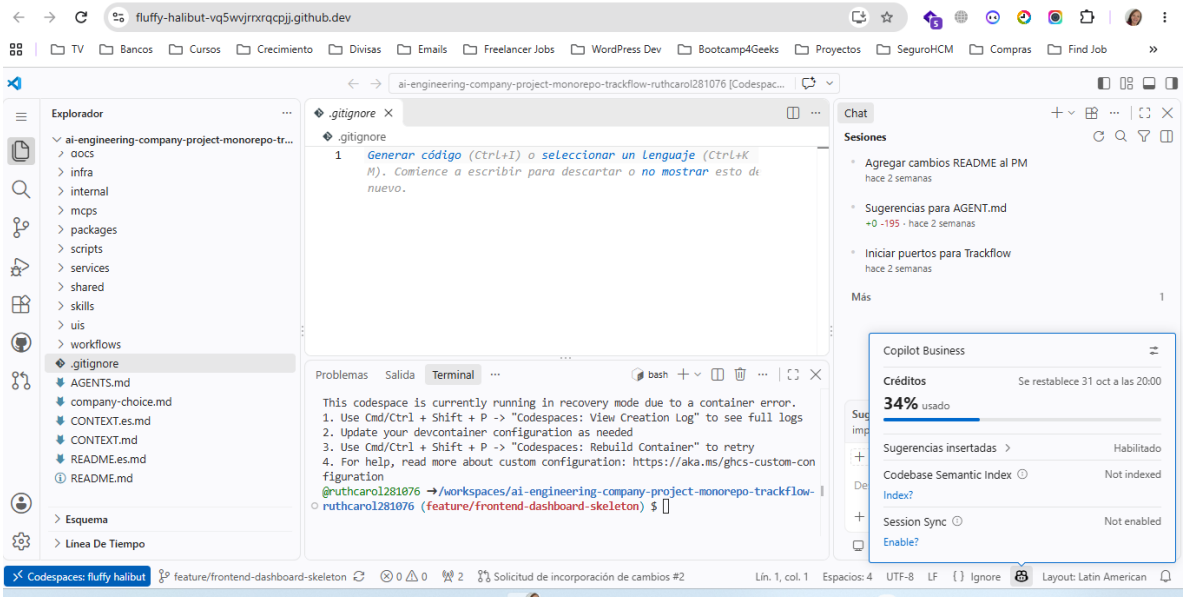
CONFIGURACIÓN DE OPENCLAW 27oct2026

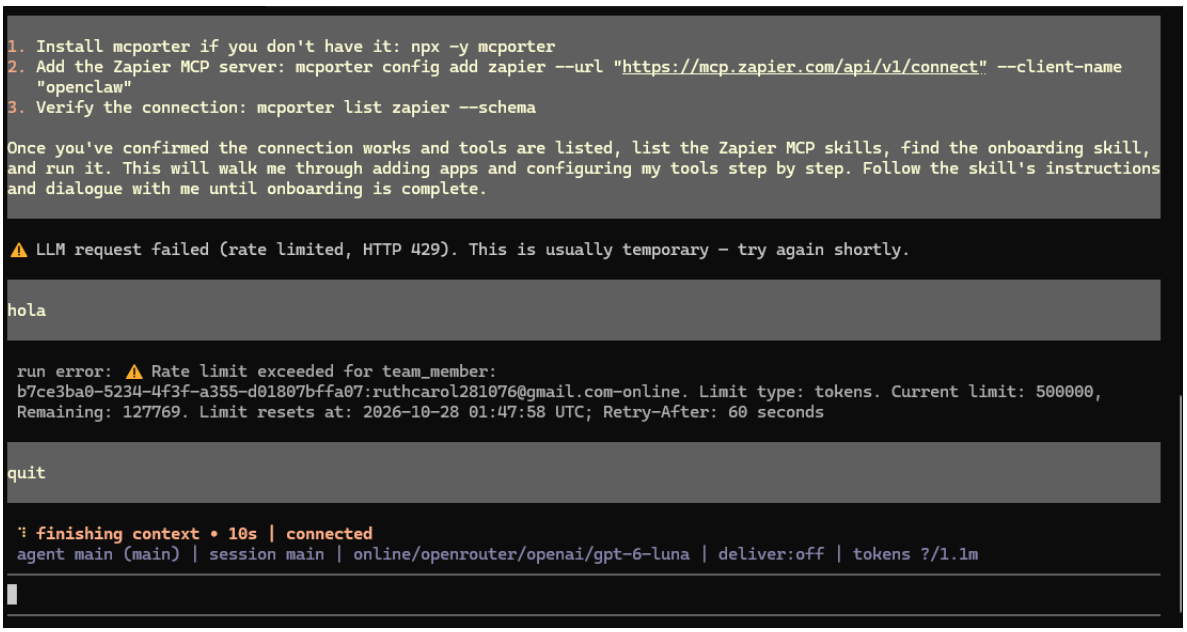
ZAPIER

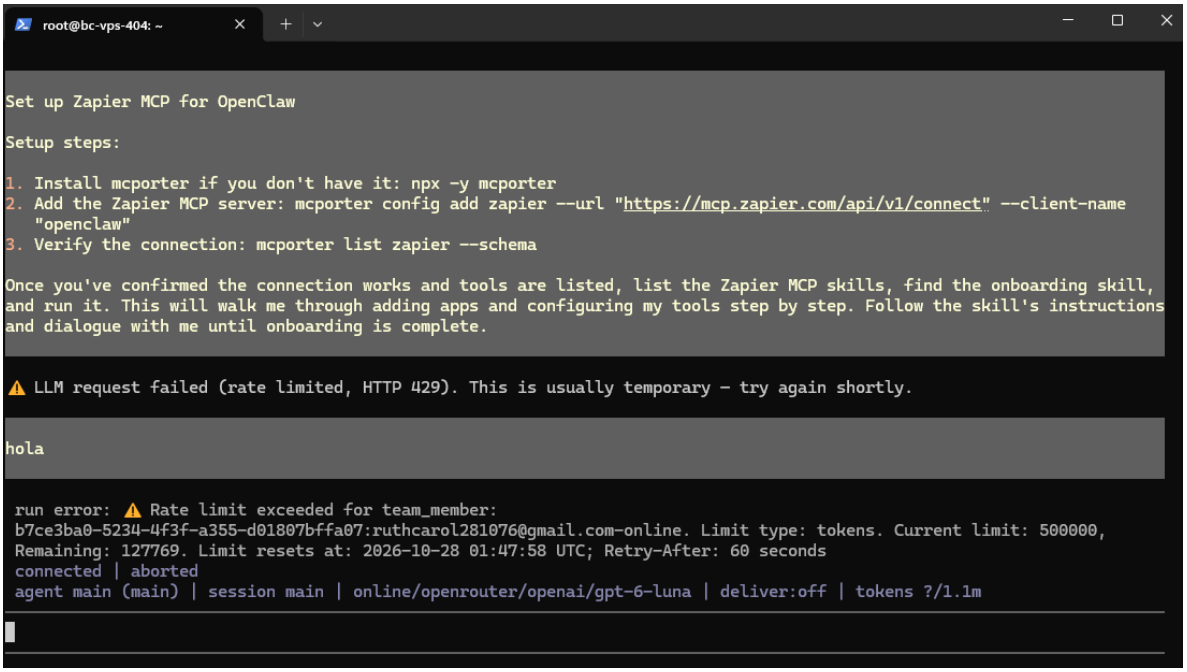


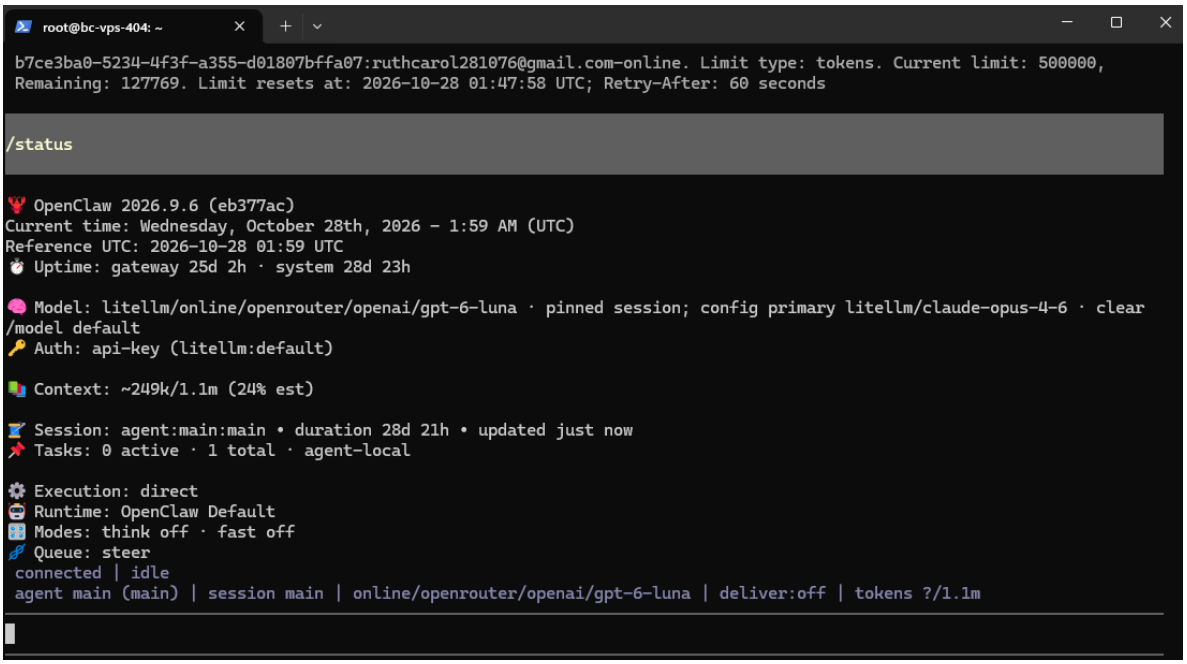
Verificar estatus de consumo de tokens

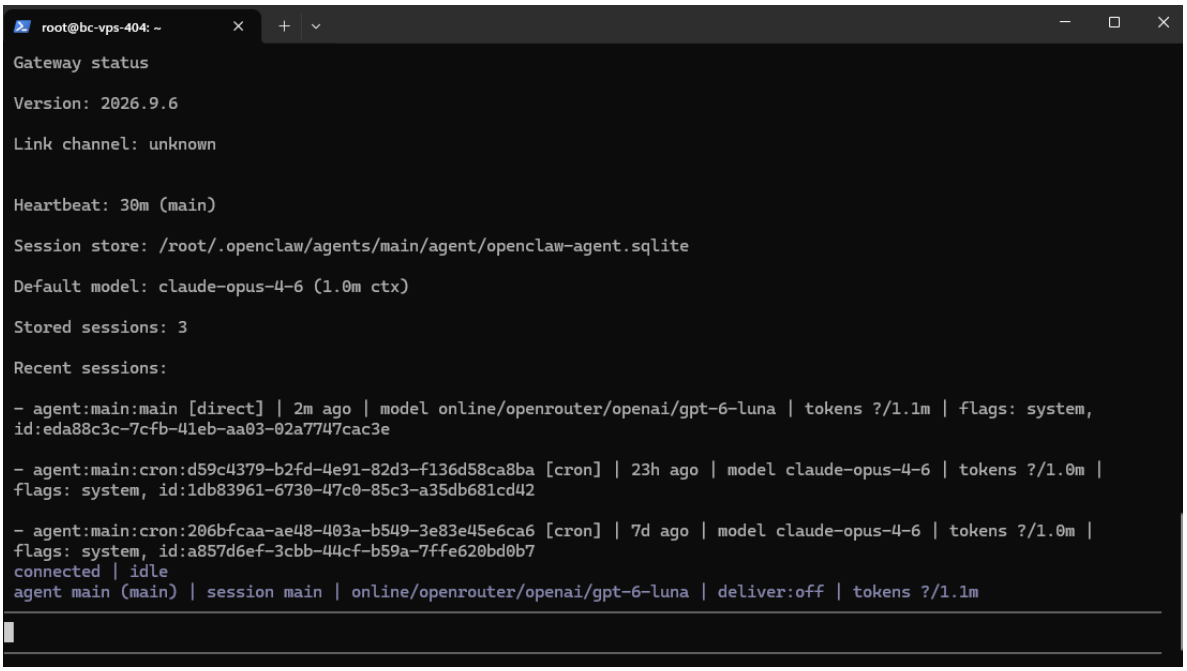


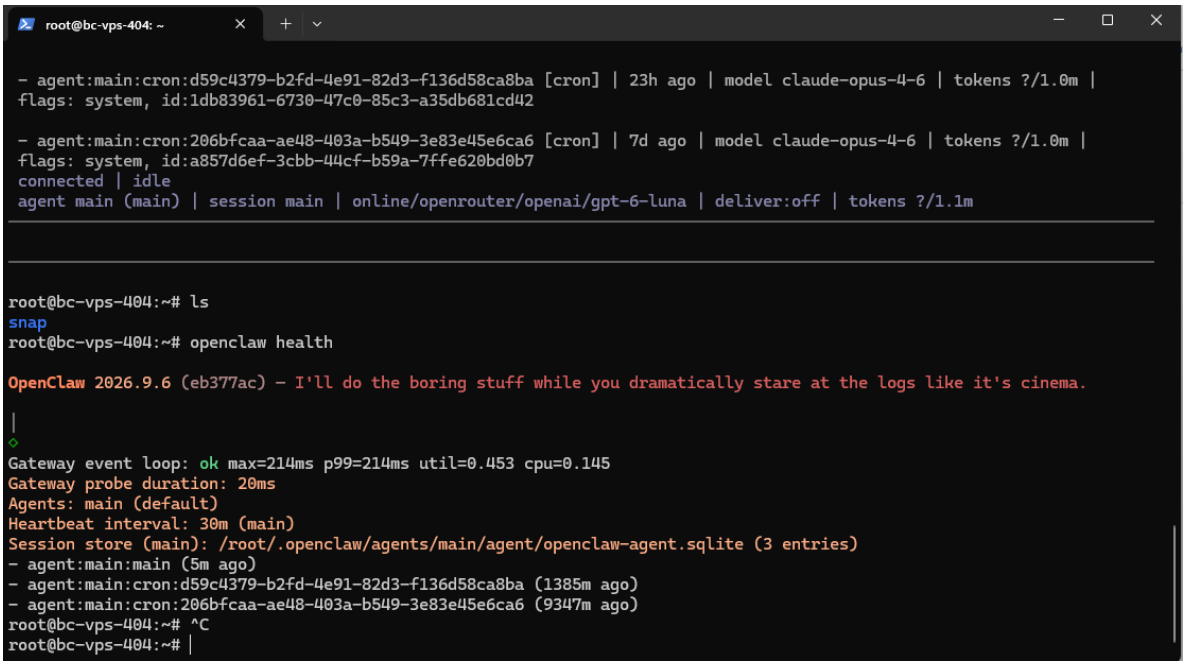
. error:

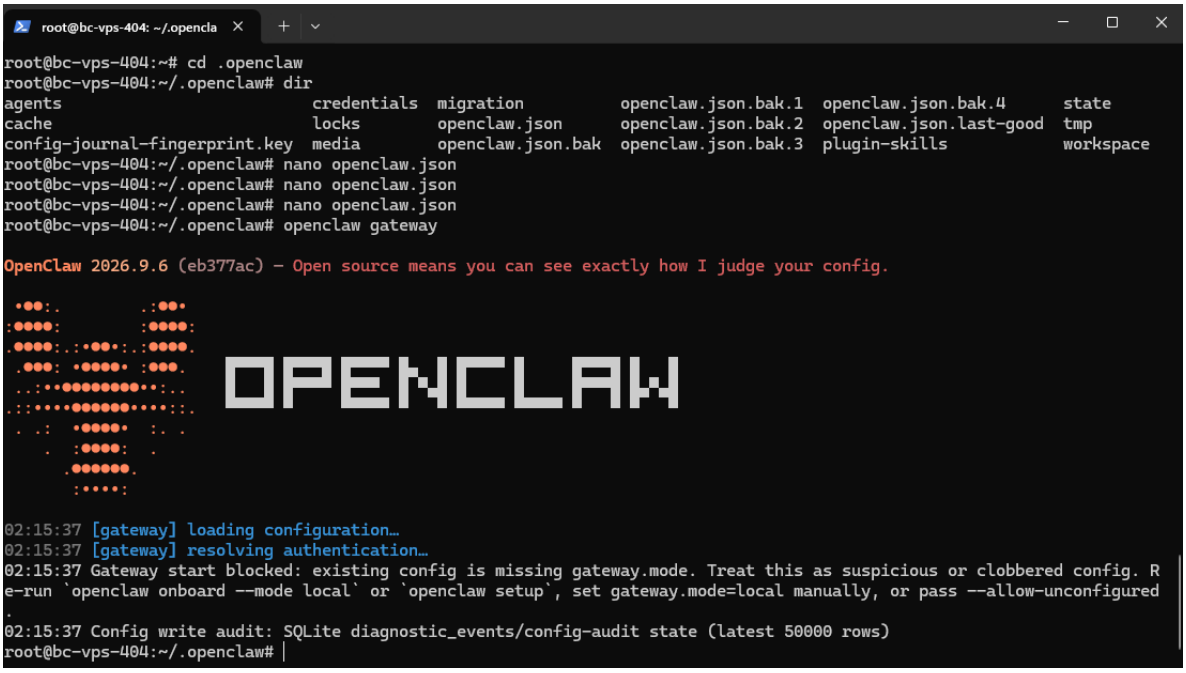

1. Install mcporter if you don't have it: npx -y mcporter
2. Add the Zapier MCP server: mcporter config add zapier --url "https://mcp.zapier.com/api/v1/connect" --client-name "openclaw"
3. Verify the connection: mcporter list zapier --schema
Once you've confirmed the connection works and tools are listed, list the Zapier MCP skills, find the onboarding skill, and run it. This will walk me through adding apps and configuring my tools step by step. Follow the skill's instructions and dialogue with me until onboarding is complete.
⚠ LLM request failed (rate limited, HTTP 429). This is usually temporary — try again shortly.
hola
run error: ⚠ Rate limit exceeded for team_member: b7ce3ba0-5234-4f3f-a355-d01807bffa07:ruthcarol281076@gmail.com-online. Limit type: tokens. Current limit: 500000, Remaining: 127769. Limit resets at: 2026-10-28 01:47:58 UTC; Retry-After: 60 seconds
quit
finishing context • 10s | connected
agent main (main) | session main | online/openrouter/openai/gpt-6-luna | deliver:off | tokens ?/1.1m

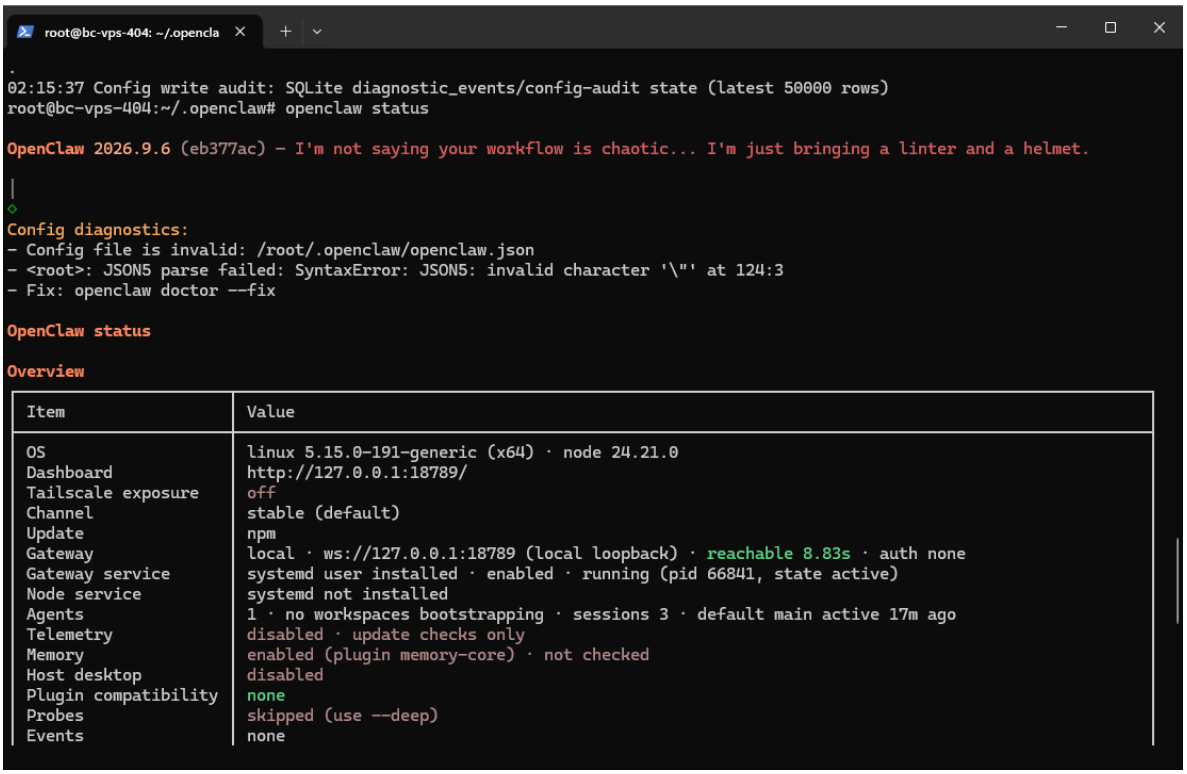

root@bc-vps-404: ~
Set up Zapier MCP for OpenClaw
Setup steps:
1. Install mcporter if you don't have it: npx -y mcporter
2. Add the Zapier MCP server: mcporter config add zapier --url "https://mcp.zapier.com/api/v1/connect" --client-name "openclaw"
3. Verify the connection: mcporter list zapier --schema
Once you've confirmed the connection works and tools are listed, list the Zapier MCP skills, find the onboarding skill, and run it. This will walk me through adding apps and configuring my tools step by step. Follow the skill's instructions and dialogue with me until onboarding is complete.
⚠ LLM request failed (rate limited, HTTP 429). This is usually temporary — try again shortly.
hola
run error: ⚠ Rate limit exceeded for team_member: b7ce3ba0-5234-4f3f-a355-d01807bffa07:ruthcarol281076@gmail.com-online. Limit type: tokens. Current limit: 500000, Remaining: 127769. Limit resets at: 2026-10-28 01:47:58 UTC; Retry-After: 60 seconds
connected | aborted
agent main (main) | session main | online/openrouter/openai/gpt-6-luna | deliver:off | tokens ?/1.1m

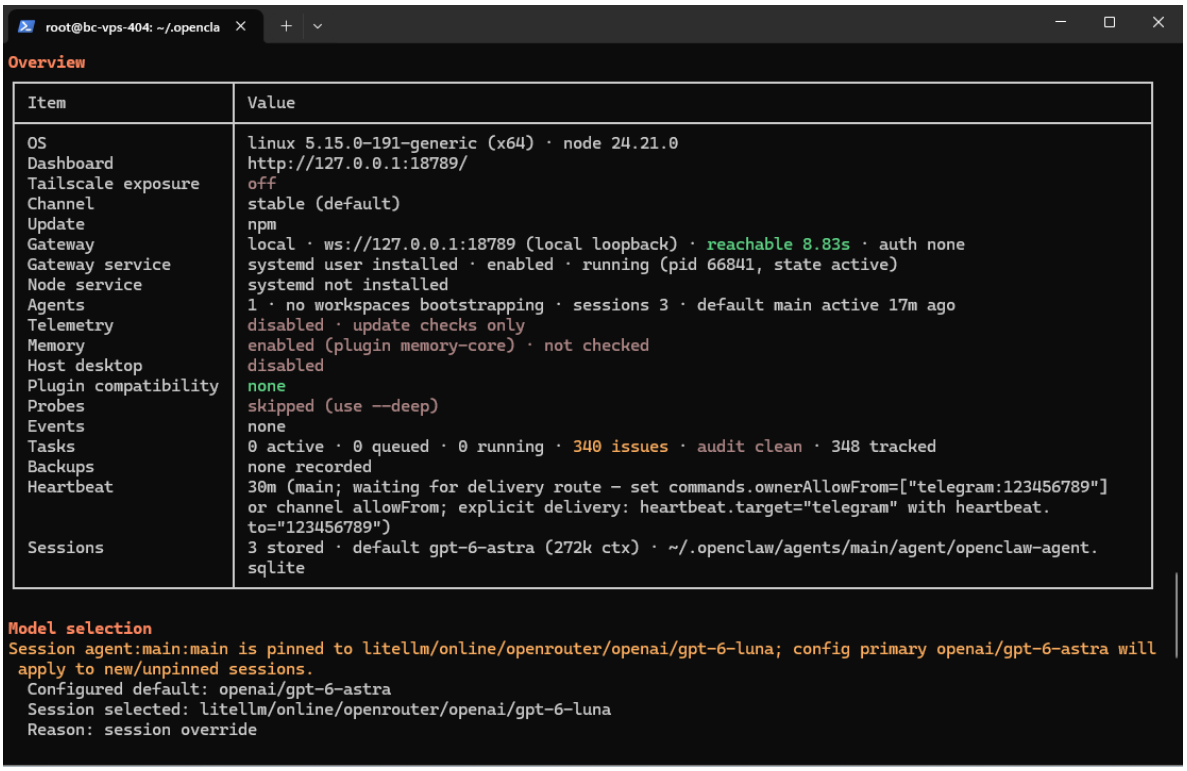

root@bc-vps-404: ~
b7ce3ba0-5234-4f3f-a355-d01807bffa07:ruthcarol281076@gmail.com-online. Limit type: tokens. Current limit: 500000,
Remaining: 127769. Limit resets at: 2026-10-28 01:47:58 UTC; Retry-After: 60 seconds
/status
OpenClaw 2026.9.6 (eb377ac)
Current time: Wednesday, October 28th, 2026 - 1:59 AM (UTC)
Reference UTC: 2026-10-28 01:59 UTC
Uptime: gateway 25d 2h · system 28d 23h
Model: litellm/online/openrouter/openai/gpt-6-luna · pinned session; config primary litellm/claude-opus-4-6 · clear
/model default
Auth: api-key (litellm:default)
Context: ~249k/1.1m (24% est)
Session: agent:main:main • duration 28d 21h • updated just now
Tasks: 0 active · 1 total · agent-local
Execution: direct
Runtime: OpenClaw Default
Modes: think off · fast off
Queue: steer
connected | idle
agent main (main) | session main | online/openrouter/openai/gpt-6-luna | deliver:off | tokens ?/1.1m

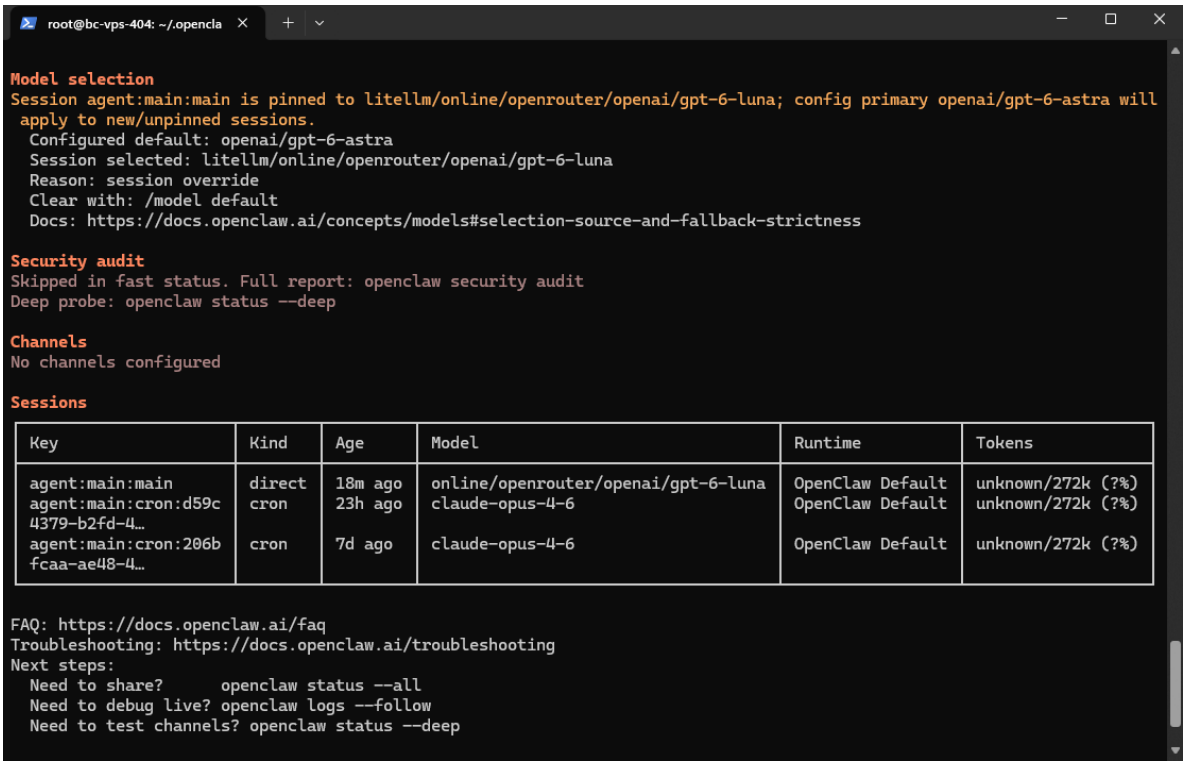

root@bc-vps-404: ~
Gateway status
Version: 2026.9.6
Link channel: unknown
Heartbeat: 30m (main)
Session store: /root/.openclaw/agents/main/agent/openclaw-agent.sqlite
Default model: claude-opus-4-6 (1.0m ctx)
Stored sessions: 3
Recent sessions:
- agent:main:main [direct] | 2m ago | model online/openrouter/openai/gpt-6-luna | tokens ?/1.1m | flags: system,
id:eda88c3c-7cfb-41eb-aa03-02a7747cac3e
- agent:main:cron:d59c4379-b2fd-4e91-82d3-f136d58ca8ba [cron] | 23h ago | model claude-opus-4-6 | tokens ?/1.0m |
flags: system, id:1db83961-6730-47c0-85c3-a35db681cd42
- agent:main:cron:206bfcaa-ae48-403a-b549-3e83e45e6ca6 [cron] | 7d ago | model claude-opus-4-6 | tokens ?/1.0m |
flags: system, id:a857d6ef-3cbb-44cf-b59a-7ffe620bd0b7
connected | idle
agent main (main) | session main | online/openrouter/openai/gpt-6-luna | deliver:off | tokens ?/1.1m

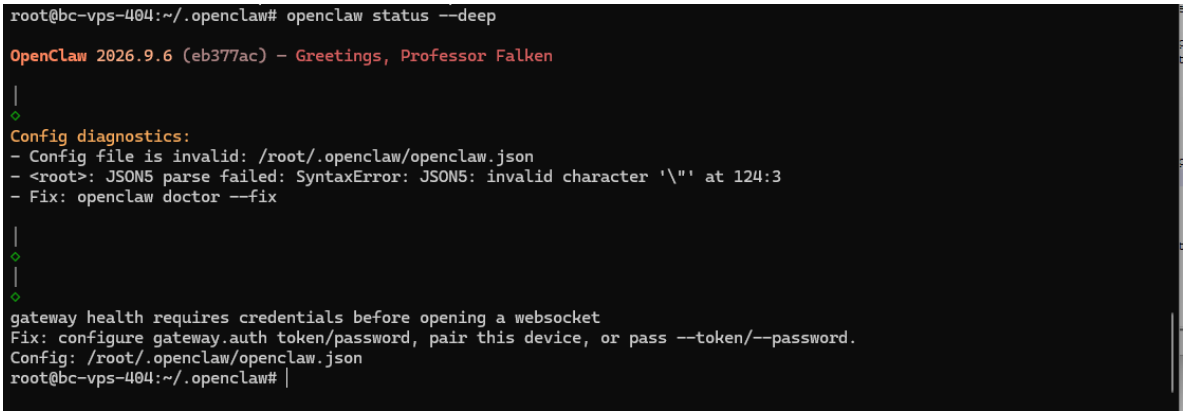

root@bc-vps-404: ~
- agent:main:cron:d59c4379-b2fd-4e91-82d3-f136d58ca8ba [cron] | 23h ago | model claude-opus-4-6 | tokens ?/1.0m |
flags: system, id:1db83961-6730-47c0-85c3-a35db681cd42
- agent:main:cron:206bfcaa-ae48-403a-b549-3e83e45e6ca6 [cron] | 7d ago | model claude-opus-4-6 | tokens ?/1.0m |
flags: system, id:a857d6ef-3cbb-44cf-b59a-7ffe620bd0b7
connected | idle
agent main (main) | session main | online/openrouter/openai/gpt-6-luna | deliver:off | tokens ?/1.1m
root@bc-vps-404:~# ls
snap
root@bc-vps-404:~# openclaw health
OpenClaw 2026.9.6 (eb377ac) — I'll do the boring stuff while you dramatically stare at the logs like it's cinema.
Gateway event loop: ok max=214ms p99=214ms util=0.453 cpu=0.145
Gateway probe duration: 20ms
Agents: main (default)
Heartbeat interval: 30m (main)
Session store (main): /root/.openclaw/agents/main/agent/openclaw-agent.sqlite (3 entries)
- agent:main:main (5m ago)
- agent:main:cron:d59c4379-b2fd-4e91-82d3-f136d58ca8ba (1385m ago)
- agent:main:cron:206bfcaa-ae48-403a-b549-3e83e45e6ca6 (9347m ago)
root@bc-vps-404:~# ^C
root@bc-vps-404:~#

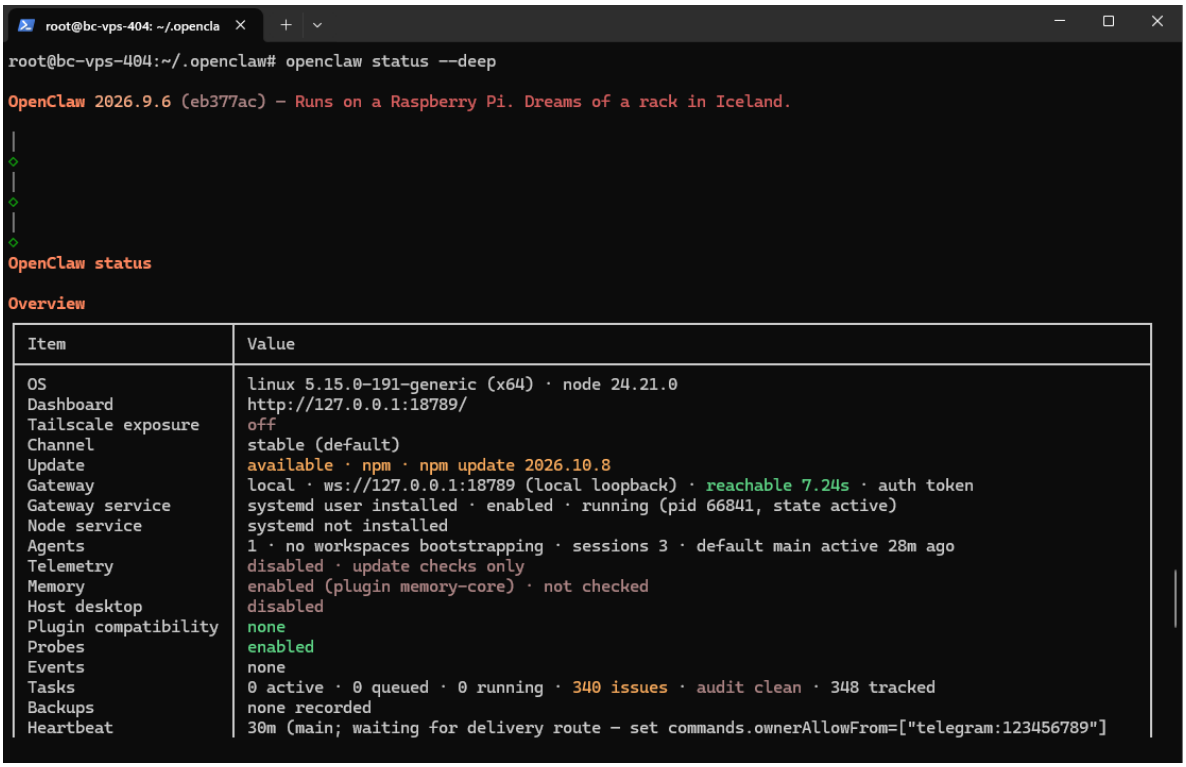

root@bc-vps-404: ~/.opencla
root@bc-vps-404:~# cd .openclaw
root@bc-vps-404:~/.openclaw# dir
agents credentials migration openclaw.json.bak.1 openclaw.json.bak.4 state
cache locks openclaw.json openclaw.json.bak.2 openclaw.json.last-good tmp
config-journal-fingerprint.key media openclaw.json.bak openclaw.json.bak.3 plugin-skills workspace
root@bc-vps-404:~/.openclaw# nano openclaw.json
root@bc-vps-404:~/.openclaw# nano openclaw.json
root@bc-vps-404:~/.openclaw# nano openclaw.json
root@bc-vps-404:~/.openclaw# openclaw gateway
OpenClaw 2026.9.6 (eb377ac) — Open source means you can see exactly how I judge your config.
OPENCLAW
02:15:37 [gateway] loading configuration…
02:15:37 [gateway] resolving authentication…
02:15:37 Gateway start blocked: existing config is missing gateway.mode. Treat this as suspicious or clobbered config. Re-run `openclaw onboard --mode local` or `openclaw setup`, set gateway.mode=local manually, or pass --allow-unconfigured.
02:15:37 Config write audit: SQLite diagnostic_events/config-audit state (latest 50000 rows)
root@bc-vps-404:~/.openclaw#

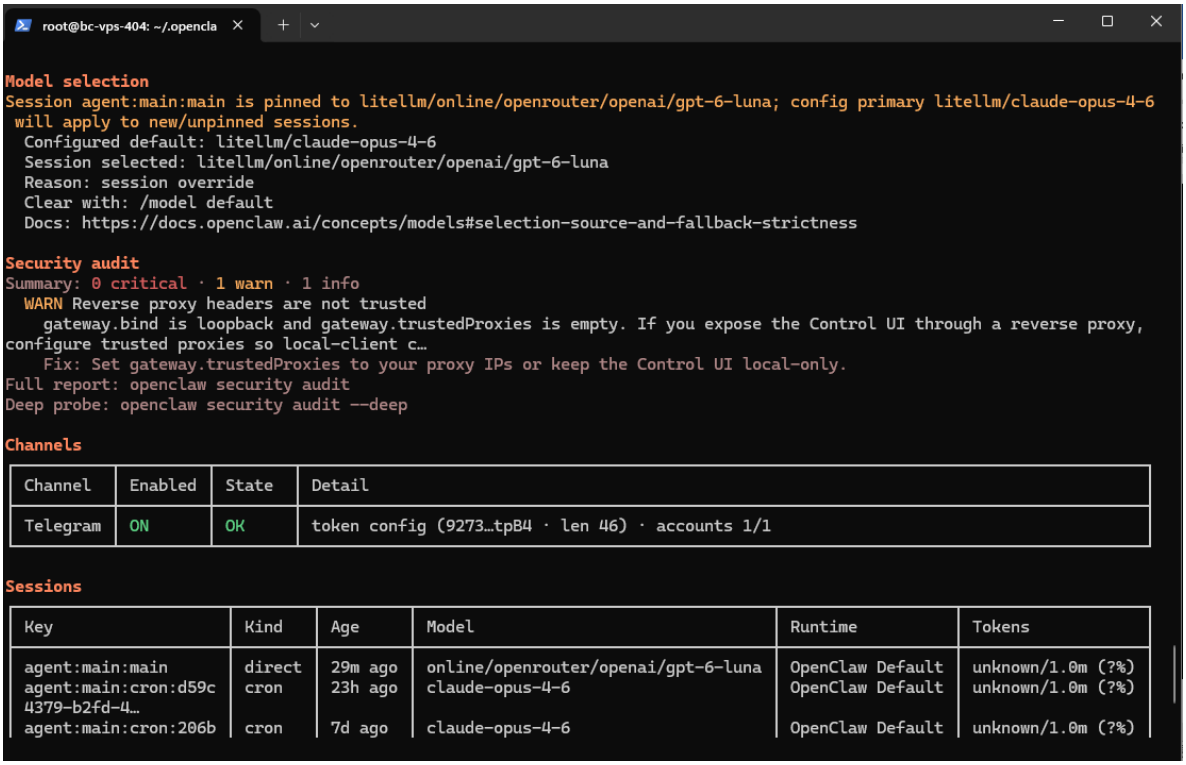

root@bc-vps-404: ~/.opencla
02:15:37 Config write audit: SQLite diagnostic_events/config-audit state (latest 50000 rows)
root@bc-vps-404:~/.openclaw# openclaw status
OpenClaw 2026.9.6 (eb377ac) — I'm not saying your workflow is chaotic... I'm just bringing a linter and a helmet.
Config diagnostics:
- Config file is invalid: /root/.openclaw/openclaw.json
- <root>: JSON5 parse failed: SyntaxError: JSON5: invalid character '\"' at 124:3
- Fix: openclaw doctor --fix
OpenClaw status
Overview
Item
Value
OS
linux 5.15.0-191-generic (x64) · node 24.21.0
Dashboard
http://127.0.0.1:18789/
Tailscale exposure
off
Channel
stable (default)
Update
npm
Gateway
local · ws://127.0.0.1:18789 (local loopback) · reachable 8.83s · auth none
Gateway service
systemd user installed · enabled · running (pid 66841, state active)
Node service
systemd not installed
Agents
1 · no workspaces bootstrapping · sessions 3 · default main active 17m ago
Telemetry
disabled · update checks only
Memory
enabled (plugin memory-core) · not checked
Host desktop
disabled
Plugin compatibility
none
Probes
skipped (use --deep)
Events
none

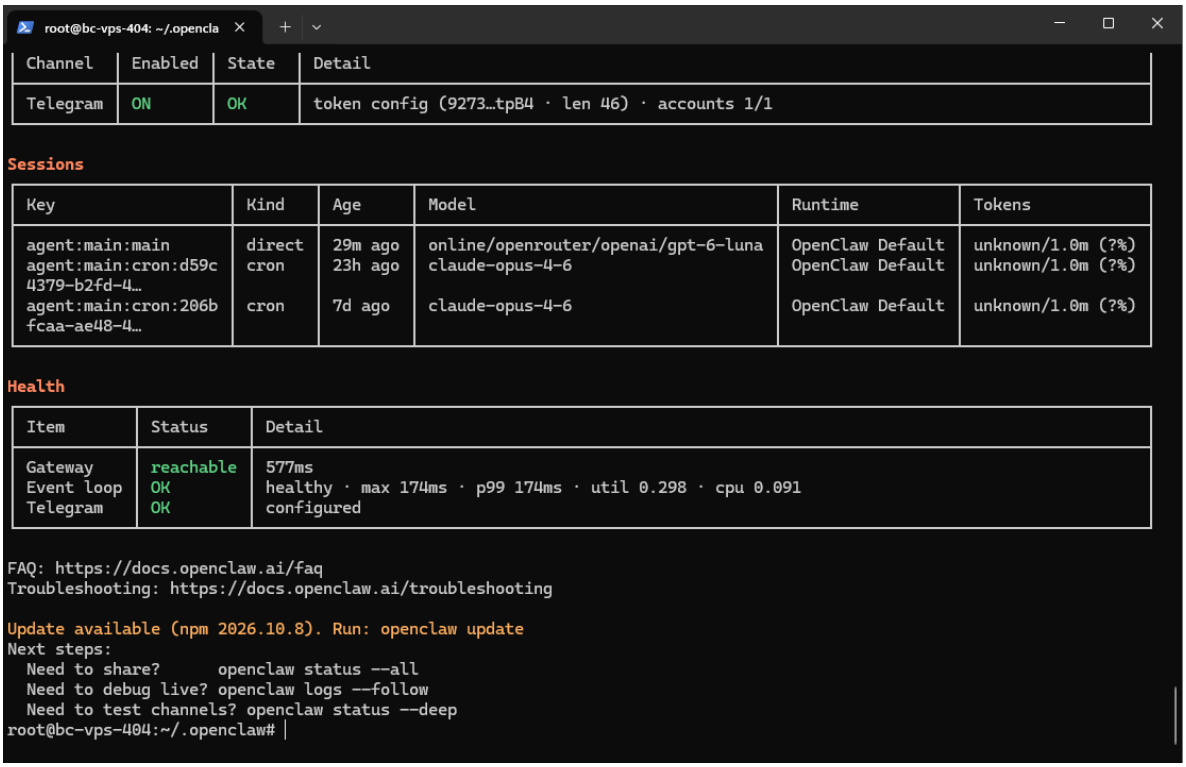

root@bc-vps-404: ~/.opencla
Overview
Item
Value
OS
linux 5.15.0-191-generic (x64) · node 24.21.0
Dashboard
http://127.0.0.1:18789/
Tailscale exposure
off
Channel
stable (default)
Update
npm
Gateway
local · ws://127.0.0.1:18789 (local loopback) · reachable 8.83s · auth none
Gateway service
systemd user installed · enabled · running (pid 66841, state active)
Node service
systemd not installed
Agents
1 · no workspaces bootstrapping · sessions 3 · default main active 17m ago
Telemetry
disabled · update checks only
Memory
enabled (plugin memory-core) · not checked
Host desktop
disabled
Plugin compatibility
none
Probes
skipped (use --deep)
Events
none
Tasks
0 active · 0 queued · 0 running · 340 issues · audit clean · 348 tracked
Backups
none recorded
Heartbeat
30m (main; waiting for delivery route — set commands.ownerAllowFrom=["telegram:123456789"] or channel allowFrom; explicit delivery: heartbeat.target="telegram" with heartbeat.to="123456789")
Sessions
3 stored · default gpt-6-astra (272k ctx) · ~/.openclaw/agents/main/agent/openclaw-agent.sqlite
Model selection
Session agent:main:main is pinned to litellm/online/openrouter/openai/gpt-6-luna; config primary openai/gpt-6-astra will apply to new/unpinned sessions.
Configured default: openai/gpt-6-astra
Session selected: litellm/online/openrouter/openai/gpt-6-luna
Reason: session override


root@bc-vps-404: ~/.opencla
Model selection
Session agent:main:main is pinned to litellm/online/openrouter/openai/gpt-6-luna; config primary openai/gpt-6-astra will apply to new/unpinned sessions.
Configured default: openai/gpt-6-astra
Session selected: litellm/online/openrouter/openai/gpt-6-luna
Reason: session override
Clear with: /model default
Docs: https://docs.openclaw.ai/concepts/models#selection-source-and-fallback-strictness
Security audit
Skipped in fast status. Full report: openclaw security audit
Deep probe: openclaw status --deep
Channels
No channels configured
Sessions
Key
Kind
Age
Model
Runtime
Tokens
agent:main:main
direct
18m ago
online/openrouter/openai/gpt-6-luna
OpenClaw Default
unknown/272k (?%)
agent:main:cron:d59c4379-b2fd-4…
cron
23h ago
claude-opus-4-6
OpenClaw Default
unknown/272k (?%)
agent:main:cron:206bfcaa-ae48-4…
cron
7d ago
claude-opus-4-6
OpenClaw Default
unknown/272k (?%)
FAQ: https://docs.openclaw.ai/faq
Troubleshooting: https://docs.openclaw.ai/troubleshooting
Next steps:
Need to share? openclaw status --all
Need to debug live? openclaw logs --follow
Need to test channels? openclaw status --deep

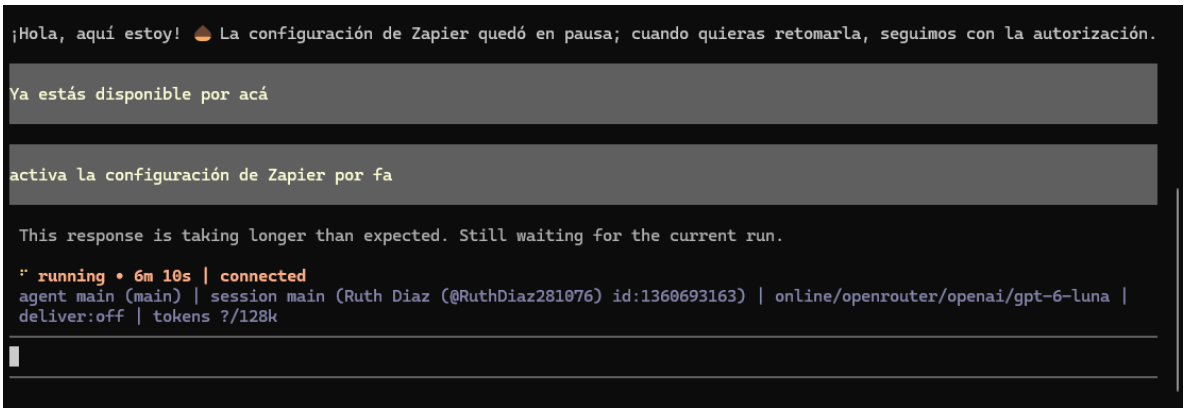

root@bc-vps-404:~/.openclaw# openclaw status --deep
OpenClaw 2026.9.6 (eb377ac) – Greetings, Professor Falken
Config diagnostics:
- Config file is invalid: /root/.openclaw/openclaw.json
- <root>: JSON5 parse failed: SyntaxError: JSON5: invalid character '\"' at 124:3
- Fix: openclaw doctor --fix
gateway health requires credentials before opening a websocket
Fix: configure gateway.auth token/password, pair this device, or pass --token/--password.
Config: /root/.openclaw/openclaw.json
root@bc-vps-404:~/.openclaw#


root@bc-vps-404: ~/.opencla
root@bc-vps-404:~/.openclaw# openclaw status --deep
OpenClaw 2026.9.6 (eb377ac) — Runs on a Raspberry Pi. Dreams of a rack in Iceland.
OpenClaw status
Overview
Item
Value
OS
linux 5.15.0-191-generic (x64) · node 24.21.0
Dashboard
http://127.0.0.1:18789/
Tailscale exposure
off
Channel
stable (default)
Update
available · npm · npm update 2026.10.8
Gateway
local · ws://127.0.0.1:18789 (local loopback) · reachable 7.24s · auth token
Gateway service
systemd user installed · enabled · running (pid 66841, state active)
Node service
systemd not installed
Agents
1 · no workspaces bootstrapping · sessions 3 · default main active 28m ago
Telemetry
disabled · update checks only
Memory
enabled (plugin memory-core) · not checked
Host desktop
disabled
Plugin compatibility
none
Probes
enabled
Events
none
Tasks
0 active · 0 queued · 0 running · 340 issues · audit clean · 348 tracked
Backups
none recorded
Heartbeat
30m (main; waiting for delivery route — set commands.ownerAllowFrom=["telegram:123456789"]

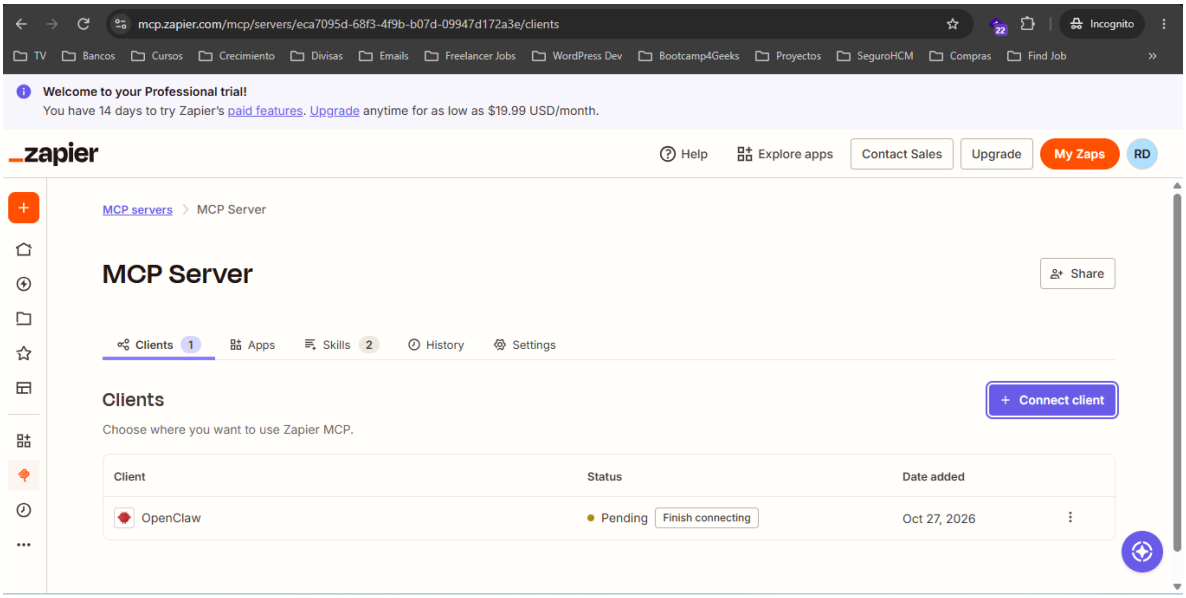

root@bc-vps-404: ~/.opencla
Model selection
Session agent:main:main is pinned to litellm/online/openrouter/openai/gpt-6-luna; config primary litellm/claude-opus-4-6 will apply to new/unpinned sessions.
Configured default: litellm/claude-opus-4-6
Session selected: litellm/online/openrouter/openai/gpt-6-luna
Reason: session override
Clear with: /model default
Docs: https://docs.openclaw.ai/concepts/models#selection-source-and-fallback-strictness
Security audit
Summary: 0 critical · 1 warn · 1 info
WARN Reverse proxy headers are not trusted
gateway.bind is loopback and gateway.trustedProxies is empty. If you expose the Control UI through a reverse proxy, configure trusted proxies so local-client c…
Fix: Set gateway.trustedProxies to your proxy IPs or keep the Control UI local-only.
Full report: openclaw security audit
Deep probe: openclaw security audit --deep
Channels
Channel
Enabled
State
Detail
Telegram
ON
OK
token config (9273…tpB4 · len 46) · accounts 1/1
Sessions
Key
Kind
Age
Model
Runtime
Tokens
agent:main:main
direct
29m ago
online/openrouter/openai/gpt-6-luna
OpenClaw Default
unknown/1.0m (?%)
agent:main:cron:d59c4379-b2fd-4…
cron
23h ago
claude-opus-4-6
OpenClaw Default
unknown/1.0m (?%)
agent:main:cron:206b
cron
7d ago
claude-opus-4-6
OpenClaw Default
unknown/1.0m (?%)


root@bc-vps-404: ~/.opencla
Channel | Enabled | State | Detail
Telegram | ON | OK | token config (9273…tpB4 · len 46) · accounts 1/1
Sessions
Key | Kind | Age | Model | Runtime | Tokens
agent:main:main | direct | 29m ago | online/openrouter/openai/gpt-6-luna | OpenClaw Default | unknown/1.0m (?%)
agent:main:cron:d59c4379-b2fd-4… | cron | 23h ago | claude-opus-4-6 | OpenClaw Default | unknown/1.0m (?%)
agent:main:cron:206bfcaa-ae48-4… | cron | 7d ago | claude-opus-4-6 | OpenClaw Default | unknown/1.0m (?%)
Health
Item | Status | Detail
Gateway | reachable | 577ms
Event loop | OK | healthy · max 174ms · p99 174ms · util 0.298 · cpu 0.091
Telegram | OK | configured
FAQ: https://docs.openclaw.ai/faq
Troubleshooting: https://docs.openclaw.ai/troubleshooting
Update available (npm 2026.10.8). Run: openclaw update
Next steps:
Need to share? openclaw status --all
Need to debug live? openclaw logs --follow
Need to test channels? openclaw status --deep
root@bc-vps-404:~/.openclaw#

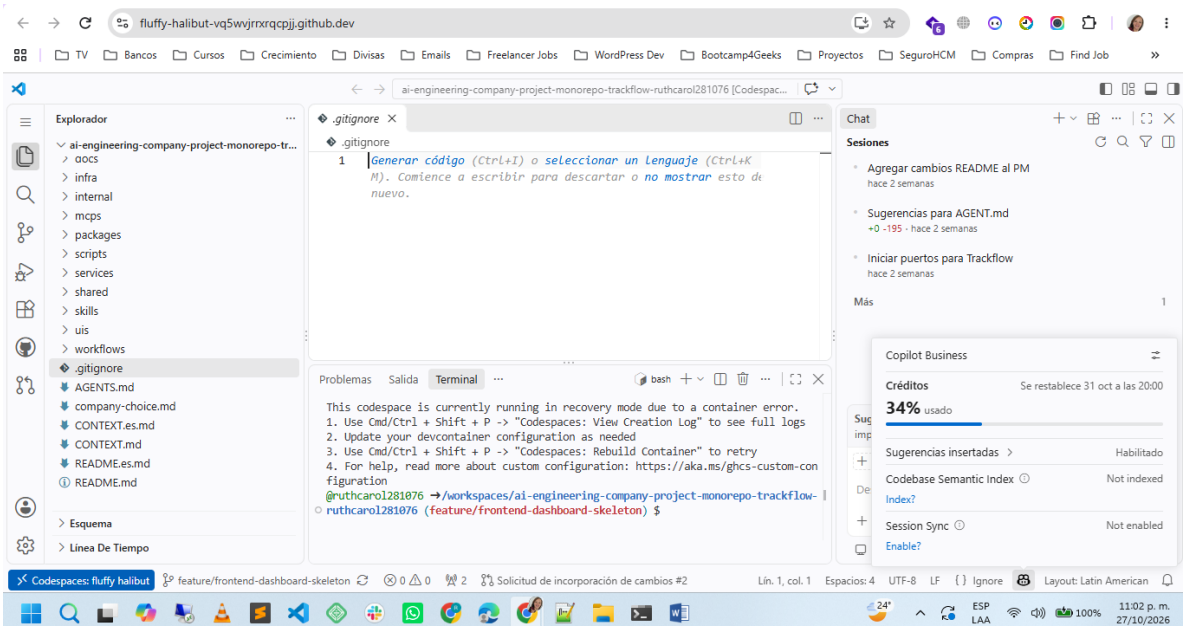

root@bc-vps-404:~/.openclaw# openclaw pairing approve telegram
OpenClaw 2026.9.6 (eb377ac) — I'm not magic—I'm just extremely persistent with retries and coping strategies.
02:36:45 [sqlite/transaction] slow SQLite transaction hold async=false database=/root/.openclaw/state/openclaw.sqlite elapsedMs=3089 isMainThread=true operation=state.write pid=547828 threadId=0 thresholdMs=1000
Approved telegram sender
Command owner configured telegram: (commands.ownerAllowFrom was empty).
root@bc-vps-404:~/.openclaw#


¡Hola, aquí estoy! 🥧 La configuración de Zapier quedó en pausa; cuando quieras retomarla, seguimos con la autorización.
Ya estás disponible por acá
activa la configuración de Zapier por fa
This response is taking longer than expected. Still waiting for the current run.
running • 6m 10s | connected
agent main (main) | session main (Ruth Diaz (@RuthDiaz281076) id:1360693163) | online/openrouter/openai/gpt-6-luna | deliver:off | tokens ?/128k

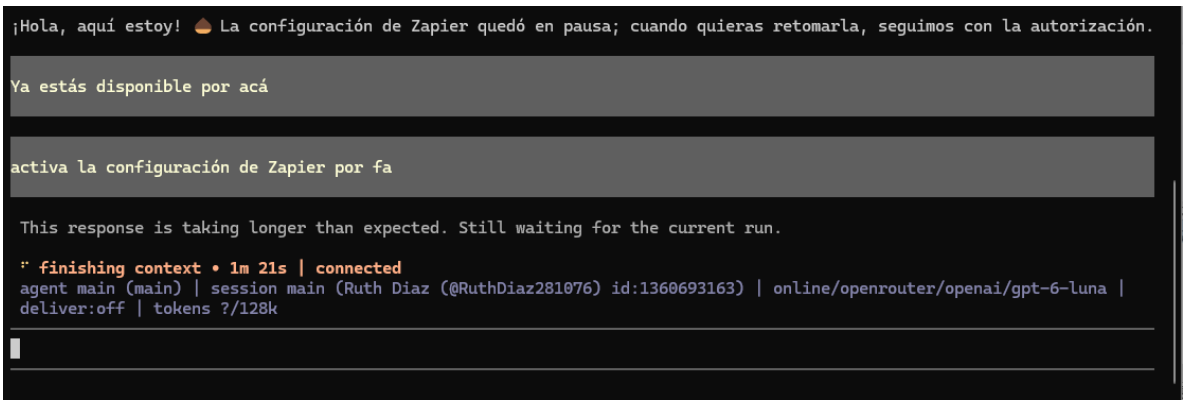
Chequeo estatus de Zapier

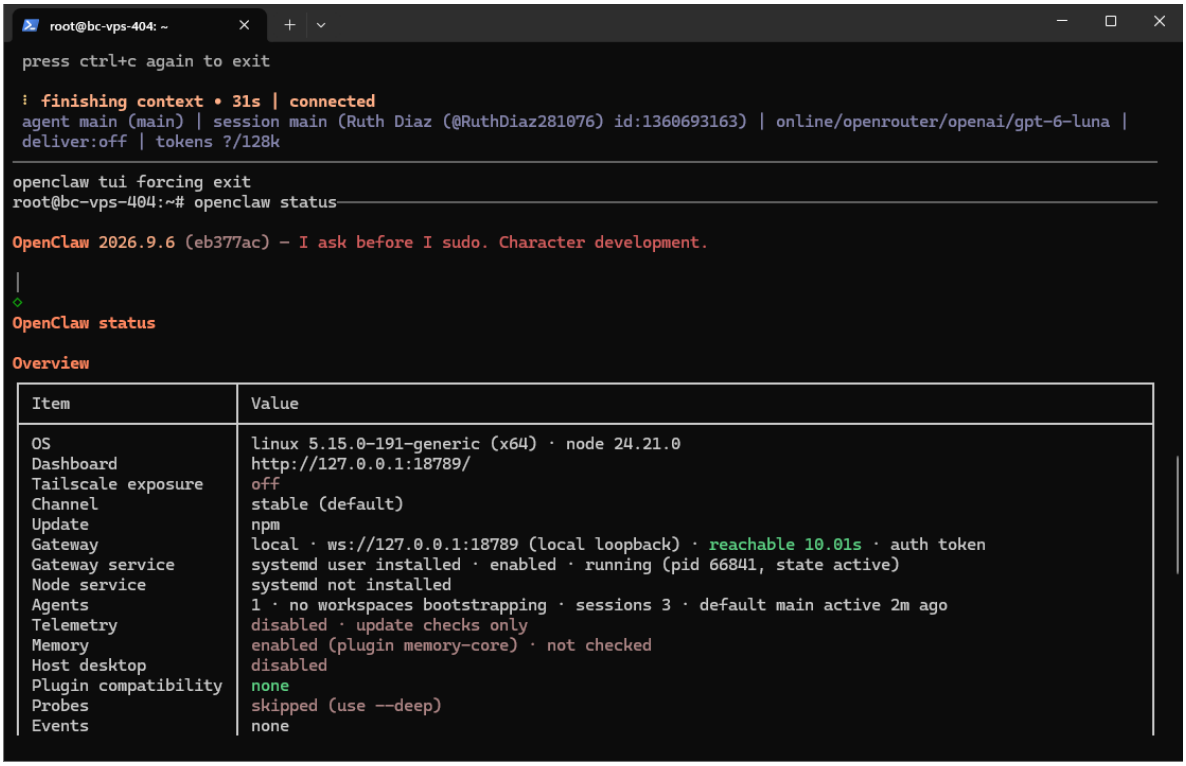


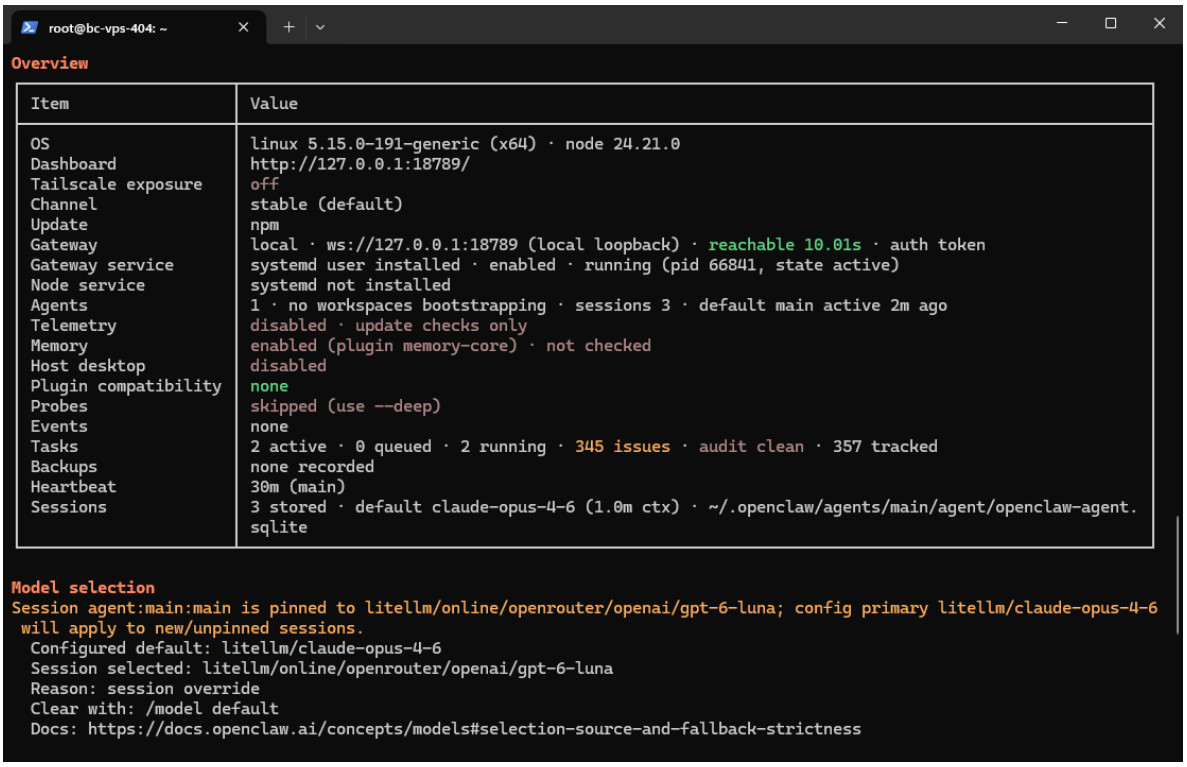
Chequeo consumo de tockens

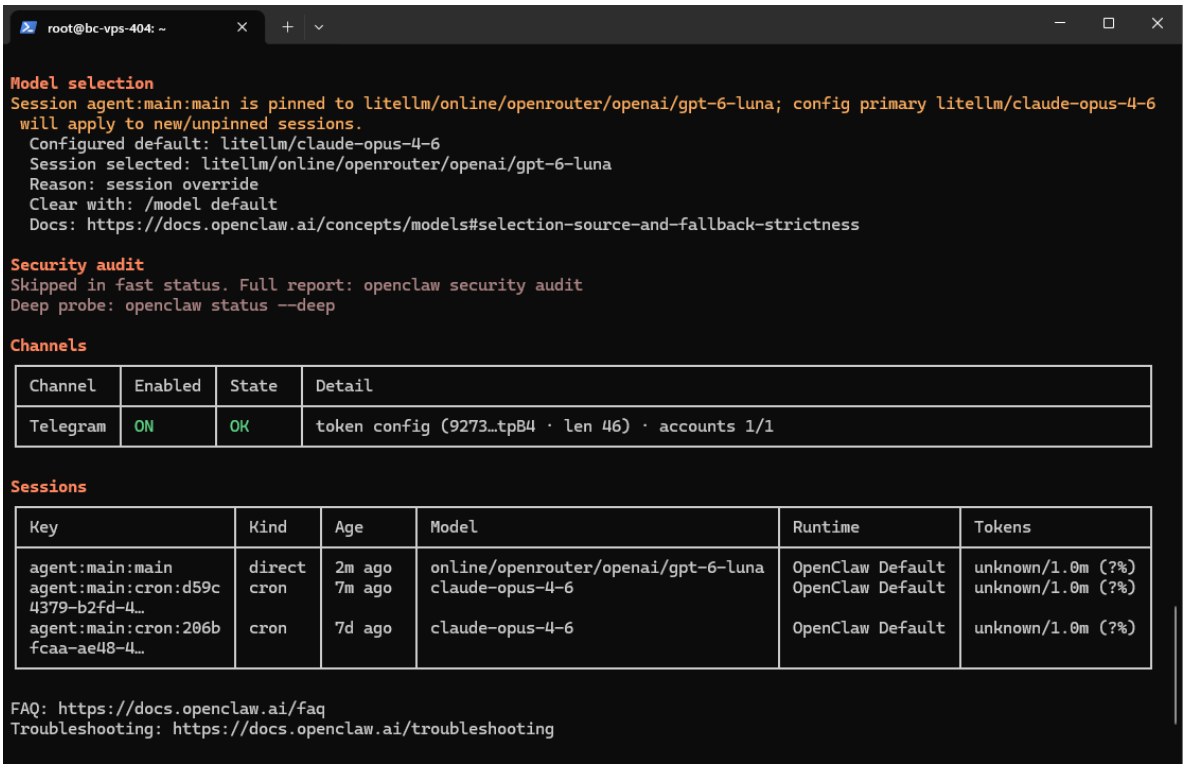


OpenClaw Tui (se observan las indicaciones dadas por Telegram)





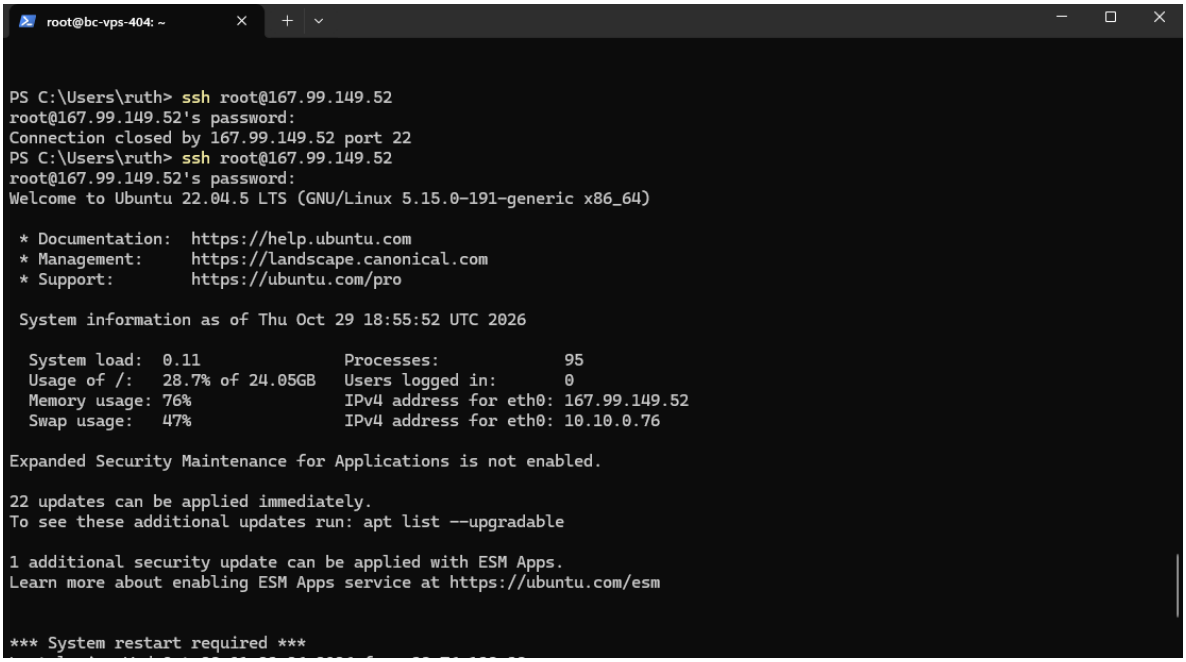

root@bc-vps-404: ~
Overview
Item
Value
OS
linux 5.15.0-191-generic (x64) · node 24.21.0
Dashboard
http://127.0.0.1:18789/
Tailscale exposure
off
Channel
stable (default)
Update
npm
Gateway
local · ws://127.0.0.1:18789 (local loopback) · reachable 10.01s · auth token
Gateway service
systemd user installed · enabled · running (pid 66841, state active)
Node service
systemd not installed
Agents
1 · no workspaces bootstrapping · sessions 3 · default main active 2m ago
Telemetry
disabled · update checks only
Memory
enabled (plugin memory-core) · not checked
Host desktop
disabled
Plugin compatibility
none
Probes
skipped (use --deep)
Events
none
Tasks
2 active · 0 queued · 2 running · 345 issues · audit clean · 357 tracked
Backups
none recorded
Heartbeat
30m (main)
Sessions
3 stored · default claude-opus-4-6 (1.0m ctx) · ~/.openclaw/agents/main/agent/openclaw-agent.sqlite
Model selection
Session agent:main:main is pinned to litellm/online/openrouter/openai/gpt-6-luna; config primary litellm/claude-opus-4-6 will apply to new/unpinned sessions.
Configured default: litellm/claude-opus-4-6
Session selected: litellm/online/openrouter/openai/gpt-6-luna
Reason: session override
Clear with: /model default
Docs: https://docs.openclaw.ai/concepts/models#selection-source-and-fallback-strictness

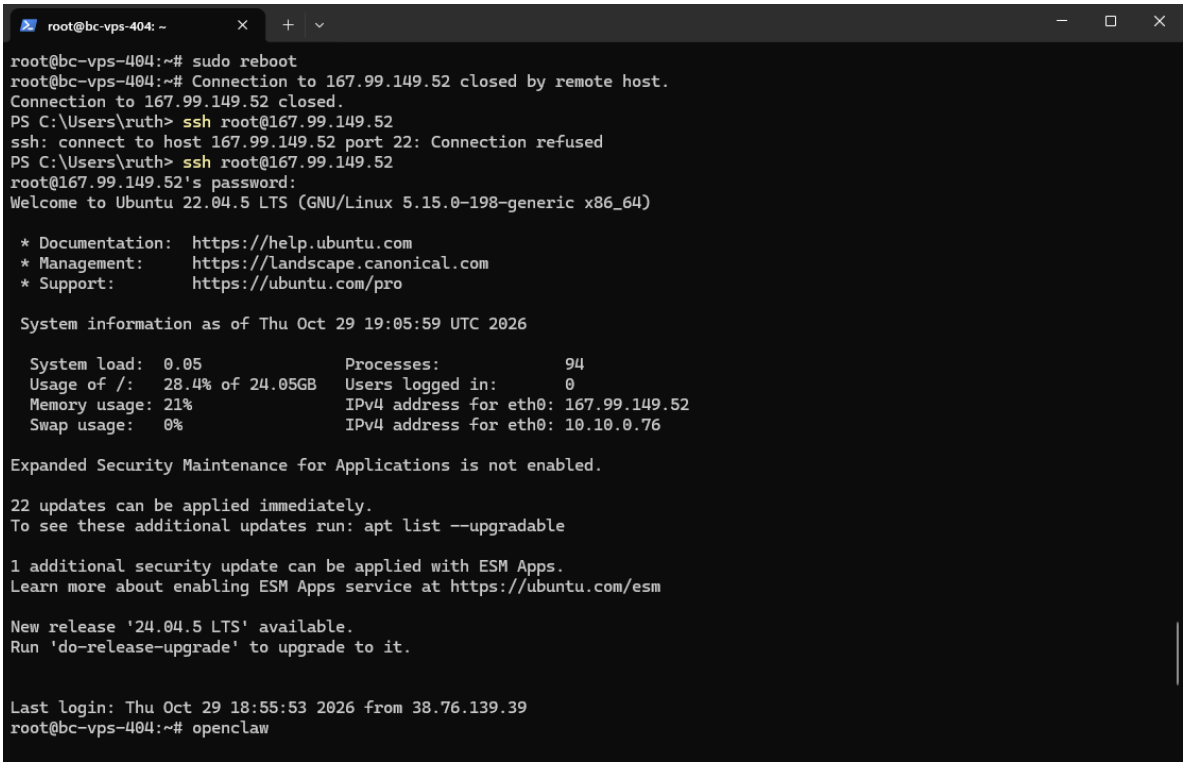

root@bc-vps-404: ~
Model selection
Session agent:main:main is pinned to litellm/online/openrouter/openai/gpt-6-luna; config primary litellm/claude-opus-4-6 will apply to new/unpinned sessions.
Configured default: litellm/claude-opus-4-6
Session selected: litellm/online/openrouter/openai/gpt-6-luna
Reason: session override
Clear with: /model default
Docs: https://docs.openclaw.ai/concepts/models#selection-source-and-fallback-strictness
Security audit
Skipped in fast status. Full report: openclaw security audit
Deep probe: openclaw status --deep
Channels
Channel
Enabled
State
Detail
Telegram
ON
OK
token config (9273…tpB4 · len 46) · accounts 1/1
Sessions
Key
Kind
Age
Model
Runtime
Tokens
agent:main:main
direct
2m ago
online/openrouter/openai/gpt-6-luna
OpenClaw Default
unknown/1.0m (?%)
agent:main:cron:d59c4379-b2fd-4…
cron
7m ago
claude-opus-4-6
OpenClaw Default
unknown/1.0m (?%)
agent:main:cron:206bfcaa-ae48-4…
cron
7d ago
claude-opus-4-6
OpenClaw Default
unknown/1.0m (?%)
FAQ: https://docs.openclaw.ai/faq
Troubleshooting: https://docs.openclaw.ai/troubleshooting

****

**** jue 29oct2026 ****

****





```
root@bc-vps-404:~# openclaw
 openclaw tui - ws://127.0.0.1:18789 - agent main - session main
 gateway disconnected: connect ECONNREFUSED 127.0.0.1:18789 | idle
 agent main | session main | unknown | deliver:off | tokens ?

/quit
^C
root@bc-vps-404:~# ^C
root@bc-vps-404:~# openclaw gateway restart
◇

     o   o
     )   (
  ~~~~~~~~~~~~~
OpenClaw 2026.9.6 (eb377ac) — You force-pushed to main, then asked me what happened. I know exactly what happened.

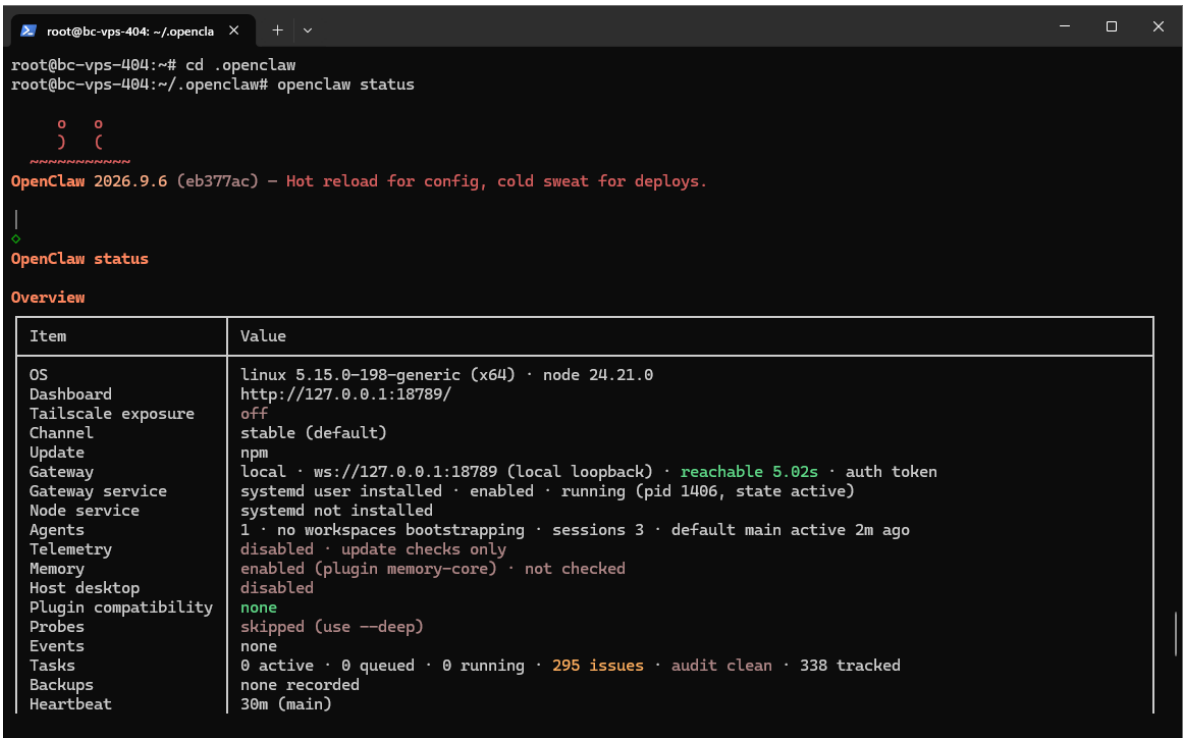
19:11:01 [sqlite/transaction] slow SQLite coordinator lock wait async=false database=/root/.openclaw/state/openclaw.sqli
te elapsedMs=5013.4137709999995 isMainThread=true operation=state.write pid=1094 threadId=0 thresholdMs=100
19:11:01 [restart] failed to write gateway restart intent: StateDatabaseCoordinatorContentionError: another OpenClaw pro
cess owns state-lifecycle
Gateway restart failed: GatewayRestartPreparationError: GATEWAY_RESTART_PREPARATION_REFUSED: Cannot record restart inten
t for the serving Gateway. Gateway was not signaled. Verify the service definition and Gateway status, then retry.
Tip: openclaw gateway install
Tip: openclaw gateway start
Tip: systemctl --user start openclaw-gateway.service
root@bc-vps-404:~#
```

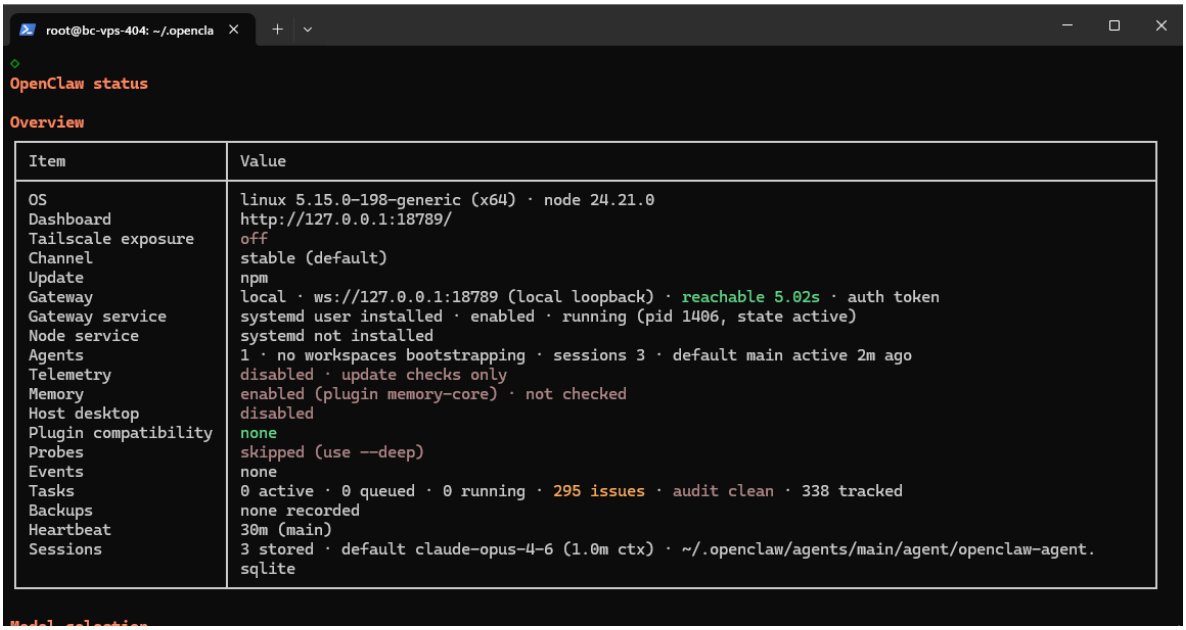
Ampliación memoria swap

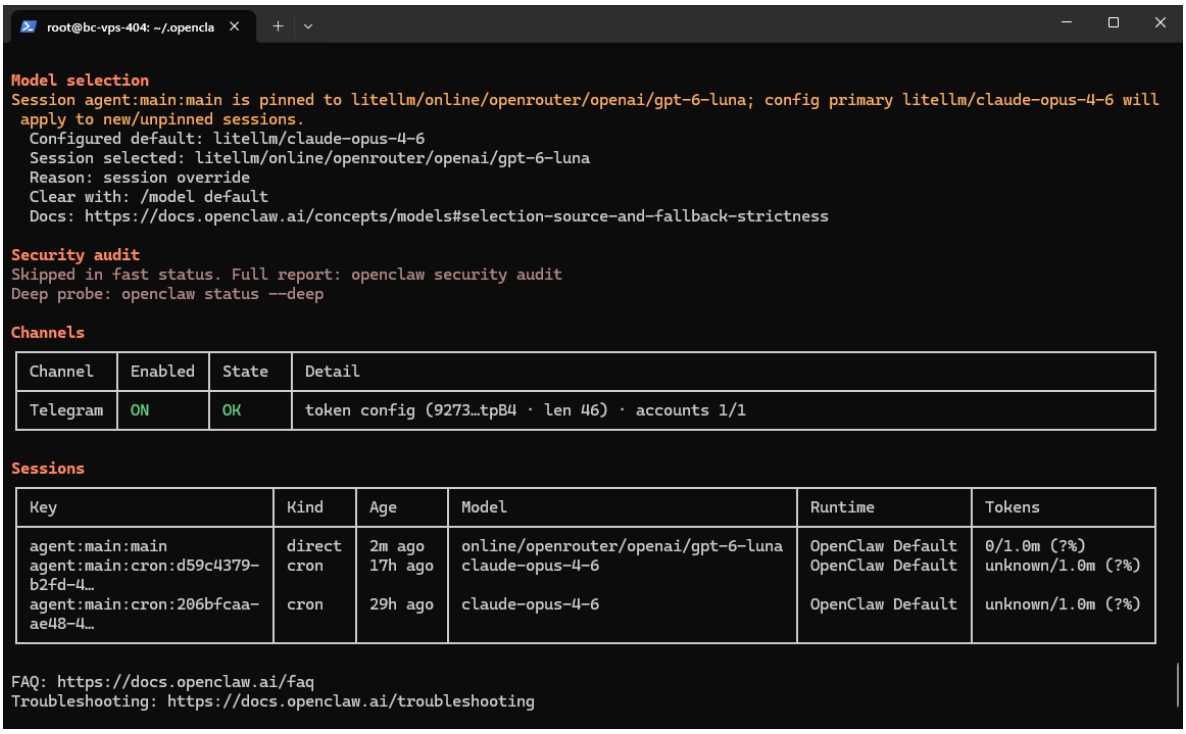
```
root@bc-vps-404: ~/.opencla
root@bc-vps-404:~# openclaw status



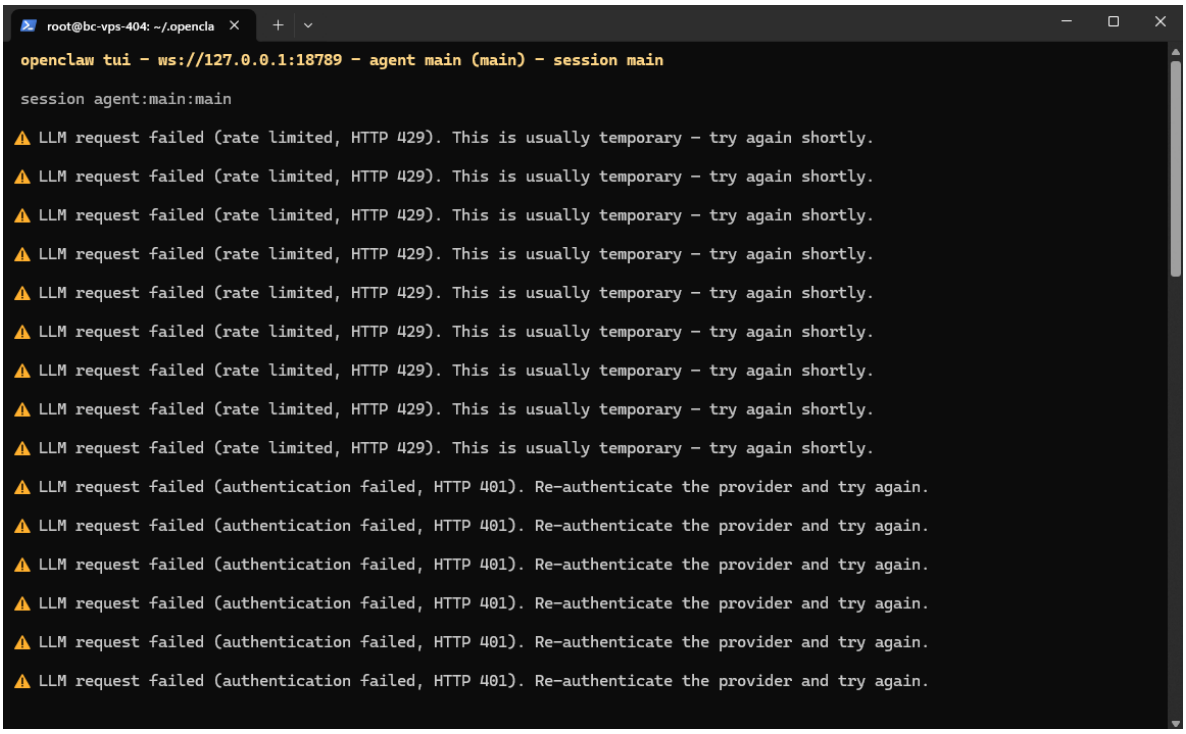
^C
root@bc-vps-404:~# ^C
root@bc-vps-404:~# fallocate -l 2G /swapfile
root@bc-vps-404:~# chmod 600 /swapfile
root@bc-vps-404:~# mkswap /swapfile
mkswap: /swapfile: warning: wiping old swap signature.
Setting up swapspace version 1, size = 2 GiB (2147479552 bytes)
no label, UUID=72cbc133-f583-432f-a8d6-0de346837113
root@bc-vps-404:~# swapon /swapfile
root@bc-vps-404:~# bash -c "echo '/swapfile none swap sw 0 0' >> /etc/fstab"
root@bc-vps-404:~# swapon --show
NAME      TYPE SIZE   USED PRIO
/swapfile file   2G 556.1M   -2
root@bc-vps-404:~# ls
snap
root@bc-vps-404:~# ls -a
.   .bash_history  .cache                 .config     .lesshst  .mcporter  .openclaw  .ssh        snap
..  .bashrc        .cloud-locale-test.skip  .gitconfig  .local    .npm       .profile   .wget-hsts
root@bc-vps-404:~# cd snap
root@bc-vps-404:~/snap# ls -a
.  ..  lxd
root@bc-vps-404:~/snap# cd ..
```

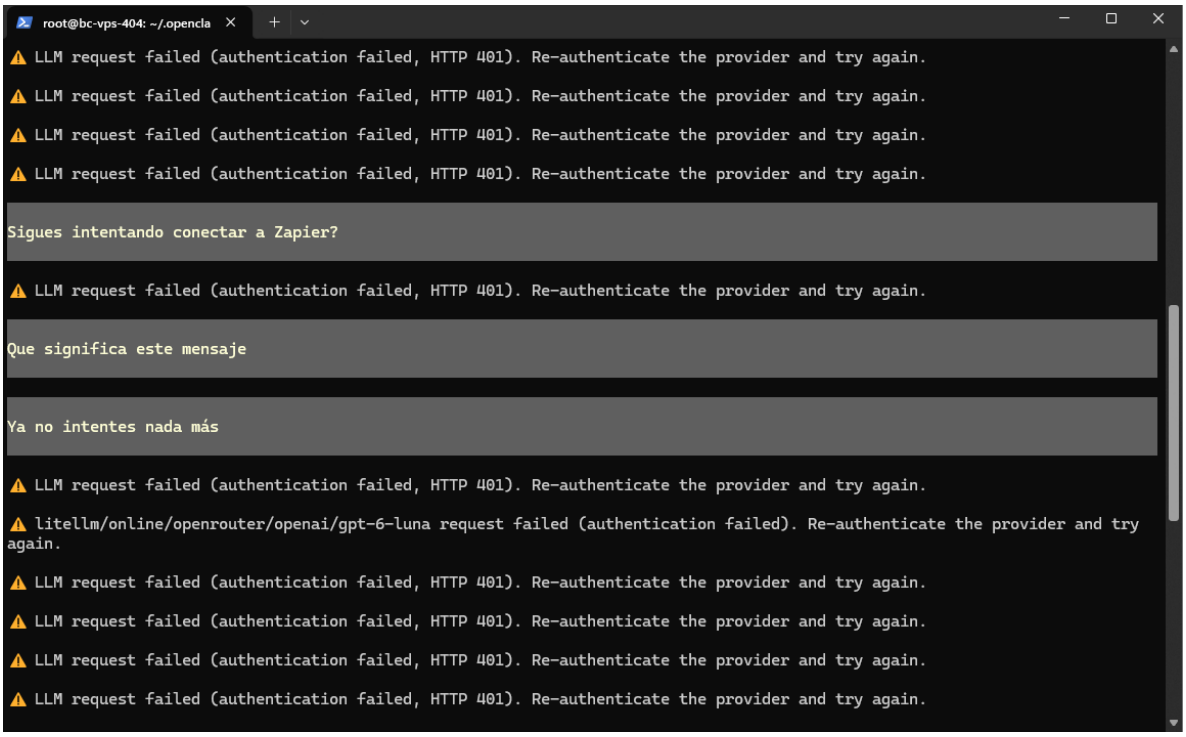

root@bc-vps-404: ~/.opencla
root@bc-vps-404:~# cd .openclaw
root@bc-vps-404:~/.openclaw# openclaw status
OpenClaw 2026.9.6 (eb377ac) — Hot reload for config, cold sweat for deploys.
OpenClaw status
Overview
Item
Value
OS
linux 5.15.0-198-generic (x64) · node 24.21.0
Dashboard
http://127.0.0.1:18789/
Tailscale exposure
off
Channel
stable (default)
Update
npm
Gateway
local · ws://127.0.0.1:18789 (local loopback) · reachable 5.02s · auth token
Gateway service
systemd user installed · enabled · running (pid 1406, state active)
Node service
systemd not installed
Agents
1 · no workspaces bootstrapping · sessions 3 · default main active 2m ago
Telemetry
disabled · update checks only
Memory
enabled (plugin memory-core) · not checked
Host desktop
disabled
Plugin compatibility
none
Probes
skipped (use --deep)
Events
none
Tasks
0 active · 0 queued · 0 running · 295 issues · audit clean · 338 tracked
Backups
none recorded
Heartbeat
30m (main)

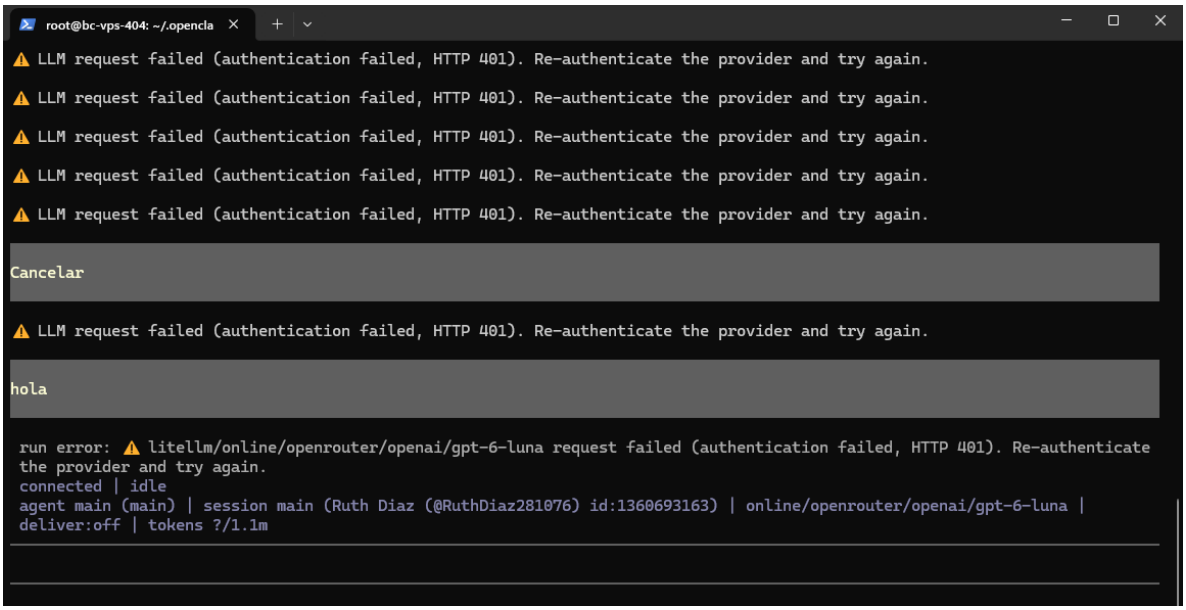

root@bc-vps-404: ~/.opencla
OpenClaw status
Overview
Item
Value
OS
linux 5.15.0-198-generic (x64) · node 24.21.0
Dashboard
http://127.0.0.1:18789/
Tailscale exposure
off
Channel
stable (default)
Update
npm
Gateway
local · ws://127.0.0.1:18789 (local loopback) · reachable 5.02s · auth token
Gateway service
systemd user installed · enabled · running (pid 1406, state active)
Node service
systemd not installed
Agents
1 · no workspaces bootstrapping · sessions 3 · default main active 2m ago
Telemetry
disabled · update checks only
Memory
enabled (plugin memory-core) · not checked
Host desktop
disabled
Plugin compatibility
none
Probes
skipped (use --deep)
Events
none
Tasks
0 active · 0 queued · 0 running · 295 issues · audit clean · 338 tracked
Backups
none recorded
Heartbeat
30m (main)
Sessions
3 stored · default claude-opus-4-6 (1.0m ctx) · ~/.openclaw/agents/main/agent/openclaw-agent.sqlite

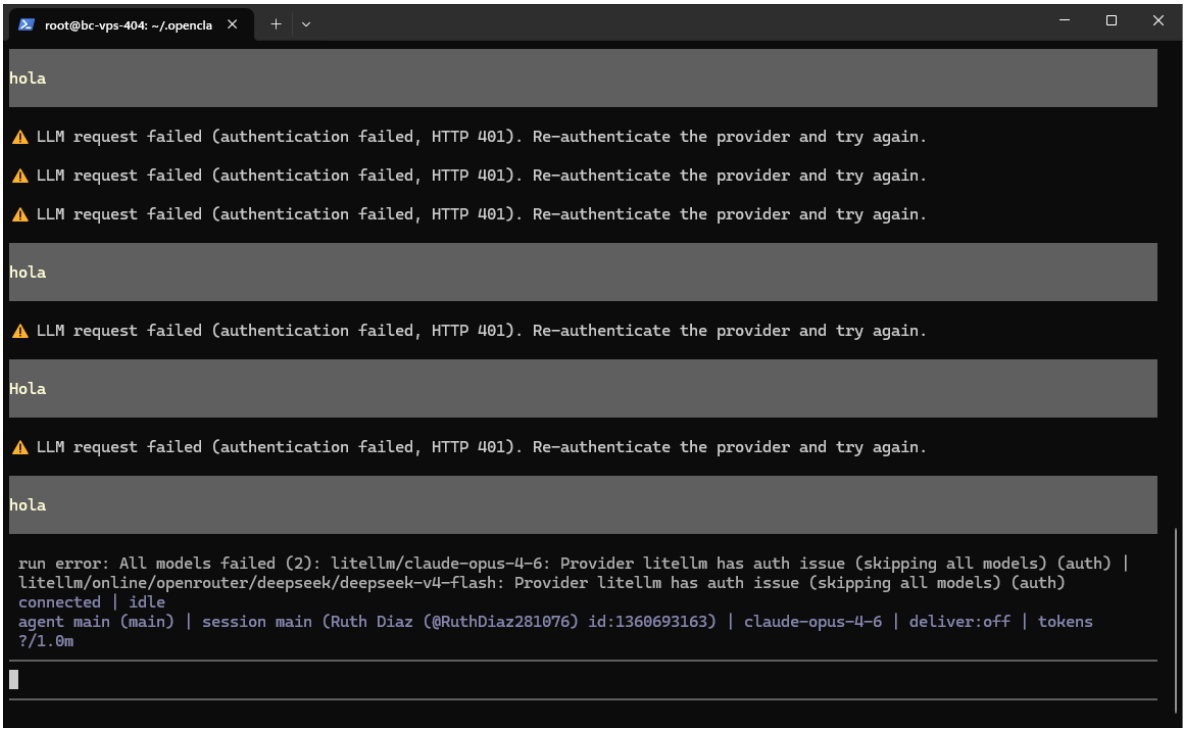

root@bc-vps-404: ~/.opencla
Model selection
Session agent:main:main is pinned to litellm/online/openrouter/openai/gpt-6-luna; config primary litellm/claude-opus-4-6 will apply to new/unpinned sessions.
Configured default: litellm/claude-opus-4-6
Session selected: litellm/online/openrouter/openai/gpt-6-luna
Reason: session override
Clear with: /model default
Docs: https://docs.openclaw.ai/concepts/models#selection-source-and-fallback-strictness
Security audit
Skipped in fast status. Full report: openclaw security audit
Deep probe: openclaw status --deep
Channels
Channel Enabled State Detail
Telegram ON OK token config (9273…tpB4 · len 46) · accounts 1/1
Sessions
Key Kind Age Model Runtime Tokens
agent:main:main direct 2m ago online/openrouter/openai/gpt-6-luna OpenClaw Default 0/1.0m (?%)
agent:main:cron:d59c4379-b2fd-4… cron 17h ago claude-opus-4-6 OpenClaw Default unknown/1.0m (?%)
agent:main:cron:206bfcaa-ae48-4… cron 29h ago claude-opus-4-6 OpenClaw Default unknown/1.0m (?%)
FAQ: https://docs.openclaw.ai/faq
Troubleshooting: https://docs.openclaw.ai/troubleshooting


Sessions
Key Kind Age Model Runtime Tokens
agent:main:main direct 2m ago online/openrouter/openai/gpt-6-luna OpenClaw Default 0/1.0m (?%)
agent:main:cron:d59c4379-b2fd-4… cron 17h ago claude-opus-4-6 OpenClaw Default unknown/1.0m (?%)
agent:main:cron:206bfcaa-ae48-4… cron 29h ago claude-opus-4-6 OpenClaw Default unknown/1.0m (?%)
FAQ: https://docs.openclaw.ai/faq
Troubleshooting: https://docs.openclaw.ai/troubleshooting
Next steps:
Need to share? openclaw status --all
Need to debug live? openclaw logs --follow
Need to test channels? openclaw status --deep
root@bc-vps-404:~/.openclaw#


root@bc-vps-404: ~/.opencla
openclaw tui - ws://127.0.0.1:18789 - agent main (main) - session main
session agent:main:main
⚠ LLM request failed (rate limited, HTTP 429). This is usually temporary - try again shortly.
⚠ LLM request failed (rate limited, HTTP 429). This is usually temporary - try again shortly.
⚠ LLM request failed (rate limited, HTTP 429). This is usually temporary - try again shortly.
⚠ LLM request failed (rate limited, HTTP 429). This is usually temporary - try again shortly.
⚠ LLM request failed (rate limited, HTTP 429). This is usually temporary - try again shortly.
⚠ LLM request failed (rate limited, HTTP 429). This is usually temporary - try again shortly.
⚠ LLM request failed (rate limited, HTTP 429). This is usually temporary - try again shortly.
⚠ LLM request failed (rate limited, HTTP 429). This is usually temporary - try again shortly.
⚠ LLM request failed (rate limited, HTTP 429). This is usually temporary - try again shortly.
⚠ LLM request failed (authentication failed, HTTP 401). Re-authenticate the provider and try again.
⚠ LLM request failed (authentication failed, HTTP 401). Re-authenticate the provider and try again.
⚠ LLM request failed (authentication failed, HTTP 401). Re-authenticate the provider and try again.
⚠ LLM request failed (authentication failed, HTTP 401). Re-authenticate the provider and try again.
⚠ LLM request failed (authentication failed, HTTP 401). Re-authenticate the provider and try again.
⚠ LLM request failed (authentication failed, HTTP 401). Re-authenticate the provider and try again.


root@bc-vps-404: ~/.opencla
⚠ LLM request failed (authentication failed, HTTP 401). Re-authenticate the provider and try again.
⚠ LLM request failed (authentication failed, HTTP 401). Re-authenticate the provider and try again.
⚠ LLM request failed (authentication failed, HTTP 401). Re-authenticate the provider and try again.
⚠ LLM request failed (authentication failed, HTTP 401). Re-authenticate the provider and try again.
Sigues intentando conectar a Zapier?
⚠ LLM request failed (authentication failed, HTTP 401). Re-authenticate the provider and try again.
Que significa este mensaje
Ya no intentes nada más
⚠ LLM request failed (authentication failed, HTTP 401). Re-authenticate the provider and try again.
⚠ litellm/online/openrouter/openai/gpt-6-luna request failed (authentication failed). Re-authenticate the provider and try again.
⚠ LLM request failed (authentication failed, HTTP 401). Re-authenticate the provider and try again.
⚠ LLM request failed (authentication failed, HTTP 401). Re-authenticate the provider and try again.
⚠ LLM request failed (authentication failed, HTTP 401). Re-authenticate the provider and try again.
⚠ LLM request failed (authentication failed, HTTP 401). Re-authenticate the provider and try again.


root@bc-vps-404: ~/.opencla
⚠ LLM request failed (authentication failed, HTTP 401). Re-authenticate the provider and try again.
⚠ LLM request failed (authentication failed, HTTP 401). Re-authenticate the provider and try again.
⚠ LLM request failed (authentication failed, HTTP 401). Re-authenticate the provider and try again.
⚠ LLM request failed (authentication failed, HTTP 401). Re-authenticate the provider and try again.
⚠ LLM request failed (authentication failed, HTTP 401). Re-authenticate the provider and try again.
Cancelar
⚠ LLM request failed (authentication failed, HTTP 401). Re-authenticate the provider and try again.
hola
run error: ⚠ litellm/online/openrouter/openai/gpt-6-luna request failed (authentication failed, HTTP 401). Re-authenticate the provider and try again.
connected | idle
agent main (main) | session main (Ruth Diaz (@RuthDiaz281076) id:1360693163) | online/openrouter/openai/gpt-6-luna | deliver:off | tokens ?/1.1m


root@bc-vps-404: ~/.opencla
hola
⚠ LLM request failed (authentication failed, HTTP 401). Re-authenticate the provider and try again.
⚠ LLM request failed (authentication failed, HTTP 401). Re-authenticate the provider and try again.
⚠ LLM request failed (authentication failed, HTTP 401). Re-authenticate the provider and try again.
hola
⚠ LLM request failed (authentication failed, HTTP 401). Re-authenticate the provider and try again.
Hola
⚠ LLM request failed (authentication failed, HTTP 401). Re-authenticate the provider and try again.
hola
run error: All models failed (2): litellm/claude-opus-4-6: Provider litellm has auth issue (skipping all models) (auth) | litellm/online/openrouter/deepseek/deepseek-v4-flash: Provider litellm has auth issue (skipping all models) (auth)
connected | idle
agent main (main) | session main (Ruth Diaz (@RuthDiaz281076) id:1360693163) | claude-opus-4-6 | deliver:off | tokens ?/1.0m

****

**** jue 05nov2026 ****

****

```
root@bc-vps-404:~# openclaw status

OpenClaw 2026.9.6 (eb377ac) — The artist formerly known as Clawdbot.

🦞
OpenClaw status

Overview
```

Item	Value
OS	linux 5.15.0-198-generic (x64) · node 24.21.0
Dashboard	http://127.0.0.1:18789/
Tailscale exposure	off
Channel	stable (default)
Update	npm
Gateway	local · ws://127.0.0.1:18789 (local loopback) · reachable 14.85s · auth token · bc-vps-404 (167.99.149.52) app 2026.9.6 linux 5.15.0-198-generic
Gateway self	bc-vps-404 (167.99.149.52) app 2026.9.6 linux 5.15.0-198-generic
Gateway service	systemd user installed · enabled · running (pid 9082, state active)
Node service	systemd not installed
Agents	1 · no workspaces bootstrapping · sessions 4 · default main active 50m ago
Telemetry	disabled · update checks only
Memory	enabled (plugin memory-core) · not checked
Host desktop	disabled
Plugin compatibility	none
Probes	skipped (use --deep)
Events	none
Tasks	0 active · 0 queued · 0 running · 167 issues · audit clean · 174 tracked
Backups	none recorded
Heartbeat	30m (main)
Sessions	4 stored · default claude-opus-4-6 (1.0m ctx) · ~/.openclaw/agents/main/agent/openclaw-agent.sqlite

```
root@bc-vps-404: ~
```

Item	Value
Probes	skipped (use --deep)
Events	none
Tasks	0 active · 0 queued · 0 running · 167 issues · audit clean · 174 tracked
Backups	none recorded
Heartbeat	30m (main)
Sessions	4 stored · default claude-opus-4-6 (1.0m ctx) · ~/.openclaw/agents/main/agent/openclaw-agent.sqlite

```
Security audit
Skipped in fast status. Full report: openclaw security audit
Deep probe: openclaw status --deep

Channels
```

Channel	Enabled	State	Detail
Telegram	ON	OK	token config (9273…tpB4 · len 46) · accounts 1/1

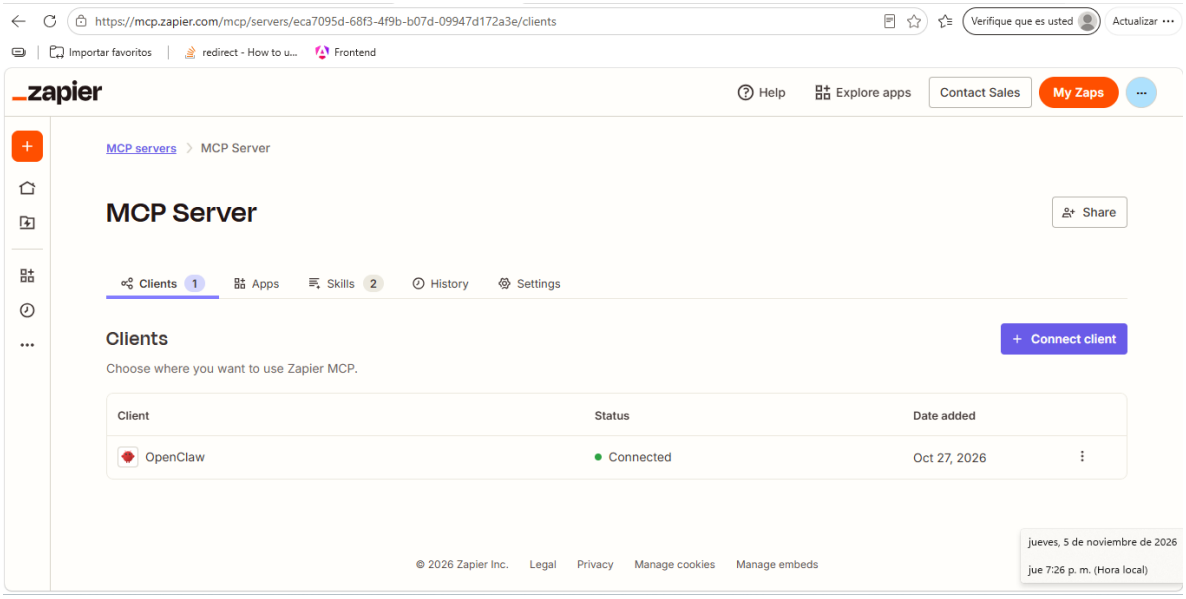
```
Sessions
```

Key	Kind	Age	Model	Runtime	Tokens
agent:main:main	direct	51m ago	claude-opus-4-6	OpenClaw Default	0/1.0m (?%)
agent:main:cron:d59c4379-b2fd-4…	cron	12h ago	claude-opus-4-6	OpenClaw Default	unknown/1.0m (?%)
agent:main:cron:206bfcaa-ae48-4…	cron	24h ago	online/z-ai/glm-5.3-flash	OpenClaw Default	unknown/1.0m (?%)
agent:main:tui-b4ad50c9-3c6d-40…	direct	7d ago	claude-opus-4-6	OpenClaw Default	unknown/1.0m (?%)

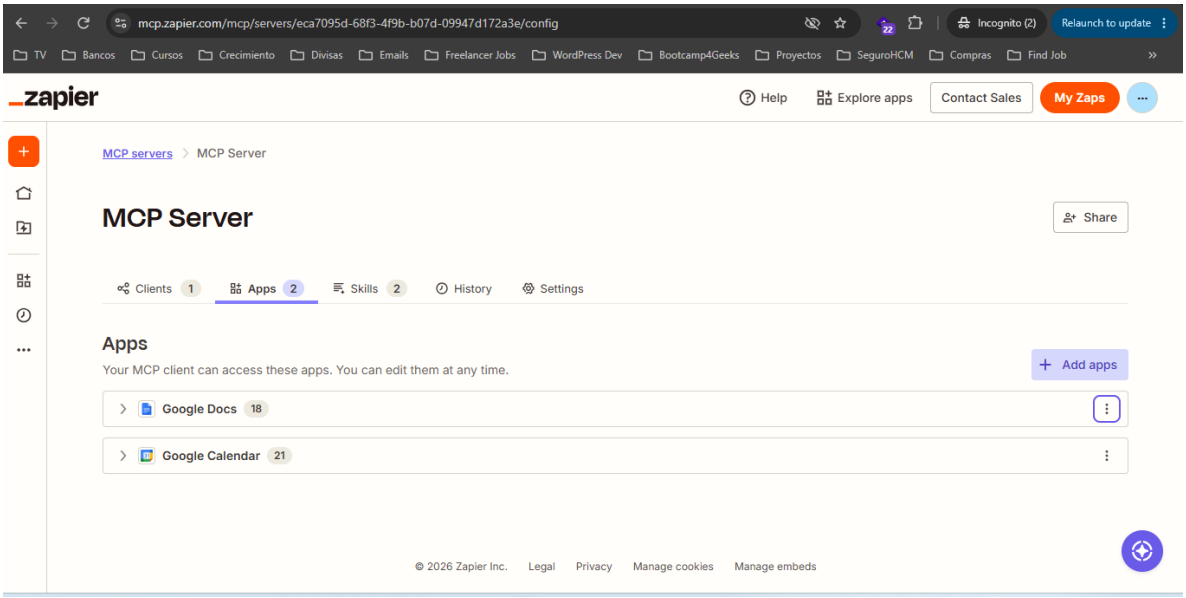
```
FAQ: https://docs.openclaw.ai/faq
Troubleshooting: https://docs.openclaw.ai/troubleshooting
Next steps:
  Need to share?      openclaw status --all
```

****** Luego de ajustes en VPS, con mentoría de Deimian. ******

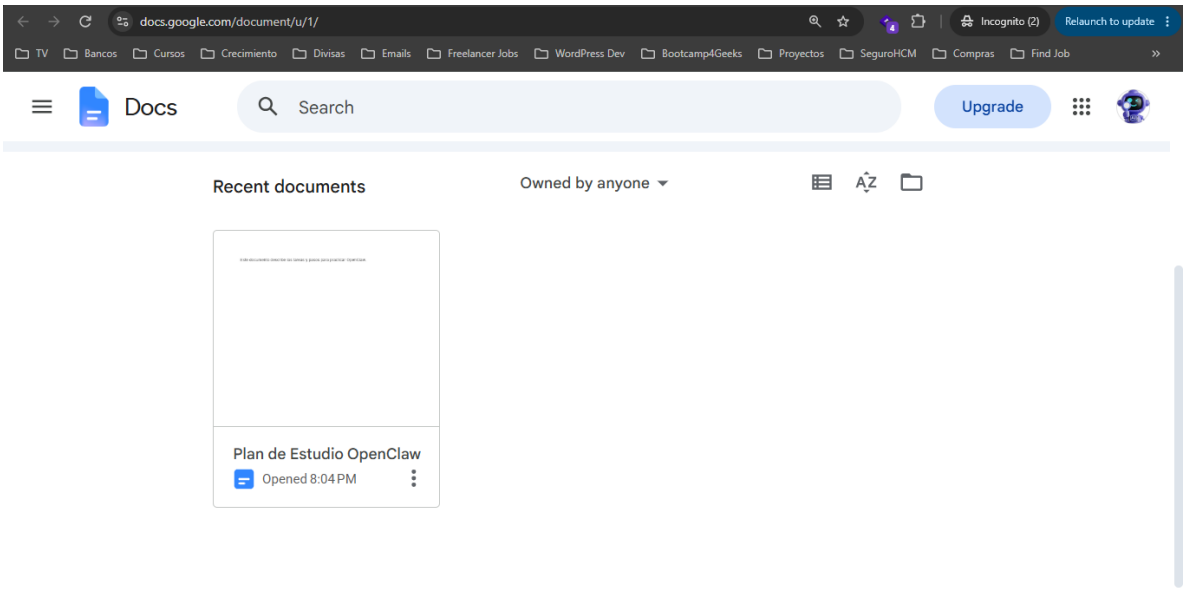
Conexión con Zapier exitosa



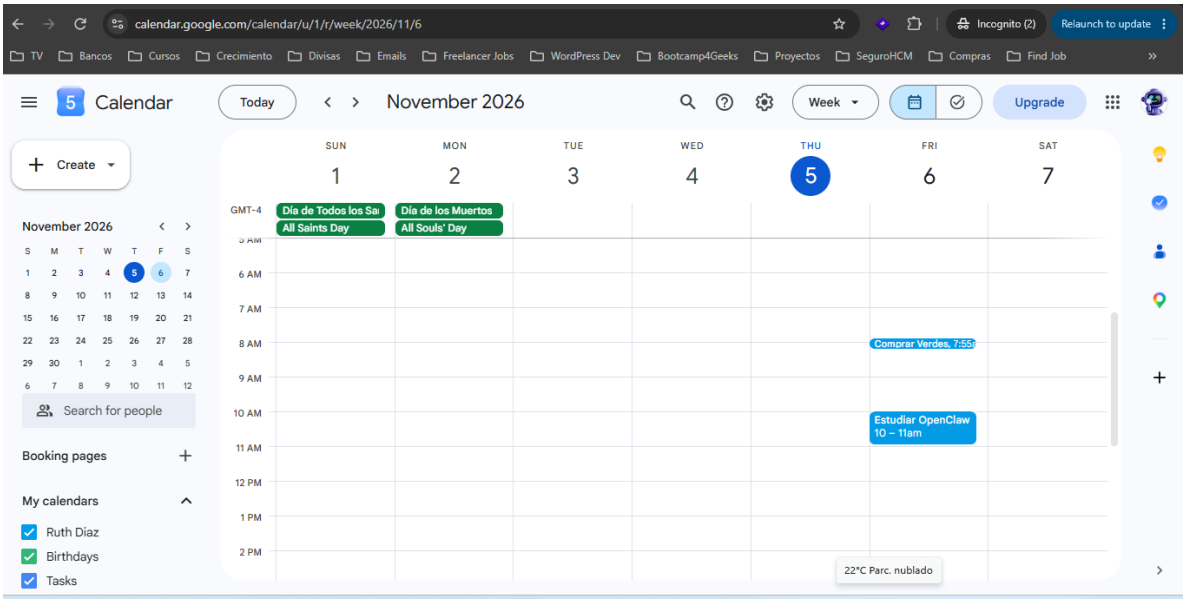
Conexión de Google Calendar y Google Docs



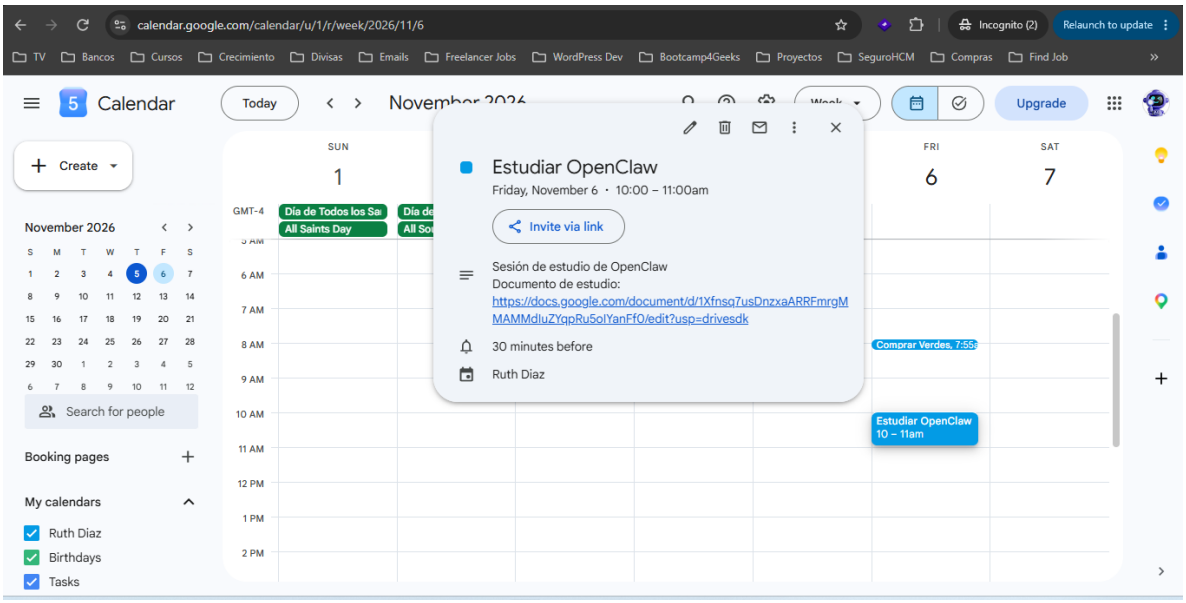
Conexión con Google Docs – Documento creado



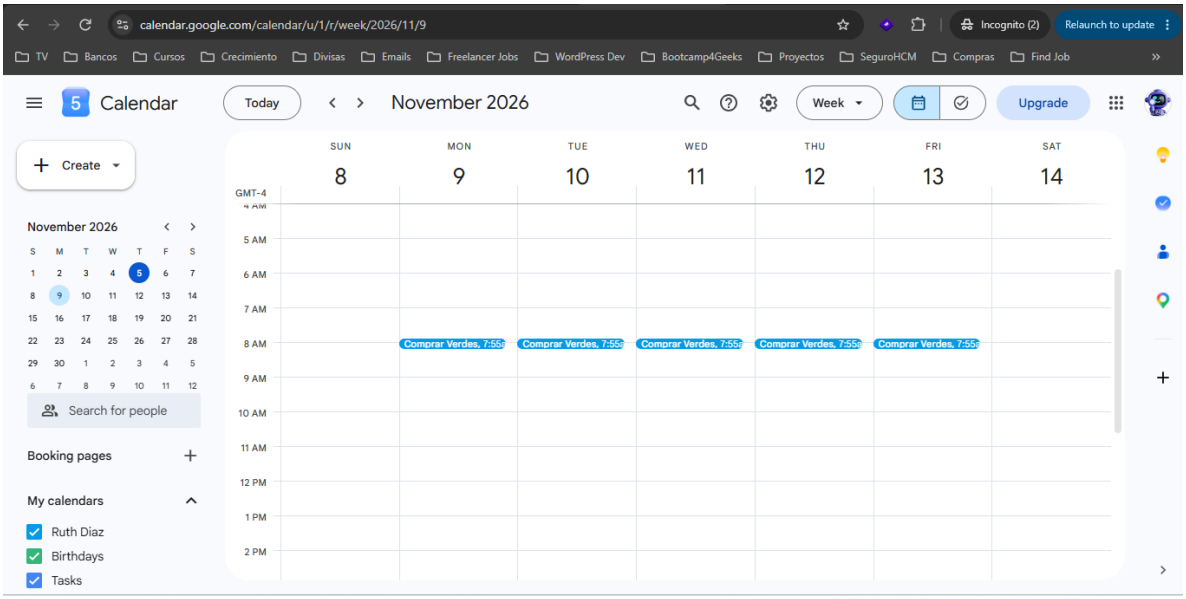
Conexión con Google Calendar – Eventos creados



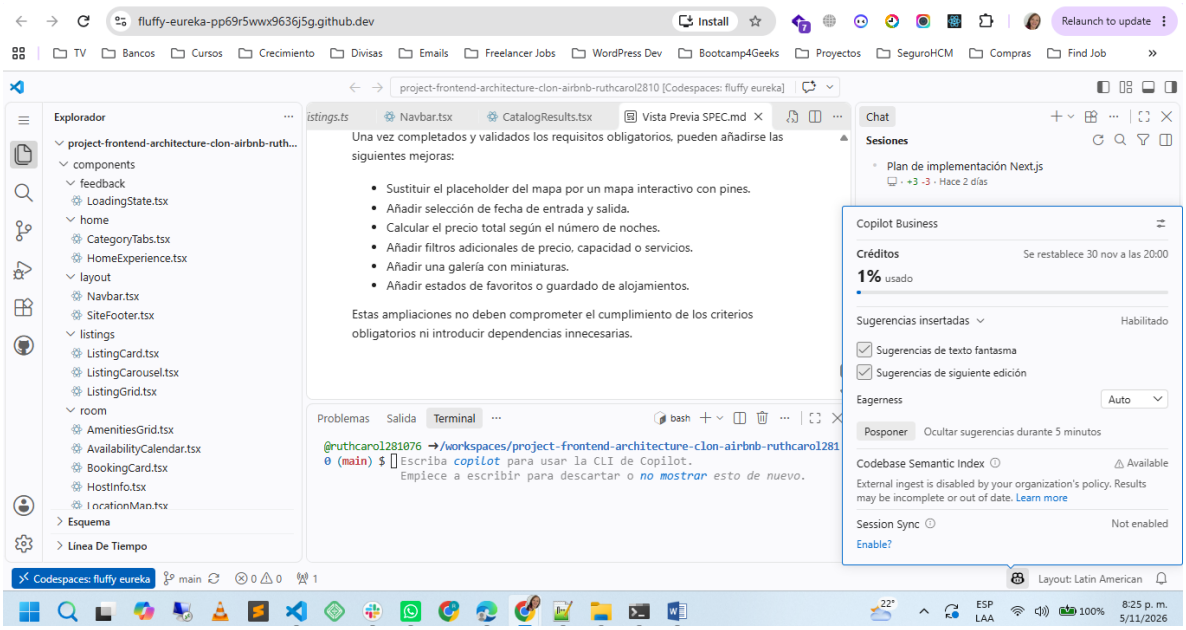
Evento vinculado con Documento



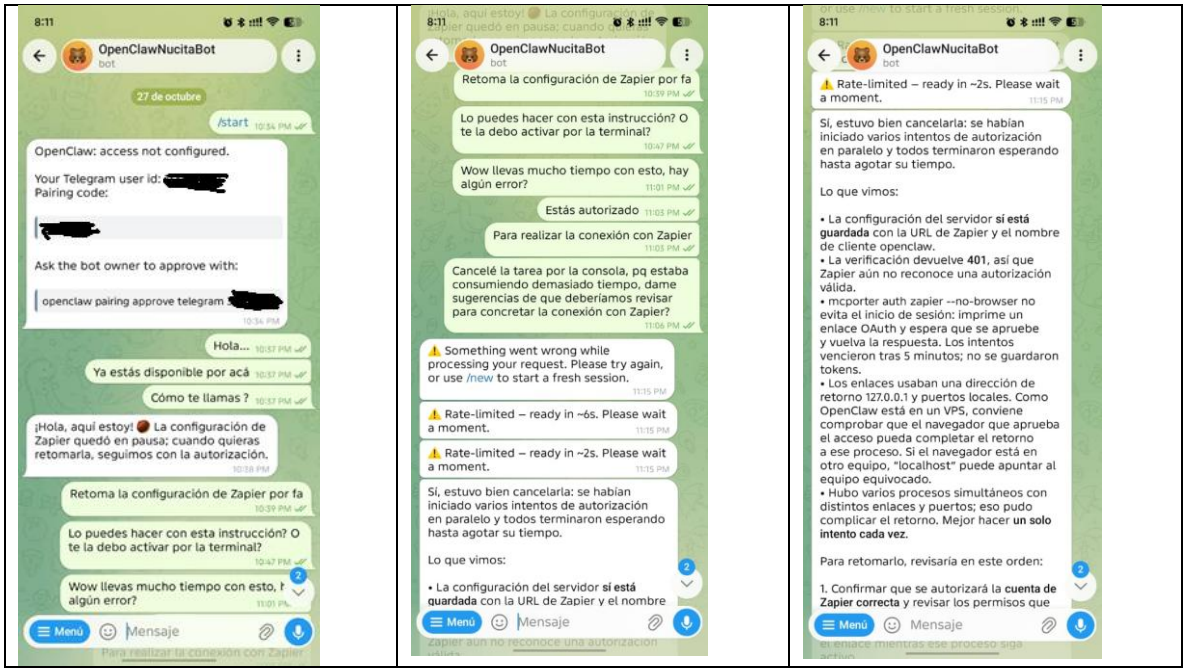
Evento recurrente creado

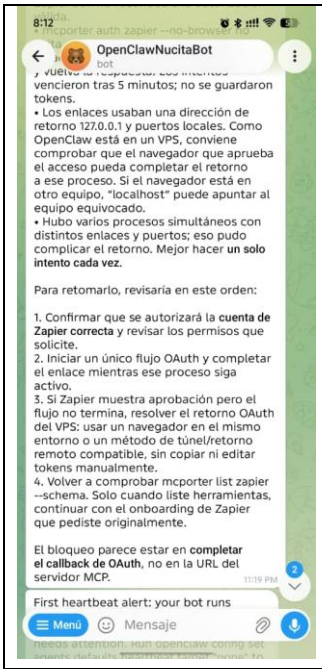


Uso de tockens, luego de las configuraciones:

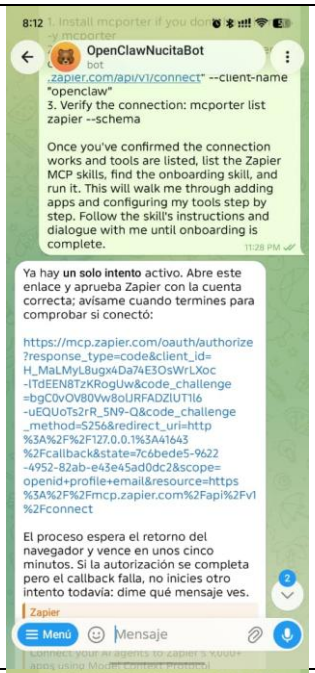


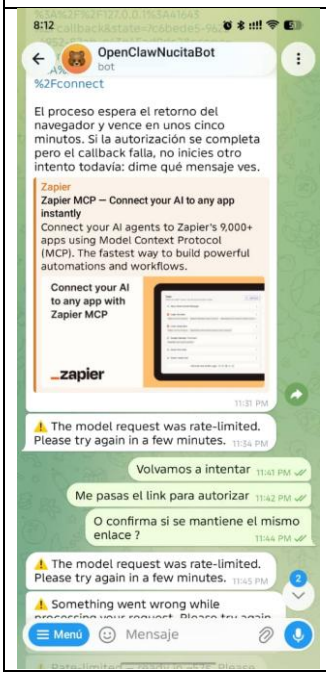
CONVERSACIÓN CON OPENCLAW DESDE TELEGRAM



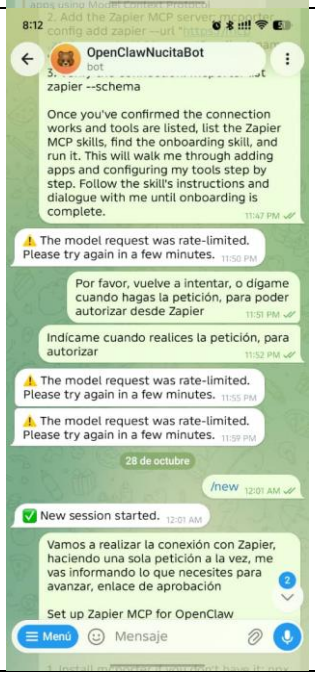

OpenClawNucitaBot
bot
vencieron tras 5 minutos; no se guardaron tokens.
• Los enlaces usaban una dirección de retorno 127.0.0.1 y puertos locales. Como OpenClaw está en un VPS, conviene comprobar que el navegador que aprueba el acceso pueda completar el retorno a ese proceso. Si el navegador está en otro equipo, "localhost" puede apuntar al equipo equivocado.
• Hubo varios procesos simultáneos con distintos enlaces y puertos; eso pudo complicar el retorno. Mejor hacer un solo intento cada vez.
Para retomarlo, revisaría en este orden:
1. Confirmar que se autorizará la cuenta de Zapier correcta y revisar los permisos que solicite.
2. Iniciar un único flujo OAuth y completar el enlace mientras ese proceso siga activo.
3. Si Zapier muestra aprobación pero el flujo no termina, resolver el retorno OAuth del VPS: usar un navegador en el mismo entorno o un método de túnel/retorno remoto compatible, sin copiar ni editar tokens manualmente.
4. Volver a comprobar mcporter list zapier --schema. Solo cuando liste herramientas, continuar con el onboarding de Zapier que pediste originalmente.
El bloqueo parece estar en completar el callback de OAuth, no en la URL del servidor MCP.
11:19 PM
First heartbeat alert: your bot runs
Menú
Mensaje

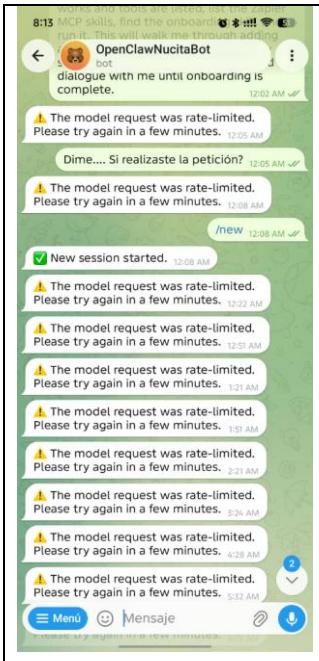
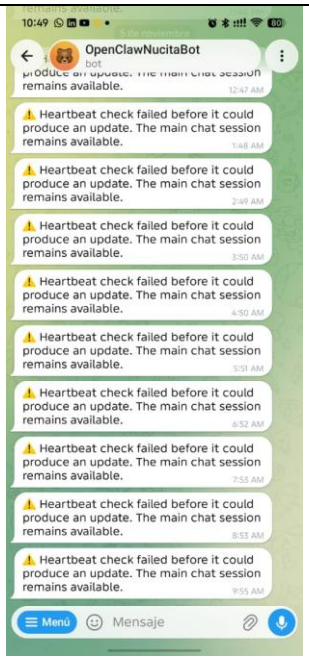
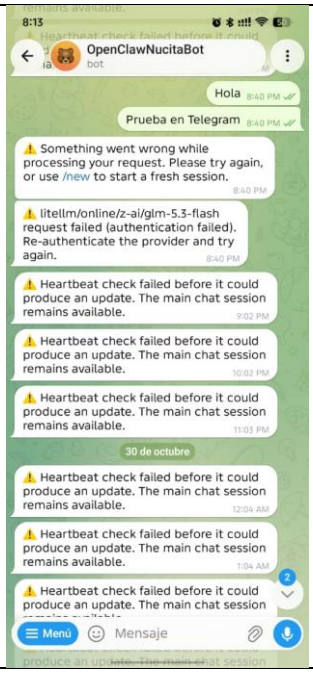

OpenClawNucitaBot
bot
servidor MCP.
11:19 PM
First heartbeat alert: your bot runs periodic background checks and messages you only when something needs attention. Run openclaw config set agents.defaults.heartbeat.target "none" to keep these internal.
Los comandos en segundo plano ya terminaron; no queda ninguno activo. La comprobación confirmó que Zapier sigue sin autenticar: el servidor MCP devuelve 401. Los intentos de autorización OAuth fallaron porque no recibieron el callback y agotaron el tiempo de espera de 300 segundos; no se obtuvo un token.
11:19 PM
Intentemos una vez con una sola petición a la vez
11:28 PM
Set up Zapier MCP for OpenClaw
Setup steps:
1. Install mcporter if you don't have it: npx -y mcporter
2. Add the Zapier MCP server: mcporter config add zapier --url "https://mcp.zapier.com/api/v1/connect" --client-name "openclaw"
3. Verify the connection: mcporter list zapier --schema
Once you've confirmed the connection works and tools are listed, list the Zapier MCP skills, find the onboarding skill, and run it. This will walk me through adding apps and configuring my tools step by step. Follow the skill's instructions and
Menú
Mensaje

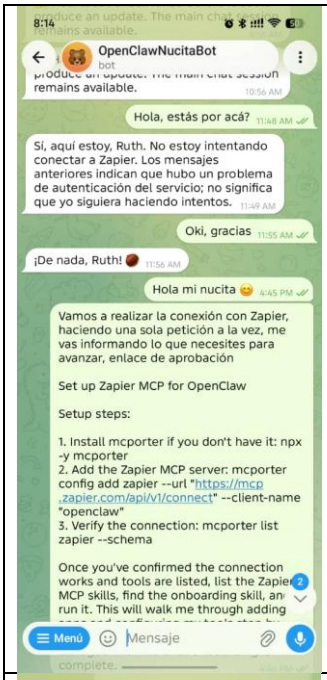

OpenClawNucitaBot
bot
.zapier.com/api/v1/connect" --client-name "openclaw"
3. Verify the connection: mcporter list zapier --schema
Once you've confirmed the connection works and tools are listed, list the Zapier MCP skills, find the onboarding skill, and run it. This will walk me through adding apps and configuring my tools step by step. Follow the skill's instructions and dialogue with me until onboarding is complete.
11:28 PM
Ya hay un solo intento activo. Abre este enlace y aprueba Zapier con la cuenta correcta; avísame cuando termines para comprobar si conectó:
https://mcp.zapier.com/oauth/authorize?response_type=code&client_id=H_MaLMyL8ugx4Da74E3OsWrLXoc-lTdEEN8TzKRogUw&code_challenge=bgC0vOV80Vw8oURFADZlUT1l6-uEQUoTs2rR_5N9-Q&code_challenge_method=S256&redirect_uri=http%3A%2F%2F127.0.0.1%3A41643%2Fcallback&state=7c6bede5-9622-4952-82ab-e43e45ad0dc2&scope=openid+profile+email&resource=https%3A%2F%2Fmcp.zapier.com%2Fapi%2Fv1%2Fconnect
El proceso espera el retorno del navegador y vence en unos cinco minutos. Si la autorización se completa pero el callback falla, no inicies otro intento todavía: dime qué mensaje ves.
Zapier
Menú
Mensaje

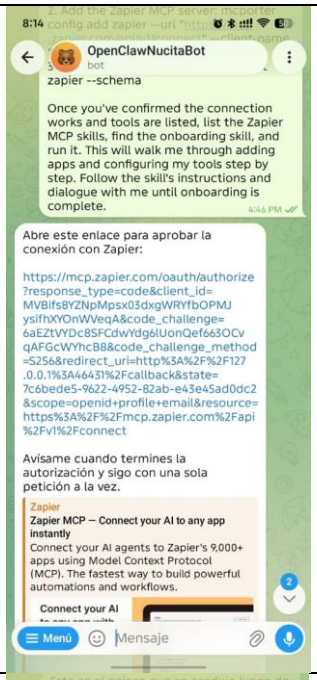

OpenClawNucitaBot
bot
%2Fconnect
El proceso espera el retorno del navegador y vence en unos cinco minutos. Si la autorización se completa pero el callback falla, no inicies otro intento todavía: dime qué mensaje ves.
Zapier
Zapier MCP — Connect your AI to any app instantly
Connect your AI agents to Zapier's 9,000+ apps using Model Context Protocol (MCP). The fastest way to build powerful automations and workflows.
Connect your AI to any app with Zapier MCP
_zapier
11:31 PM
⚠ The model request was rate-limited. Please try again in a few minutes.
11:34 PM
Volvamos a intentar
11:41 PM
Me pasas el link para autorizar
11:42 PM
O confirma si se mantiene el mismo enlace ?
11:44 PM
⚠ The model request was rate-limited. Please try again in a few minutes.
11:45 PM
⚠ Something went wrong while
Menú
Mensaje

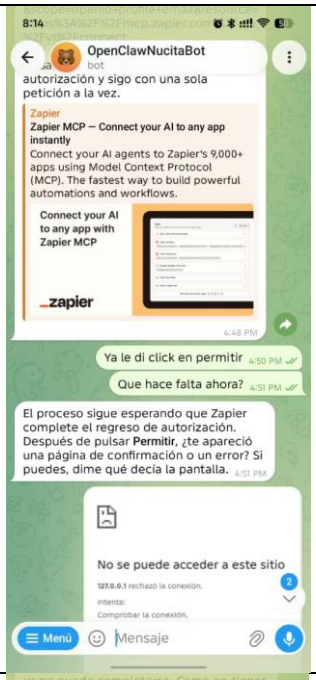

Me pasas el link para autorizar
OpenClawNucitaBot
bot
⚠ The model request was rate-limited. Please try again in a few minutes.
11:45 PM
⚠ Something went wrong while processing your request. Please try again, or use /new to start a fresh session.
11:45 PM
⚠ Rate-limited — ready in ~52s. Please wait a moment.
11:45 PM
/new
11:46 PM
✅ New session started.
11:46 PM
Vamos a realizar la conexión con Zapier, haciendo una sola petición a la vez, me vas informando lo que necesites para avanzar
Set up Zapier MCP for OpenClaw
Setup steps:
1. Install mcporter if you don't have it: npx -y mcporter
2. Add the Zapier MCP server: mcporter config add zapier --url "https://mcp.zapier.com/api/v1/connect" --client-name "openclaw"
3. Verify the connection: mcporter list zapier --schema
Once you've confirmed the connection works and tools are listed, list the Zapier MCP skills, find the onboarding skill, and run it. This will walk me through adding apps and configuring my tools step by step. Follow the skill's instructions and
Menú
Mensaje


OpenClawNucitaBot
bot
zapier --schema
Once you've confirmed the connection works and tools are listed, list the Zapier MCP skills, find the onboarding skill, and run it. This will walk me through adding apps and configuring my tools step by step. Follow the skill's instructions and dialogue with me until onboarding is complete.
11:47 PM
⚠ The model request was rate-limited. Please try again in a few minutes.
11:50 PM
Por favor, vuelve a intentar, o dígame cuando hagas la petición, para poder autorizar desde Zapier
11:51 PM
Indícame cuando realices la petición, para autorizar
11:52 PM
⚠ The model request was rate-limited. Please try again in a few minutes.
11:55 PM
⚠ The model request was rate-limited. Please try again in a few minutes.
11:59 PM
28 de octubre
/new
12:01 AM
✅ New session started.
12:01 AM
Vamos a realizar la conexión con Zapier, haciendo una sola petición a la vez, me vas informando lo que necesites para avanzar, enlace de aprobación
Set up Zapier MCP for OpenClaw
Menú
Mensaje

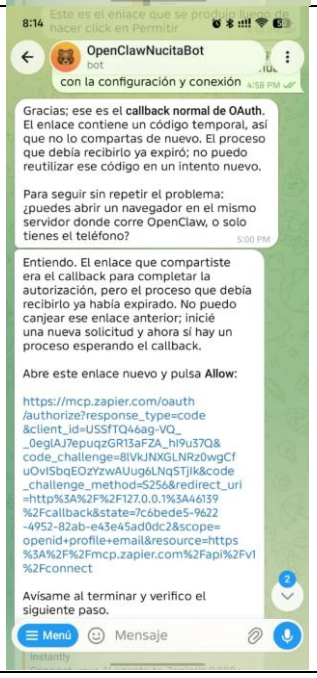
		
		… Persistió el error y los mensajes de intento de verificación de BotFather Telegram … No consumió tockens.

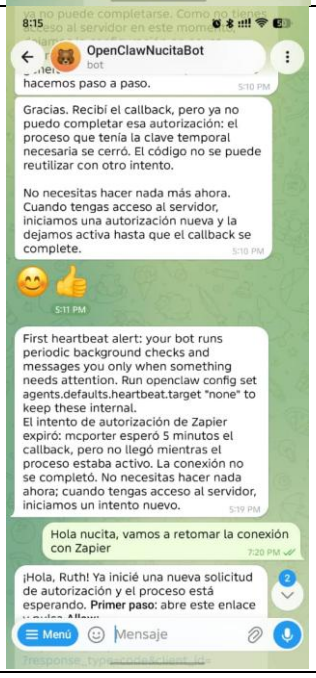

OpenClawNucitaBot
bot
remains available.
10:56 AM
Hola, estás por acá? 11:48 AM
Sí, aquí estoy, Ruth. No estoy intentando conectar a Zapier. Los mensajes anteriores indican que hubo un problema de autenticación del servicio; no significa que yo siguiera haciendo intentos. 11:49 AM
Oki, gracias 11:55 AM
¡De nada, Ruth! 11:56 AM
Hola mi nucita 4:45 PM
Vamos a realizar la conexión con Zapier, haciendo una sola petición a la vez, me vas informando lo que necesites para avanzar, enlace de aprobación
Set up Zapier MCP for OpenClaw
Setup steps:
1. Install mcporter if you don't have it: npx -y mcporter
2. Add the Zapier MCP server: mcporter config add zapier --url "https://mcp.zapier.com/api/v1/connect" --client-name "openclaw"
3. Verify the connection: mcporter list zapier --schema
Once you've confirmed the connection works and tools are listed, list the Zapier MCP skills, find the onboarding skill, and run it. This will walk me through adding
Menú
Mensaje

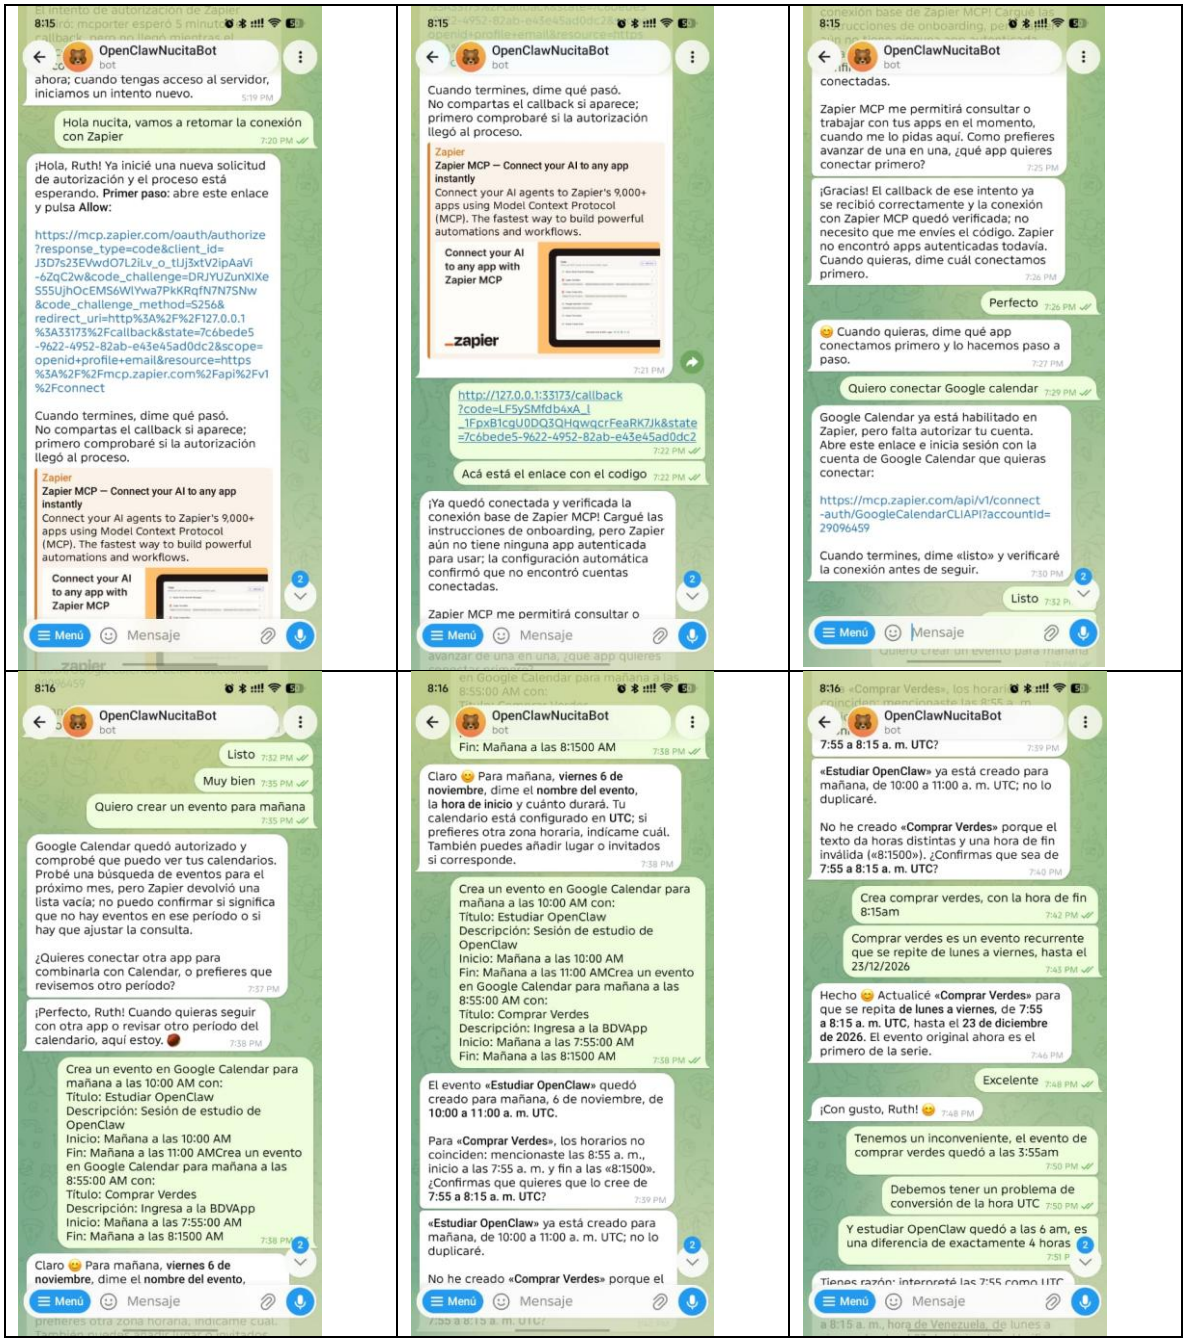

OpenClawNucitaBot
bot
zapier --schema
Once you've confirmed the connection works and tools are listed, list the Zapier MCP skills, find the onboarding skill, and run it. This will walk me through adding apps and configuring my tools step by step. Follow the skill's instructions and dialogue with me until onboarding is complete. 4:46 PM
Abre este enlace para aprobar la conexión con Zapier:
https://mcp.zapier.com/oauth/authorize?response_type=code&client_id=MVBifs8YZNpMpsx03dxgWRYfbOPMJysifhXYOnWVeqA&code_challenge=6aEZtVYDc85FCdwYdg6lUonQef663OCvqAFGcWYhcB8&code_challenge_method=S256&redirect_uri=http%3A%2F%2F127.0.0.1%3A46431%2Fcallback&state=7c6bede5-9622-4952-82ab-e43e45ad0dc2&scope=openid+profile+email&resource=https%3A%2F%2Fmcp.zapier.com%2Fapi%2Fv1%2Fconnect
Avísame cuando termines la autorización y sigo con una sola petición a la vez.
Zapier
Zapier MCP — Connect your AI to any app instantly
Connect your AI agents to Zapier's 9,000+ apps using Model Context Protocol (MCP). The fastest way to build powerful automations and workflows.
Menú
Mensaje

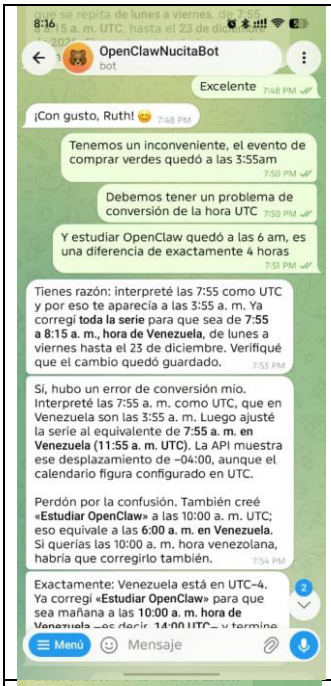

OpenClawNucitaBot
bot
autorización y sigo con una sola petición a la vez.
Zapier
Zapier MCP — Connect your AI to any app instantly
Connect your AI agents to Zapier's 9,000+ apps using Model Context Protocol (MCP). The fastest way to build powerful automations and workflows.
Connect your AI to any app with Zapier MCP
_zapier
4:48 PM
Ya le di click en permitir 4:50 PM
Que hace falta ahora? 4:51 PM
El proceso sigue esperando que Zapier complete el regreso de autorización. Después de pulsar Permitir, ¿te apareció una página de confirmación o un error? Si puedes, dime qué decía la pantalla. 4:51 PM
No se puede acceder a este sitio
127.0.0.1 rechazó la conexión.
Intenta:
Comprobar la conexión.
Menú
Mensaje


OpenClawNucitaBot
bot
Screenshot (5 nov 2026 4:54:34 p.m.)
4:54 PM
Este es el resultado luego de hacer click en Allow (permitir) 4:55 PM
Gracias, ya veo qué pasó. No hiciste nada mal: Zapier intentó volver a 127.0.0.1:46431, pero al abrir el enlace en tu teléfono, esa dirección apunta al propio teléfono, mientras que mcporter estaba esperando en el servidor. Por eso apareció "conexión rechazada"; la autorización expiró y la conexión aún no quedó lista.
Para continuar, dime solo esto: ¿puedes abrir un navegador en el mismo servidor donde corre OpenClaw, o estás usando únicamente el teléfono? 4:56 PM
http://127.0.0.1:46431/callback?code=WWWGcRE8bF-OAoDGZsV_XubvNuAeZSor9gmiEDTlkOM&state=7c6bede5-9622-4952-82ab-e43e45ad0dc2 4:57 PM
Este es el enlace que se produjo luego de hacer click en Permitir 4:58 PM
Mis instrucciones dice que te entregué este enlace para que puedas continuar con la configuración y conexión 4:58 PM
Gracias; ese es el callback normal de OAuth. El enlace contiene un código temporal, así
Menú
Mensaje

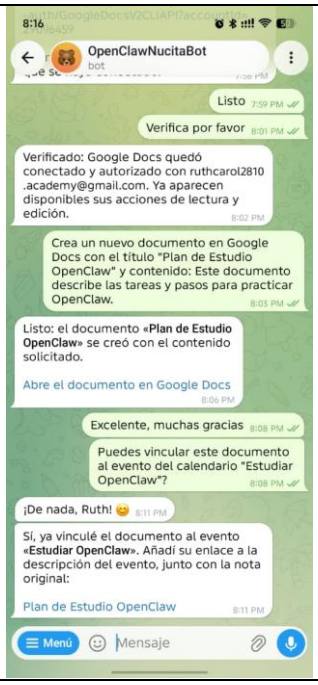

OpenClawNucitaBot
bot
con la configuración y conexión 4:58 PM
Gracias; ese es el callback normal de OAuth. El enlace contiene un código temporal, así que no lo compartas de nuevo. El proceso que debía recibirlo ya expiró; no puedo reutilizar ese código en un intento nuevo.
Para seguir sin repetir el problema: ¿puedes abrir un navegador en el mismo servidor donde corre OpenClaw, o solo tienes el teléfono? 5:00 PM
Entiendo. El enlace que compartiste era el callback para completar la autorización, pero el proceso que debía recibirlo ya había expirado. No puedo canjear ese enlace anterior; inicié una nueva solicitud y ahora sí hay un proceso esperando el callback.
Abre este enlace nuevo y pulsa Allow:
https://mcp.zapier.com/oauth/authorize?response_type=code&client_id=USSfTQ46ag-VQ_-0eglAJ7epuqzGR13aFZA_hl9u37Q&code_challenge=8lVkJNXGLNRz0wgCfuOvlSbqEOzYzwAUug6LNqSTjlk&code_challenge_method=S256&redirect_uri=http%3A%2F%2F127.0.0.1%3A46139%2Fcallback&state=7c6bede5-9622-4952-82ab-e43e45ad0dc2&scope=openid+profile+email&resource=https%3A%2F%2Fmcp.zapier.com%2Fapi%2Fv1%2Fconnect
Avísame al terminar y verifico el siguiente paso.
Menú
Mensaje


OpenClawNucitaBot
bot
hacemos paso a paso. 5:10 PM
Gracias. Recibí el callback, pero ya no puedo completar esa autorización: el proceso que tenía la clave temporal necesaria se cerró. El código no se puede reutilizar con otro intento.
No necesitas hacer nada más ahora. Cuando tengas acceso al servidor, iniciamos una autorización nueva y la dejamos activa hasta que el callback se complete. 5:10 PM
5:11 PM
First heartbeat alert: your bot runs periodic background checks and messages you only when something needs attention. Run openclaw config set agents.defaults.heartbeat.target "none" to keep these internal.
El intento de autorización de Zapier expiró: mcporter esperó 5 minutos el callback, pero no llegó mientras el proceso estaba activo. La conexión no se completó. No necesitas hacer nada ahora; cuando tengas acceso al servidor, iniciamos un intento nuevo. 5:19 PM
Hola nucita, vamos a retomar la conexión con Zapier 7:20 PM
¡Hola, Ruth! Ya inicié una nueva solicitud de autorización y el proceso está esperando. Primer paso: abre este enlace
Menú
Mensaje


OpenClawNucitaBot
bot
ahora; cuando tengas acceso al servidor, iniciamos un intento nuevo.
Hola nucita, vamos a retomar la conexión con Zapier
¡Hola, Ruth! Ya inicié una nueva solicitud de autorización y el proceso está esperando. Primer paso: abre este enlace y pulsa Allow:
https://mcp.zapier.com/oauth/authorize?response_type=code&client_id=J3D7s23EVwdO7L2iLv_o_tIJj3xtV2ipAaVi-6ZqC2w&code_challenge=DRJYUZunXIXeS55UjhOcEMS6WlYwa7PkkRqfN7N7SNw&code_challenge_method=S256&redirect_uri=http%3A%2F%2F127.0.0.1%3A33173%2Fcallback&state=7c6bede5-9622-4952-82ab-e43e45ad0dc2&scope=openid+profile+email&resource=https%3A%2F%2Fmcp.zapier.com%2Fapi%2Fv1%2Fconnect
Cuando termines, dime qué pasó. No compartas el callback si aparece; primero comprobaré si la autorización llegó al proceso.
Zapier
Zapier MCP — Connect your AI to any app instantly
Connect your AI agents to Zapier's 9,000+ apps using Model Context Protocol (MCP). The fastest way to build powerful automations and workflows.
Connect your AI to any app with Zapier MCP
Menú
Mensaje
Cuando termines, dime qué pasó. No compartas el callback si aparece; primero comprobaré si la autorización llegó al proceso.
http://127.0.0.1:33173/callback?code=LF5ySMfdb4xA_l_1FpxB1cgU0DQ3QHqwqcrFeaRK7Jk&state=7c6bede5-9622-4952-82ab-e43e45ad0dc2
Acá está el enlace con el codigo
¡Ya quedó conectada y verificada la conexión base de Zapier MCP! Cargué las instrucciones de onboarding, pero Zapier aún no tiene ninguna app autenticada para usar; la configuración automática confirmó que no encontró cuentas conectadas.
Zapier MCP me permitirá consultar o trabajar con tus apps en el momento, cuando me lo pidas aquí. Como prefieres avanzar de una en una, ¿qué app quieres conectar primero?
¡Gracias! El callback de ese intento ya se recibió correctamente y la conexión con Zapier MCP quedó verificada; no necesito que me envíes el código. Zapier no encontró apps autenticadas todavía. Cuando quieras, dime cuál conectamos primero.
Perfecto
Cuando quieras, dime qué app conectamos primero y lo hacemos paso a paso.
Quiero conectar Google calendar
Google Calendar ya está habilitado en Zapier, pero falta autorizar tu cuenta. Abre este enlace e inicia sesión con la cuenta de Google Calendar que quieras conectar:
https://mcp.zapier.com/api/v1/connect-auth/GoogleCalendarCLIAPI?accountId=29096459
Cuando termines, dime «listo» y verificaré la conexión antes de seguir.
Listo
Listo
Muy bien
Quiero crear un evento para mañana
Google Calendar quedó autorizado y comprobé que puedo ver tus calendarios. Probé una búsqueda de eventos para el próximo mes, pero Zapier devolvió una lista vacía; no puedo confirmar si significa que no hay eventos en ese período o si hay que ajustar la consulta.
¿Quieres conectar otra app para combinarla con Calendar, o prefieres que revisemos otro período?
¡Perfecto, Ruth! Cuando quieras seguir con otra app o revisar otro período del calendario, aquí estoy.
Crea un evento en Google Calendar para mañana a las 10:00 AM con:
Título: Estudiar OpenClaw
Descripción: Sesión de estudio de OpenClaw
Inicio: Mañana a las 10:00 AM
Fin: Mañana a las 11:00 AMCrea un evento en Google Calendar para mañana a las 8:55:00 AM con:
Título: Comprar Verdes
Descripción: Ingresa a la BDVApp
Inicio: Mañana a las 7:55:00 AM
Fin: Mañana a las 8:1500 AM
Claro Para mañana, viernes 6 de noviembre, dime el nombre del evento,
Fin: Mañana a las 8:1500 AM
Claro Para mañana, viernes 6 de noviembre, dime el nombre del evento, la hora de inicio y cuánto durará. Tu calendario está configurado en UTC; si prefieres otra zona horaria, indícame cuál. También puedes añadir lugar o invitados si corresponde.
El evento «Estudiar OpenClaw» quedó creado para mañana, 6 de noviembre, de 10:00 a 11:00 a. m. UTC.
Para «Comprar Verdes», los horarios no coinciden: mencionaste las 8:55 a. m., inicio a las 7:55 a. m. y fin a las «8:1500». ¿Confirmas que quieres que lo cree de 7:55 a 8:15 a. m. UTC?
«Estudiar OpenClaw» ya está creado para mañana, de 10:00 a 11:00 a. m. UTC; no lo duplicaré.
No he creado «Comprar Verdes» porque el
7:55 a 8:15 a. m. UTC?
«Estudiar OpenClaw» ya está creado para mañana, de 10:00 a 11:00 a. m. UTC; no lo duplicaré.
No he creado «Comprar Verdes» porque el texto da horas distintas y una hora de fin inválida («8:1500»). ¿Confirmas que sea de 7:55 a 8:15 a. m. UTC?
Crea comprar verdes, con la hora de fin 8:15am
Comprar verdes es un evento recurrente que se repite de lunes a viernes, hasta el 23/12/2026
Hecho Actualicé «Comprar Verdes» para que se repita de lunes a viernes, de 7:55 a 8:15 a. m. UTC, hasta el 23 de diciembre de 2026. El evento original ahora es el primero de la serie.
Excelente
¡Con gusto, Ruth!
Tenemos un inconveniente, el evento de comprar verdes quedó a las 3:55am
Debemos tener un problema de conversión de la hora UTC
Y estudiar OpenClaw quedó a las 6 am, es una diferencia de exactamente 4 horas
Tienes razón: interpreté las 7:55 como UTC


8:16
OpenClawNucitaBot
bot
Excelente 7:48 PM
¡Con gusto, Ruth! 😊 7:48 PM
Tenemos un inconveniente, el evento de comprar verdes quedó a las 3:55am 7:50 PM
Debemos tener un problema de conversión de la hora UTC 7:50 PM
Y estudiar OpenClaw quedó a las 6 am, es una diferencia de exactamente 4 horas 7:51 PM
Tienes razón: interpreté las 7:55 como UTC y por eso te aparecía a las 3:55 a. m. Ya corregí toda la serie para que sea de 7:55 a 8:15 a. m., hora de Venezuela, de lunes a viernes hasta el 23 de diciembre. Verifiqué que el cambio quedó guardado. 7:53 PM
Sí, hubo un error de conversión mío. Interpreté las 7:55 a. m. como UTC, que en Venezuela son las 3:55 a. m. Luego ajusté la serie al equivalente de 7:55 a. m. en Venezuela (11:55 a. m. UTC). La API muestra ese desplazamiento de −04:00, aunque el calendario figura configurado en UTC.
Perdón por la confusión. También creé «Estudiar OpenClaw» a las 10:00 a. m. UTC; eso equivale a las 6:00 a. m. en Venezuela. Si querías las 10:00 a. m. hora venezolana, habría que corregirlo también. 7:54 PM
Exactamente: Venezuela está en UTC−4. Ya corregí «Estudiar OpenClaw» para que sea mañana a las 10:00 a. m. hora de
Menú
Mensaje


8:16
OpenClawNucitaBot
bot
habría que corregirlo también. 7:54 PM
Exactamente: Venezuela está en UTC−4. Ya corregí «Estudiar OpenClaw» para que sea mañana a las 10:00 a. m. hora de Venezuela –es decir, 14:00 UTC– y termine a las 11:00 a. m. hora local. Disculpa la confusión con la conversión. 7:55 PM
Si perfecto, puedo ver qué ya están corregidos ambos eventos 7:56 PM
Quiero configurar Google Docs 7:57 PM
Google Docs ya está habilitado en Zapier; falta autorizar tu cuenta de Google. Abre este enlace e inicia sesión con la cuenta que quieras conectar:
https://mcp.zapier.com/api/v1/connect-auth/GoogleDocsV2CLIAPI?accountId=29096459
Cuando termines, dime «listo» y verifico que se haya conectado. 7:58 PM
Listo 7:59 PM
Verifica por favor 8:01 PM
Verificado: Google Docs quedó conectado y autorizado con ruthcarol2810.academy@gmail.com. Ya aparecen disponibles sus acciones de lectura y edición. 8:02 PM
Crea un nuevo documento en Google Docs con el título "Plan de Estudio OpenClaw" y contenido: Este documento
Menú
Mensaje


8:16
OpenClawNucitaBot
bot
Listo 7:59 PM
Verifica por favor 8:01 PM
Verificado: Google Docs quedó conectado y autorizado con ruthcarol2810.academy@gmail.com. Ya aparecen disponibles sus acciones de lectura y edición. 8:02 PM
Crea un nuevo documento en Google Docs con el título "Plan de Estudio OpenClaw" y contenido: Este documento describe las tareas y pasos para practicar OpenClaw. 8:03 PM
Listo: el documento «Plan de Estudio OpenClaw» se creó con el contenido solicitado.
Abre el documento en Google Docs 8:06 PM
Excelente, muchas gracias 8:08 PM
Puedes vincular este documento al evento del calendario "Estudiar OpenClaw"? 8:08 PM
¡De nada, Ruth! 😊 8:11 PM
Sí, ya vinculé el documento al evento «Estudiar OpenClaw». Añadí su enlace a la descripción del evento, junto con la nota original:
Plan de Estudio OpenClaw 8:11 PM
Menú
Mensaje


8:39
OpenClawNucitaBot
bot
Excelente, muchas gracias 8:08 PM
Puedes vincular este documento al evento del calendario "Estudiar OpenClaw"? 8:08 PM
¡De nada, Ruth! 😊 8:11 PM
Sí, ya vinculé el documento al evento «Estudiar OpenClaw». Añadí su enlace a la descripción del evento, junto con la nota original:
Plan de Estudio OpenClaw 8:11 PM
Buenísimo, muchas gracias 8:25 PM
Tienes acceso a la información de tu consumo de tockens? 8:25 PM
¡De nada, Ruth! 😊 Me alegra que haya quedado todo listo. 8:28 PM
Tengo acceso a una estimación del contexto de esta sesión: ahora muestra unos 227 mil de 1 millón de tokens (23%). Eso indica cuánto espacio de contexto está ocupado, no el total acumulado de tokens consumidos ni el costo facturado.
No tengo aquí acceso al consumo o facturación total de tu cuenta de OpenRouter/LiteLLM. 8:29 PM
Está bien, muchas gracias 8:33 PM
¡De nada, Ruth! 😊 8:34 PM
Menú
Mensaje