


2)

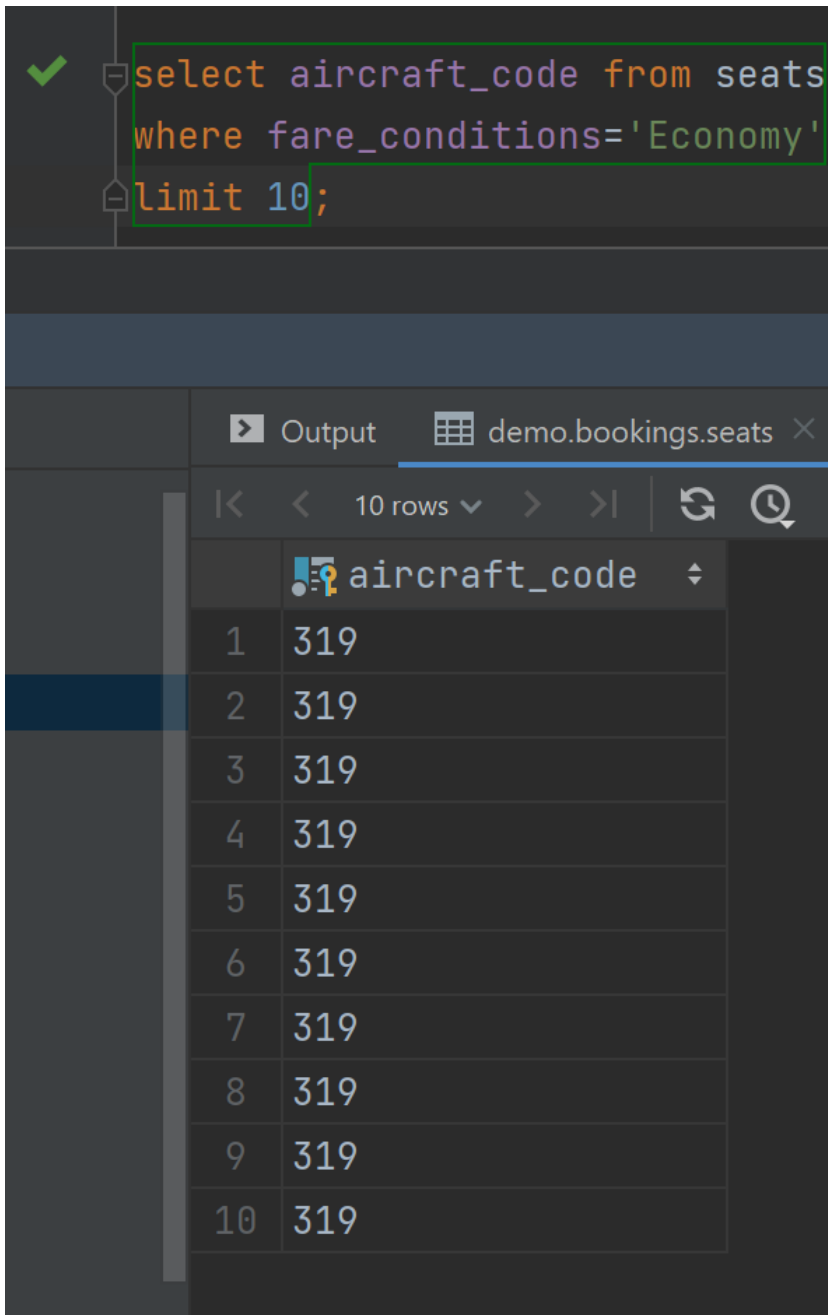

The screenshot shows a SQL query execution interface. At the top, a green checkmark indicates a successful query. The query text is: `select aircraft_code from seats where fare_conditions='Economy' limit 10;`. Below the query, the output is displayed in a table. The table has a single column labeled `aircraft_code` and 10 rows, all containing the value `319`. The interface includes a tab labeled `demo.bookings.seats` and a status bar showing `10 rows`.

```
select aircraft_code from seats
where fare_conditions='Economy'
limit 10;
```

	aircraft_code
1	319
2	319
3	319
4	319
5	319
6	319
7	319
8	319
9	319
10	319

3)

```
select departure_airport, arrival_airport, flight_id from flights
where exists(select 1 from ticket_flights where amount < 10000)
order by flight_id;
```

Output demo.bookings.flights X

1-500 of 501+

Tx: Auto DDL

	departure_airport	arrival_airport	flight_id
1	DME	LED	1
2	DME	LED	2
3	DME	LED	3
4	DME	LED	4
5	DME	LED	5
6	DME	LED	6
7	DME	LED	7
8	DME	LED	8
9	DME	LED	9
10	DME	LED	10

Services Profiler Database Changes Dependencies