

Automated 3D Stenosis Quantification and Visualization Workflow for Coronary Artery Disease Clinical Decision Support

Adrià Cortés Cugat



Universitat
Pompeu Fabra
Barcelona

A la meva família, que ha estat al meu costat en tot moment, donant-me l'empenta i el suport incondicional que necessitava, sobretot quan més em costava creure en mi mateix. I als meus amics, per ser la força que m'ha acompanyat dia a dia. Aquest projecte no marca només el final del grau, sinó el tancament d'una etapa vital molt important que m'ha canviat com a persona i l'inici d'un nou capítol.

A l'Hospital de Sant Pau i al Dimension Lab, per obrir-me les portes i ensenyar-me que el més bonic d'aquesta professió no són els algorismes ni els números, sinó veure com allò que aprens pot servir per ajudar les persones i fer el bé. Sentir que aquest esforç pot tenir un impacte real i útil en la vida dels altres és la recompensa que dona sentit a tot el camí.

Acknowledgements

First and foremost, I would like to express my sincere gratitude to Oscar Camara Rey, my thesis director at Universitat Pompeu Fabra, for the trust he placed in me from the very first day, his remarkable ability to align my technical interests with real clinical needs, and for opening the doors to a medical sector that was completely new to me.

I also want to thank César Acebes Pinilla, my supervisor at Hospital de la Santa Creu i Sant Pau, for welcoming me into the Dimension Lab and guiding me through a real coronary artery disease diagnostic environment. Furthermore, my sincere thanks go to the expert cardiologists and medical doctors who took the time to review my work, provided invaluable feedback, and explained their daily workflows, allowing me to adapt this project to their actual needs.

I further acknowledge the prior work of the students and researchers within this clinical ecosystem, upon which much of the technical framework of this thesis is built.

Finally, I want to thank my family and my friends, both from the Mathematical Engineering in Data Science degree and other engineering programs, who have accompanied and supported me throughout my entire university journey at UPF.

Abstract

Coronary artery disease (CAD) assessment from coronary computed tomography angiography (CCTA) remains largely manual and time-consuming in clinical practice. At Hospital de la Santa Creu i Sant Pau, expert review of a single study can require between 30 minutes and two hours depending on case complexity. This bachelor's thesis presents an automated, end-to-end computational pipeline that transforms segmented coronary anatomy into quantitative stenosis metrics, CAD-RADS 2.0-oriented reporting support, and an interactive clinical visualization dashboard. The system is organized into four modular blocks: automated anatomy extraction, geometric stenosis quantification, segment labeling with CAD-RADS scoring, and a Streamlit-based decision-support interface. Designed as a transparent in-house framework rather than a proprietary black box, the pipeline aims to reduce reporting burden, improve reproducibility, and assist patient prioritization while preserving final clinical authority. Validation combines ASOCA and MACS-18 cohorts with synthetic phantoms for controlled geometric verification.

Resum

L'avaluació de la malaltia coronària (MAC) a partir de la tomografia computada coronària (TCCC) continua sent, en la pràctica clínica, un procés manual i molt costós en temps. A l'Hospital de la Santa Creu i Sant Pau, la revisió experta d'un estudi pot requerir entre 30 minuts i dues hores segons la complexitat del cas. Aquest treball de fi de grau presenta un pipeline computacional automatitzat d'extrem a extrem que transforma l'anatomia coronària segmentada en mètriques quantitatives d'estenosi, suport orientat al CAD-RADS 2.0 i un tauler clínic interactiu de visualització. El sistema s'organitza en quatre blocs modulars: extracció automatitzada de l'anatomia, quantificació geomètrica de l'estenosi, etiquetatge segmentari amb puntuació CAD-RADS i una interfície Streamlit de suport a la decisió. Dissenyat com a marc transparent i intern, el pipeline pretén reduir la càrrega de informes, millorar la reproduïbilitat i assistir la priorització de pacients sense substituir l'autoritat clínica final. La validació combina les cohorts ASOCA i MACS-18 amb fantasmes sintètics per a la verificació geomètrica controlada.

Resumen

La evaluación de la enfermedad coronaria (EC) a partir de la angiografía por tomografía computarizada coronaria (ATCC) sigue siendo, en la práctica clínica, un proceso manual y muy costoso en tiempo. En el Hospital de la Santa Creu i Sant Pau, la revisión experta de un estudio puede requerir entre 30 minutos y dos horas según la complejidad del caso. Este trabajo de fin de grado presenta un *pipeline* computacional automatizado de extremo a extremo que transforma la anatomía coronaria segmentada en métricas cuantitativas de estenosis, soporte orientado al CAD-RADS 2.0 y un panel clínico interactivo de visualización. El sistema se organiza en cuatro bloques modulares: extracción automatizada de la anatomía, cuantificación geométrica de la estenosis, etiquetado segmentario con puntuación CAD-RADS e interfaz Streamlit de apoyo a la decisión. Diseñado como un marco transparente e interno, el *pipeline* pretende reducir la carga de informes, mejorar la reproducibilidad y asistir la priorización de pacientes sin sustituir la autoridad clínica final. La validación combina las cohortes ASOCA y MACS-18 con fantasmas sintéticos para la verificación geométrica controlada.

Preface

This document presents the bachelor’s thesis completed during the 2025–2026 academic year within the Bachelor’s Degree in Mathematical Engineering in Data Science at Universitat Pompeu Fabra, in collaboration with the Dimension Lab at Hospital de la Santa Creu i Sant Pau.

The main body of the thesis (Introduction through Conclusions) is written in English for consistency with the scientific literature in the field.

Use of Generative AI Disclosure

The Author, Adrià Cortés Cugat, discloses that the writing of this document “Automated 3D Stenosis Quantification and Visualization Workflow for Coronary Artery Disease Clinical Decision Support” involved the use of Cursor AI and Google Gemini AI, for the purpose of: language review; text editing; technical writing support; $\LaTeX$ integration and formatting; software development assistance; code debugging and optimization; and pipeline documentation support. The Author warrants, however, that the contents of this thesis are a genuine human creation, as the results obtained from Cursor AI and Google Gemini AI have been duly reviewed and edited by Adrià Cortés Cugat. In accordance with university guidelines on the use of AI in assessable work, the technical and clinical substance of the main body, especially the Introduction, Methodology, and Conclusions, has been written, validated, and revised by the Author with the support of the thesis director and supervisor.

Information source disclosure. The Author declares that all cited sources have been appropriately reviewed and validated by Adrià Cortés Cugat to support the claims made in this work, ensuring they are sufficiently contrasted and reliable.

Note on Figures and Data

The diagram figures that illustrate clinical and reporting workflows have been entirely designed and created by the Author. Where other figures build upon internal hospital materials, they are explicitly cited in the corresponding figure captions. Clinical cohort data and pipeline results are documented in the corresponding chapters and, where appropriate, in the supporting appendix.

Contents

List of Figures	VIII
List of Tables	IX
1. INTRODUCTION	1
1.1. Clinical Context and Motivation	1
1.1.1. Anatomy of Coronary Arteries	1
1.1.2. Coronary Artery Disease	2
1.1.3. Stenosis Quantification: A Key Indicator of CAD Severity	3
1.1.4. CAD-RADS 2.0 and the Need for Decision Support	3
1.2. Clinical Automation Challenges at Hospital de la Santa Creu i Sant Pau	4
1.2.1. Current CAD Diagnostic Workflow and Associated Limitations	4
1.2.2. The Bottleneck: Manual Image Analysis and Reporting	4
1.3. State of the Art: Automation of CAD Diagnosis and Visualization	5
1.4. Project Scope and Contributions	6
1.5. Objectives	7
2. METHODOLOGY	8
2.1. System Overview and Core Automated Workflow	8
2.1.1. End-to-End Data Flow	8
2.2. ASOCA and MACS-18: Coronary Segmentation and Labeling Data	9
2.2.1. Segmentation and Label Volumes	9
2.2.2. ASOCA Dataset	10
2.2.3. MACS-18 Dataset	10
2.3. Block 1: 3D Artery Anatomy Extraction	11
2.4. Block 2: Geometric Stenosis Quantification	11
2.5. Block 3: Artery Labeling and CAD-RADS 2.0 Scoring	11
2.6. Block 4: Patient Visualization Dashboard	11
2.7. Experimental Design and Validation Framework	11
2.7.1. Workflow Validation on Real Datasets: ASOCA	11
2.7.2. Workflow Validation on Real Datasets: MACS-18	11
2.7.3. Geometry and Quantification Verification: Synthetic Data	11
2.7.4. User Experience and Interface Usability Evaluation	11
3. RESULTS	12
3.1. Pipeline Execution: ASOCA vs. MACS-18	12
3.2. Geometric and Algorithmic Accuracy via Synthetic Data	12
3.3. Coronary Artery Dashboard Visualization Output	12
3.4. User Experience and Interface Usability Evaluation	12

4. DISCUSSION	13
4.1. Analysis of the Results	13
4.2. Technical and Anatomical Limitations	13
4.3. Future Work	13
5. CONCLUSIONS	14
A. SUPPORTING MATERIAL	17

List of Figures

1.1. Anterior view of the human coronary tree. Coronary arteries are highlighted in red, and other cardiac structures in blue. Adapted from Lynch et al. [23].	1
1.2. Coronary arteries narrowed by atherosclerotic plaque. Adapted from Kaiser Permanente [18].	2
1.3. Current CAD diagnostic workflow at Hospital de Sant Pau. The primary operational bottleneck (image assessment and reporting) is highlighted in red. Adapted from Ferrer Beltran [13].	4
1.4. Detailed representation of the image analysis and reporting workflow at Hospital de Sant Pau. Adapted from Acebes Pinilla [1].	5
1.5. Contextual overview of the proposed automated diagnostic framework at Hospital de la Santa Creu i Sant Pau. The contributions of this thesis (green dashed box) bridge the gap between existing hospital data systems (blue) and the final clinical report. Adapted from Acebes Pinilla [1].	7
2.1. End-to-end automated workflow for a single patient case. Each block constitutes a self-contained processing stage; arrows indicate mandatory sequential dependencies and the principal data passed between stages.	8

List of Tables

2.1. Overview of the four pipeline blocks: processing role, primary inputs, and principal outputs per patient case.	9
2.2. Comparison of the ASOCA and MACS-18 segmentation sources for the shared 40-patient cohort.	11

Chapter 1

INTRODUCTION

1.1. Clinical Context and Motivation

1.1.1. Anatomy of Coronary Arteries

The human heart is the central organ of the cardiovascular system and requires a continuous supply of oxygen and nutrients to function properly. This supply is provided by the coronary artery tree, a specialized vascular network that delivers blood directly to the heart muscle, known as the myocardium. The coronary arteries originate from the root of the aorta and surround the surface of the heart in a crown-like arrangement, from which the term *coronary artery* is derived [11]. As illustrated in Figure 1.1, the coronary arterial system is mainly composed of two vessels: the right coronary artery (RCA) and the left coronary artery (LCA).

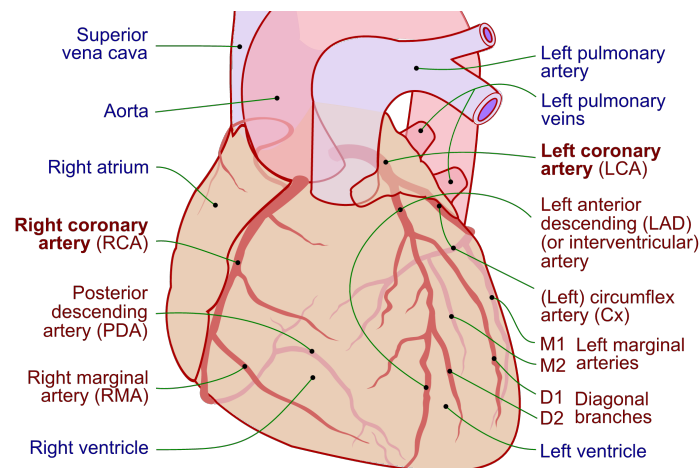


Figure 1.1: Anterior view of the human coronary tree. Coronary arteries are highlighted in red, and other cardiac structures in blue. Adapted from Lynch et al. [23].

The RCA primarily supplies blood to the right atrium and right ventricle. In contrast, the LCA quickly divides into two major branches: the left anterior descending (LAD) artery and the circumflex (LCx), which together supply the majority of the left ventricle and the interventricular septum [11]. From these primary vessels, a network of smaller branches extends deep into the myocardium to ensure regional blood delivery across the entire heart.

A critical characteristic of the coronary circulation is its limited collateral connectivity. Unlike other vascular systems in the human body, coronary arteries generally lack sufficient alternative pathways to

redirect blood flow when an obstruction occurs. Consequently, any narrowing or blockage in a proximal arterial segment directly compromises blood flow to all downstream regions supplied by that vessel [26].

Additionally, coronary anatomy presents significant inter-patient variability in terms of vessel size, branching structure, and coronary dominance. Dominance is defined by which artery gives rise to the posterior descending artery (PDA) and can be classified as right-dominant, left-dominant, or codominant. Right-dominant circulation, in which the PDA originates from the RCA, is the most common configuration, followed by left dominance and codominance [29]. Understanding this complex anatomical layout is fundamental, as it provides the basis for locating lesions, quantifying stenosis severity, and stratifying risk in coronary artery disease (CAD) diagnosis.

1.1.2. Coronary Artery Disease

Coronary artery disease (CAD) remains one of the leading causes of morbidity and mortality worldwide [28]. It is characterized by the progressive accumulation of atherosclerotic plaque within the walls of the coronary arteries, leading to a narrowing of the vessel lumen known as stenosis. This narrowing restricts blood flow to the myocardium and, if left untreated, can result in myocardial ischemia or infarction [21, 24]. Figure 1.2 illustrates this pathological mechanism, contrasting a normal artery with one obstructed by plaque buildup.

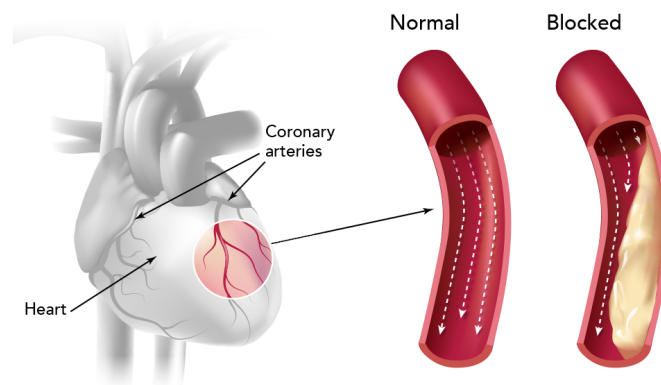


Figure 1.2: Coronary arteries narrowed by atherosclerotic plaque. Adapted from Kaiser Permanente [18].

Early and accurate diagnosis is essential for effective risk stratification and patient management. In current clinical practice, coronary computed tomography angiography (CCTA) is the standard non-invasive imaging technique for CAD evaluation [21]. CCTA provides detailed 3D reconstructions of the coronary tree, allowing clinicians to detect plaques, analyze their spatial location, and estimate the degree of luminal narrowing.

However, despite the high resolution of CCTA, the diagnostic workflow remains highly time-consuming and heavily dependent on manual and visual assessment. For instance, at Hospital de la Santa Creu i Sant Pau, reporting non-pathological or low-complexity cases requires approximately 30 minutes, while complex evaluations can take up to 2 hours [1]. This significant clinical burden drives the need for automated, data-driven tools capable of quantifying stenosis efficiently and supporting clinical decision-making, while fully preserving expert interpretability and clinical control.

1.1.3. Stenosis Quantification: A Key Indicator of CAD Severity

Among the various indicators used to assess coronary artery disease, stenosis severity plays a central role in clinical diagnosis and risk stratification. Stenosis represents the reduction of the vessel lumen caused by atherosclerotic plaque accumulation, a condition directly associated with an increased risk of myocardial ischemia and adverse cardiac events [14, 21]. In clinical practice, this severity is quantified using geometric measurements such as the minimal lumen area (MLA) or percentage diameter stenosis (%DS). These metrics evaluate the degree of narrowing by comparing the most constricted point of a lesion with a reference baseline, which is typically estimated from adjacent, relatively healthy vessel segments [14, 16].

Although these definitions are conceptually simple, accurate stenosis quantification presents significant clinical challenges. Coronary arteries exhibit complex, tortuous geometries, and diffuse atherosclerosis often makes it difficult to identify truly healthy reference regions. In addition, limitations in image resolution, segmentation errors, and noise in CCTA-derived data can highly influence measurements, leading to variability in stenosis estimates [16, 19].

In routine clinical practice, stenosis assessment is often performed visually or using semi-automatic tools provided by proprietary software [1, 12]. Although these methods are widely used, they depend heavily on the clinician’s interpretation and can vary between observers, which reduces consistency and reproducibility [16].

Consequently, there is a strong clinical need to develop robust, transparent, and reproducible quantification methods. Automating these geometric measurements has the potential to standardize stenosis evaluation, reduce reporting time, and provide reliable quantitative data essential for downstream clinical tasks, such as CAD-RADS 2.0 assignment and patient prioritization.

1.1.4. CAD-RADS 2.0 and the Need for Decision Support

To standardize the reporting of coronary disease and facilitate clinical communication, the Coronary Artery Disease-Reporting and Data System (CAD-RADS 2.0) was established [12]. This structured framework categorizes patients into distinct risk scores ranging from 0 to 5, primarily based on the most severe stenosis measured via CCTA. Each categorical score reflects the overall disease burden and provides specific clinical recommendations, offering a standardized pathway for subsequent patient management [12].

While CAD-RADS 2.0 significantly improves reporting consistency across institutions, its assignment still relies heavily on the manual interpretation of stenosis severity across multiple vessels and segments. This process requires clinicians to continuously synthesize quantitative geometric measurements with complex anatomical context. Consequently, evaluating these scans becomes highly cognitively demanding, particularly in time-constrained clinical environments [1]. In practice, manual scoring remains susceptible to inter-observer variability, especially in borderline cases or in patients presenting with multiple moderate lesions. Such discrepancies can lead to inconsistent diagnostic classifications, ultimately impacting downstream clinical decisions, further testing, and patient prioritization [1, 16].

To address these limitations, there is a growing clinical imperative to develop automated decision support tools. These solutions can span from rule-based algorithms mapping quantitative stenosis measurements to machine learning approaches that leverage structured imaging features. Crucially, these computational tools aim to provide objective, reproducible, and transparent suggestions to assist radiologists and cardiologists. By streamlining the CAD-RADS assignment process, these systems reduce reporting times and variability while strictly preserving expert clinical judgment and final decision authority.

1.2. Clinical Automation Challenges at Hospital de la Santa Creu i Sant Pau

1.2.1. Current CAD Diagnostic Workflow and Associated Limitations

The current diagnostic workflow for Coronary Artery Disease (CAD) at Hospital de la Santa Creu i Sant Pau involves a complex and coordinated series of steps, managed primarily by the specialized cardiac imaging unit (Unitat d'Imatge i Funció Cardíaca, UIFC). As illustrated in Figure 1.3, the clinical pathway begins when a patient presenting with symptoms such as chest pain is scheduled for a Coronary Computed Tomography Angiography (CCTA). Once the scan is acquired, the images are stored in the hospital's *Picture Archiving and Communication System* (PACS) for further evaluation.

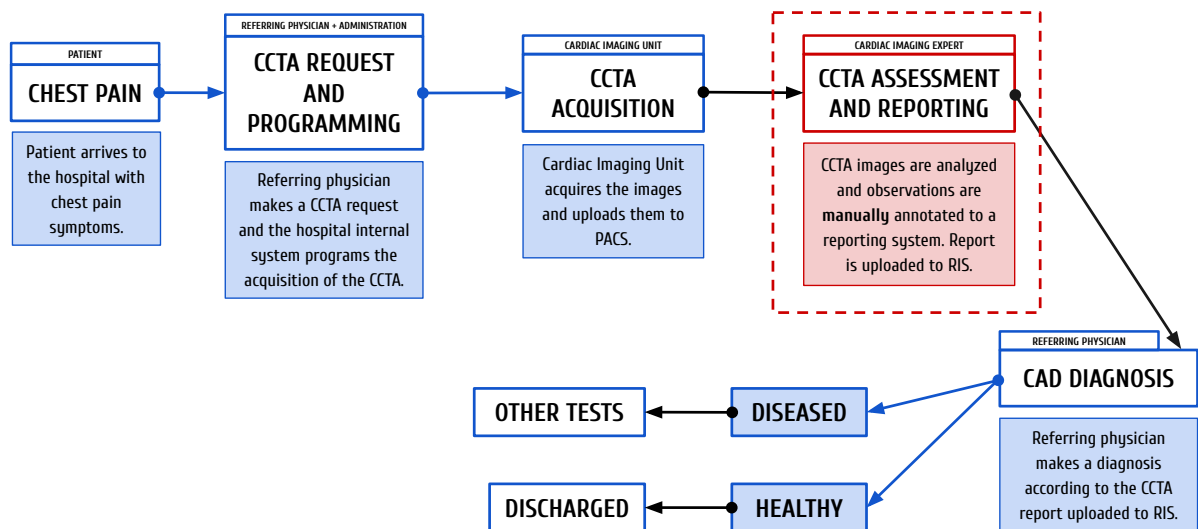


Figure 1.3: Current CAD diagnostic workflow at Hospital de Sant Pau. The primary operational bottleneck (image assessment and reporting) is highlighted in red. Adapted from Ferrer Beltran [13].

The core of this diagnostic pipeline relies heavily on the visual and manual analysis of these scans by expert cardiologists and radiologists to extract clinical metrics. These findings are then compiled into a clinical report, which the referring clinician evaluates to determine the appropriate subsequent medical actions, ranging from discharging a healthy patient to programming further invasive tests.

While the overall infrastructure is well-established, the central phase of image analysis and reporting (highlighted in red in Figure 1.3) represents a critical operational bottleneck.

1.2.2. The Bottleneck: Manual Image Analysis and Reporting

Zooming into the specific image analysis and reporting phase (Figure 1.3), the limitations of the current clinical pathway become evident. Currently, clinicians rely on commercial software solutions, such as *syngo.via*, to manually inspect the coronary arteries, differentiate segments, and calculate stenosis severity. Although these platforms offer semi-automated tools, the process remains highly dependent on the clinician's expertise to visually verify the vessels, identify bifurcations, and assess the plaque burden. Depending on the anatomical complexity and image quality, analyzing a single patient can consume around 30 minutes for healthy cases and 90 minutes for complex cases [1].

Once the visual assessment is complete, the extracted metrics are manually entered into an internal custom-built platform called *Filemaker*, which generates a template-based preliminary report. The spe-

cialist must then review, correct, and finalize this text before it is integrated into the *Radiology Information System* (RIS).

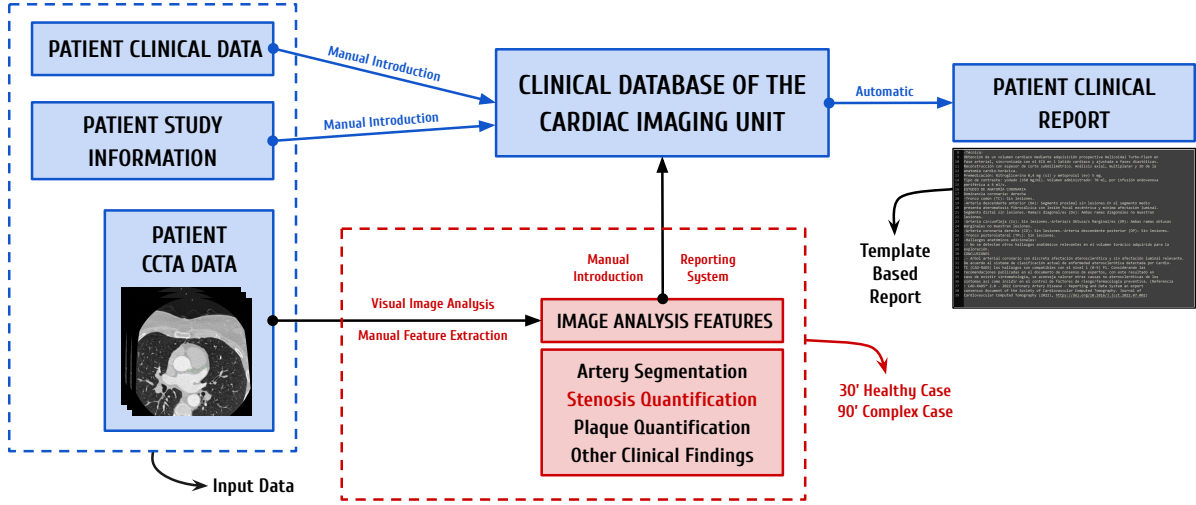


Figure 1.4: Detailed representation of the image analysis and reporting workflow at Hospital de Sant Pau. Adapted from Acebes Pinilla [1].

This heavy reliance on manual quantification and data entry presents significant operational challenges. Consequently, highly specialized experts spend considerable time performing repetitive, manual tasks on low-risk patients, rather than focusing their expertise on critical cases. This lack of an automated, prioritized workflow delays the diagnosis of severe cases and highlights a clear necessity for robust and automated solutions.

1.3. State of the Art: Automation of CAD Diagnosis and Visualization

The integration of Artificial Intelligence (AI) and advanced computer vision in cardiac imaging has seen exponential growth over the past decade, driven by the need to optimize clinical workflows [22]. Deep learning algorithms, particularly Convolutional Neural Networks (CNNs), have demonstrated remarkable success in medical image analysis, encouraging a move from manual CCTA assessment to automated systems [27]. However, significant limitations remain regarding their practical implementation. For these new techniques to succeed, they must be practical for hospitals, integrate smoothly into current systems, and be easily adopted by the clinical staff [20].

The prerequisite first step in any automated CAD assessment pipeline is the accurate segmentation and anatomical labeling of the coronary artery tree; before any downstream diagnostic metric can be calculated, the vessels must be correctly isolated and identified. Recent advancements have leveraged deep learning architectures, such as 3D U-Nets, to extract the vessel lumen from CCTA images [8, 31], while graph-based models like Graph Convolutional Networks (GCNs) are increasingly used to ensure topological consistency when labeling segments according to standard clinical guidelines [30]. Within Hospital de la Santa Creu i Sant Pau, preliminary research has explored these initial segmentation and labeling tasks using transformer-based models and the nn-UNet framework [9, 25].

Following successful segmentation, extracting the precise geometric properties of the vessels is essential. The Vascular Modeling Toolkit (VMTK) stands out as one of the most prominent open-source libraries for medical geometry data extraction [3]. Specifically, algorithms implemented within VMTK are widely utilized to extract accurate vascular centerlines and compute cross-sectional areas. These metrics pro-

vide the essential topological framework required to perform continuous Multi-Planar Reformations and subsequently evaluate vessel narrowing.

Once the 3D geometry of the coronary tree is established, the focus shifts to quantifying the disease burden. Current stenosis quantification techniques range from traditional intensity-based thresholding (which often struggles with severe calcifications) to modern machine learning models that predict stenosis severity directly from image features [17, 31]. Alternatively, geometric, non-ML approaches offer highly interpretable and robust methods by calculating the percentage of diameter or area stenosis based purely on the physical vessel profile, comparing the minimal lumen area against an interpolated healthy reference [16]. Recognizing the clinical value of algorithmic transparency, ongoing research at Hospital de la Santa Creu i Sant Pau has actively explored these purely geometric techniques to quantify stenosis, establishing a reliable, explainable foundation for disease assessment [7].

Beyond quantification, the effective visualization of these complex 3D metrics remains a critical challenge in the state of the art [6]. In the current clinical routine at Hospital de Sant Pau, specialists must manually navigate through cross-sectional slices and use standard viewing software to visually synthesize the data, assess the lesions, and manually fill out structured reports [1]. This cognitive load highlights a significant gap: the lack of dedicated, interactive visualization tools that bridge the gap between automated metrics and clinical reality. Modern research and clinical consensus emphasize that integrating 3D anatomical models alongside continuous luminal profiles and real medical images (such as Curved Multi-Planar Reformations) into a unified graphical interface is essential. Such integration allows clinicians to continuously validate automated findings against the ground-truth CCTA, drastically reducing the time and effort required to verify stenosis locations and seamlessly generate diagnostic reports [6].

Several commercial software solutions have emerged to address these overarching needs, including platforms like *Cleerly* [10] and *Artrya Salix* [4], which use AI to analyze arterial plaque and assess ischemia risk from CCTA images. While these robust dashboards offer highly desirable visualization components, they often function as proprietary “black boxes”. This lack of algorithmic transparency significantly hinders explainability, a feature strongly demanded by medical experts to verify how a specific CAD-RADS score, plaque distribution, or stenosis percentage was computed. Finally, these standalone commercial platforms frequently struggle to integrate well into the highly specific IT infrastructures and patient prioritization workflows of public hospitals [20].

1.4. Project Scope and Contributions

To address the clinical challenges outlined in Section 1.2, and to overcome the limitations of commercial tools discussed in Section 1.3, this project contributes directly to the comprehensive, transparent, and in-house AI-enabled diagnostic framework developed by the Dimension Lab at Hospital de la Santa Creu i Sant Pau [1]. While previous academic efforts have tackled earlier stages of this pipeline, such as patient prioritization [13] and coronary artery segmentation and labeling [9], a critical gap remains in translating raw segmented geometries into actionable clinical insights.

Therefore, the scope of this bachelor’s thesis focuses on automating the geometric quantification of coronary stenosis, predicting the associated CAD-RADS score, and integrating these findings into an interactive clinical dashboard.

Figure 1.5 provides a high-level overview of where this project sits within the pipeline, while the detailed technical workflow is reserved for the Methodology chapter.

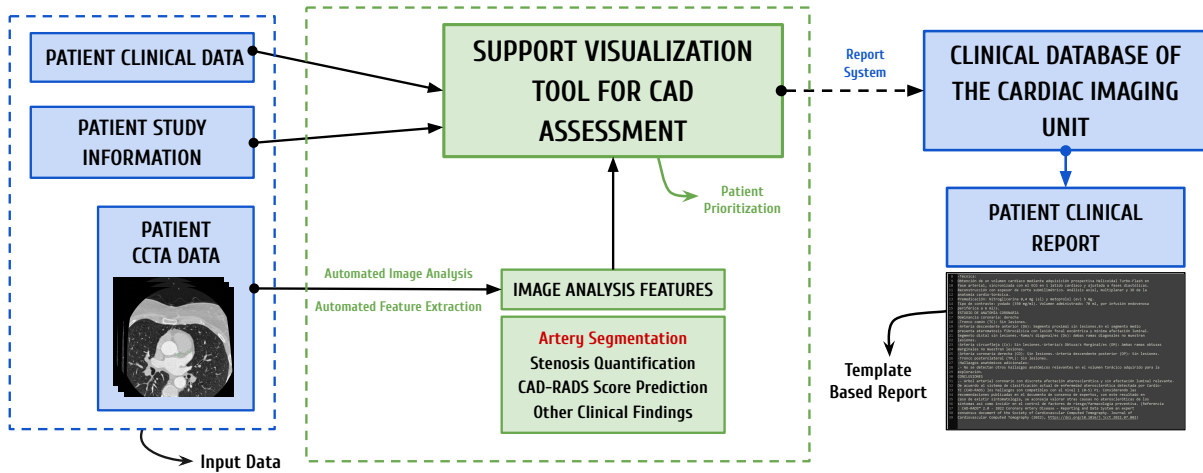


Figure 1.5: Contextual overview of the proposed automated diagnostic framework at Hospital de la Santa Creu i Sant Pau. The contributions of this thesis (green dashed box) bridge the gap between existing hospital data systems (blue) and the final clinical report. Adapted from Acebes Pinilla [1].

By seamlessly connecting raw image analysis with the hospital’s reporting systems, this project aims to mitigate operational bottlenecks and reduce overall diagnostic times.

However, it is crucial to emphasize that the solution developed in this project is intended solely as a clinical decision-support tool, not as a replacement for medical expertise. In the highly sensitive healthcare sector, human oversight is crucial. Rather than replacing detailed diagnostic software, this visualization tool is designed to act as a rapid initial assessment interface. By presenting an immediate, high-level overview of the patient’s critical metrics, it assists specialists in quickly evaluating prioritized patient lists, helping them decide which cases require immediate, in-depth analysis. Thus, the automated findings are designed to streamline the workflow, ensuring that the final diagnostic decisions and clinical validations always remain firmly in the hands of the medical professionals.

1.5. Objectives

The primary objective of this thesis is to design and develop an automated, end-to-end pipeline that successfully bridges the current gap in the CAD diagnostic workflow. Importantly, this project does not seek to maximize the precision of individual algorithmic components; rather, the proposed functional workflow is, in itself, the core product of this work.

To achieve this overarching goal, the project addresses a sequence of intermediate objectives. First, it requires deep contextualization within the complex clinical environment to evaluate prior research conducted at the hospital and design a unified, clinically applicable framework. Building upon this foundation, the project aims to implement computational geometry algorithms to accurately extract cross-sectional areas and calculate the percentage of area stenosis from 3D models. Subsequently, a standardized logic is developed to translate these geometric metrics into a reliable CAD-RADS score prediction.

To aggregate these findings and provide cardiologists with interpretable metrics, an interactive clinical dashboard is built. Functioning as a rapid-access pop-up interface, this Support Visualization Tool gives clinicians an immediate, visual summary of the patient’s coronary status, ultimately reducing medical workload, optimizing case triaging, and significantly decreasing overall assessment time. Finally, a technical validation is conducted to verify the reliability of the extracted metrics and ensure the overall stability of the complete framework.

Chapter 2

METHODOLOGY

2.1. System Overview and Core Automated Workflow

This section formalizes the modular Python pipeline introduced in Section 1.4, translating the clinical decision-support framework into an executable computational workflow. For each patient identifier, a pre-segmented coronary lumen mask is processed sequentially into quantitative stenosis metrics, a CAD-RADS 2.0-oriented report, and an interactive visualization session.

The workflow comprises four automated blocks (Sections 2.3 to 2.6) executed as a linear chain, with each stage consuming the artifacts produced by its predecessor and no manual intervention between steps. A unified patient identifier routes ASOCA, MACS-18, and synthetic cohorts through the same implementations, while runtimes and extraction metrics are logged for Section 2.7.

2.1.1. End-to-End Data Flow

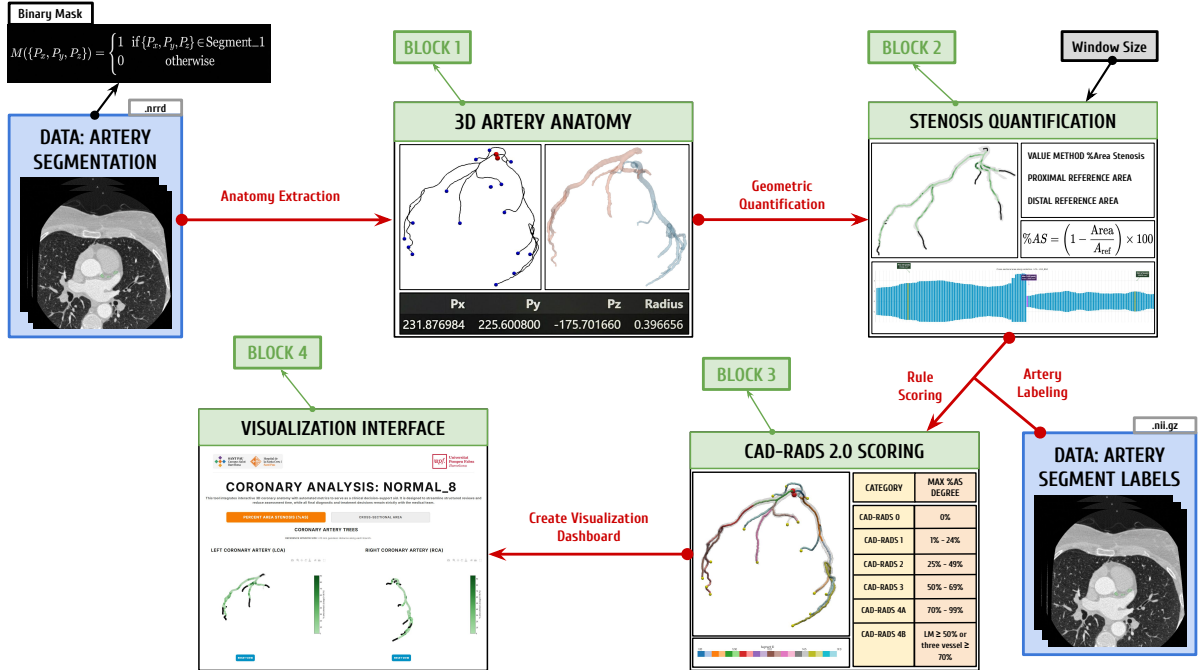


Figure 2.1: End-to-end automated workflow for a single patient case. Each block constitutes a self-contained processing stage; arrows indicate mandatory sequential dependencies and the principal data passed between stages.

Figure 2.1 summarizes the four-block architecture. The workflow assumes as input a pre-segmented coronary lumen mask and, when available, anatomical segment labels from prior segmentation and labeling work at the hospital [9].

Table 2.1: Overview of the four pipeline blocks: processing role, primary inputs, and principal outputs per patient case.

Block	Primary input(s)	Principal output(s)
1 Anatomy Extraction	Binary lumen mask	Centerline geometry, branch paths, and vessel surface models
2 Stenosis Quantification	Centerline and surface representations from Block 1	Cross-sectional area profiles, percentage area stenosis (%AS), and merged branch-level data
3 Labeling & CAD-RADS	Geometric and stenosis tables	Segment stenosis summary and patient CAD-RADS report
4 Visualization	Aggregated metrics and geometry from Blocks 1–3	Interactive clinical decision-support dashboard

To ensure explainability, the system retains intermediate mesh and tabular representations for potential clinical audits. The clinical cohorts utilized, along with the methodological depth of each processing block, are detailed below.

2.2. ASOCA and MACS-18: Coronary Segmentation and Labeling Data

In medical image analysis, *segmentation* denotes the partition of a three-dimensional scan into meaningful regions. For each voxel in the volume, an expert or algorithm decides whether it belongs to a structure of interest, such as the blood-filled interior (*lumen*) of the coronary arteries, rather than to background tissue, myocardium, or surrounding anatomy. The result is not a single measurement but a spatial map that localizes the vessel tree within the patient-specific CCTA grid.

The ASOCA and MACS-18 resources provide this map, together with companion anatomical label volumes, for a shared cohort of 40 CCTA cases (20 normal and 20 diseased anatomy). These data served primarily as the reference on which Blocks 1–4 were designed and implemented. Once the pipeline was in place, the full cohort was processed to evaluate end-to-end behavior. The experimental protocol and result analysis are reported in Section 2.7.

2.2.1. Segmentation and Label Volumes

For each patient case, the *segmentation annotation* is stored as a three-dimensional voxel grid in NRRD format. Each voxel indicates whether it belongs to the coronary lumen. The pipeline treats this volume as a binary mask from which centerlines, branch topology, and surface geometry are extracted (Block 1). The grid is registered to the same physical coordinate system as the source CCTA, preserving patient-specific scale and orientation.

The *segment label volume* is a separate three-dimensional grid aligned with the segmentation, stored as a compressed NIfTI file. Instead of a binary lumen flag, each foreground voxel stores an integer class identifier that maps to a standardized coronary segment under the AHA 17-segment model [5] (e.g.,

proximal left anterior descending, circumflex branches). Background voxels are assigned zero. The same label volumes are used for every case in the cohort regardless of whether the ASOCA or MACS-18 lumen mask is supplied to Block 1.

2.2.2. ASOCA Dataset

The ASOCA (*Automated Segmentation of Coronary Arteries*) challenge established the first large, standardized benchmark for fully automatic segmentation of complete normal and diseased coronary trees from CCTA [15]. The resource addresses the difficulty of imaging small, moving vessels and supports research on end-to-end coronary analysis beyond semi-automatic, expert-guided workflows.

ASOCA is a publicly available dataset. In this project, its release provided the initial lumen segmentation masks for the 40-patient cohort and constituted the working ground truth during pipeline development. These challenge annotations define the coronary tree extent used as the default Block 1 input and remain the public reference against which the hospital-refined alternative described below is compared.

2.2.3. MACS-18 Dataset

While public benchmarks such as ASOCA have accelerated algorithm development, their lumen annotations often prioritize voxel-level overlap over topological completeness [2]. Discontinuities in the mask and inconsistent distal coverage can limit centerline extraction, branch-level quantification, and geometric analysis in Blocks 1 and 2.

MACS-18 (*Multiclass Anatomical Coronary Segmentation, 18-segment*) is a re-segmentation of the same 40 ASOCA patient volumes currently under development at Hospital de la Santa Creu i Sant Pau under the supervision of César Acebes Pinilla [1, 2]. Unlike ASOCA, this resource is not yet publicly released. Expert refinements target continuous lumen connectivity from the aortic root to the most distal visible branches, yielding more anatomically faithful masks without altering the underlying imaging data or patient identity. The aim is to obtain more accurate segmentations of the existing cases, not to introduce new patients or a different labeling scheme. Each MACS-18 volume therefore uses the identical AHA segment label map as its ASOCA counterpart; only the lumen mask differs between the two sources. Both datasets are processed by the same pipeline implementation.

- 2.3. Block 1: 3D Artery Anatomy Extraction**
- 2.4. Block 2: Geometric Stenosis Quantification**
- 2.5. Block 3: Artery Labeling and CAD-RADS 2.0 Scoring**
- 2.6. Block 4: Patient Visualization Dashboard**
- 2.7. Experimental Design and Validation Framework**
 - 2.7.1. Workflow Validation on Real Datasets: ASOCA**
 - 2.7.2. Workflow Validation on Real Datasets: MACS-18**
 - 2.7.3. Geometry and Quantification Verification: Synthetic Data**
 - 2.7.4. User Experience and Interface Usability Evaluation**

Chapter 3

RESULTS

- 3.1. Pipeline Execution: ASOCA vs. MACS-18**
- 3.2. Geometric and Algorithmic Accuracy via Synthetic Data**
- 3.3. Coronary Artery Dashboard Visualization Output**
- 3.4. User Experience and Interface Usability Evaluation**

Chapter 4

DISCUSSION

4.1. Analysis of the Results

4.2. Technical and Anatomical Limitations

4.3. Future Work

Chapter 5

CONCLUSIONS

Bibliography

- [1] C. Acebes Pinilla. An artificial intelligence framework for the prioritization and reporting of coronary artery disease patients in a cardiac imaging unit. Presentation, Hospital de la Santa Creu i Sant Pau, Dimension Lab, 2024.
- [2] C. Acebes Pinilla et al. MACS-18: Multiclass anatomical coronary segmentation with SCCT-18 regional labeling. Work in progress, Hospital de la Santa Creu i Sant Pau, 2026.
- [3] L. Antiga, M. Piccinelli, L. Botti, B. Ene-Iordache, A. Remuzzi, and D. A. Steinman. An image-based modeling framework for patient-specific computational hemodynamics. *Medical & Biological Engineering & Computing*, 46(11):1097–1112, 2008.
- [4] Artrya Ltd. Artrya salix coronary anatomy (SCA) – AI-driven detection of vulnerable plaque. <https://www.artrya.com/>, 2024.
- [5] W. G. Austen, J. E. Edwards, R. L. Frye, G. G. Gensini, V. L. Gott, L. S. Griffith, D. C. McGoon, M. L. Murphy, and B. B. Roe. A reporting system on patients evaluated for coronary artery disease. Report of the Ad Hoc Committee for grading of coronary artery disease, Council on Cardiovascular Surgery, American Heart Association. *Circulation*, 51(4 Suppl):5–40, 1975.
- [6] M. Borkin, K. Gajos, A. Peters, D. Mitsouras, S. Melchionna, F. Rybicki, et al. Evaluation of artery visualizations for heart disease diagnosis. *IEEE Transactions on Visualization and Computer Graphics*, 17(12):2479–2488, 2011.
- [7] E. Burrull. Stenosis quantification pipeline. Internal research, Hospital de la Santa Creu i Sant Pau, 2023.
- [8] Ö. Çiçek, A. Abdulkadir, S. S. Lienkamp, T. Brox, and O. Ronneberger. 3D U-Net: learning dense volumetric segmentation from sparse annotation. In *Medical Image Computing and Computer-Assisted Intervention (MICCAI)*, pages 424–432, 2016.
- [9] M. Clapers Colet. Automatic labeling of coronary artery segments: Multi-strategy development and evaluation. Bachelor’s thesis, Universitat Pompeu Fabra, 2025.
- [10] Cleerly, Inc. Cleerly – AI-driven heart disease care. <https://cleerlyhealth.com/>, 2024.
- [11] Cleveland Clinic. Coronary arteries: Anatomy and function. <https://my.clevelandclinic.org/health/body/22973-coronary-arteries>, 2024. Accessed: 2026-05-30.
- [12] R. C. Cury, S. Abbara, S. Achenbach, A. Agatston, D. S. Berman, M. J. Budoff, et al. CAD-RADS 2.0–2022 coronary artery disease-reporting and data system. *Journal of Cardiovascular Computed Tomography*, 16(6):536–557, 2022.
- [13] E. Ferrer Beltran. Enhanced prioritization and reporting for coronary artery disease diagnosis. Bachelor’s thesis, Universitat Pompeu Fabra, 2024.

- [14] H. M. Garcia-Garcia, M. A. Costa, and P. W. Serruys. Assessment of coronary artery disease by intravascular imaging. *European Heart Journal*, 35(35):2321–2330, 2014.
- [15] R. Gharleghi, D. Adikari, K. Ellenberger, S. Y. Ooi, C. Ellis, C. M. Chen, et al. Automated segmentation of normal and diseased coronary arteries—the ASOCA challenge. *Computerized Medical Imaging and Graphics*, 97:102049, 2022.
- [16] A. Hideo-Kajita, S. Wopperer, S. S. Beyene, Y. F. Meirovich, G. D. Melaku, K. O. Kuku, et al. Impact of two formulas to calculate percentage diameter stenosis of coronary lesions: from stenosis models (phantom lesion model) to actual clinical lesions. *The International Journal of Cardiovascular Imaging*, 35(12):2139–2146, 2019.
- [17] Y. Hong, F. Commandeur, S. Cadet, M. Goeller, M. K. Doris, X. Chen, et al. Deep learning-based stenosis quantification from coronary CT angiography. In *Proceedings of SPIE*, volume 10949, page 109492I, 2019.
- [18] Kaiser Permanente. Cardiology – artery with atherosclerosis – TPMG. Medical illustration, 2024.
- [19] K. Kalisz, J. Buethe, S. S. Saboo, S. Abbara, S. Halliburton, and P. Rajiah. Artifacts at cardiac CT: Physics and solutions. *RadioGraphics*, 36(7):2064–2083, 2016.
- [20] C. J. Kelly, A. Karthikesalingam, M. Suleyman, G. Corrado, and D. King. Key challenges for delivering clinical impact with artificial intelligence. *BMC Medicine*, 17(1):1–9, 2019.
- [21] J. Knuuti, W. Wijns, A. Saraste, D. Capodanno, E. Barbato, C. Funck-Brentano, et al. 2019 ESC guidelines for the diagnosis and management of chronic coronary syndromes. *European Heart Journal*, 41(3):407–477, 2020.
- [22] G. Litjens, T. Kooi, B. E. Bejnordi, A. A. A. Setio, F. Ciompi, M. Ghafoorian, et al. A survey on deep learning in medical image analysis. *Medical Image Analysis*, 42:60–88, 2017.
- [23] P. J. Lynch, Fred the Oyster, and M. Häggström. Coronary circulation in anterior view. Medical illustration, Wikimedia Commons, 2010.
- [24] P. A. McCullough. Coronary artery disease. *Clinical Journal of the American Society of Nephrology*, 2(3):611–616, 2007.
- [25] C. Sanchez Gomez. Coronary artery segmentation using transformer neural networks. Master’s thesis, Universitat de Barcelona, 2022.
- [26] C. Seiler. The human coronary collateral circulation. *European Journal of Clinical Investigation*, 40(5):465–476, 2010.
- [27] P. J. Slomka, D. Dey, A. Sitek, M. Motwani, D. S. Berman, and G. Germano. Artificial intelligence in cardiovascular imaging. *JACC: Cardiovascular Imaging*, 10(6):615–626, 2017.
- [28] World Health Organization. Cardiovascular diseases (CVDs). <https://www.who.int/health-topics/cardiovascular-diseases>, 2023.
- [29] B. Wu, A. Kheiwa, P. Swamy, M. A. Mamas, R. J. Tedford, M. Alasnag, et al. Clinical significance of coronary arterial dominance: a review of the literature. *Journal of the American Heart Association*, 13(9):e032851, 2024.
- [30] H. Yang et al. CPR-GCN: Conditional partial-residual graph convolutional network in automated anatomical labeling of coronary arteries. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 3802–3810, 2020.
- [31] X. Zhang, B. Zhang, and F. Zhang. Stenosis detection and quantification of coronary artery using machine learning and deep learning. *Angiology*, 75(5):405–416, 2024.

Appendix A

SUPPORTING MATERIAL