

# **Лаб. 7**

**МС**

Тараканов Борис, студент НПИ

# Содержание

Цель работы	5
Задание	6
Теоретическое введение	7
Выполнение лабораторной работы	8

# Список иллюстраций

0.1	Название рисунка . . . . .	8
0.2	Добавление достижений . . . . .	9
0.3	Добавление опыта . . . . .	10
0.4	Добавление навыков . . . . .	11
0.5	Написание поста . . . . .	12

## Список таблиц

## Цель работы

Добавить к сайту достижения.

# Задание

- Список достижений.
- Добавить информацию о навыках (Skills).
- Добавить информацию об опыте (Experience).
- Добавить информацию о достижениях (Accomplishments).
- Сделать пост по прошедшей неделе.
- Добавить пост на тему по выбору:
- Легковесные языки разметки.
- Языки разметки. LaTeX.
- Язык разметки Markdown.

# Теоретическое введение

GNU Midnight Commander — один из файловых менеджеров с текстовым интерфейсом типа Norton Commander для UNIX-подобных операционных систем, а также Microsoft Windows и Windows NT, OS/2, macOS. Создан в 1994 году Мигелем де Икасой.

# Выполнение лабораторной работы

Запустим сервер Hugo (рис. 1)

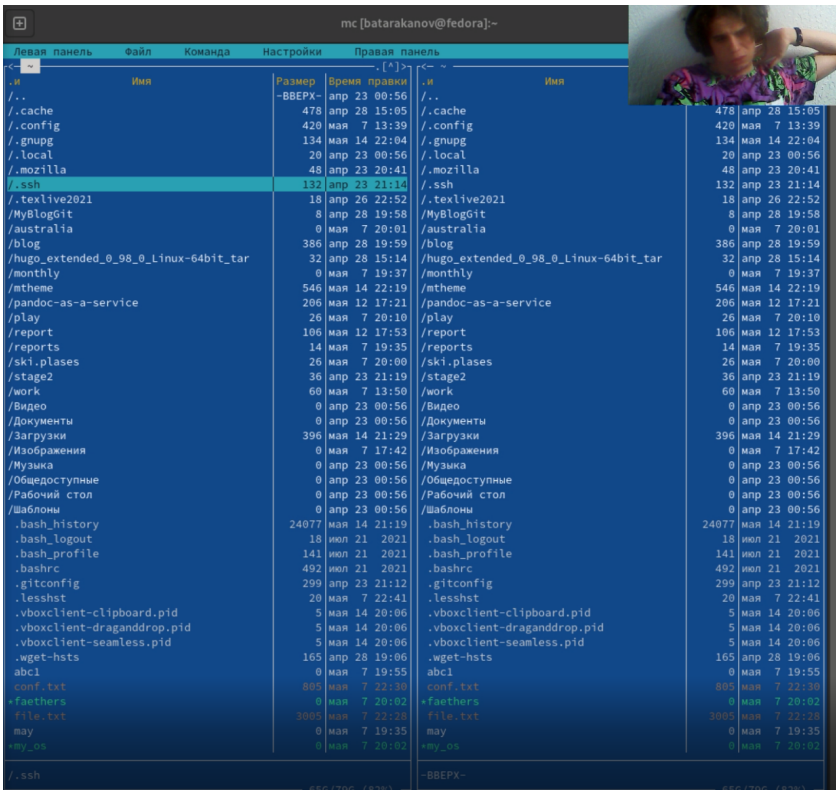


Рис. 0.1: Название рисунка

Заполним данные в файле accomplishments.md (рис.2)



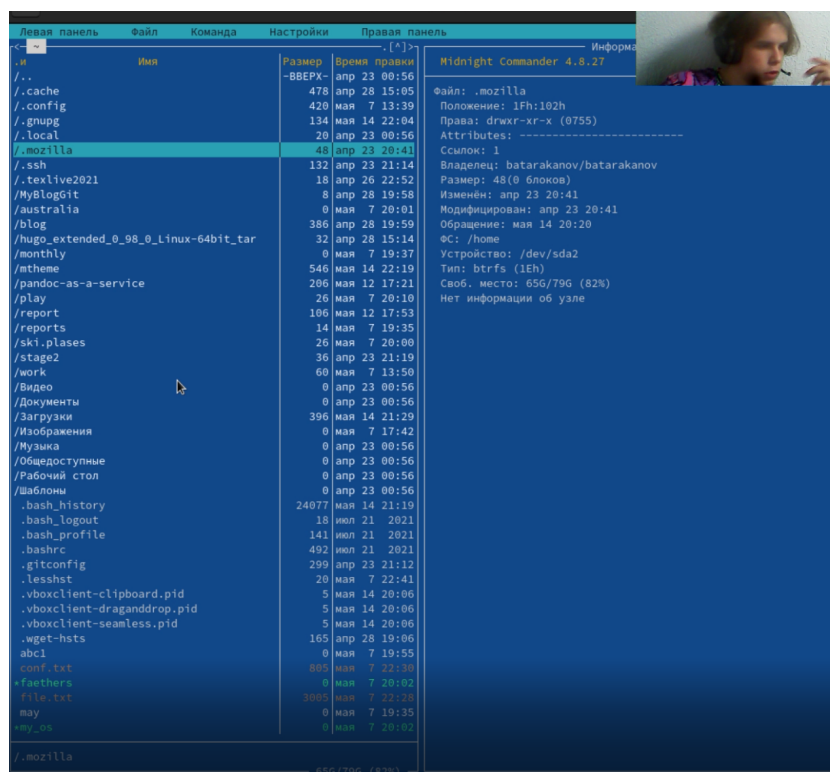


Рис. 0.2: Добавление достижений

Заполним данные в файле experience.md (рис. 3)

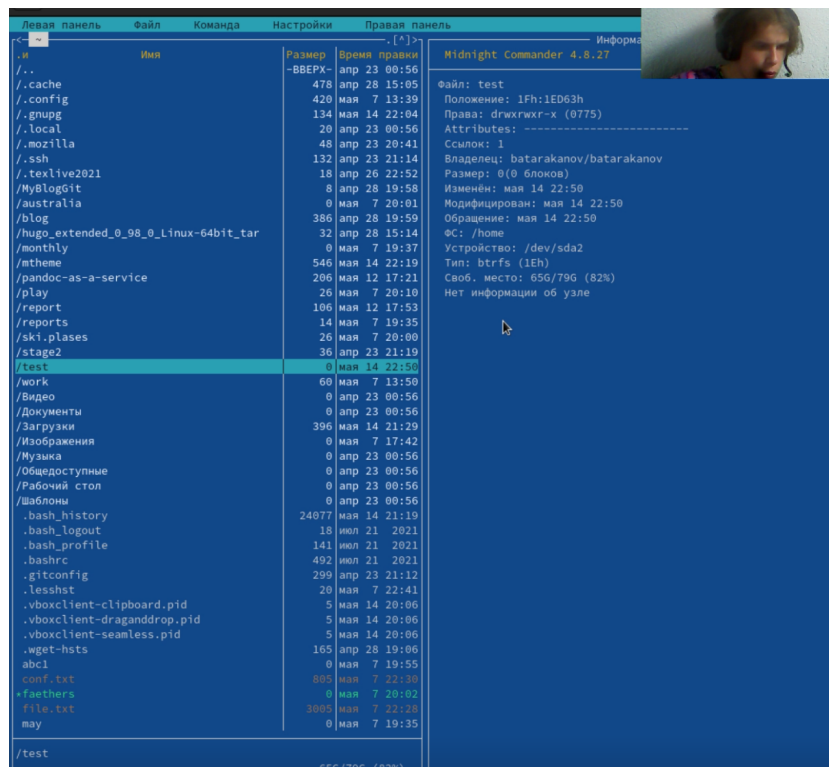


Рис. 0.3: Добавление опыта

Заполним данные в файле skills.md (рис. 4)


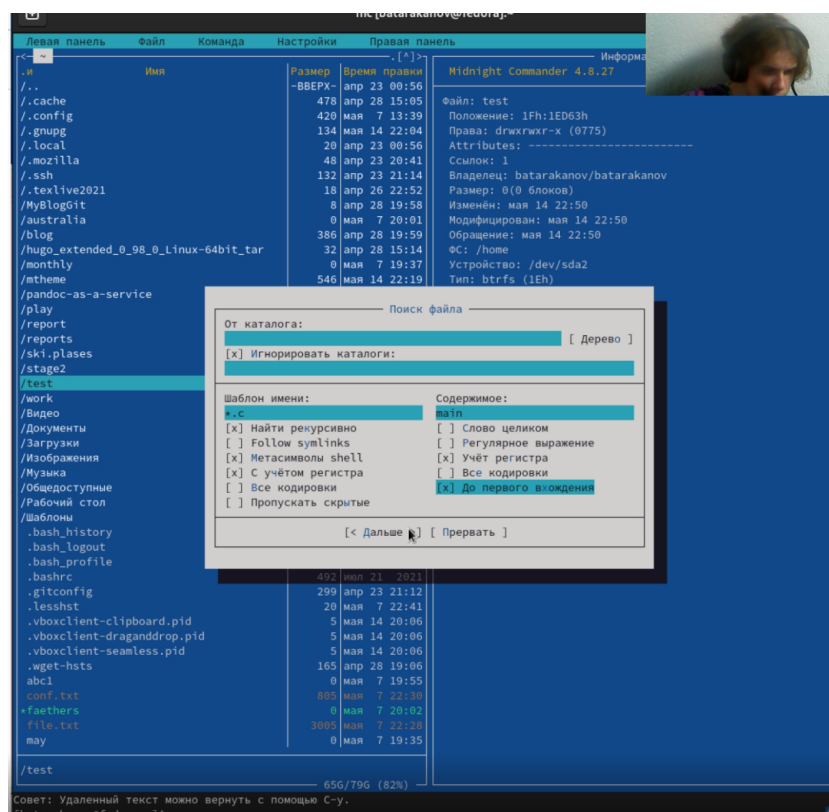


Рис. 0.4: Добавление навыков

Напишем пост по прошлой неделе добавив папку в дерикторию post (мой пост посвящен программе World Machine) (рис. 5)

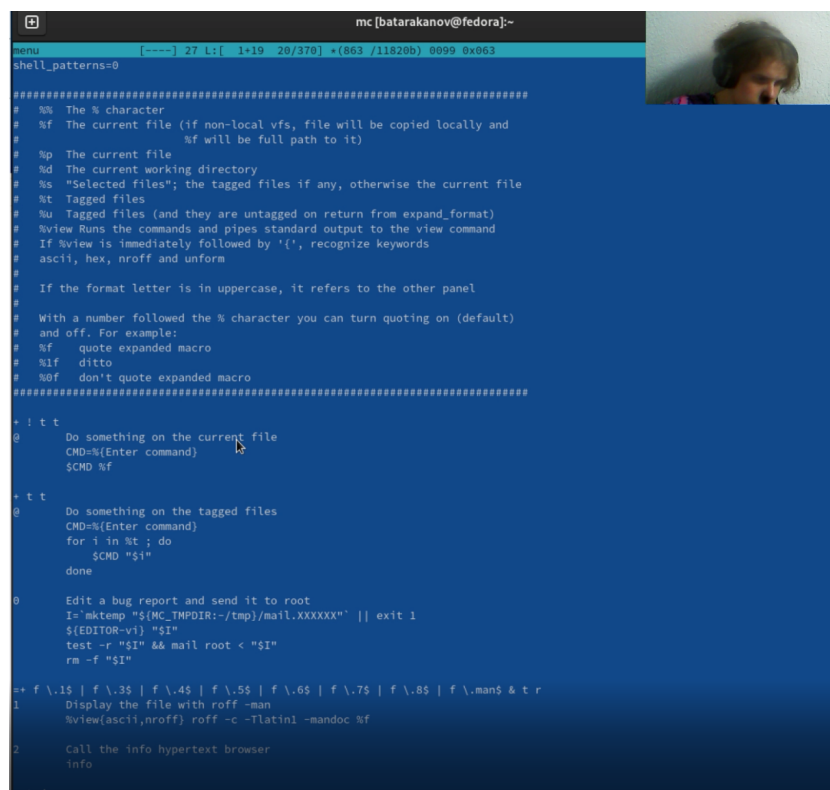

```
mc [batarakanov@fedora]:~
menu
shell_patterns=0

#####
# %% The % character
# %f The current file (if non-local vfs, file will be copied locally and
#      %f will be full path to it)
# %p The current file
# %d The current working directory
# %s "Selected files"; the tagged files if any, otherwise the current file
# %t Tagged files
# %u Tagged files (and they are untagged on return from expand_format)
# %view Runs the commands and pipes standard output to the view command
# If %view is immediately followed by '{', recognize keywords
#      ascii, hex, nroff and unform
#
# If the format letter is in uppercase, it refers to the other panel
#
# With a number followed the % character you can turn quoting on (default)
# and off. For example:
# %f quote expanded macro
# %if ditto
# %of don't quote expanded macro
#####

+ : t t
@
  Do something on the current file
  CMD=%{Enter command}
  $CMD %f

+ t t
@
  Do something on the tagged files
  CMD=%{Enter command}
  for i in %t ; do
    $CMD "$i"
  done

0
  Edit a bug report and send it to root
  I='mktmp "${MC_TMPDIR:-/tmp}/mail.XXXXXX" || exit 1
  ${EDITOR-vi} "$i"
  test -r "$i" && mail root < "$i"
  rm -f "$i"


++ f \.1$ | f \.2$ | f \.4$ | f \.5$ | f \.6$ | f \.7$ | f \.8$ | f \.man$ & t r
1
  Display the file with roff -man
  %view(ascii,nroff) roff -c -Tlatin1 -mandoc %f

2
  Call the info hypertext browser
  info
```

Рис. 0.5: Написание поста

Напишем пост о языке разметки markdown добавив папку в дерикторию post  
(рис. 6)

```
mc [batarakanov@fedora]~  
senu [----] 27 L:[ 1*19 20/370] +(863 /11820b) 0099 0x063  
shell_patterns=0  
#####  
# %% The % character  
# %f The current file (if non-local vfs, file will be copied locally and  
# %f will be full path to it)  
# %p The current file  
# %d The current working directory  
# %s "Selected files"; the tagged files if any, otherwise the current file  
# %t Tagged files  
# %u Tagged files (and they are untagged on return from expand_format)  
# %view Runs the commands and pipes standard output to the view command  
# If %view is immediately followed by '(', recognize keywords  
# ascii, hex, nroff and unform  
#  
# If the format letter is in uppercase, it refers to the other panel  
#  
# With a number followed the % character you can turn quoting on (default)  
# and off. For example:  
# %f quote expanded macro  
# %if ditto  
# %of don't quote expanded macro  
#####  
+ ! t t  
# Do something on the current file  
# CMD=%(Enter command)  
# $CMD %f  
+ t t  
# Do something on the tagged files  
# CMD=%(Enter command)  
# for i in %t ; do  
# $CMD "$i"  
# done  
# Edit a bug report and send it to root  
# I=mktemp "${MC_TMPDIR:-/tmp}/mail.XXXXXX" || exit 1  
# $(EDITOR-vi) "$I"  
# test -r "$I" && mail root < "$I"  
# rm -f "$I"  
+ f \.1$ | f \.3$ | f \.4$ | f \.5$ | f \.6$ | f \.7$ | f \.8$ | f \.man$ & t r  
# Display the file with roff -man  
# %view(ascii,nroff) roff -c -Tlatin1 -mandoc %f  
# Call the info hypertext browser  
# info  
+ t d
```



# Выводы

В ходе этапа я еще лучше изучил программу hugo