


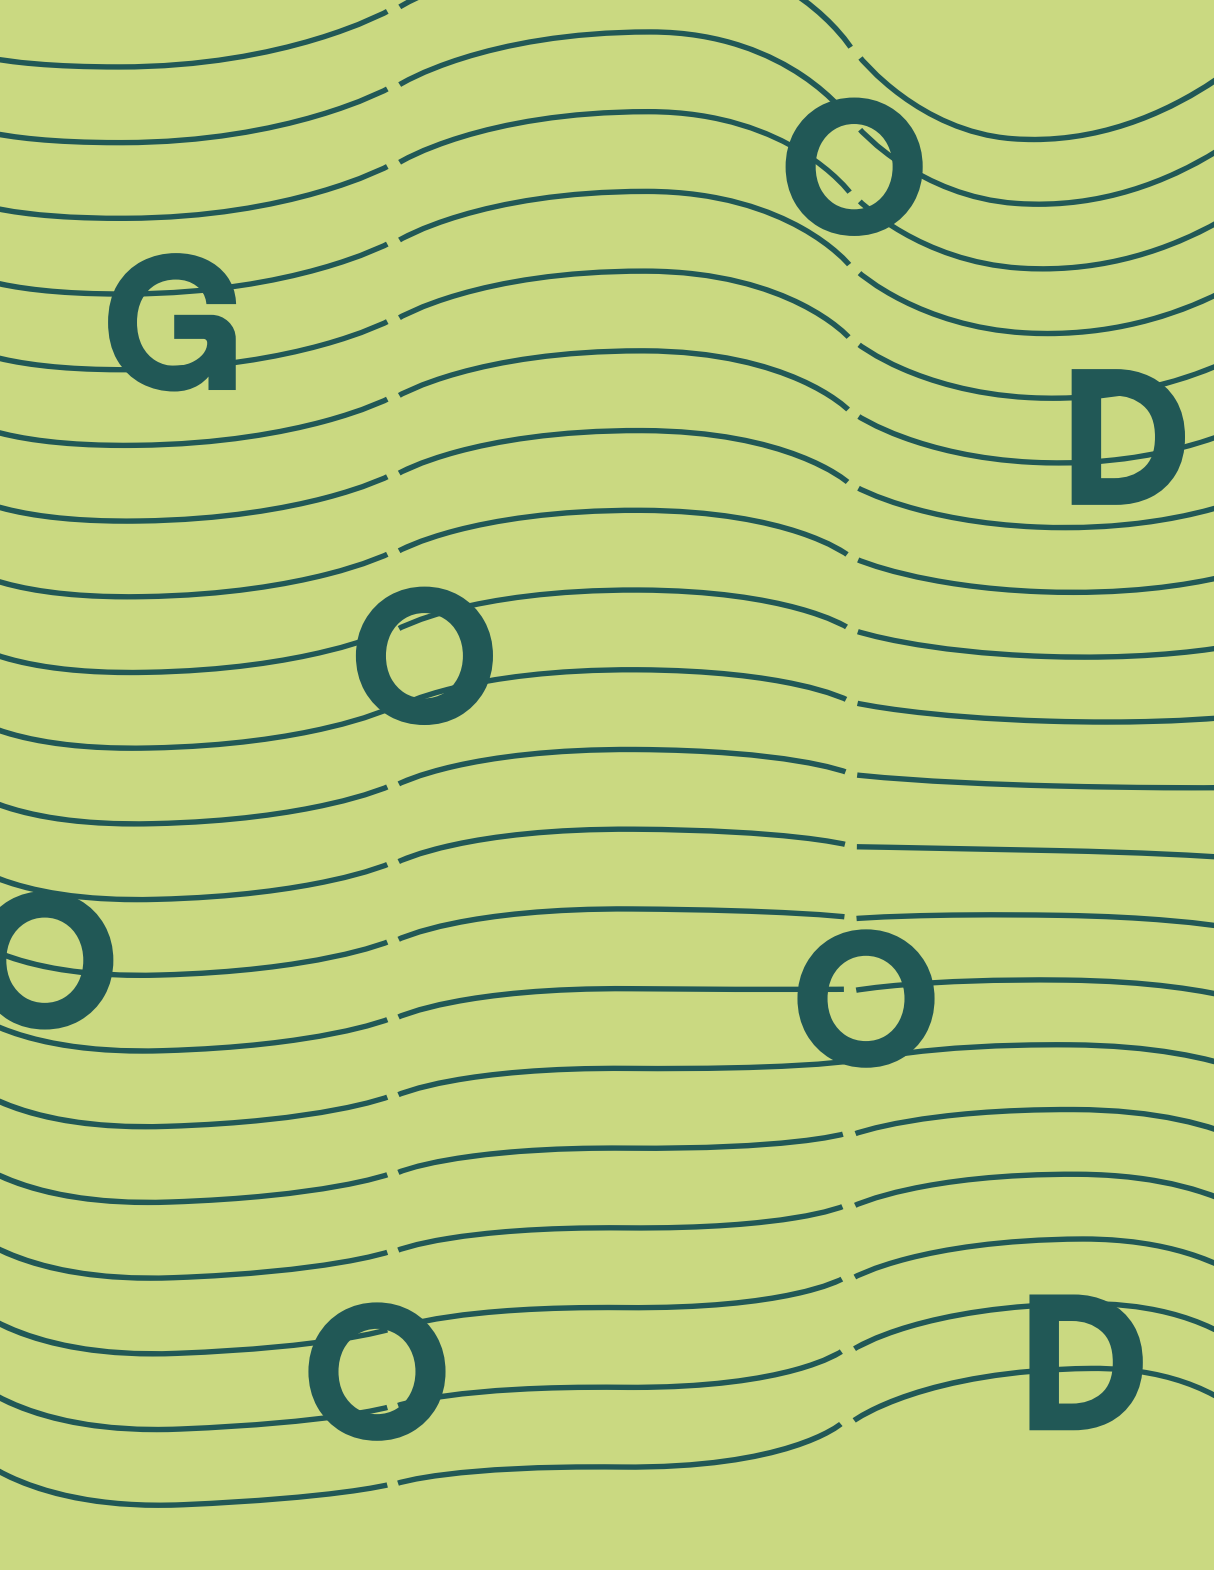

G

O

D

O

O

O

O


D

I. hw_1.c

struct NODE (= node) {


int data;

struct NODE* next;




```
Node* curr = head->next;
while(curr != NULL)
{
    print(~, curr->data);
    curr = curr->next;
}
```

curr
data
next

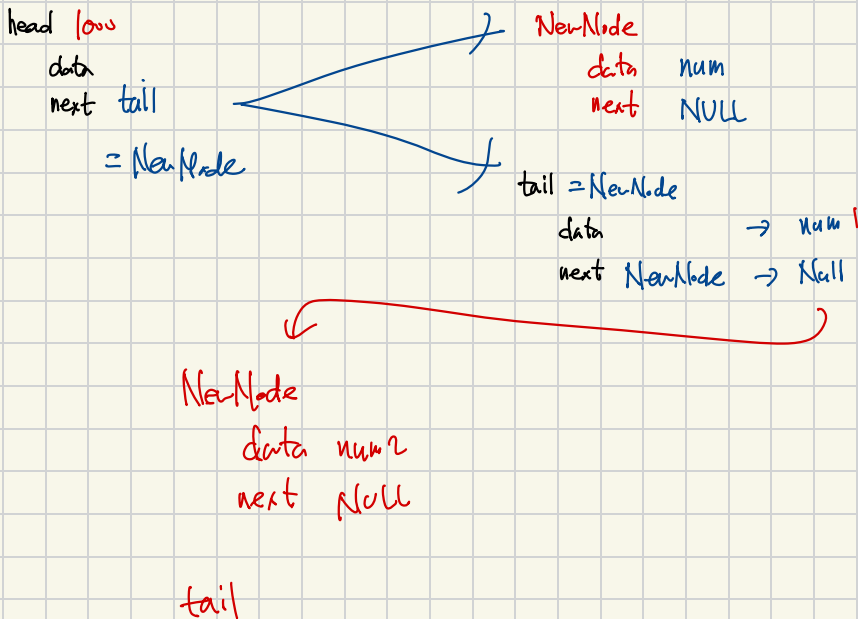

head
data
next

tail
data
next Null

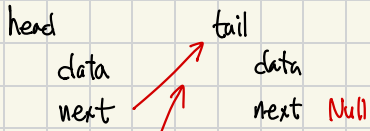

A diagram showing two nodes, 'head' and 'tail', each with 'data' and 'next' fields. Two red arrows originate from the 'next' field of the 'head' node and the 'next' field of the 'tail' node, both pointing to the 'data' field of the 'tail' node. This indicates that both pointers refer to the same node in the list.

curr
data
next

NewNode
data num
next Null

7/6

head

data

next ~~NULL~~
1004

New Node (ex 1004)

data

10
next ~~NULL~~
1006

New Node (ex 1008)

data

20
next NULL

tail

data

next ~~NULL~~
1004

tail

data

10
next ~~NULL~~
1006

tail

data

20
next NULL

curr

data

next 1004

curr

data 10

next 1006

