
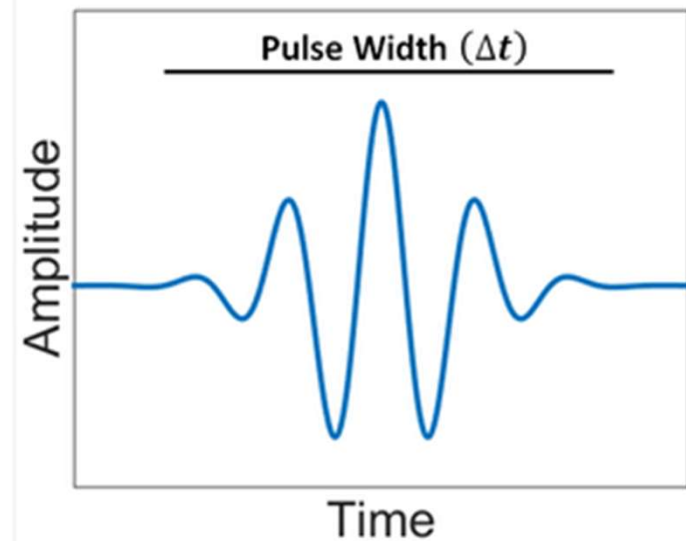
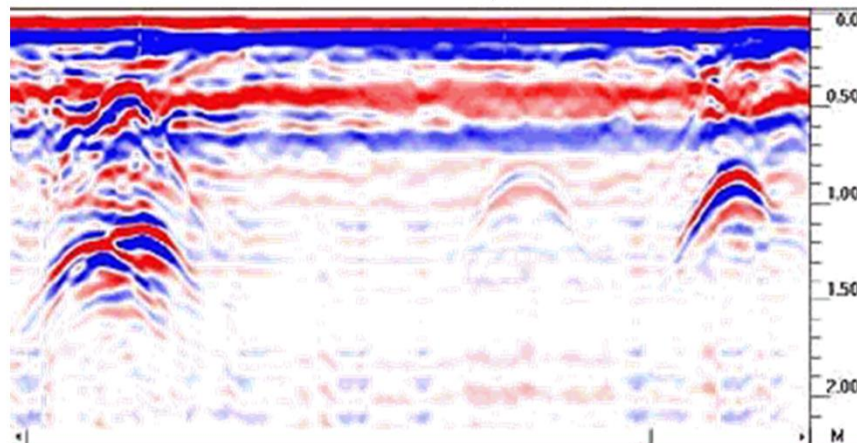


Announcements

- **Quiz:** Friday
- **Lab:** Monday, Tuesday, Wednesday next week
- **Midterm:**
 - Review next Wednesday
 - Midterm next Friday

Ground Penetrating Radar (day 2)

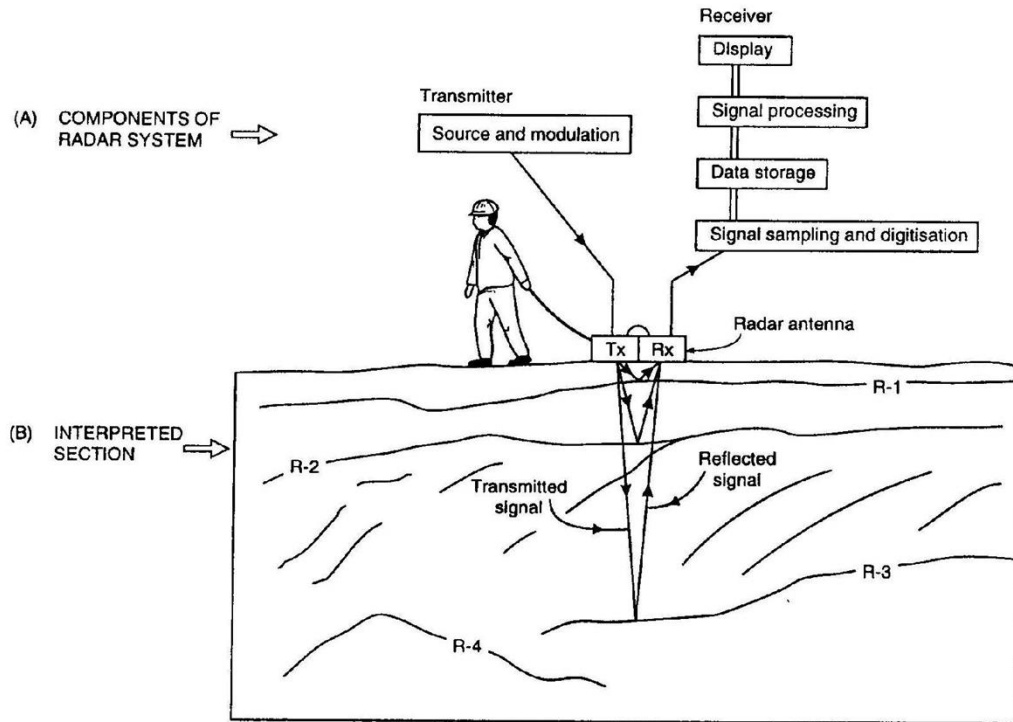

From Last Time

- Permittivity (ϵ) is the diagnostic physical property but electrical conductivity (σ) plays an important role.
- Radiowaves propagate at different speeds in different materials:

$$v = \frac{c}{\sqrt{\epsilon_r}}$$

- Radiowaves attenuate (lose amplitude) while they propagate:

Skin depth:

$$\delta \approx \begin{cases} 503 \sqrt{\frac{1}{\sigma f}} & \text{for } \omega\epsilon \ll \sigma \\ 0.0053 \frac{\sqrt{\epsilon_r}}{\sigma} & \text{for } \sigma \ll \omega\epsilon \end{cases}$$

From Last Time

- Radiowaves reflect at boundaries where the velocity/dielectric permittivity changes:

$$R = \frac{\text{Reflected Amplitude}}{\text{Incident Amplitude}} = \frac{\sqrt{\epsilon_1} - \sqrt{\epsilon_2}}{\sqrt{\epsilon_1} + \sqrt{\epsilon_2}}$$

- Conductors are large reflectors of radiowaves
- Snell's law applies to GPR:

$$\frac{\sin\theta_1}{V_1} = \frac{\sin\theta_2}{V_2}$$


$$\sqrt{\epsilon_1} \sin\theta_1 = \sqrt{\epsilon_2} \sin\theta_2$$

Today's Topics

- Common survey configurations and some applications
- The source wavelet signal
- Resolution
- GPR App
- Probing distance
- Sources of Noise
- Processing


Common Offset Survey

- Tx-Rx distance is fixed
- Tx-Rx is moved for every shot
- Most common GPR survey
- Good for:
 - Finding horizontal interfaces
 - Locating discrete objects
- **Zero offset** survey has Tx-Rx coincident (same location)


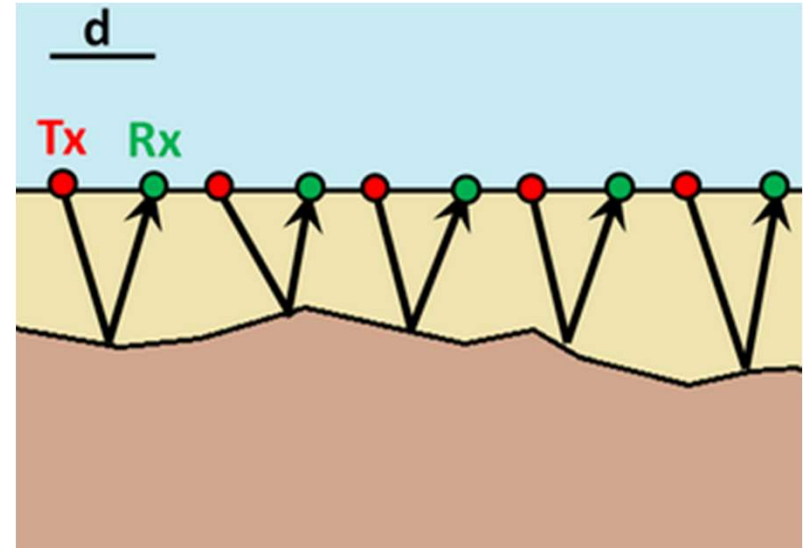


Common Offset Survey

- Tx-Rx distance is fixed
- Tx-Rx is moved for every shot
- Most common GPR survey
- Good for:
 - Finding horizontal interfaces
 - Locating discrete objects
- **Zero offset** survey has Tx-Rx coincident (same location)


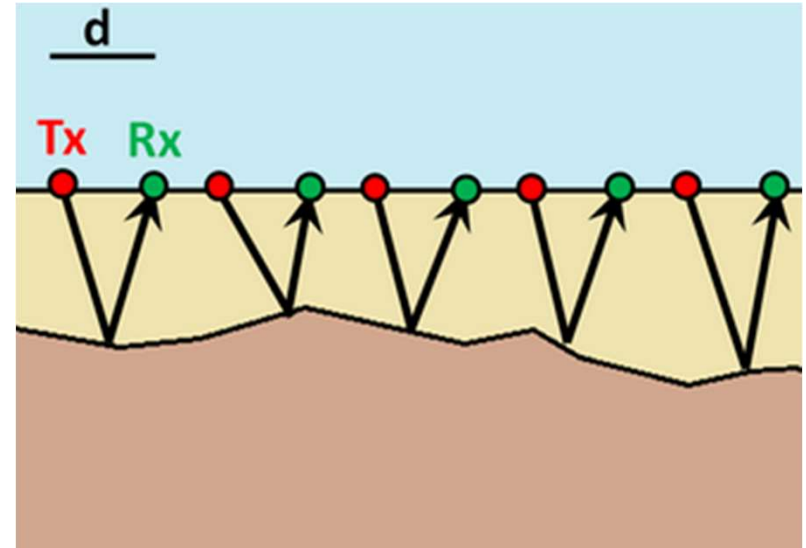


Zero Offset Survey: Finding Objects

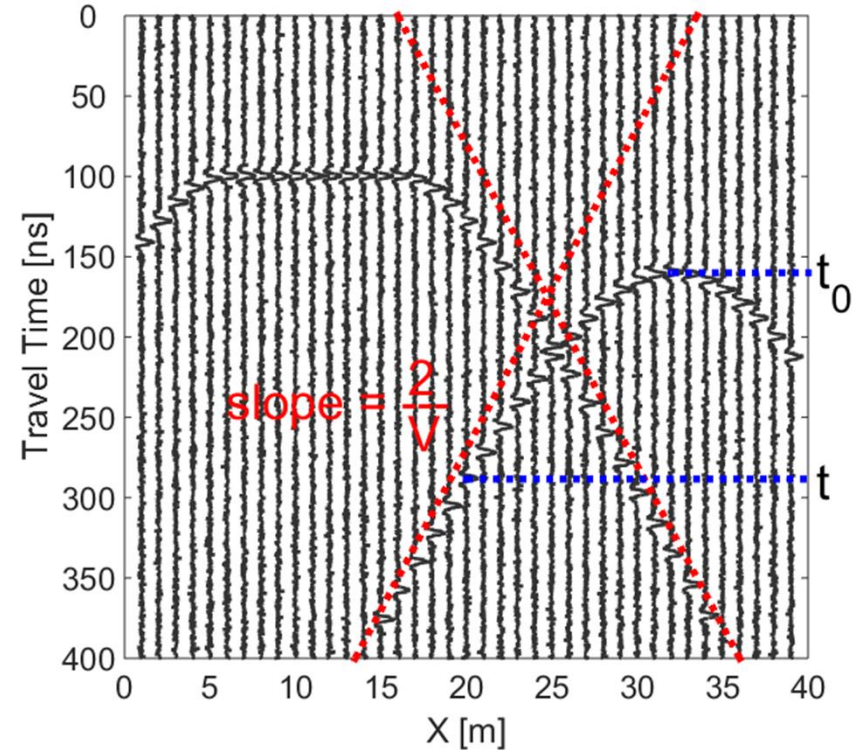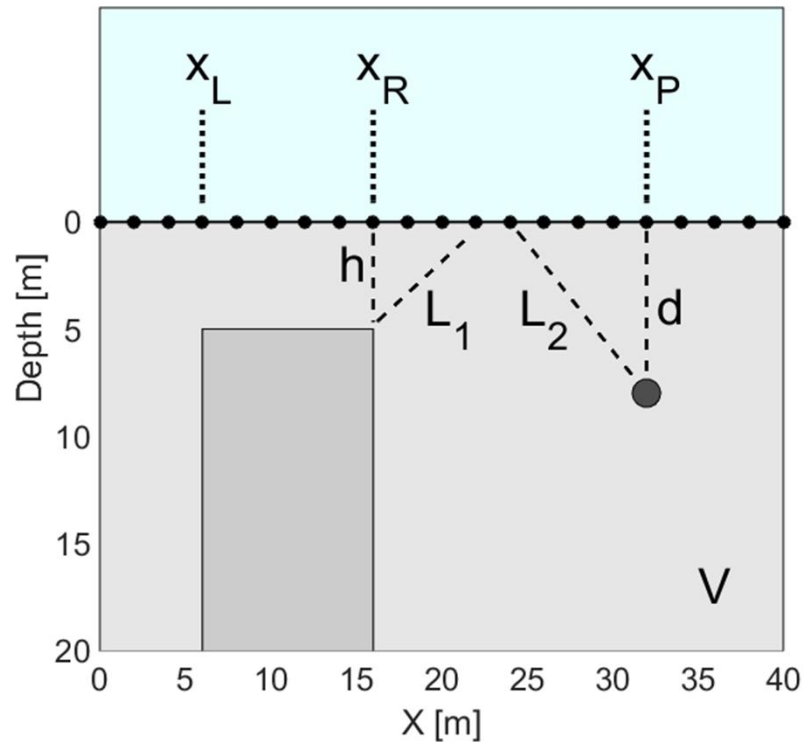

- A thin pipe at $x = 32$ m and depth 8 m
- A block between x_L and x_R at 5 m depth

Zero Offset Survey: Finding Objects

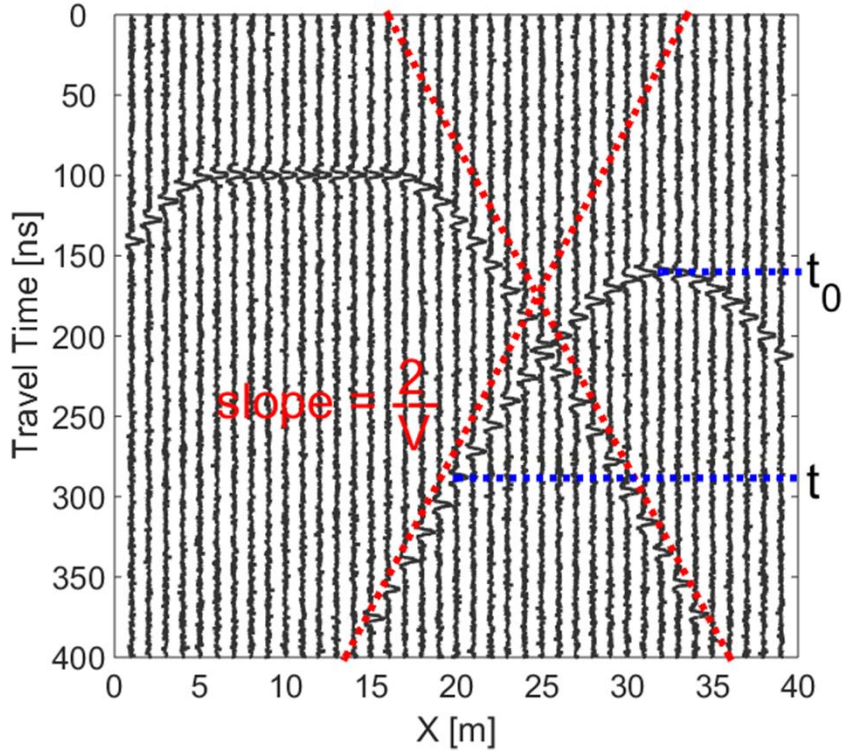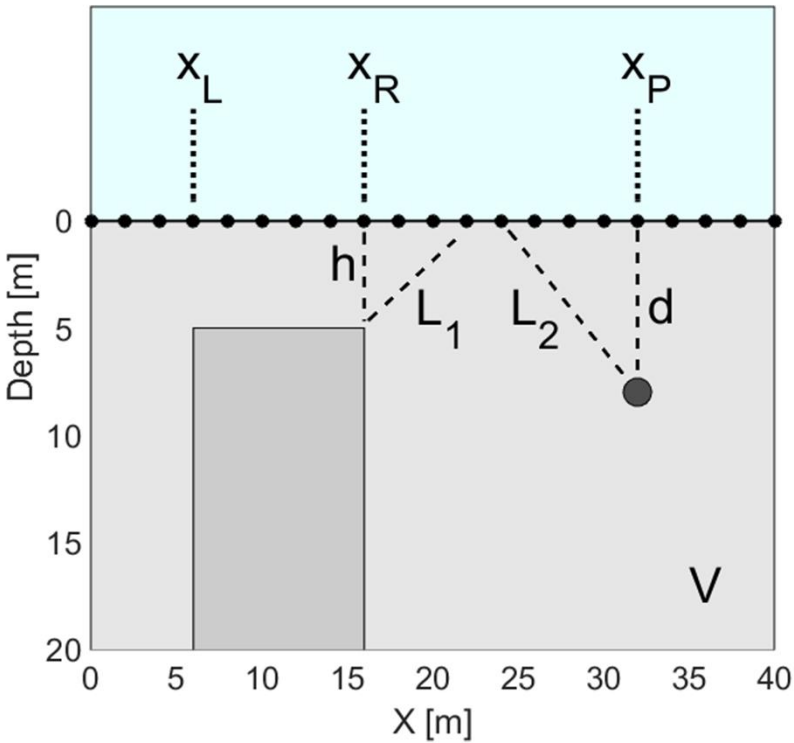



Travel time for the pipe:

$$t_p = \frac{2L_2}{V} = \frac{2\sqrt{(x - x_p)^2 + d^2}}{V}$$

where $t_p(x_p) = \frac{2d}{V}$

EOSC 350 '06



Zero Offset Survey: Finding Objects

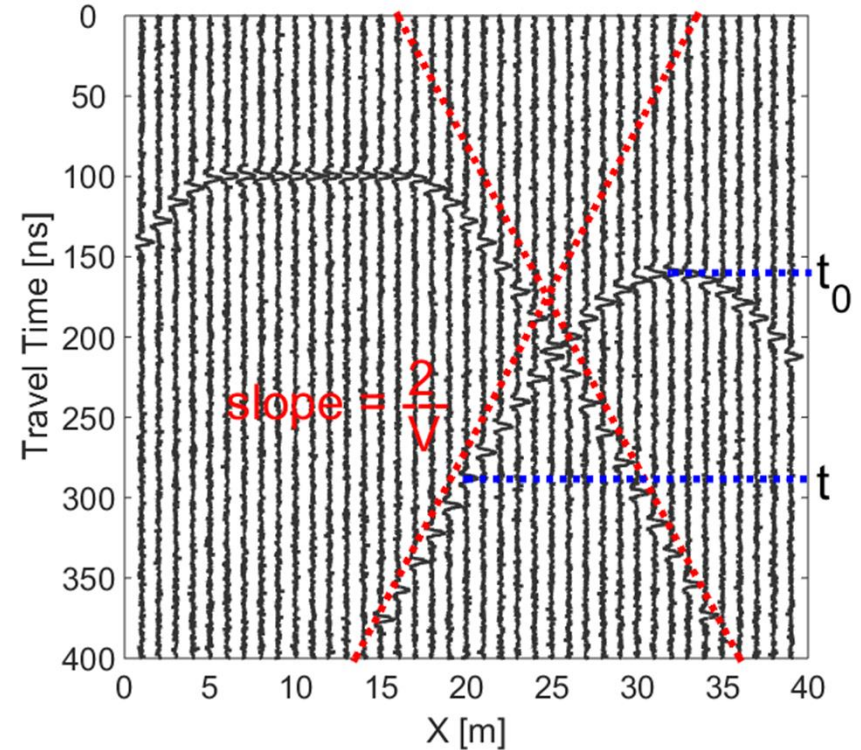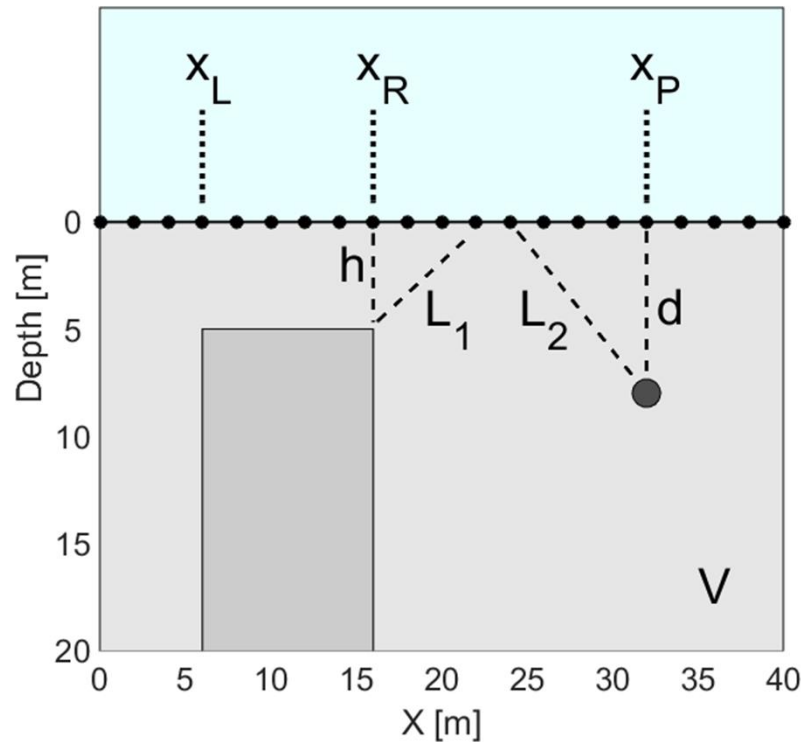


For the block:

$$t_b = \begin{cases} \frac{2\sqrt{(x - x_L)^2 + h^2}}{V} & \text{for } x < x_L \\ \frac{2h}{V} & \text{for } x_L \leq x \leq x_R \\ \frac{2\sqrt{(x - x_R)^2 + h^2}}{V} & \text{for } x > x_R \end{cases}$$

Finding Objects (Method 1)

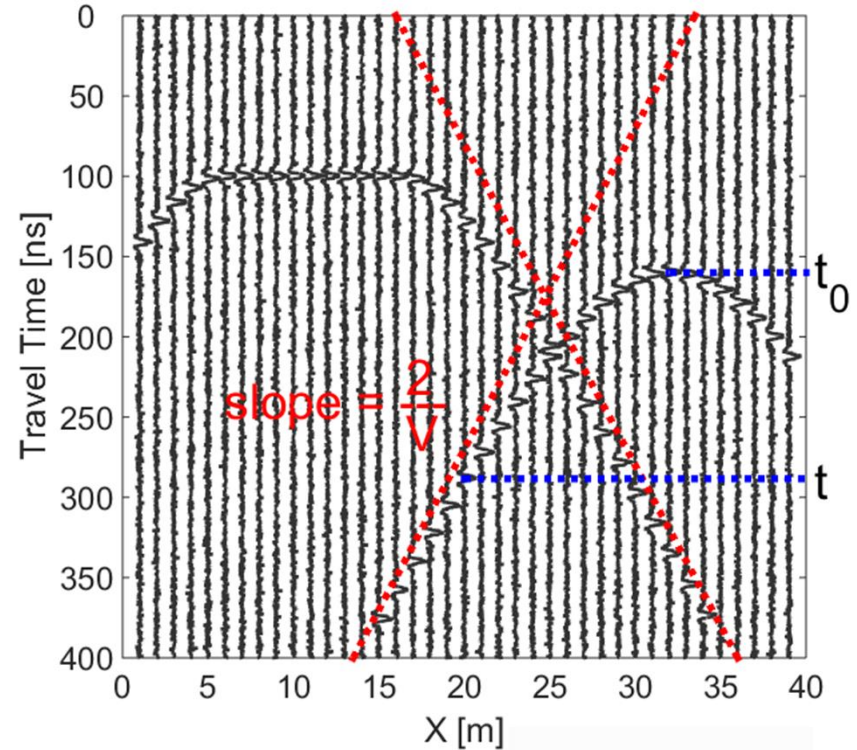
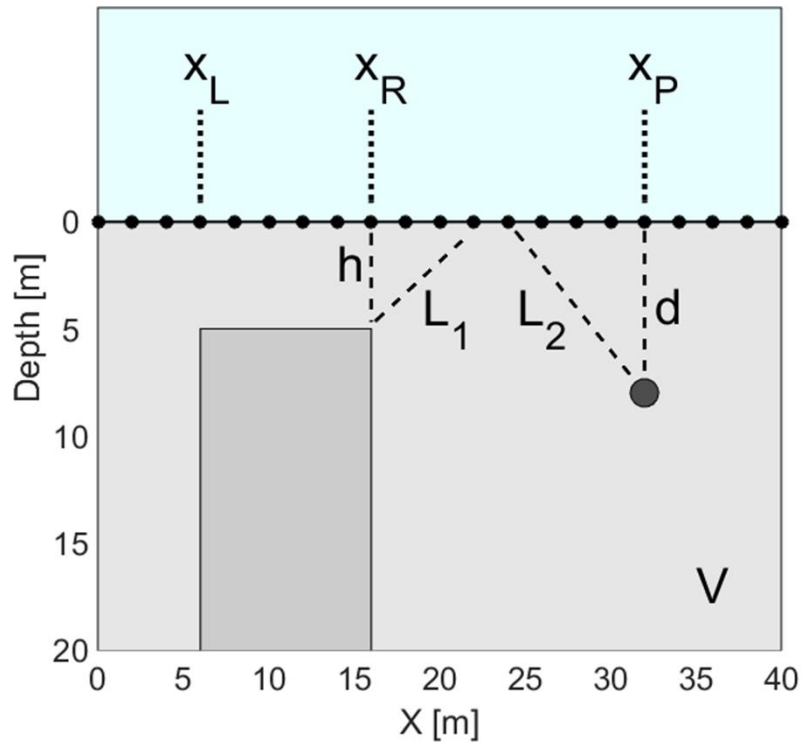


Slope (red dashed): $m = \pm 2/V$ where $t_0 = \frac{2d}{V}$




- 1) Get velocity from slope
- 2) Get depth to object

Finding Objects (Method 2)

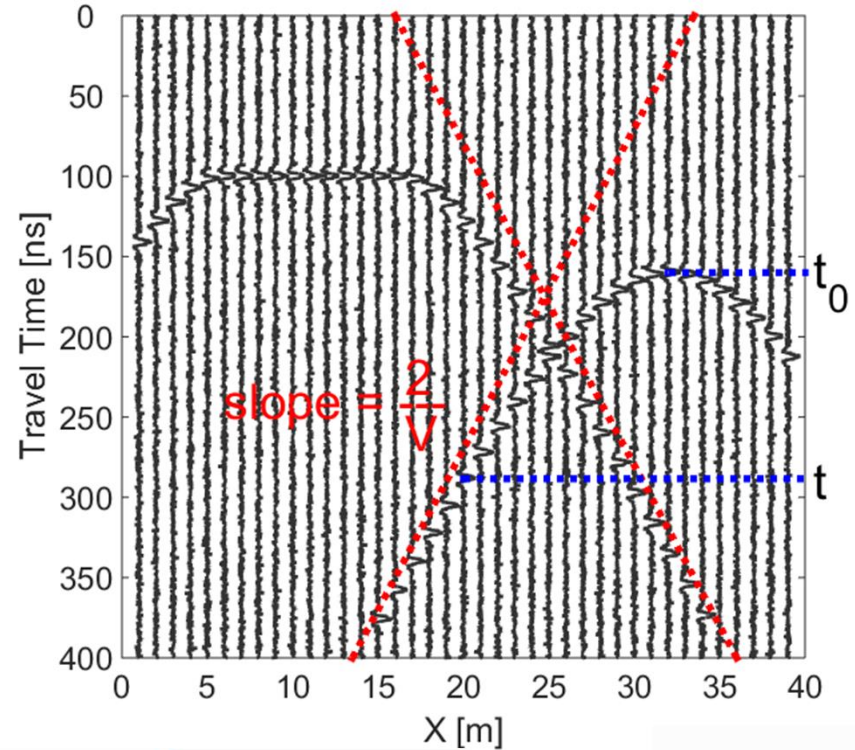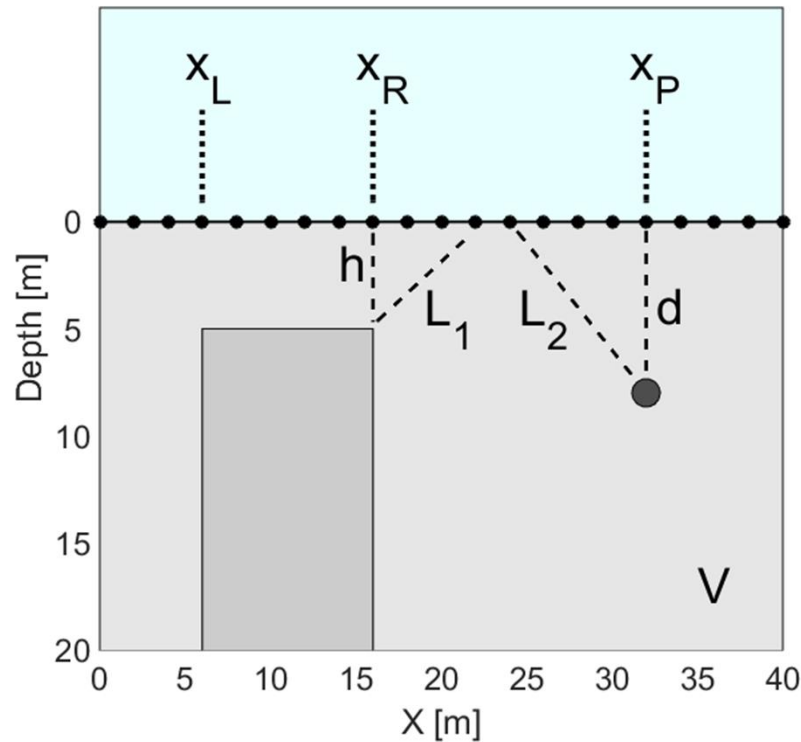


Using a point (blue dashed): $V = 2 \sqrt{\frac{(x - x_p)^2}{t^2 - t_0^2}}$ where $t_0 = \frac{2d}{V}$



- 1) Get velocity from a point on the curve
- 2) Get depth to object


Zero Offset Survey: Dipping Layers

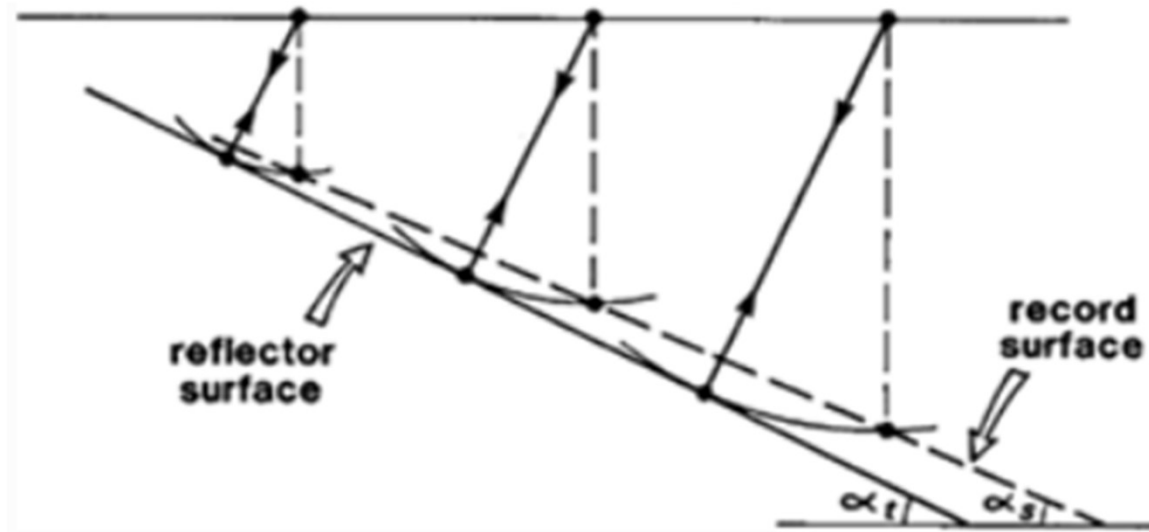

- Zero offset reflection is perpendicular to surface
- Can lead to underestimate of depth and slope of layer
- Can be corrected using **migration correction (GPG)**

Common Midpoint Survey

- Tx-Rx distance varies
- Midpoint between Tx-Rx is left constant
- Good for:
 - Finding horizontal interfaces


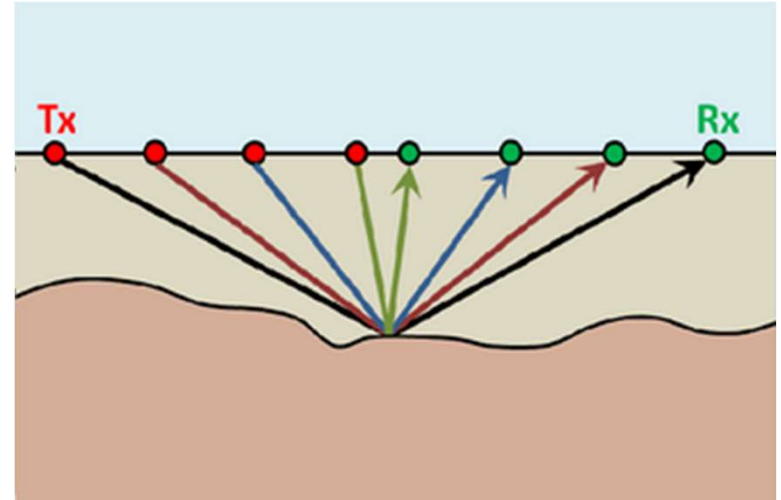


Common Midpoint Survey

- Travel time off same reflection point make a hyperbola:

$$t = \frac{2(x^2 + d^2)^{1/2}}{V}$$



- Can use hyperbola to get velocity and layer depth
- Reading not hyperbola:
 - Indicates uneven/dipping interface

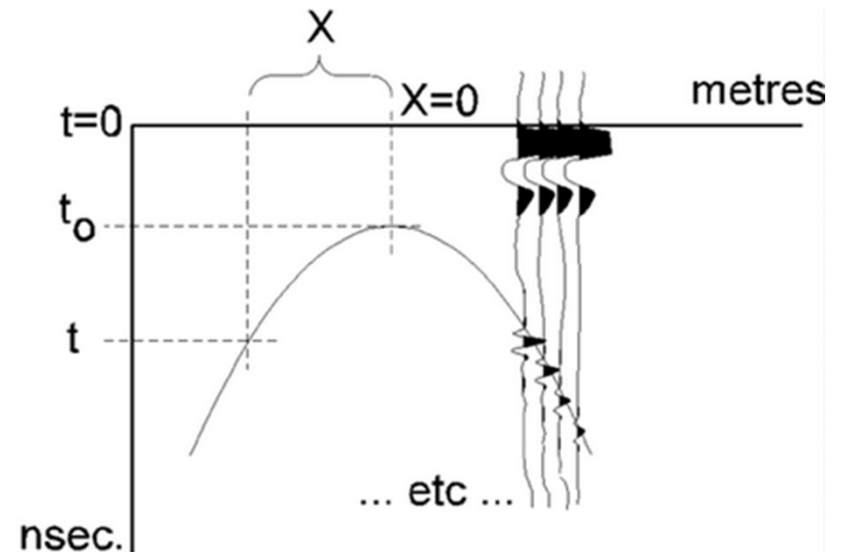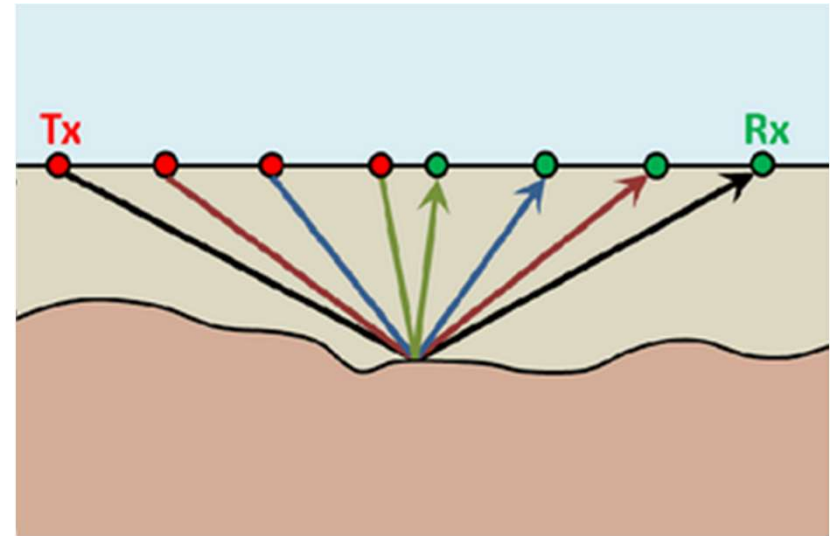


Transillumination Survey

- Tx and Rx are placed on opposing sides of a target.
- Sometimes many Tx and Rx
- Used for:
 - Structural integrity of mine shafts
 - Borehole surveys
 - Finding internal structures within objects

712 *An introduction to applied and environmental geophysics*

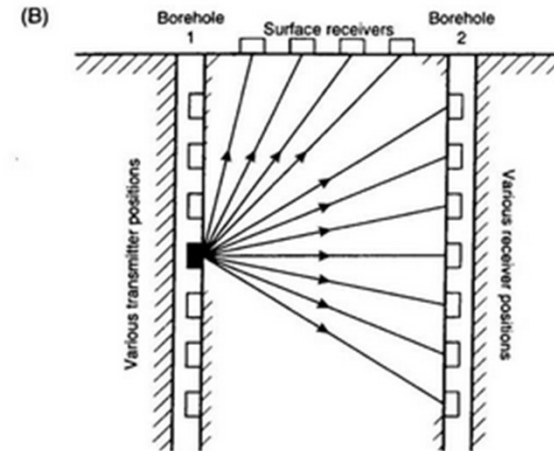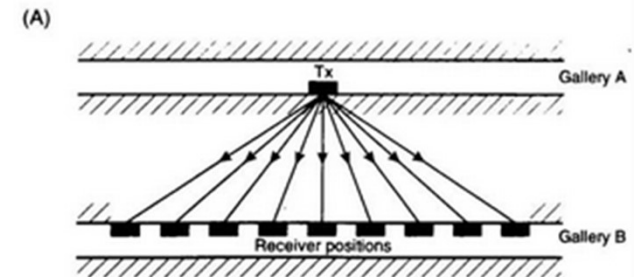

Cross-hole and hole-surface mode
(direct raypath from only one transmitter shown)


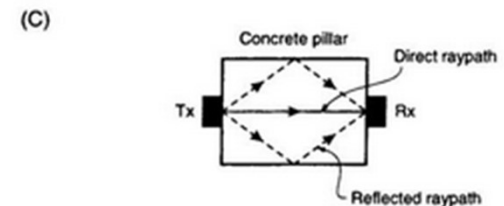


Recap Questions


Q: What is the most commonly used survey configuration?

Q: What kind of signatures do objects make in radargrams?

GPR Source Signal

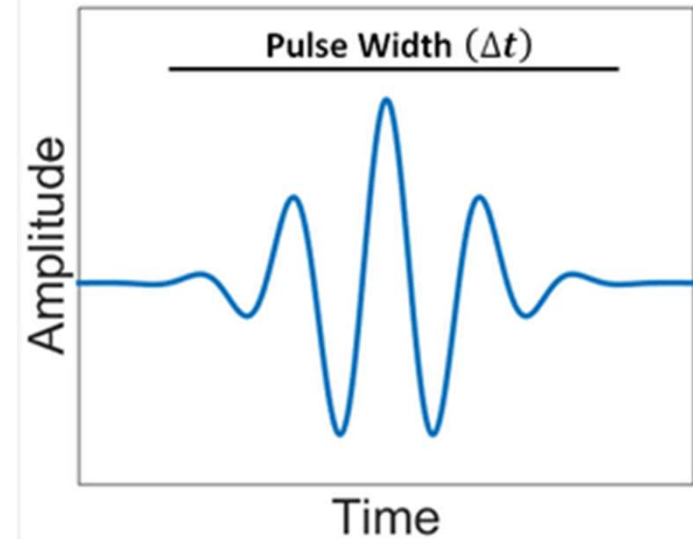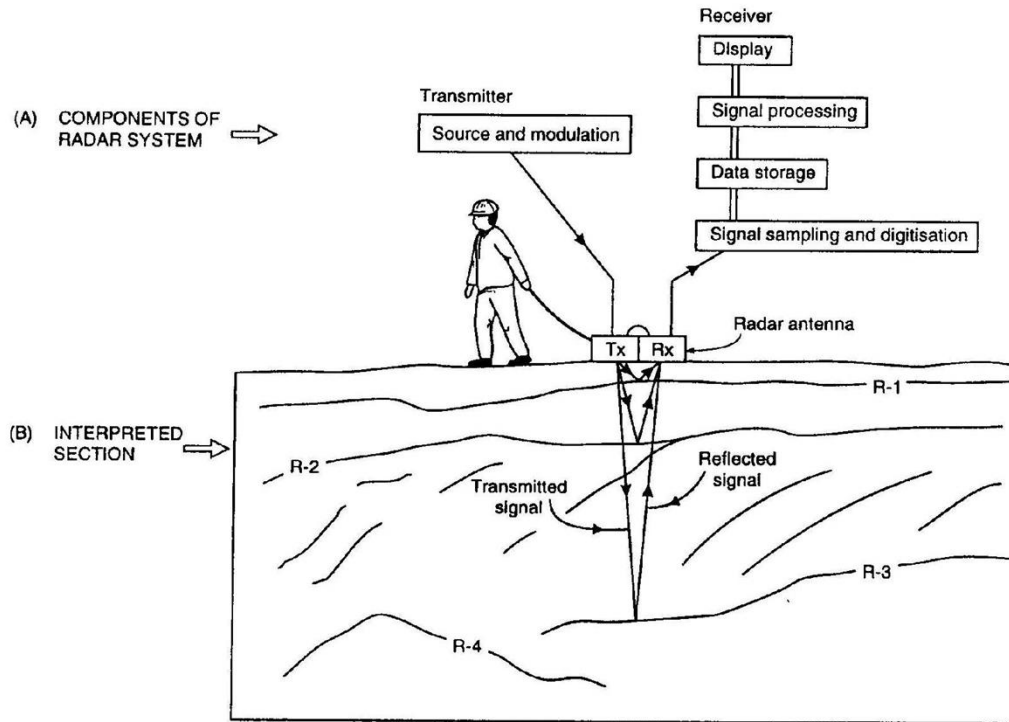

Examine properties of the source pulse

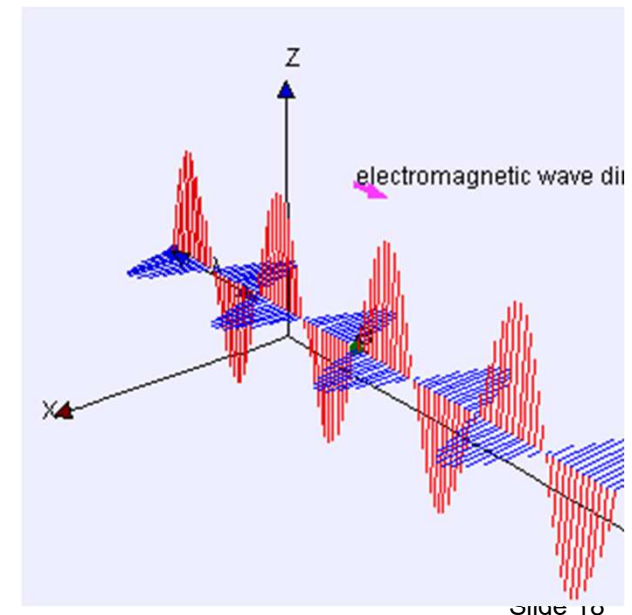


GPR Source Signal: Wavelet


- **Wavelet:** A wave-like oscillation of short duration
- **Bandwidth:** Range of frequencies in the wavelet
- **Pulse Width:** Time-duration of wavelet
- **Spatial Length:** Wavelength of the wavelet
- **Central Frequency:** Operating frequency of GPR survey

EOSC 350 '06

Wavelet

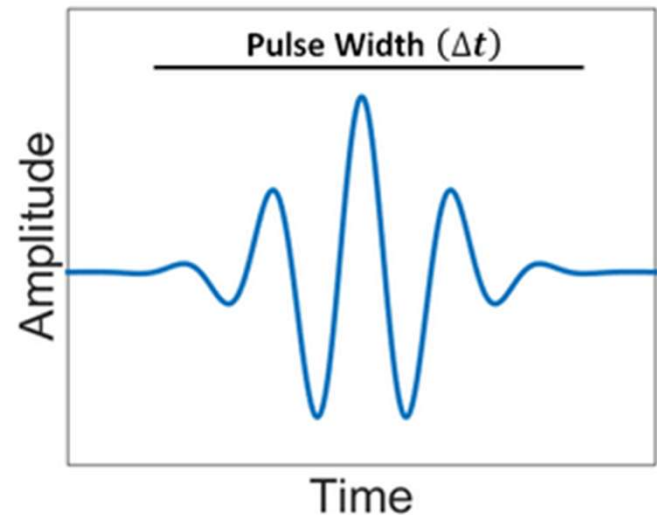


Frequencies in Wavelet

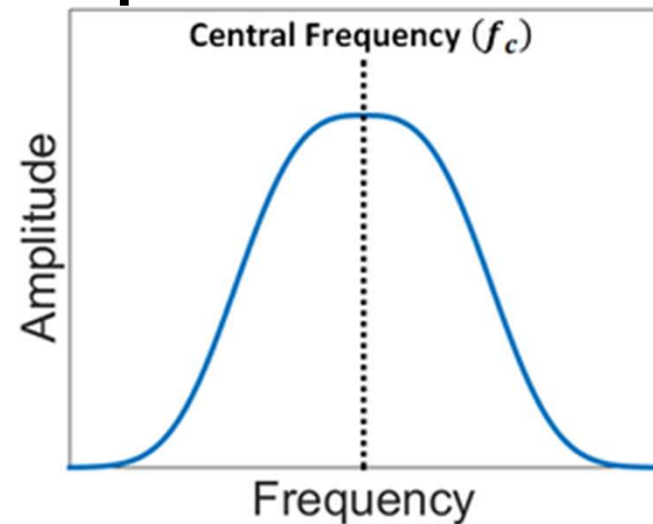

GPR Source Signal: Wavelet

- Shorter pulse overall contain higher frequencies
- Spatial length increases as pulse length increases
- Shorter pulses contain a wider range of frequencies

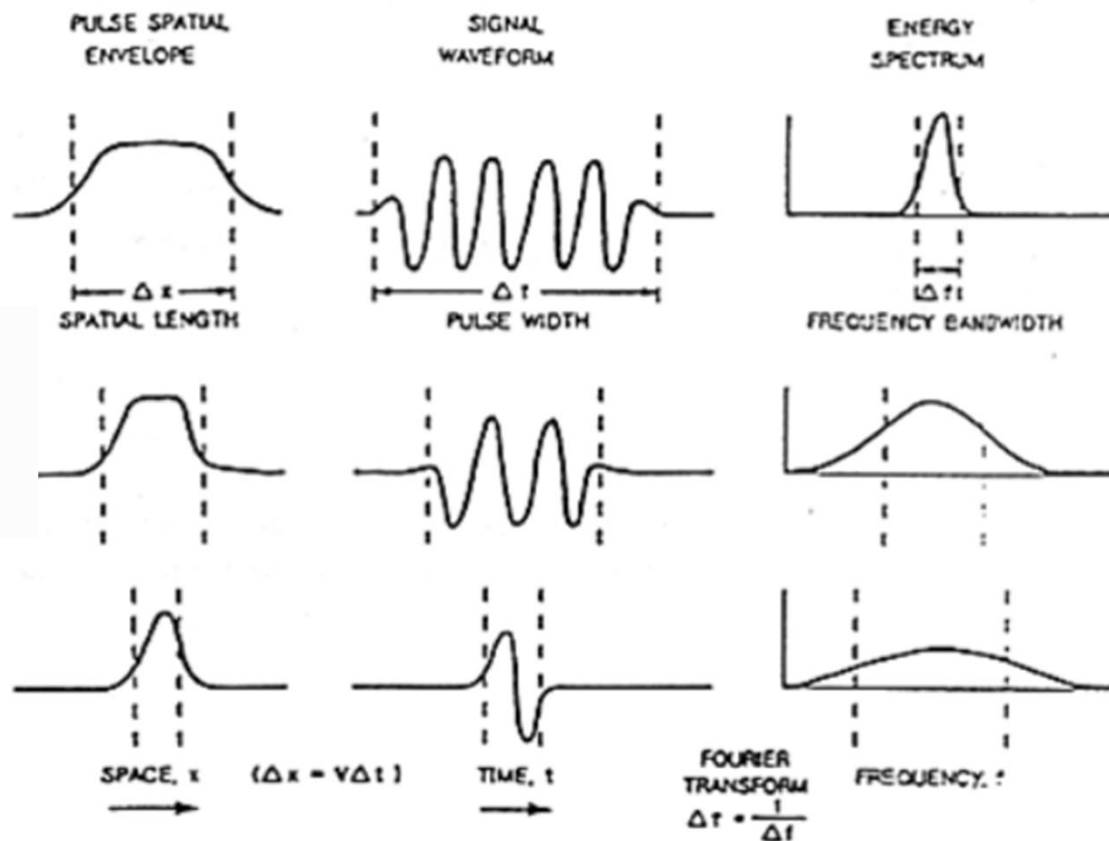



$$f_c = \frac{1}{\Delta t}$$

GPR Source Signal: Spatial Length

- The spatial length (wavelength) of the GPR pulse is dependent on the **central frequency** and **velocity**

$$\lambda = \frac{V}{f_c} = \frac{c}{f_c \sqrt{\epsilon_r}}$$



- When the GPR signal at some frequency is transmitted across an interface, it can be stretched or contracted

- Lower velocity  Shorter spatial length
- Lower frequency  Larger spatial length

GPR Source Signal: Spatial Length



- Since $f_c = 1/\Delta t$, the spatial width is given by:

$$\lambda = V \Delta t = \frac{c \Delta t}{\sqrt{\epsilon_r}}$$

- Shorter pulse width  Higher frequencies
 Shorter wavelength

Spatial Length: 2D Example

- Does the reflected signal coming up to the surface becomes stretched or contracted?
- Why is this?

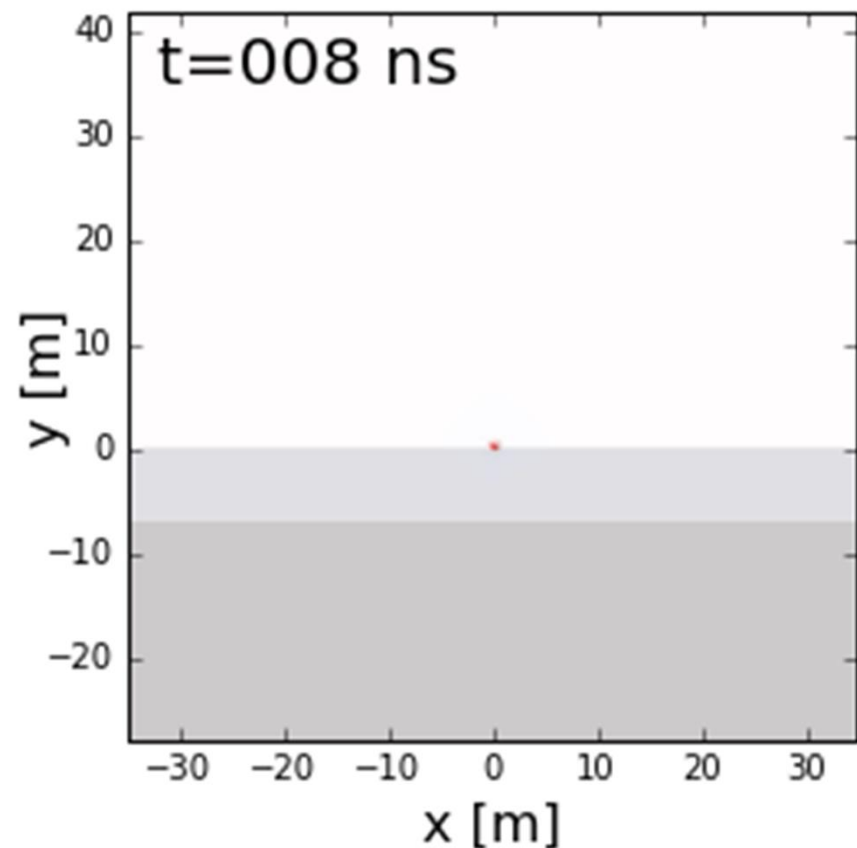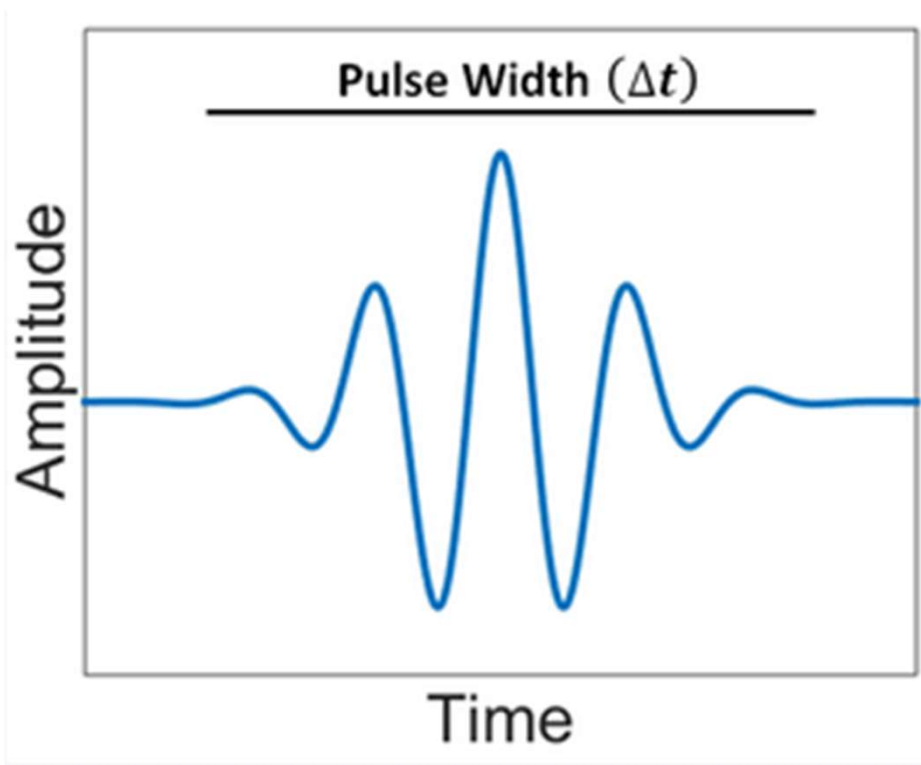

Resolution of GPR Surveys

- **Resolution:** Smallest features which can be distinguished using the survey.
- Resolution depends on:
 - The frequency of the GPR signal
 - The physical properties of the ground
 - The dimensions and separations of features

Resolution of GPR Surveys: Layers

¼ wavelength rule:


The thickness of a layer must be at least ¼ the wavelength of the GPR signal.

$$L > \frac{c}{4f_c\sqrt{\epsilon_r}} = \frac{c\Delta t}{4\sqrt{\epsilon_r}}$$


Resolution of GPR Surveys: Separation

- If objects are too close to one another:
 - The two way travel time is almost the same
 - The two returning wavelet signals will overlap
 - They will appear to be one object
- **For zero offset survey**



$$L > \sqrt{\frac{V d}{2f_c}}$$

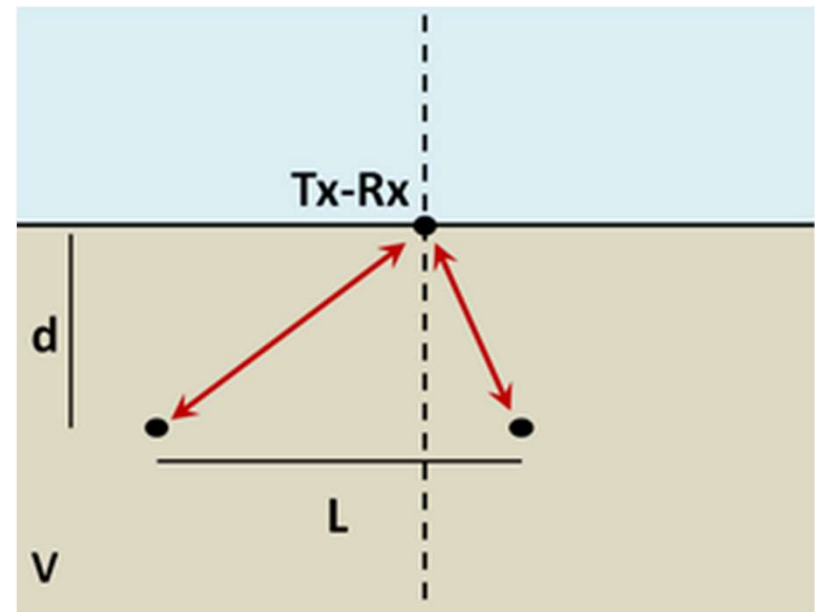

GPR Wave Regime App

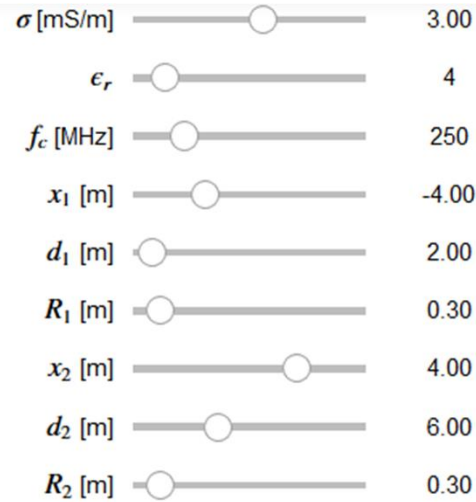

- Zero offset survey
- Two buried reflectors

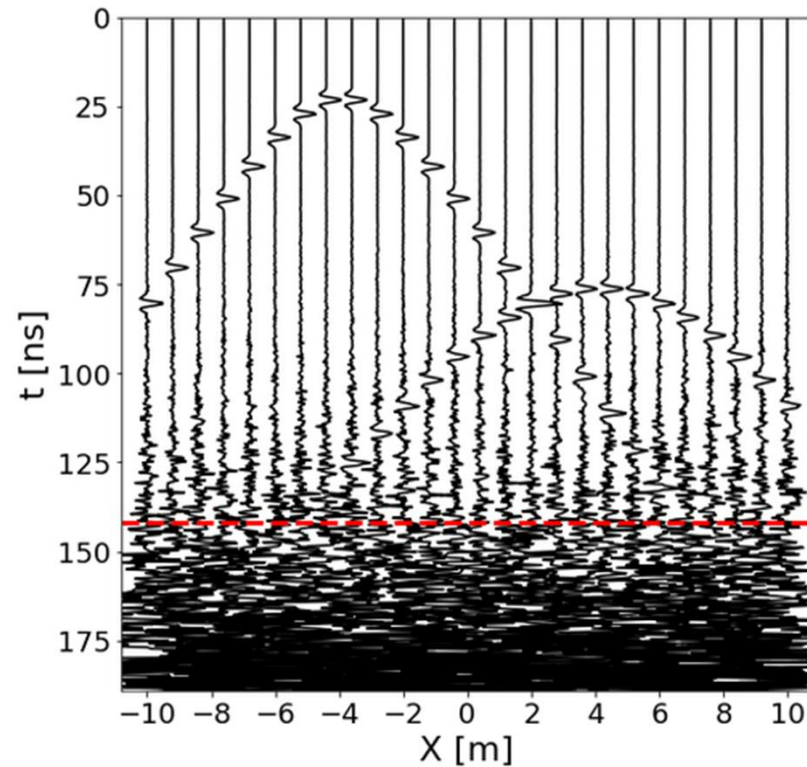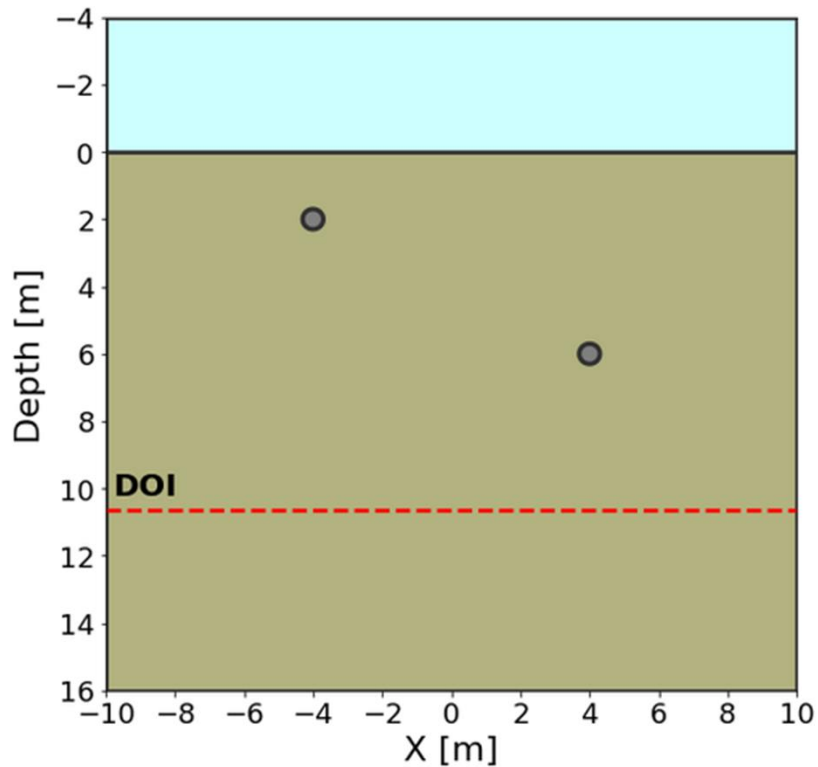


Probing Distance (Depth of Investigation)

- Maximum depth at which GPR can be used to get information about subsurface
- Probing distance is approximation **3 skin depths**:


$$D = 3\delta \approx \begin{cases} 1510 \sqrt{\frac{1}{\sigma f}} & \text{for } \omega\epsilon \ll \sigma \\ 0.0159 \frac{\sqrt{\epsilon_r}}{\sigma} & \text{for } \omega\epsilon \gg \sigma \end{cases}$$

Probing Distance (Depth of Investigation)

- Generally decreases as frequency increases
- Is lower for more conductive materials and non-dielectric materials

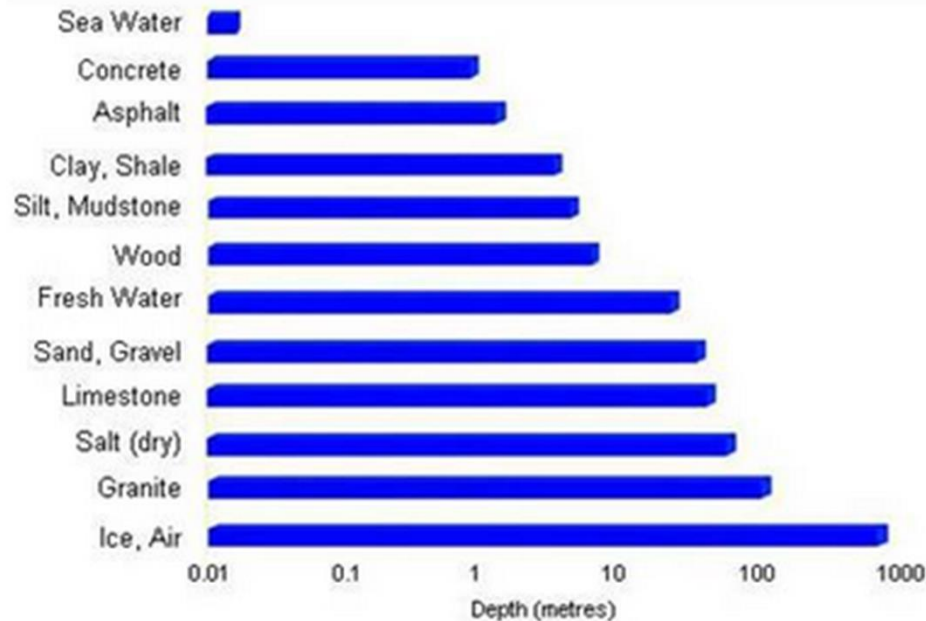

EOSC 350 '06

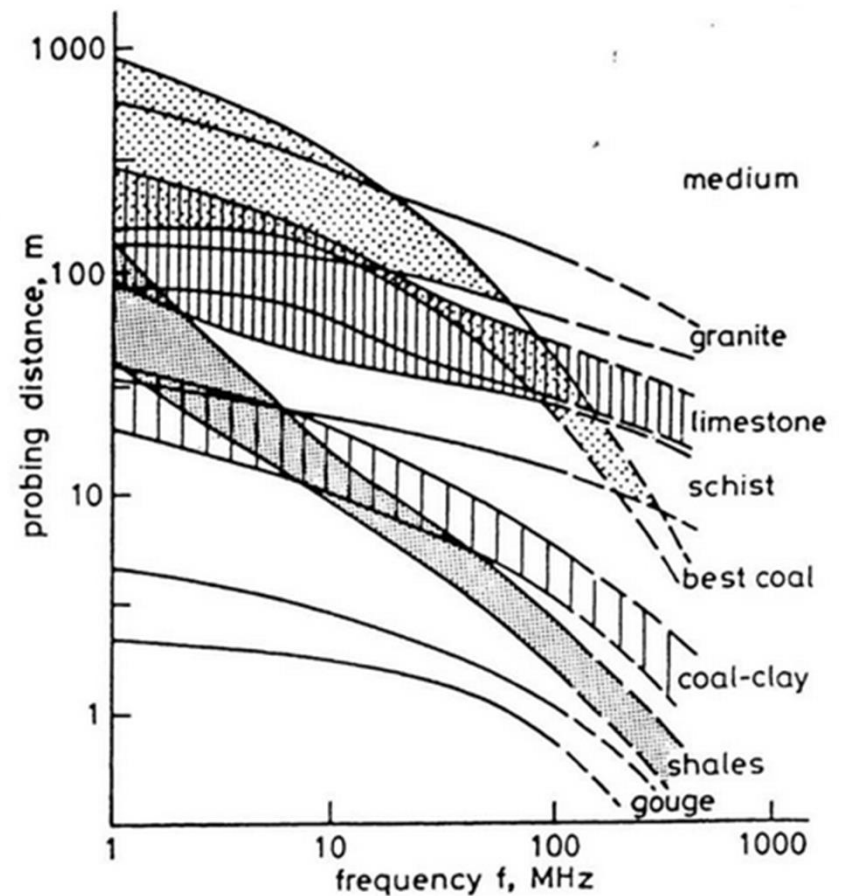

Recap Questions

Q: If a GPR signal contains more high frequency waves, is its pulse length longer or shorter?

$$f_c = \frac{1}{\Delta t}$$


Q: How thick does a layer need to be for us to see it?

Q: What happens when objects are too close together?


Q: Does probing distance increase/decrease as frequency increases?



Probing Distance vs. Resolution

- Want to find two buried tunnels.
- Using a **zero offset** survey configuration.
- Higher frequencies give better resolution
- Lower frequencies give larger probing distance

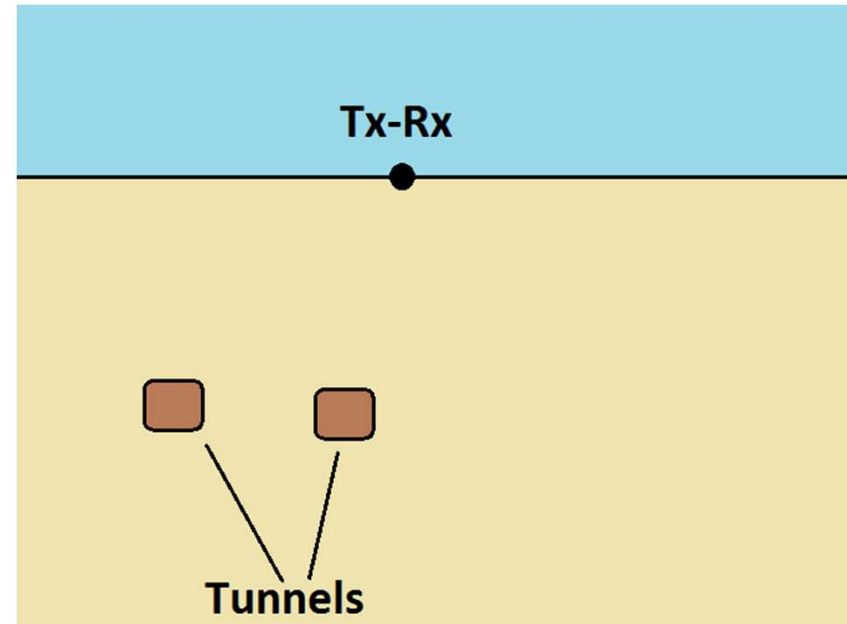

Radargram 200 MHz

- Little to no useful signal after 200 ns
 - Can't see features from the tunnels
- 
- Too much attenuation of signal
 - Probing distance insufficient

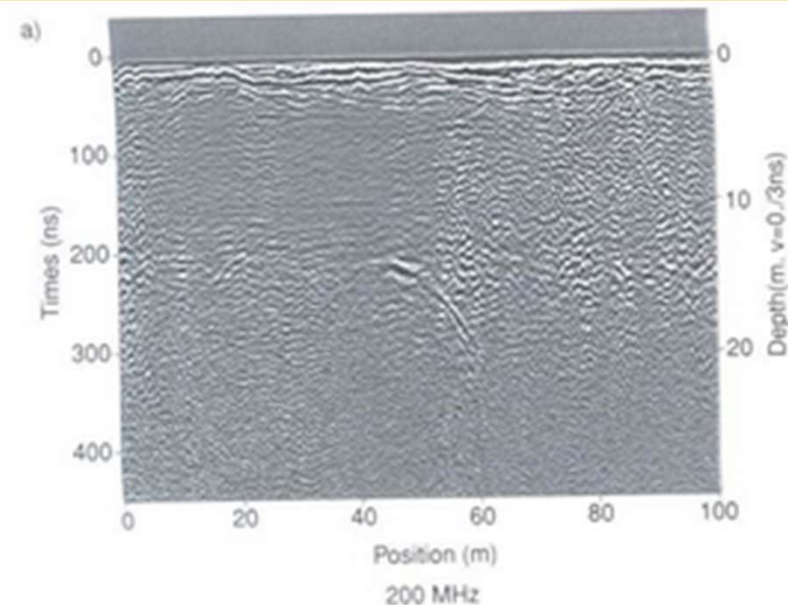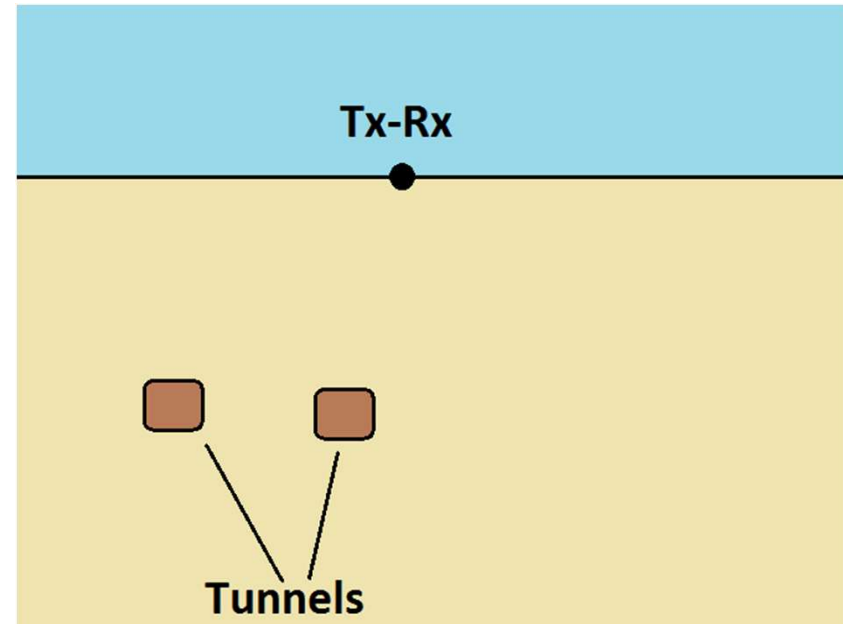



Radargram 100 MHz

- Useful signals up to 300 ns
- See top of hyperbolas from tunnels



- Lower resolution
- Can see tunnels

EOSC 350 '06

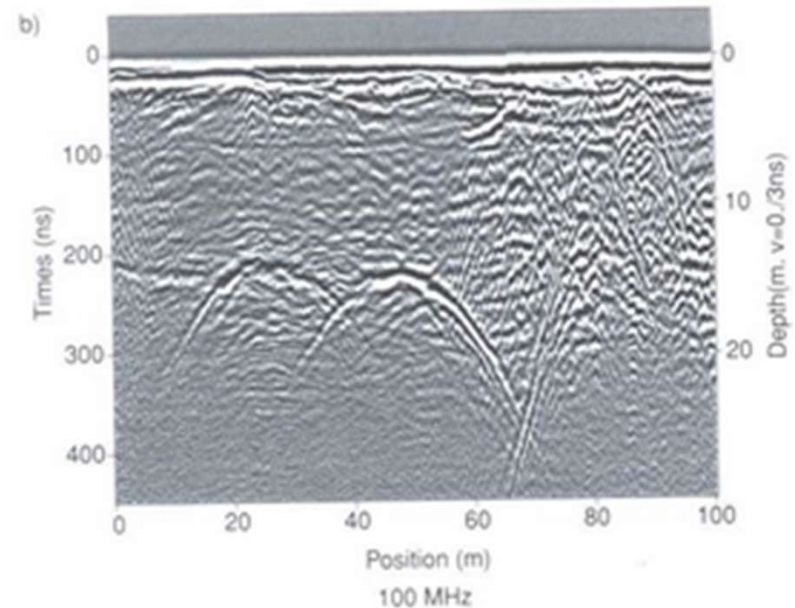
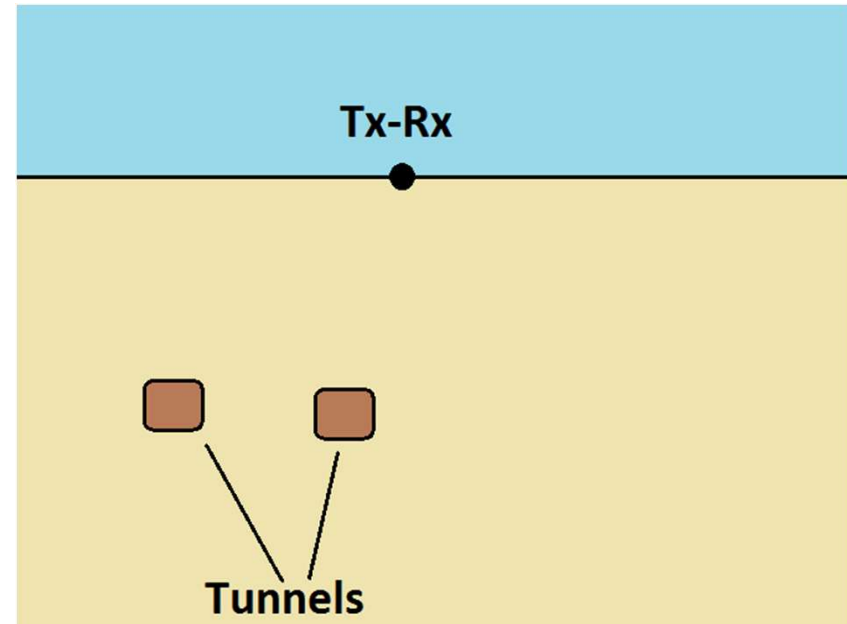


Radargram 50 MHz

- Useful signals through 400 ns
- Well-defined hyperbolas from tunnels



- Lower resolution image
- Best frequency for what we want to observe

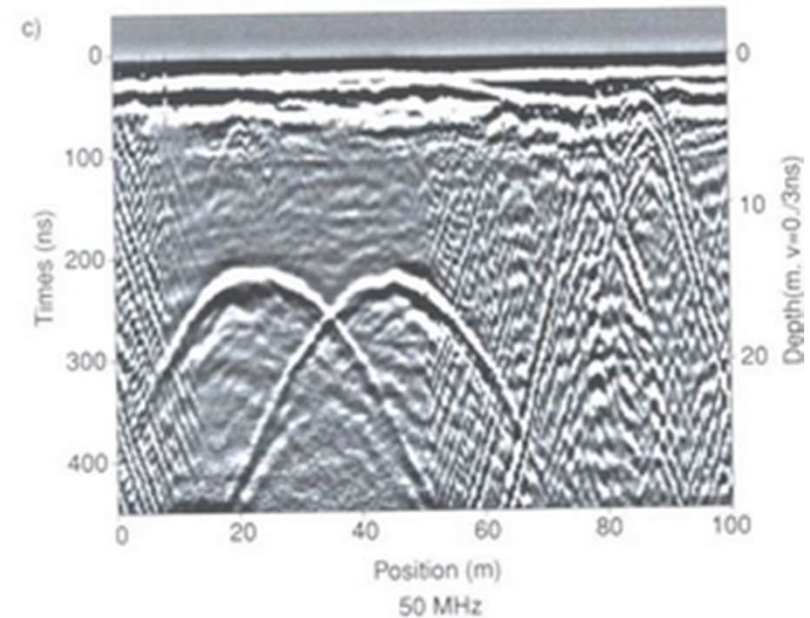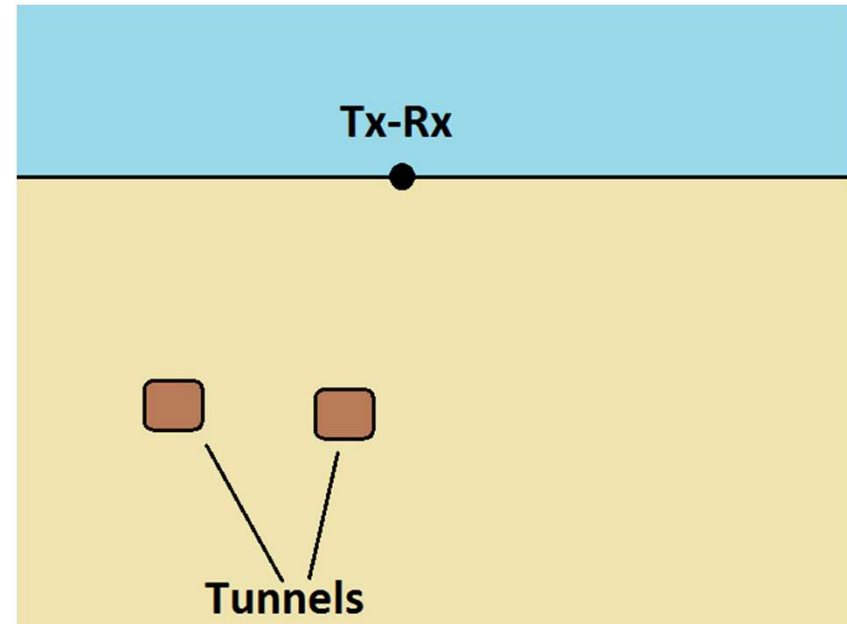

Recap of Material

- There is a compromise between resolution and probing distance:

Higher frequencies



Better resolution

$$\text{Layers: } L > \frac{c}{4f_c\sqrt{\epsilon_r}} = \frac{c\Delta t}{4\sqrt{\epsilon_r}}$$

$$\text{Objects: } L > \sqrt{\frac{Vd}{2f_c}}$$

Higher frequencies



Lower probing distance

$$D = 3\delta \approx \begin{cases} 1510\sqrt{\frac{1}{\sigma f}} & \text{for } \omega\epsilon \ll \sigma \\ 0.0159\frac{\sqrt{\epsilon_r}}{\sigma} & \text{for } \omega\epsilon \gg \sigma \end{cases}$$

Recap Questions:

Q: If higher frequencies give better resolution, what does that say about pulse width?

$$f_c = \frac{1}{\Delta t}$$

Q: What are some things you want to know before choosing an operating frequency?

Noise and GPR



- **Any** signal which interferes from useful signals from GPR targets.

Examples:

- External radiowave sources
- Above ground objects
- Ringing
- Scattering

Interference from other Radiowave Sources

- Radio towers
- Cell phones
- Power Lines

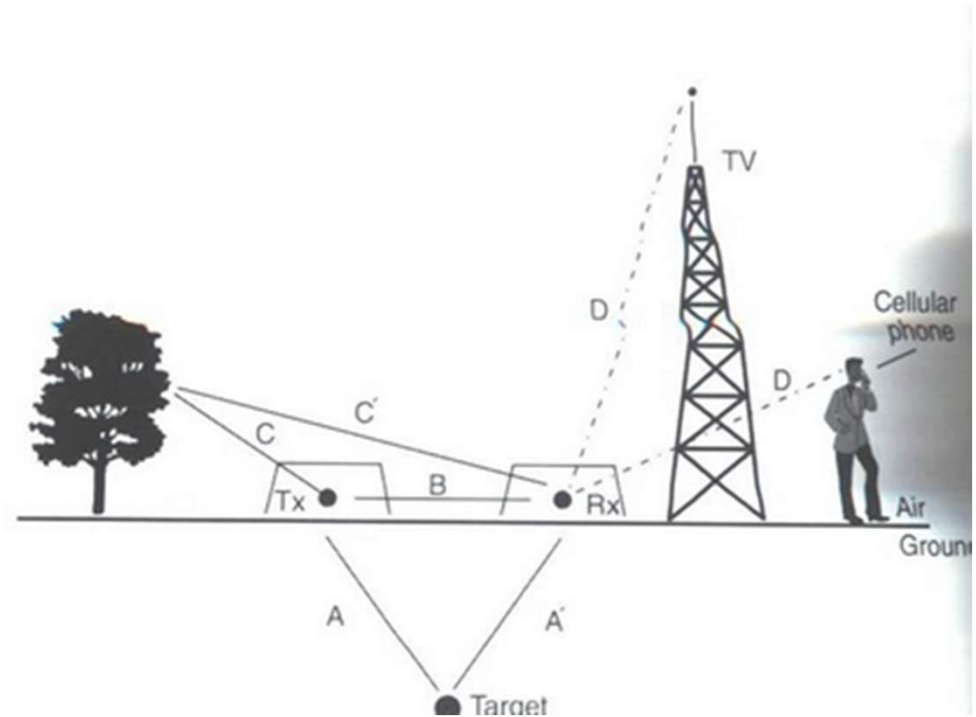

- Tx and Rx usually shielded to avoid these signals




Noise from Above Ground Objects

- Signals can reflect off nearby building and trees.

- Two-way travel time:


$$t = \frac{2(x^2 + d^2)^{1/2}}{V}$$

- Makes hyperbolas in zero offset surveys

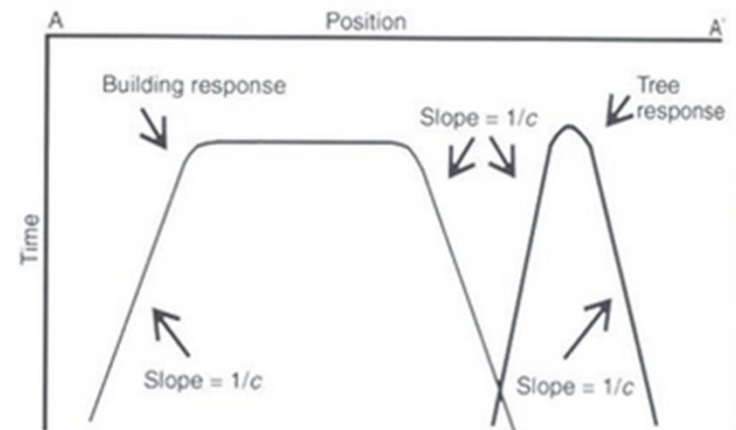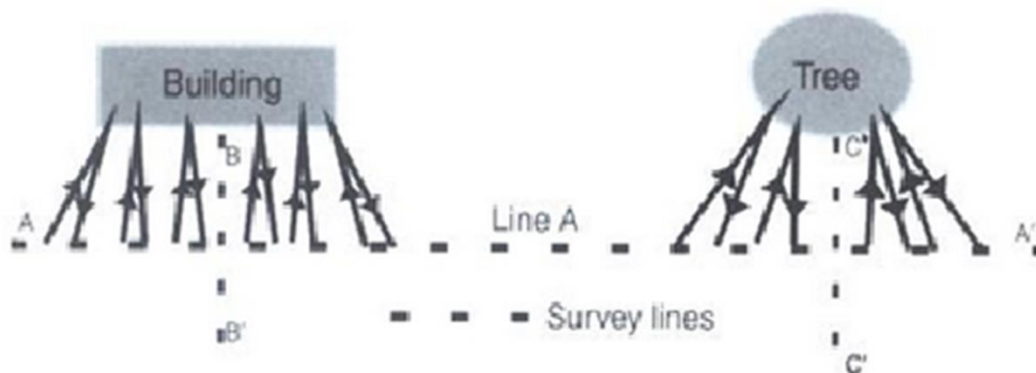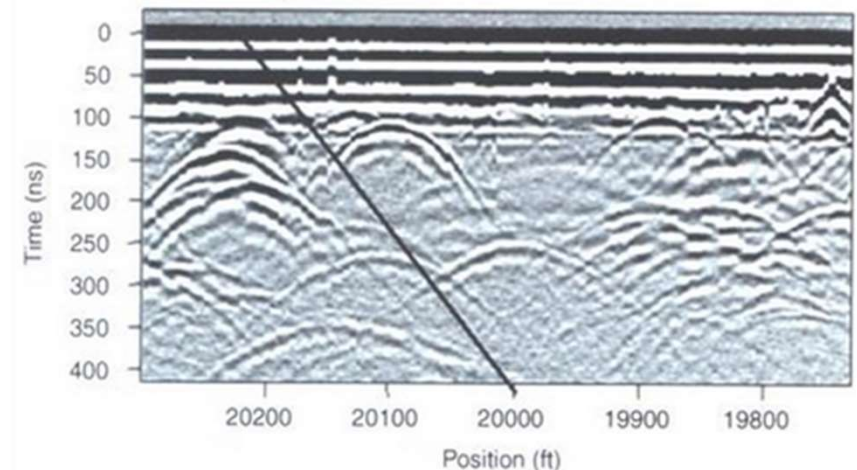


Noise from “Ringing”

- Caused when signals reverberate in regular fashion
- Signal repeatedly bounces within a layer or between objects.

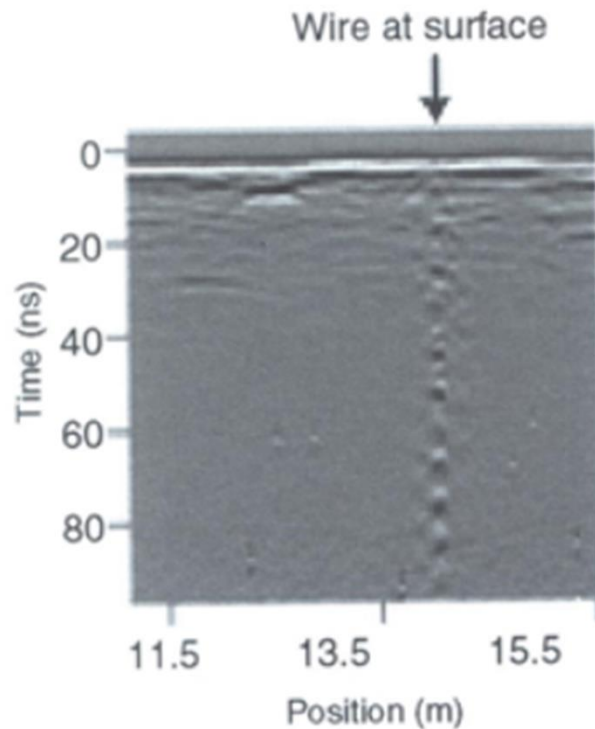


Wire below surface

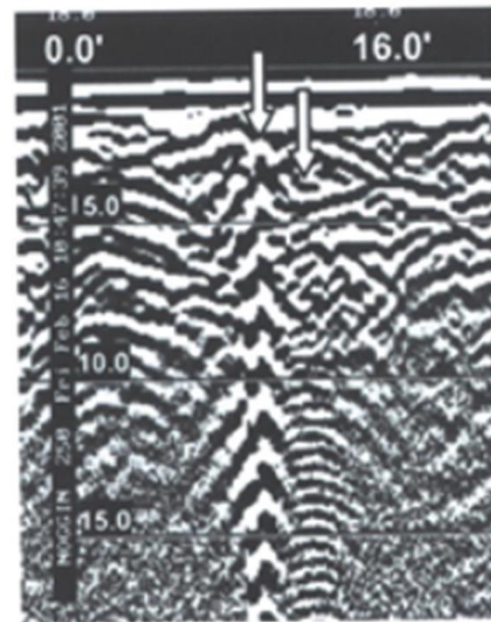


2 nearby objects

Noise from Scattering

- Deviations in signal path due to localized non-uniformities.

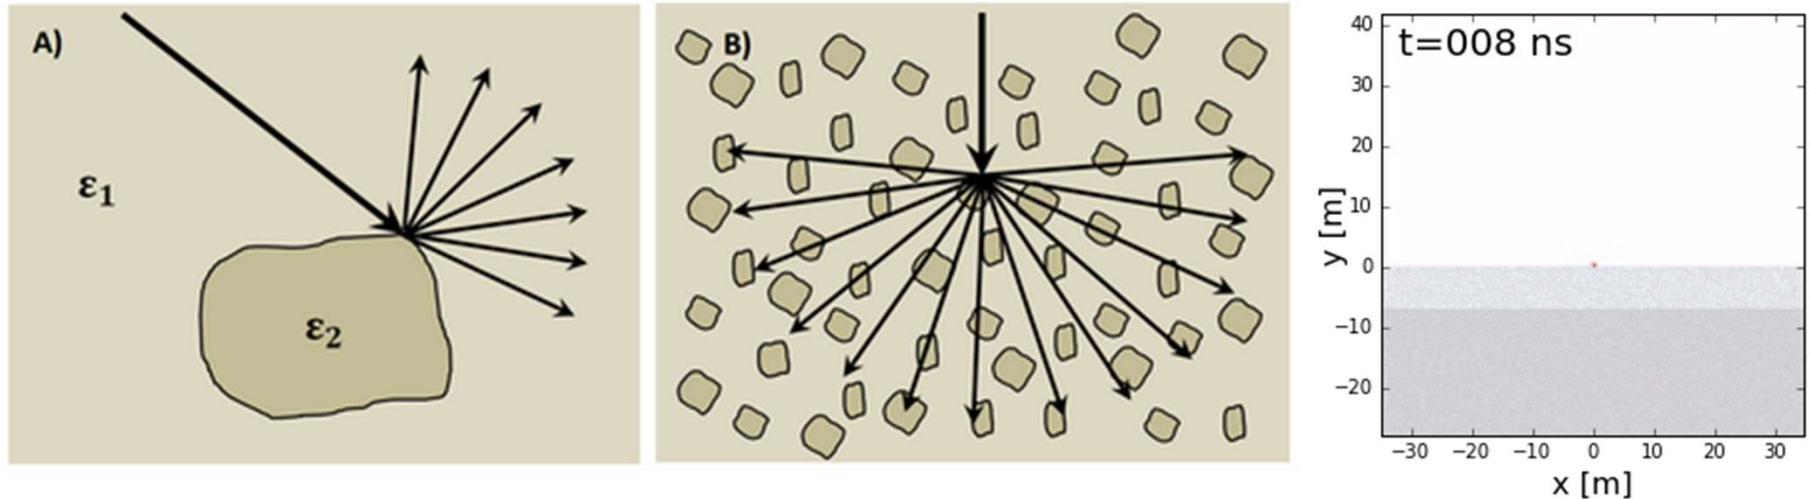

- Reduces amplitude of usable signal and increases noise.

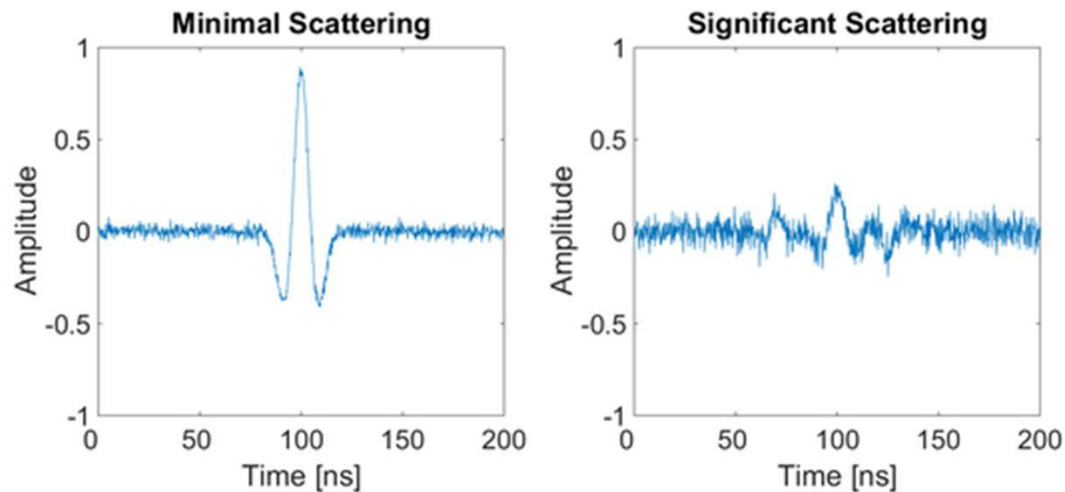

Processing


Examples:

- Arrival time to depth conversion
- Gain correction
- Stackings
- Smoothing

Arrival Time to Depth Convesion

- Vertical axis usual 2-way travel time [ns]
- If you can get velocity, you can get an apparent depth:


$$d_a = \frac{Vt}{2}$$

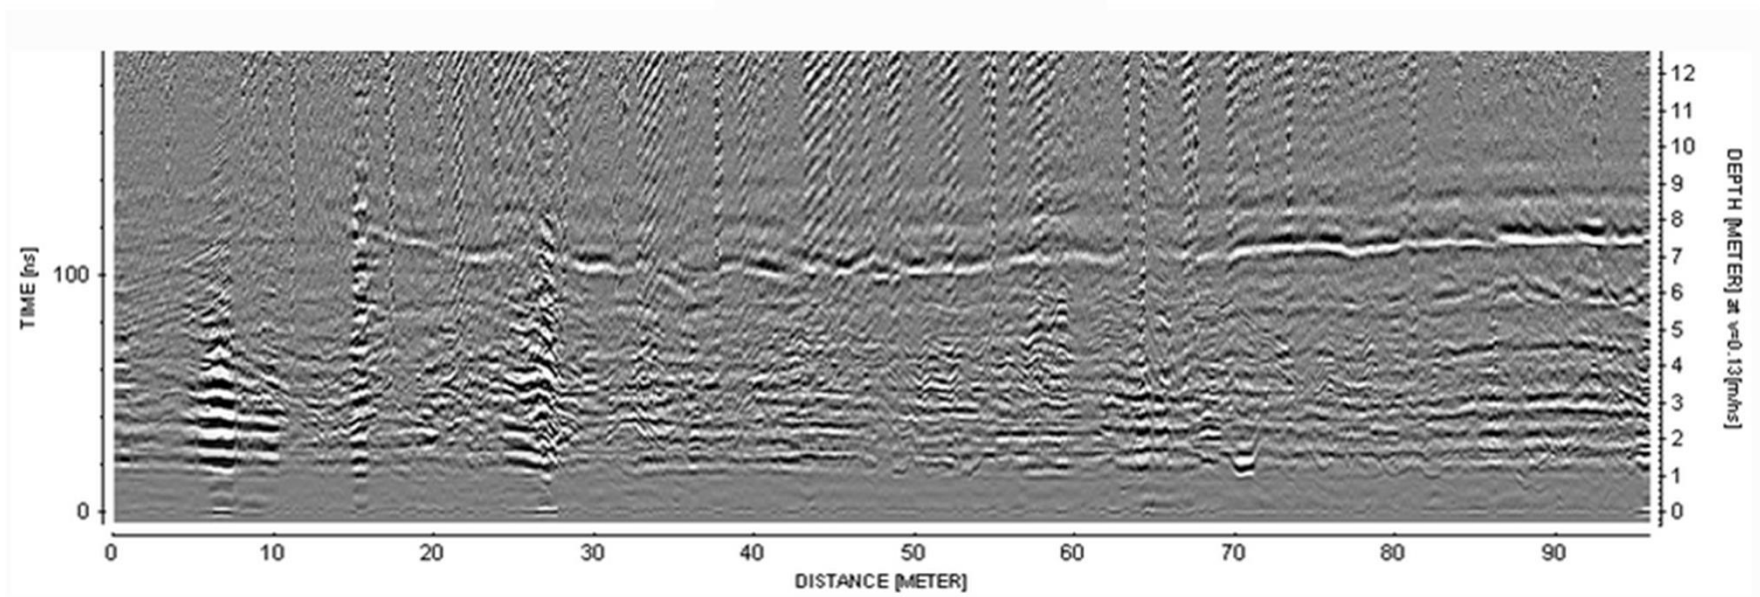


EOSC 350 '06

Gain Correction

- GPR signal strength decreases exponentially travel distance



Measured signal strength decreases over time

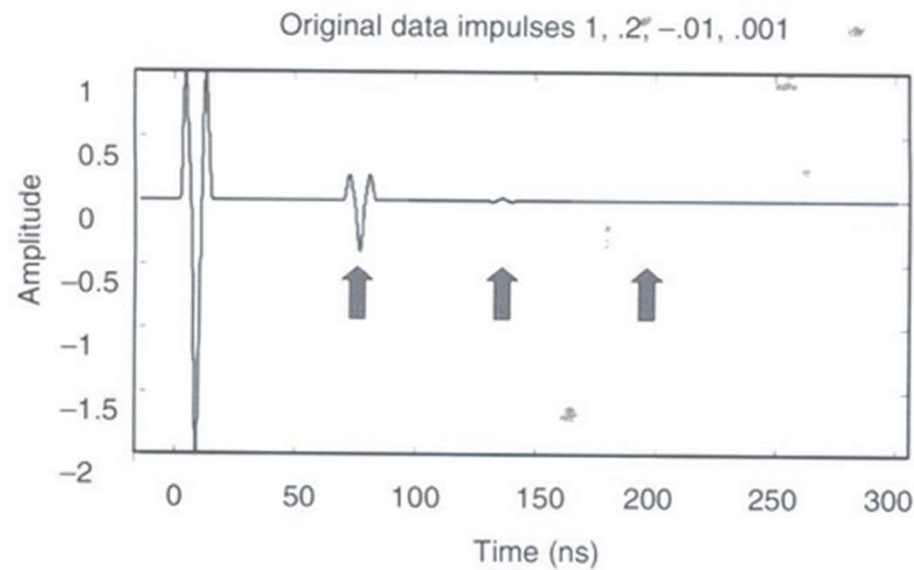


Gain Correction

- Multiply raw data by a **gain factor** so that late signals can be recognized.



$$d(t) = g(t) \times d_{raw}(t)$$

- Gain factor generally counteracts exponential decay in amplitude

Example: Time-gain function

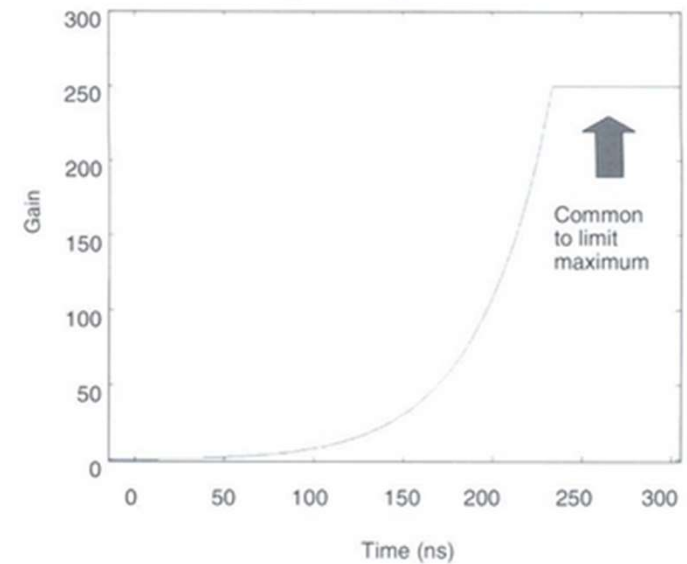


Original data impulses 1, .2, -.01, .001

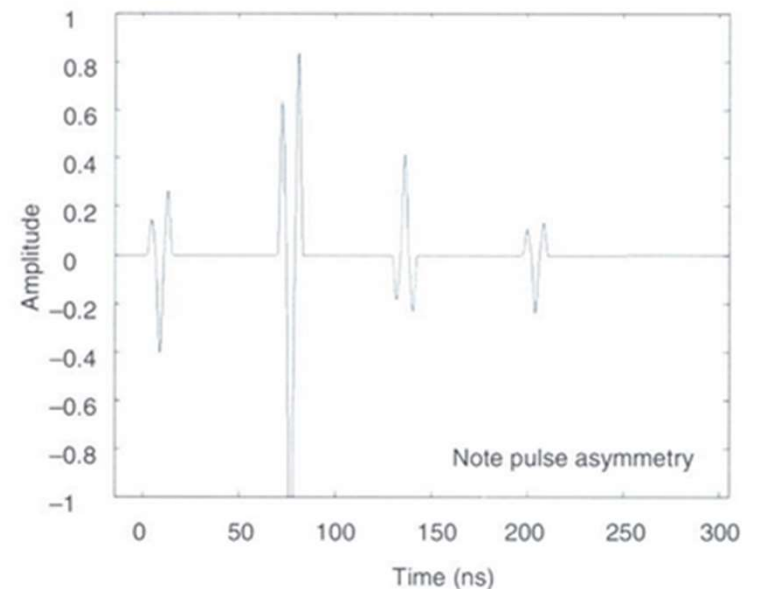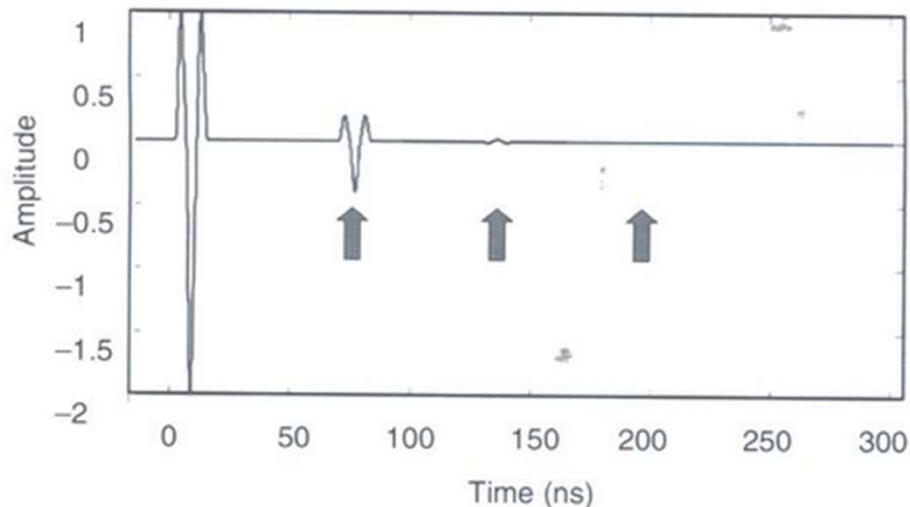


Stacking to Reduce Noise

- 2-way travel times for GPR are 100s of nanoseconds



The same GPR shot can be repeated many times within a short period of time

- Data from repeated shots are averaged (stacked)
- Stacking reduces the amplitude of incoherent noise

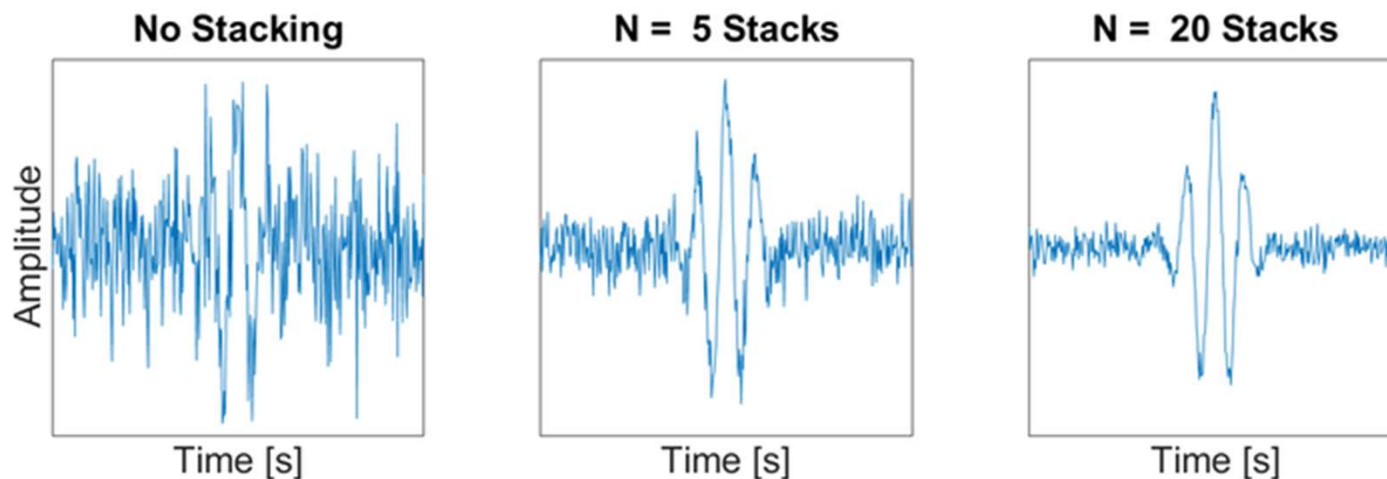


Smoothing to Reduce Noise

- Data sampling rate is very high relative to returning wavelet signal.

Wavelet signal is smooth whereas incoherent noise is random

- Smoothing decreases amplitude of random noise relative to returning signals.

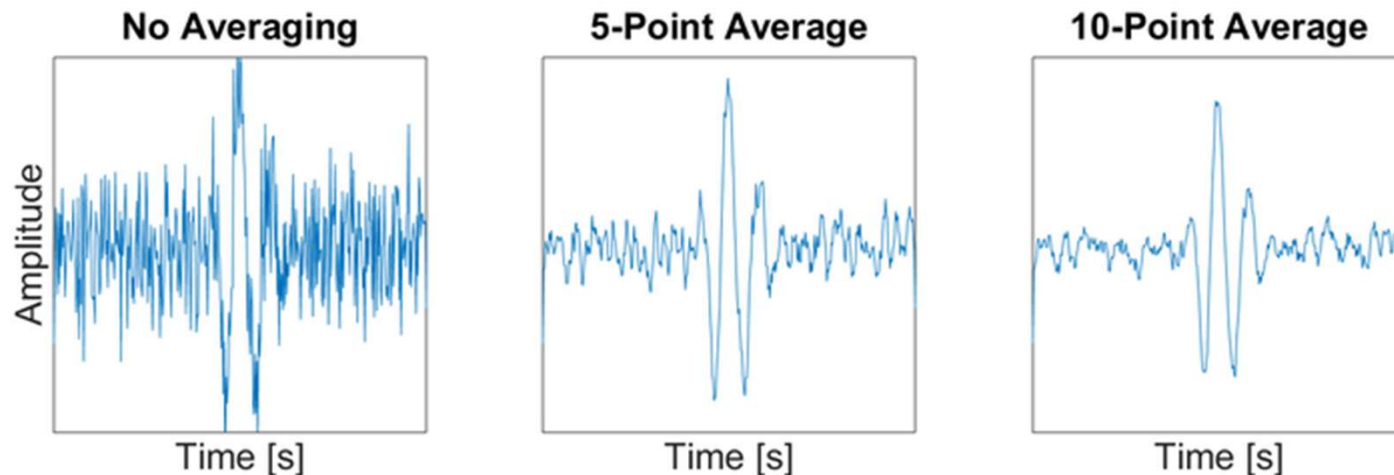

Processing Recap

- Gain correction is needed so late time signals are as visible as early time signals.
- Stacking is used to reduce the noise to signal ratio.
- Smoothing can be used to reduce the amplitude of incoherent noise.

Recap Questions

Q: Why would we do a time to depth conversion?

Q: What's a way we can reduce incoherent noise?

Questions About Material?