
Writing and Running Playbooks

Mohamed Amin AYED


/home/student/playbook-basic Ansible project directory has been created on the workstation machine for this exercise. This directory already has an ansible.cfg configuration file. It also has an inventory file named inventory that defines a web group, which includes the managed hosts serverc.lab.example.com and serverd.lab.example.com as members.

So I made this simple playbook that has 3 tasks:

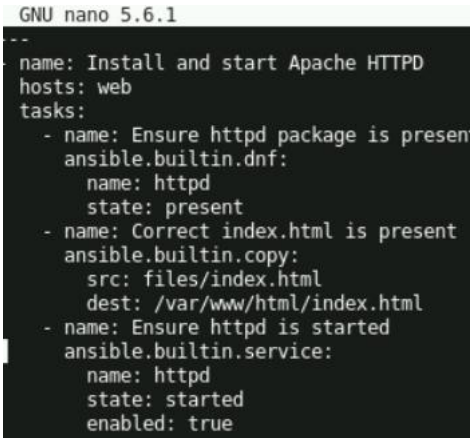


```
GNU nano 5.6.1
---
- name: Install and start Apache HTTPD
  hosts: web
  tasks:
    - name: Ensure httpd package is presen
      ansible.builtin.dnf:
        name: httpd
        state: present
    - name: Correct index.html is present
      ansible.builtin.copy:
        src: files/index.html
        dest: /var/www/html/index.html
    - name: Ensure httpd is started
      ansible.builtin.service:
        name: httpd
        state: started
        enabled: true
```

Checking playbook's syntax before running it:



```
[student@workstation playbook-basic]$ ansible-navigator run -m stdout --syntax-check site.yml
playbook: /home/student/playbook-basic/site.yml
```

All good, let's run it:

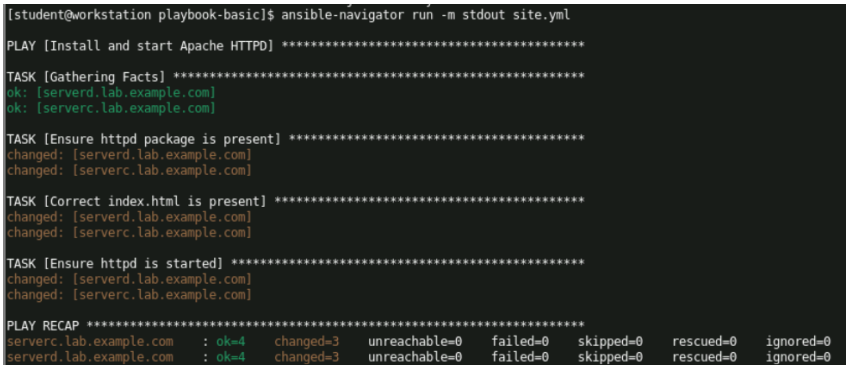

```
[student@workstation playbook-basic]$ ansible-navigator run -m stdout site.yml

PLAY [Install and start Apache HTTPD] ************************************

TASK [Gathering Facts] ***************************************************
ok: [serverd.lab.example.com]
ok: [serverc.lab.example.com]

TASK [Ensure httpd package is present] ***********************************
changed: [serverd.lab.example.com]
changed: [serverc.lab.example.com]

TASK [Correct index.html is present] *************************************
changed: [serverd.lab.example.com]
changed: [serverc.lab.example.com]


TASK [Ensure httpd is started] *******************************************
changed: [serverd.lab.example.com]
changed: [serverc.lab.example.com]

PLAY RECAP ***************************************************************
serverc.lab.example.com    : ok=4    changed=3    unreachable=0    failed=0    skipped=0    rescued=0    ignored=0
serverd.lab.example.com    : ok=4    changed=3    unreachable=0    failed=0    skipped=0    rescued=0    ignored=0
```

- ⇨ Success
  - Gathering fact is enabled by default
  - Green means unchanged and no errors
  - Orange means successful change

But running it a second time shows everything unchanged (in green) thanks to Ansible's idompotency.

And to verify httpd is actually working:



```
[student@workstation playbook-basic]$ curl serverc.lab.example.com
This is a test page.
[student@workstation playbook-basic]$ curl serverd.lab.example.com
This is a test page.
```

END