

User & Admin Manual – Domoticz-TinyTUYA-Plugin

Overview

To get started, you need to complete the following steps:

1. Create a **Tuya App Account**
2. Create a **Tuya Developer Account**
3. Install the Domoticz-TinyTUYA plugin
4. Retrieve device data and store it locally

Let the fun begin! 😊

Why Two Tuya Accounts?

Tuya requires **two separate accounts**, each serving a different purpose:

- **App Account** – used by end users to add and control smart devices via a mobile app.
- **Developer Account** – used to create cloud projects, manage APIs, and retrieve device data.

Both accounts **may use the same email address and password**, but they exist in **separate systems**.

By the end of this guide: - Your mobile app will be linked to the Tuya Development Platform - Devices added via the app will appear in the developer portal

Tuya App Account Setup

Install the **Tuya – Smart Life Smart Living** app (orange icon) by *Tuya Smart Inc.* or **SmartLife – Smart Living** by Volcano Technology Limited from the app store.

Steps

1. Start the app and create a new account.
2. Open **Profile** (bottom-right icon).
3. Optionally update your name and profile icon.
4. **Verify your timezone.**
5. At the top of the profile screen, note the three icons: **AI**, **Scan**, and **Settings**.
 - o Remember the **Scan** icon — you will need it later.

Tuya Developer Account Setup

Determine Your Data Center

First, determine which Tuya data center your country uses:


<https://developer.tuya.com/en/docs/iot/oem-app-data-center-distributed?id=Kafi0ku9l07qb>

Example: The Netherlands uses the **Central Europe Data Center**.

! Important: You must select the correct data center during project creation.

Create a Developer Account


1. Go to: <https://auth.tuya.com>

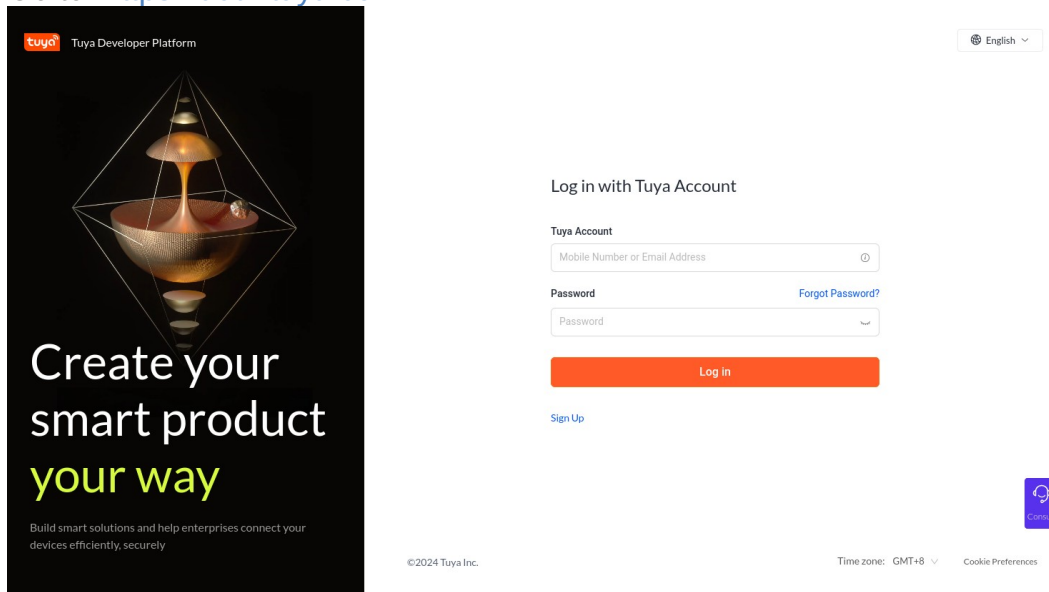

The screenshot shows the Tuya Developer Platform login page. On the left, there is a large graphic with a golden sphere and the text "Create your smart product your way". On the right, there is a login form titled "Log in with Tuya Account". The form has two input fields: "Mobile Number or Email Address" and "Password". Below the "Password" field is a "Log in" button. There is also a "Sign Up" link below the "Log in" button. The footer of the page includes the copyright information "©2024 Tuya Inc.", the time zone "GMT+8", and a "Cookie Preferences" link.

2. Click **Sign Up**

3. Fill in the registration form

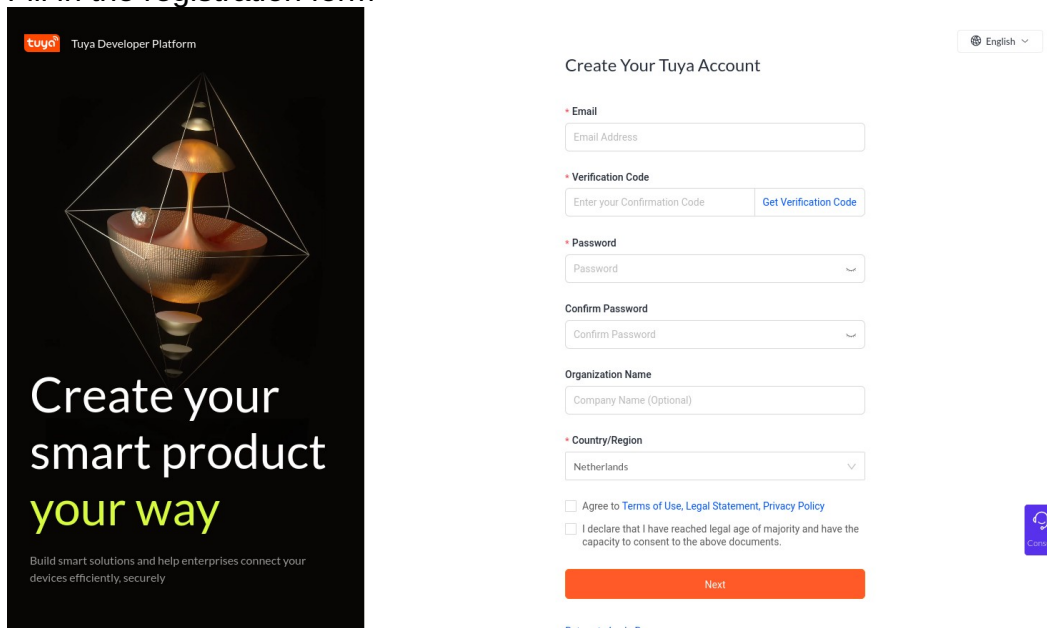

The registration form for the Tuya Developer Platform is displayed. On the left is a promotional banner with the text "Create your smart product your way" and "Build smart solutions and help enterprises connect your devices efficiently, securely". The form itself is titled "Create Your Tuya Account" and includes fields for Email, Verification Code, Password, Confirm Password, Organization Name, and Country/Region. There are checkboxes for agreeing to terms and a declaration of legal age. A "Next" button is at the bottom.

Create Your Tuya Account

* Email
Email Address

* Verification Code
Enter your Confirmation Code [Get Verification Code](#)

* Password
Password

Confirm Password
Confirm Password

Organization Name
Company Name (Optional)

* Country/Region
Netherlands

☐ Agree to [Terms of Use](#), [Legal Statement](#), [Privacy Policy](#)

☐ I declare that I have reached legal age of majority and have the capacity to consent to the above documents.


[Next](#)

4. Enter the email verification code

5. Click **Next**

After registration, you will be redirected to the login screen. Bookmark this page for future use.

Log in with your credentials and continue.

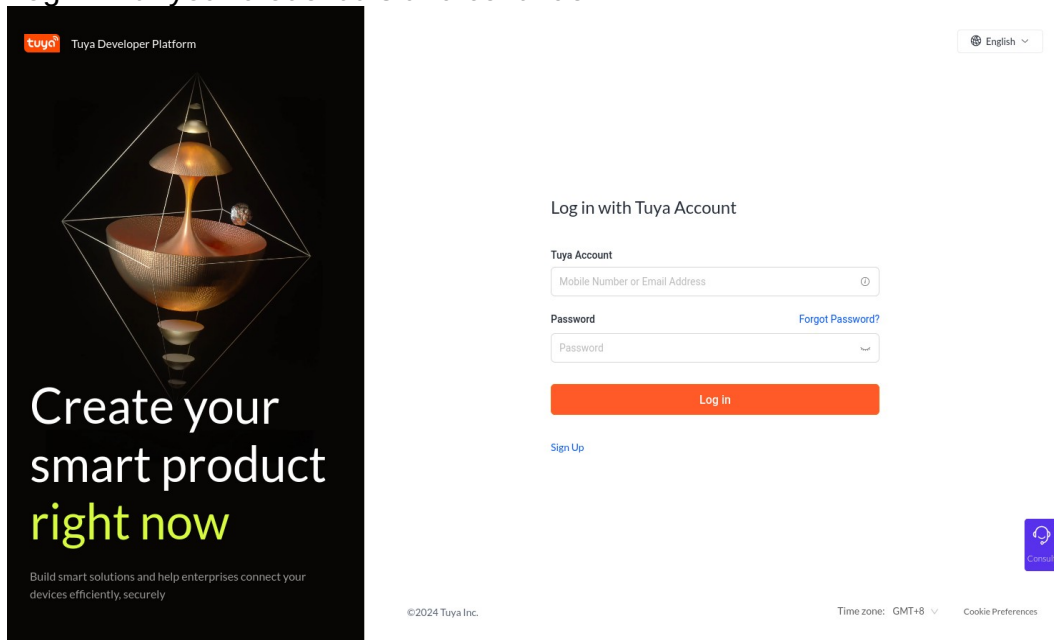

The login form for the Tuya Developer Platform is displayed. It includes fields for Tuya Account (Mobile Number or Email Address) and Password. There is a "Forgot Password?" link. A "Log in" button is at the bottom. Below the button is a "Sign Up" link. The footer contains copyright information, time zone, and cookie preferences.

Log in with Tuya Account

Tuya Account
Mobile Number or Email Address

Password [Forgot Password?](#)
Password

[Log in](#)


[Sign Up](#)

©2024 Tuya Inc. Time zone: GMT+8 [Cookie Preferences](#)


Initial Platform Setup

- Follow the beginner's guide if you like (recommended).

- When asked for **Account Type**, click **Skip this step**.

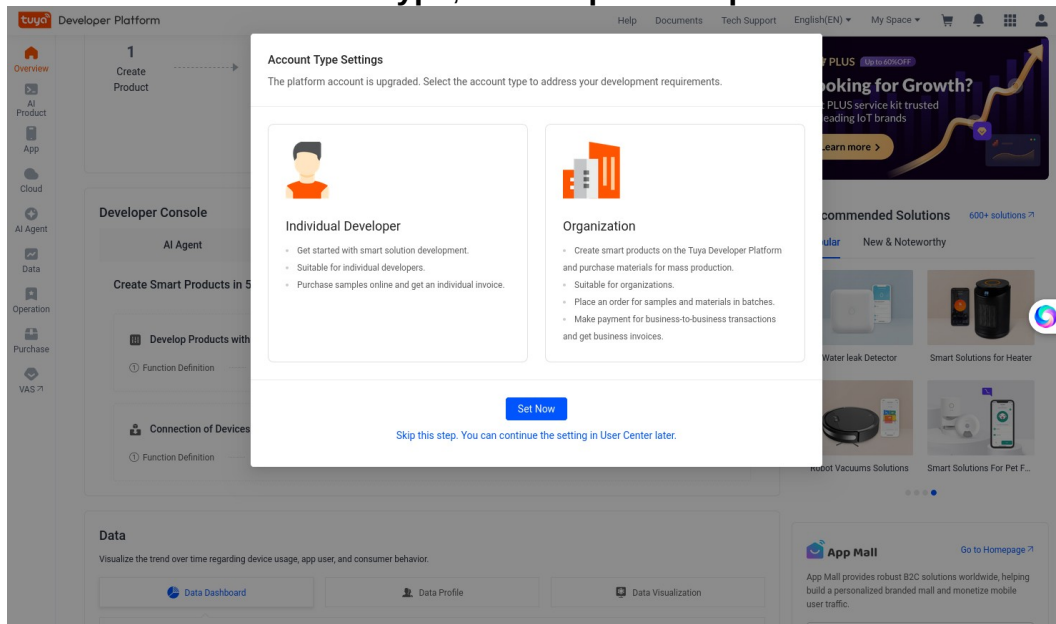


- You will now see the Tuya IoT Platform dashboard.

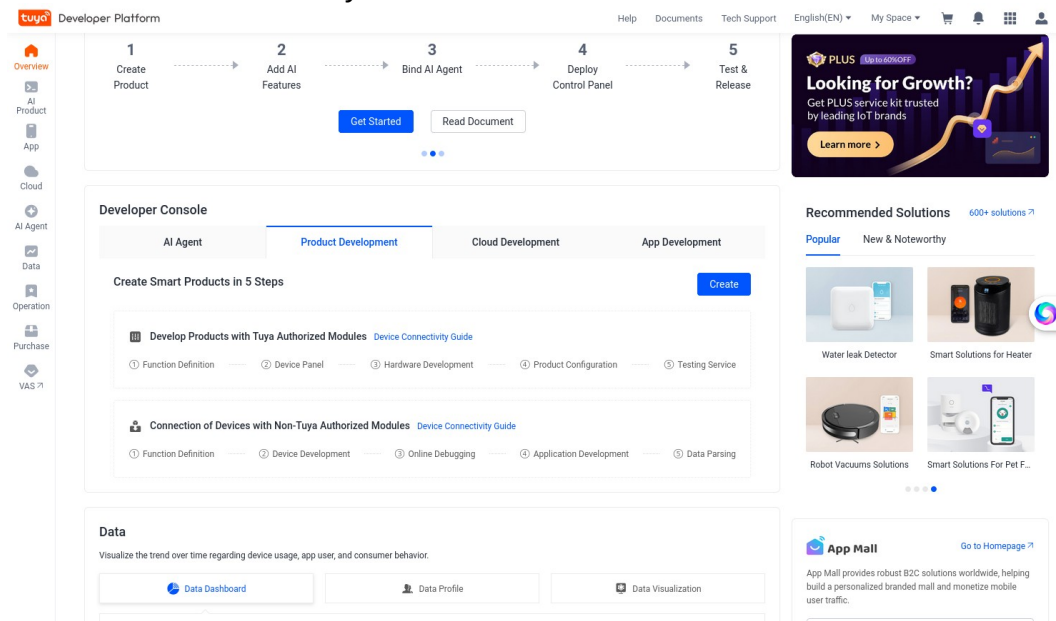

Create a Cloud Project

- Click the **Cloud** icon (left menu).
- Navigate to **Cloud Project** → **Project Management**.

3. Click **Create Cloud Project**.

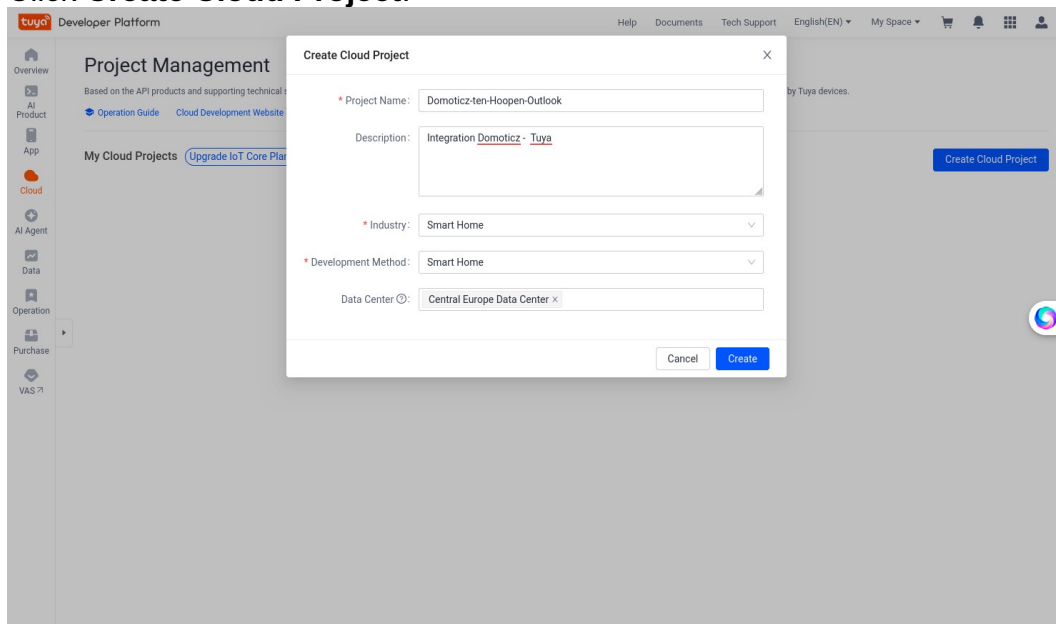

The screenshot shows the Tuya Developer Platform interface with a 'Create Cloud Project' modal dialog open. The dialog contains the following fields:


- Project Name:** Domicitz-ten-Hoopen-Outlook
- Description:** Integration Domicitz - Tuya
- Industry:** Smart Home
- Development Method:** Smart Home
- Data Center:** Central Europe Data Center

At the bottom of the dialog are 'Cancel' and 'Create' buttons. The background shows the 'Project Management' section of the platform.


Fill in the project details: - Use any name you like - **Select the correct Data Center** (from earlier step)

Click **Create**.

Authorize API Services

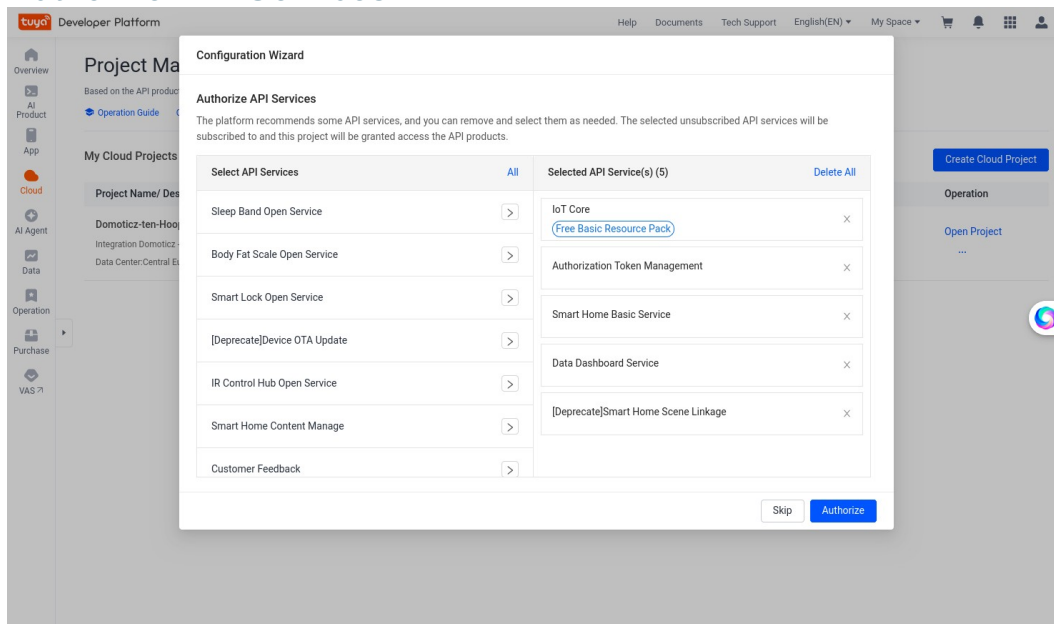

Enable the API services as shown in Tuya's documentation, then click **Authorize**.

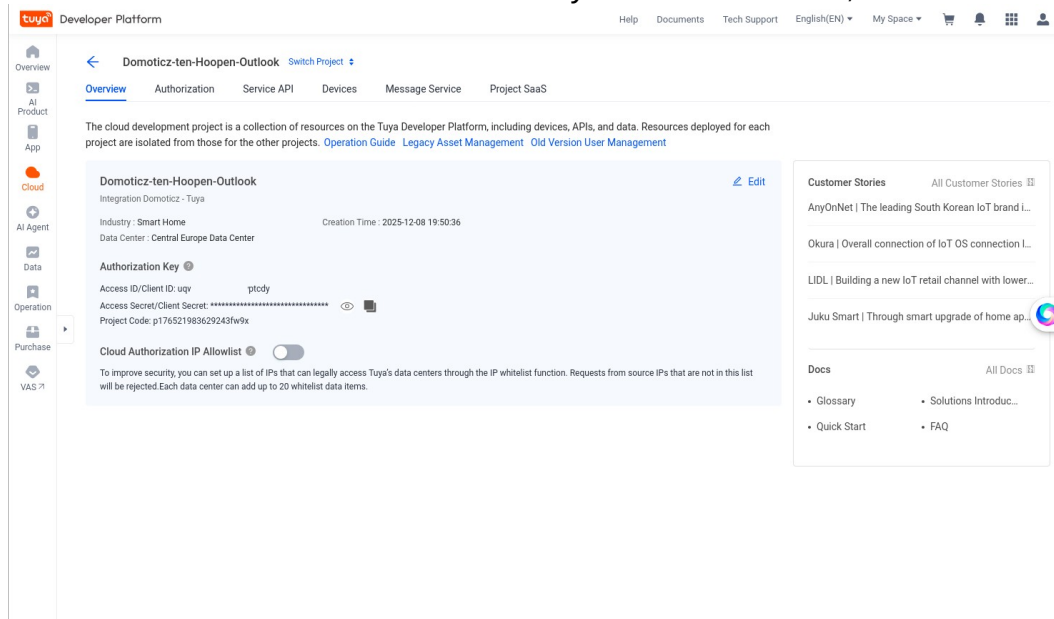


You will now see: - **Access ID / Client ID** - **Access Secret / Client Secret**

👁 Click the eye icon to reveal the secret. Use the copy icon to copy it safely.


You will need these values later in Domoticz.

Link Your Tuya App Account

1. In your Cloud Project, open the **Devices** tab.

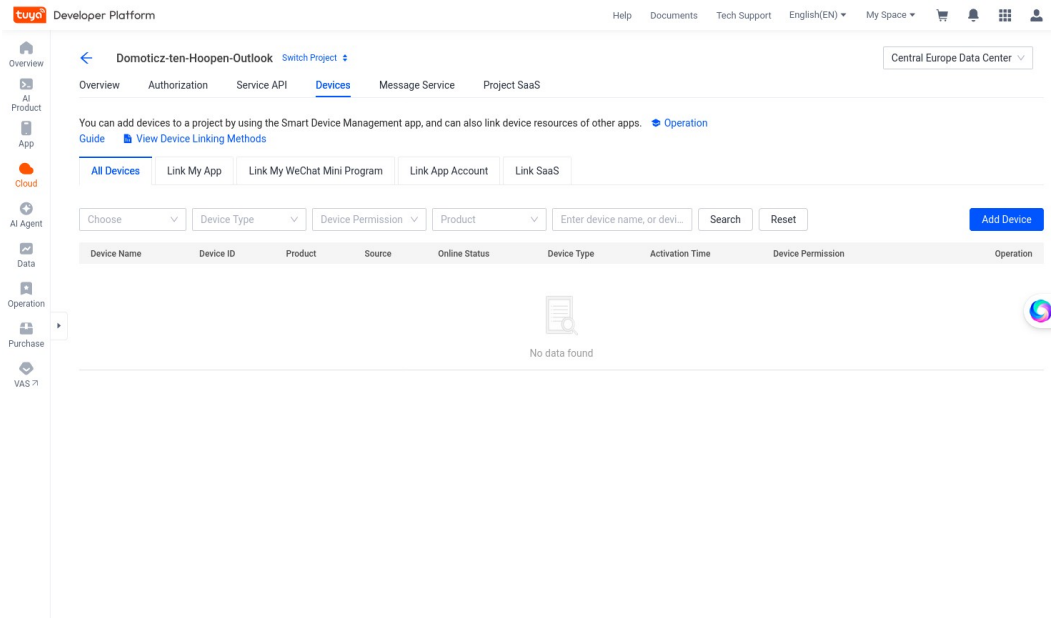


2. Click **Link App Account**.

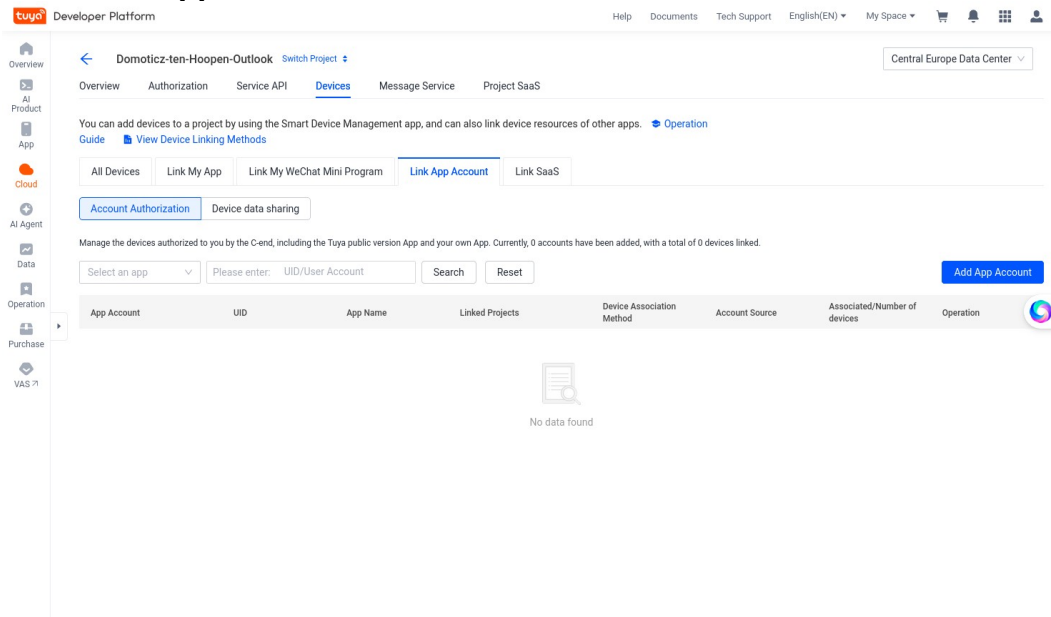


3. Select **Tuya App Account Authorization**.

4. A QR code will appear.

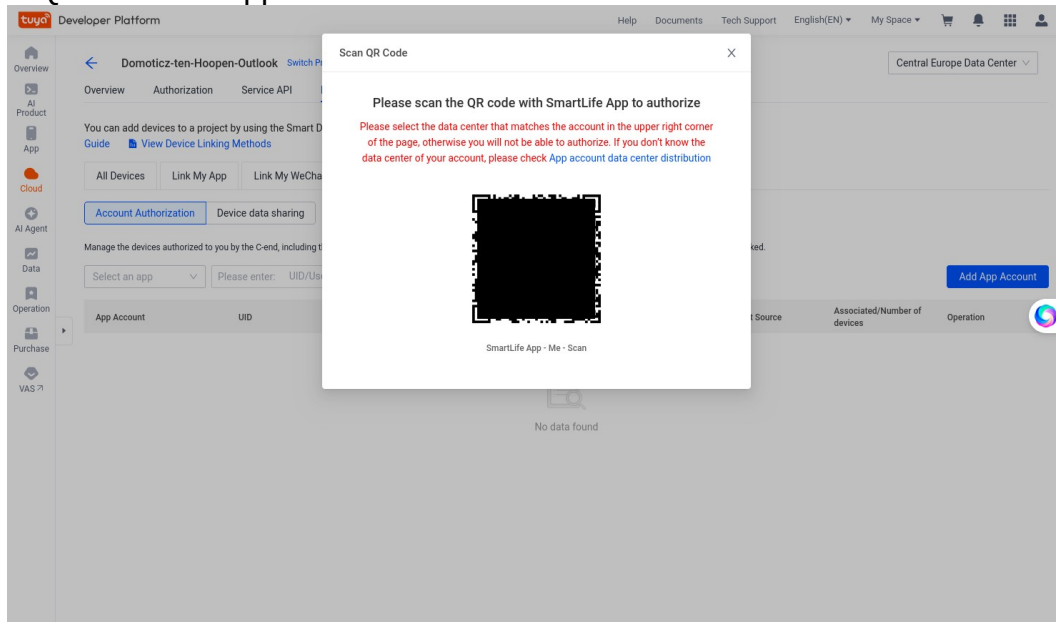

Scan the QR Code

1. Open the Tuya app on your phone.
2. Log in (if not already).
3. Go to **Profile**.
4. Tap **Scan** (top center icon).
5. Scan the QR code.

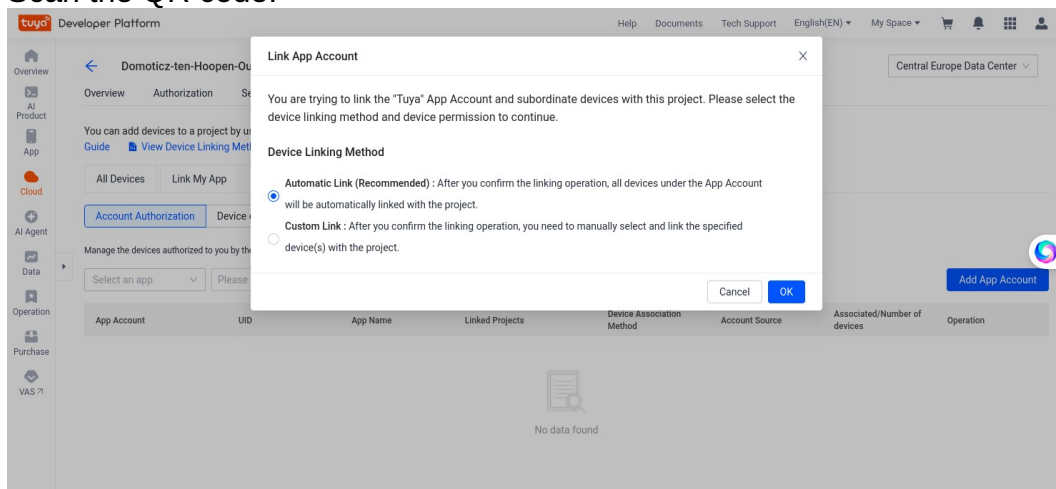

6. Confirm by pressing **OK** twice.

🎉 Your app is now linked to the Tuya Development Platform.

Add at least **one device** using the app — otherwise the plugin cannot be configured.

Domoticz System Prerequisites

Ensure the following requirements are met:

- **Python 3.8 or higher**
- **Domoticz version 2024.1 or newer**
(UI: *Settings* → *About*)

Plugin Installation

Navigate to the Domoticz plugins directory:

```
cd ~/domoticz/plugins
```

Install required Python libraries:

```
sudo pip3 install tinytuya cryptography>=3.1 pycryptodomex -U
```


Clone the plugin repository:

```
git clone https://github.com/Xenomes/Domoticz-TinyTUYA-Plugin.git
```

Setup Plugin in Domoticz

Open Domoticz and go to **Hardware**.

Add new hardware and select **TinyTUYA**.

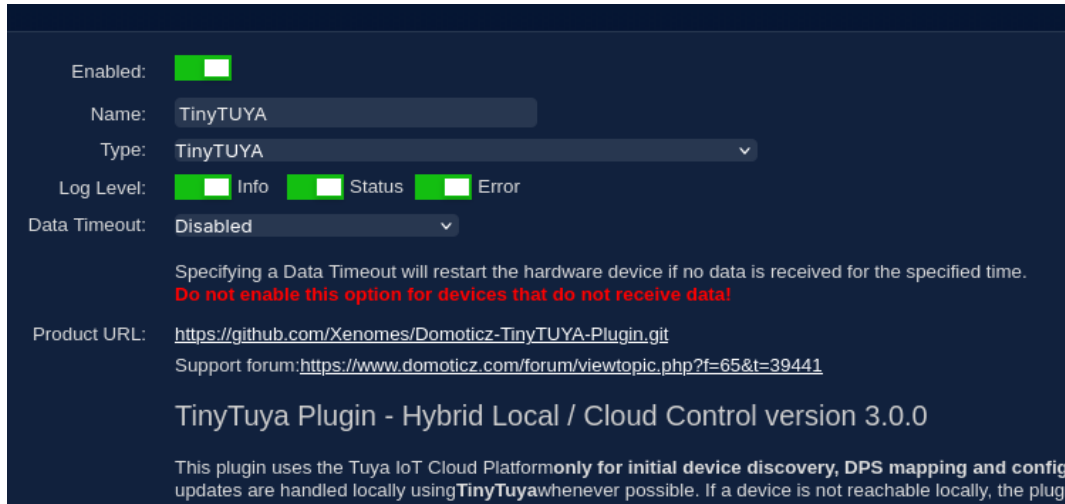

The screenshot shows the configuration page for the TinyTUYA plugin in Domoticz. The interface is dark-themed. At the top, there's a toggle for 'Enabled' which is turned on. Below it, the 'Name' field is set to 'TinyTUYA'. The 'Type' dropdown menu is also set to 'TinyTUYA'. Under 'Log Level', there are three checkboxes: 'Info' (checked), 'Status' (unchecked), and 'Error' (unchecked). The 'Data Timeout' dropdown is set to 'Disabled'. A warning message states: 'Specifying a Data Timeout will restart the hardware device if no data is received for the specified time. Do not enable this option for devices that do not receive data!'. The 'Product URL' field contains the GitHub repository link. Below this is a link to the support forum. The version 'TinyTuya Plugin - Hybrid Local / Cloud Control version 3.0.0' is displayed. At the bottom, a note explains that the plugin uses the Tuya IoT Cloud Platform for initial discovery and local updates.

Enabled: ☒

Name: TinyTUYA

Type: TinyTUYA

Log Level: ☒ Info ☐ Status ☐ Error

Data Timeout: Disabled

Specifying a Data Timeout will restart the hardware device if no data is received for the specified time.
Do not enable this option for devices that do not receive data!

Product URL: <https://github.com/Xenomes/Domoticz-TinyTUYA-Plugin.git>
Support forum: <https://www.domoticz.com/forum/viewtopic.php?f=65&t=39441>

TinyTuya Plugin - Hybrid Local / Cloud Control version 3.0.0

This plugin uses the Tuya IoT Cloud Platform **only for initial device discovery, DPS mapping and config** updates are handled locally using **TinyTuya** whenever possible. If a device is not reachable locally, the plug

Fill in the following fields:

▪ Set the API polling interval carefully. Due to Tuya API rate limits, a **15-minute interval** is recommended.
▪ After setup, the plugin minimizes cloud usage and prefers local LAN communication.

If your Tuya Cloud development subscription has expired, you can extend it [HERE](#).

Region:

Access ID:

Access Secret:

Search DeviceID:

API Polling interval:

Local IP rescan interval:

Debug:

- **Access ID / Client ID**
- **Access Secret / Client Secret**
- **Search Device ID**

A **Search Device ID** can be found in the Tuya IoT Platform:

Cloud → **Your Project** → **Devices** → **select a device**

This Device ID is **only used once** to discover all other devices linked to your Tuya project.

Final Steps

Restart Domoticz:

```
sudo systemctl restart domoticz
```

Open Domoticz → **Hardware** and add new hardware for the plugin.

Important Notes

- **Disable “Data Timeout”** in the plugin hardware settings.

✓ Setup complete — enjoy your Tuya devices in Domoticz!