

Cel:

Nazwa serwera: tajnyserwer

Nazwa stacja: tajnastacja

Proszę o instalację usługi AD na serwerze:

- domena cwiczenie.local

Dwie karty sieciowe:

1. NAT - nazwana Internet

2. WEW - nazwana Korporacja

Adresacja : Korporacja: 192.168.50.0/24 serwer .1 stacja .100

Proszę utworzyć OU:

- mobilni

- stacjonarni

utworzyć po 2 userów w każdym OU


Skonfigurować wpis prosty na hosta w domenie podstawowej wskazujący na adres 192.168.50.100 i nazwę : backup


Utworzyć strefę labolatorium.local

dodać wpis A na adres: test1.labolatorium.local -> 10.10.10.100

oraz rekord CNAME : test2.labolatorium.local wskazujący na test1

Rozwiązanie:

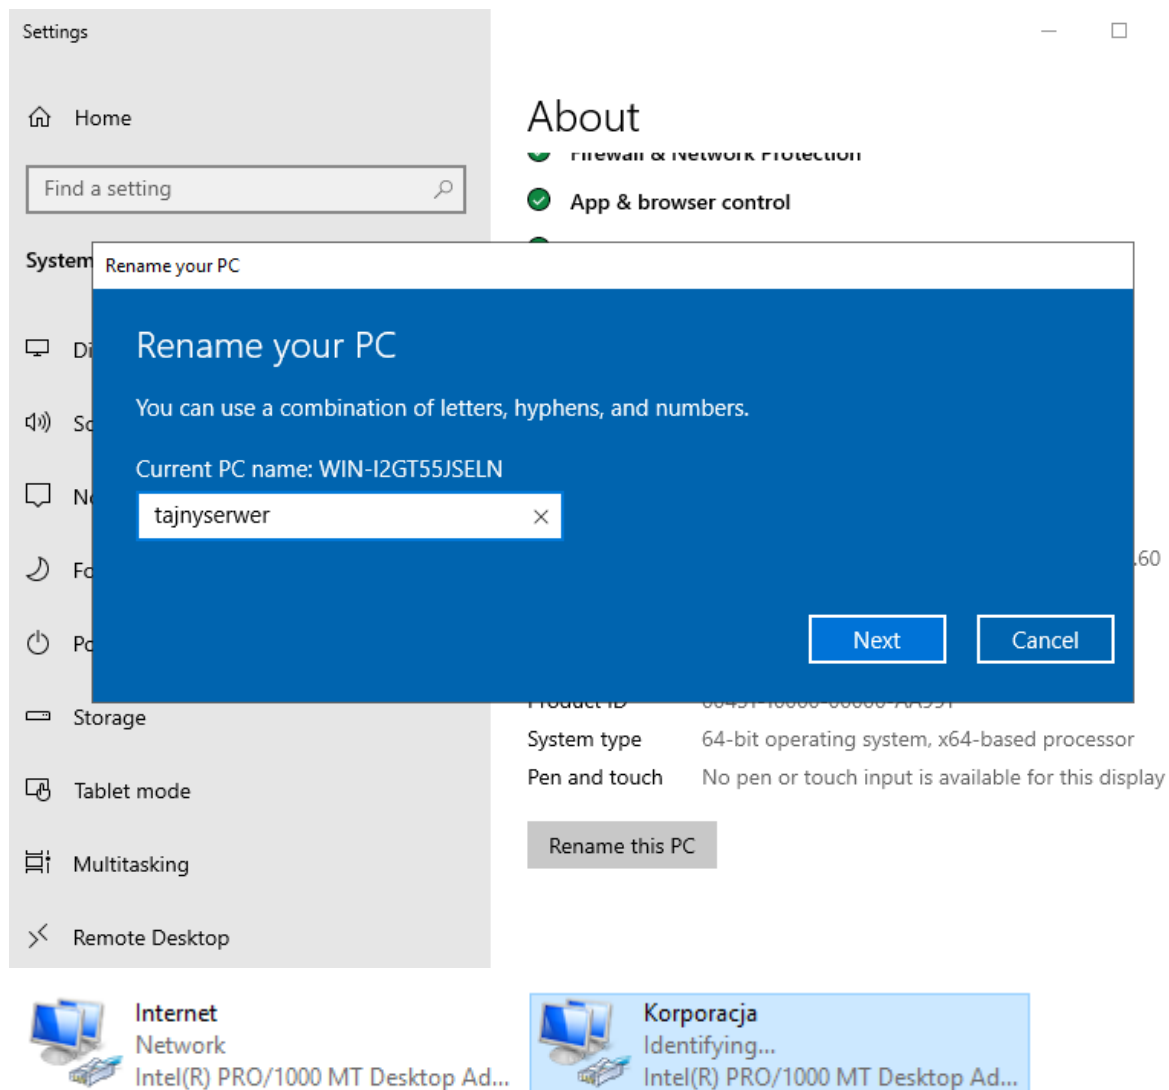

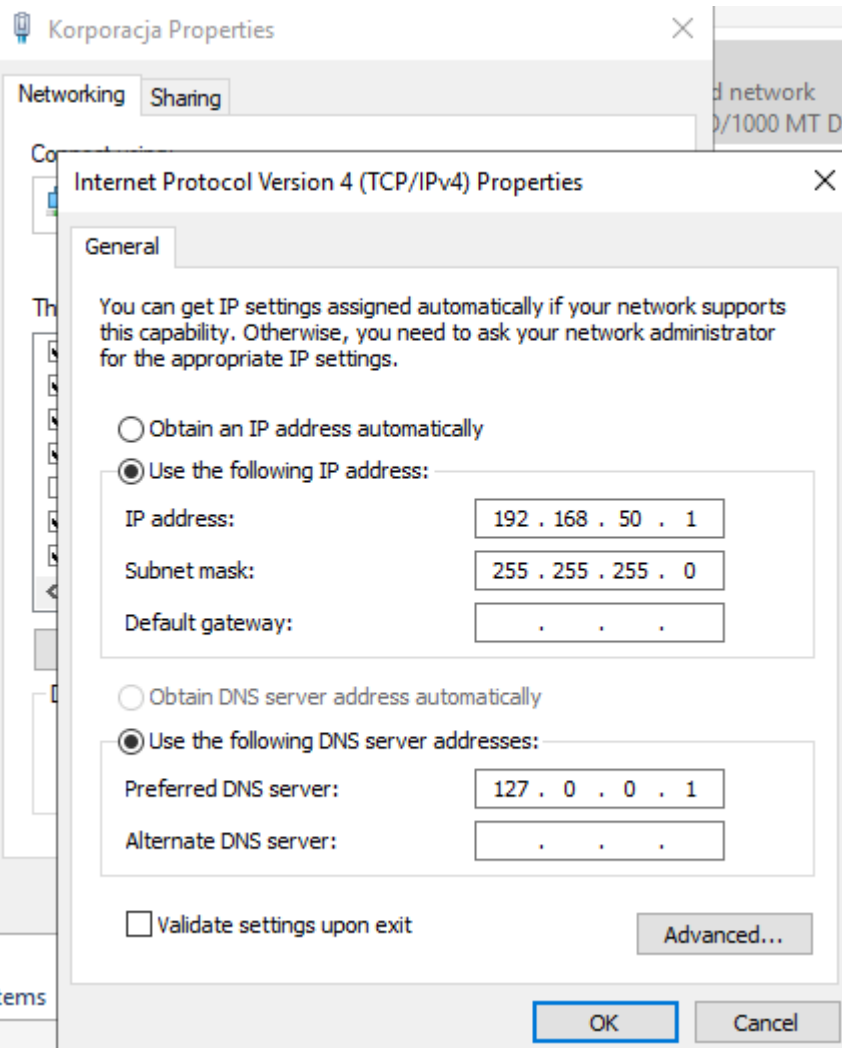

Deployment Configuration

TARGET SERVER
tajnyserver

Deployment Configuration

Domain Controller Options

Additional Options

Paths

Review Options

Prerequisites Check

Installation

Results

Select the deployment operation

- ☐ Add a domain controller to an existing domain
- ☐ Add a new domain to an existing forest
- ☒ Add a new forest

Specify the domain information for this operation

Root domain name:

cwiczenie.local

[More about deployment configurations](#)

< Previous

Next >

Install

Cancel

You're about to be signed out

The computer is being restarted because Active Directory Domain Services was installed or removed.

Close

Active Directory Users and Computers

File Action View Help

Active Directory Users and Computers

- Saved Queries
- cwiczenie.local
 - Builtin
 - Computers
 - Domain Controllers
 - ForeignSecurityPrincipals
 - Managed Service Accounts
 - Users
 - mobilni
 - stacjonarni

Name	Type	Description
Mobilny1	User	
Mobilny2	User	

Active Directory Users and Computers

File Action View Help

Active Directory Users and Computers

- Saved Queries
- cwiczenie.local
 - Builtin
 - Computers
 - Domain Controllers
 - ForeignSecurityPrincipals
 - Managed Service Accounts
 - Users
 - mobilni
 - stacjonarni

Name	Type	Description
Stacjonarny1	User	
Stacjonarny2	User	

DNS Manager

File Action View Help

DNS

- TAJNYSERVER
 - Forward Lookup Zones
 - _msdcs.cwiczenie.local
 - cwiczenie.local
 - Reverse Lookup Zones
 - Trust Points
 - Conditional Forwarders

New Host

Name (uses parent domain name if blank):
backup

Fully qualified domain name (FQDN):
backup.cwiczenie.local.

IP address:
192.168.50.100

☐ Create associated pointer (PTR) record

☐ Allow any authenticated user to update DNS records with the same owner name

Add Host Cancel

Host Name	IP Address	Record Type	Timestamp
5], tajnyserver.cwiczeni...		static	
nyserver.cwiczenie.local.		static	
0.0.2.15		static	8/26/2026
2.168.59.1		static	8/26/2026
17:625c:f037:0002:f865:9...		static	8/26/2026
0.0.2.15		static	
2.168.59.1		static	
17:625c:f037:0002:f865:9...		static	

New Zone Wizard

Zone Name

What is the name of the new zone?

The zone name specifies the portion of the DNS namespace for which this server is authoritative. It might be your organization's domain name (for example, microsoft.com) or a portion of the domain name (for example, newzone.microsoft.com). The zone name is not the name of the DNS server.

Zone name:
labolatorium.local

< Back Next > Cancel

DNS Manager

File Action View Help

DNS

- TAJNYSERVER
 - Forward Lookup Zones
 - _msdcs.cwiczenie.local
 - cwiczenie.local
 - labolatorium.local
 - Reverse Lookup Zones
 - Trust Points
 - Conditional Forwarders

Name	Type	Status	DNSSEC Status
_msdcs.cwiczenie.local	Active Directory-Integrated Pr...	Running	Not Signed
cwiczenie.local	Active Directory-Integrated Pr...	Running	Not Signed
labolatorium.local	Active Directory-Integrated Pr...	Running	Not Signed

DNS Manager

File Action View Help

DNS

- TAJNYSERVER
 - Forward Lookup Zones
 - _msdcs.cwiczenie.local
 - cwiczenie.local
 - labolatorium.local
 - Reverse Lookup Zones
 - Trust Points
 - Conditional Forwarders

New Host

Name (uses parent domain name if blank):
test1

Fully qualified domain name (FQDN):
test1.labolatorium.local.

IP address:
10.10.10.100

☐ Create associated pointer (PTR) record

☐ Allow any authenticated user to update DNS records with the same owner name

Add Host Cancel

Name	Type	Status	DNSSEC Status	Timestamp
_msdcs.cwiczenie.local	Active Directory-Integrated Pr...	Running	Not Signed	
cwiczenie.local	Active Directory-Integrated Pr...	Running	Not Signed	
labolatorium.local	Active Directory-Integrated Pr...	Running	Not Signed	
test1.labolatorium.local.	Static	Static	Static	

test2 Properties



Alias (CNAME) Security

Alias name (uses parent domain if left blank):

test2

Fully qualified domain name (FQDN):

test2.laboratorium.local

Fully qualified domain name (FQDN) for target host:

test1.laboratorium.local

Browse...

OK

Cancel

Apply

Stacja:

Internet Protocol Version 4 (TCP/IPv4) Properties

General

You can get IP settings assigned automatically if your network supports this capability. Otherwise, you need to ask your network administrator for the appropriate IP settings.

☐ Obtain an IP address automatically

☒ Use the following IP address:

IP address: 192 . 168 . 50 . 100

Subnet mask: 255 . 255 . 255 . 0

Default gateway: . . .

☐ Obtain DNS server address automatically

☒ Use the following DNS server addresses:

Preferred DNS server: 192 . 168 . 50 . 1

Alternate DNS server: . . .

☐ Validate settings upon exit

Advanced...

OK Cancel

```
C:\Users\vbuser>ipconfig /flushdns

Windows IP Configuration

Successfully flushed the DNS Resolver Cache.

C:\Users\vbuser>nslookup test1.labolatorium.local
Server: 192.168.50.1
Address: 192.168.50.1

Name:    test1.labolatorium.local
Address: 10.10.10.100
```

```
C:\Users\vbuser>nslookup test2.labolatorium.local
Server: 192.168.50.1
Address: 192.168.50.1

Name:    test1.labolatorium.local
Address: 10.10.10.100
Aliases: test2.labolatorium.local
```