


Project Porting

In many cases, we need to hand over the project we wrote to others. To ensure the project can be smoothly ported and run in a new environment, we need to package and port it according to certain steps. In this chapter, we will introduce how to port example projects from TI SDK to other platforms or devices, and provide some common precautions.

1. Find the Routine to Port and Copy It

Select the routine you need. Here we use the "empty" routine as an example.

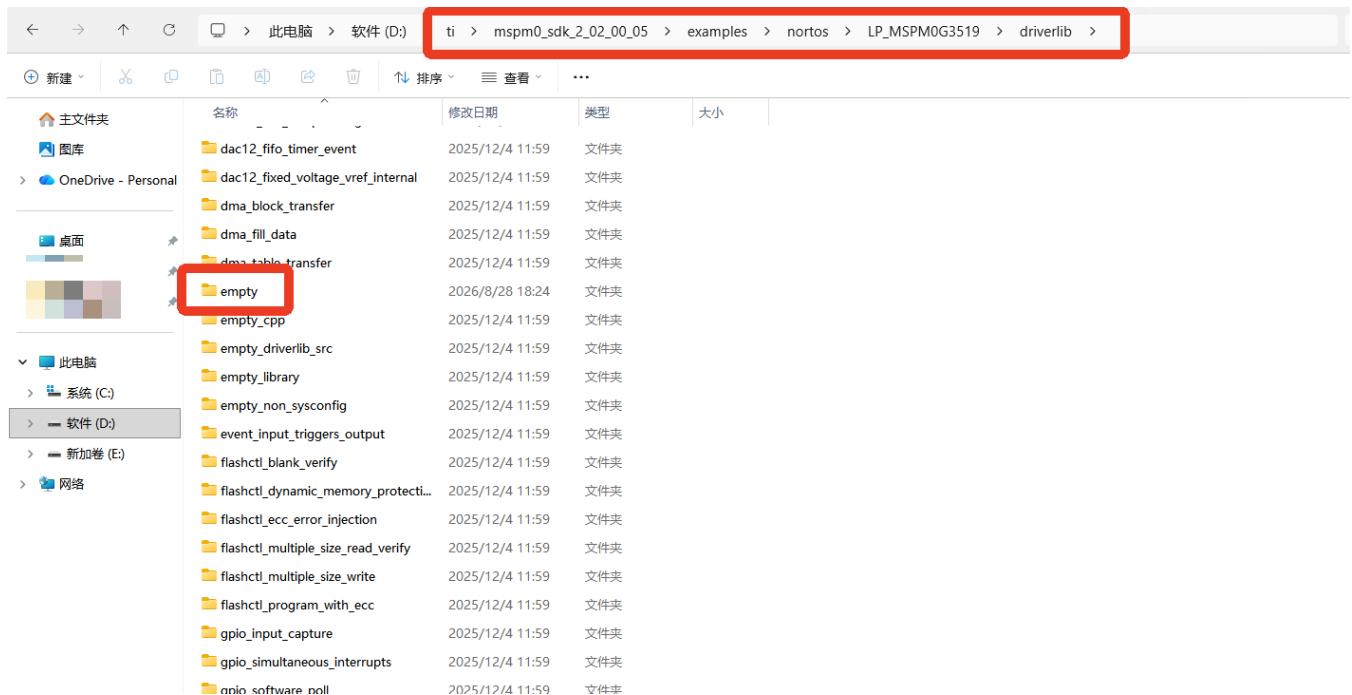

2. Paste the Copied Routine into the SDK Root Directory

Paste the copied routine file into the SDK root directory.

此电脑 > 系统 (C:) > ti > mspm0_sdk_2_02_00_05 > 在 mspm0_sdk_2_02_00_05 中搜索			
排序 查看 ...			
名称	修改日期	类型	大小
docs	2025/10/28/周二 15:04	文件夹	
examples	2025/10/28/周二 15:04	文件夹	
kernel	2025/10/28/周二 15:05	文件夹	
source	2025/10/28/周二 15:04	文件夹	
tools	2025/10/28/周二 15:04	文件夹	
imports.mak	2024/8/30/周五 11:06	MAK 文件	2 KB
known_issues_FAQ.html	2024/8/30/周五 11:04	Chrome HTML D...	67 KB
license_mspm0_sdk_2_02_00_05.txt	2024/8/30/周五 11:04	TXT 文件	33 KB
manifest_mspm0_sdk_2_02_00_05.html	2024/8/30/周五 11:04	Chrome HTML D...	344 KB
mspm0sdk_2_02_00_05.log	2025/10/28/周二 15:06	文本文档	5,703 KB
release_notes_mspm0_sdk_2_02_00_0...	2024/8/30/周五 11:04	Chrome HTML D...	105 KB
uninstall.dat	2025/10/28/周二 15:06	DAT 文件	383 KB
uninstall.exe	2025/10/28/周二 15:06	应用程序	6,107 KB
empty	2025/10/30/周四 12:14	文件夹	

3. Copy driverlib Files

Navigate to `<SDK root directory>\source\ti\driverlib` in the SDK directory, and copy all files in the `driverlib` folder (Note: Copy only files, not folders).

新加卷 (D:) > ti > mspm0_sdk_2_02_00_05 > source > ti > driverlib

名称	修改日期	类型	大小
lib	2024/11/14 15:05	文件夹	
m0p	2024/11/14 15:09	文件夹	
dl_adc12.c	2024/8/30 11:04	C 文件	3 KB
dl_adc12.h	2024/8/30 11:04	C Header 源文件	69 KB
dl_aes.c	2024/8/30 11:04	C 文件	9 KB
dl_aes.h	2024/8/30 11:04	C Header 源文件	40 KB
dl_aesadv.c	2024/8/30 11:04	C 文件	18 KB
dl_aesadv.h	2024/8/30 11:04	C Header 源文件	82 KB
dl_common.c	2024/8/30 11:04	C 文件	3 KB
dl_common.h	2024/8/30 11:04	C Header 源文件	4 KB
dl_comp.h	2024/8/30 11:04	C Header 源文件	51 KB
dl_crc.c	2024/8/30 11:04	C 文件	3 KB
dl_crc.h	2024/8/30 11:04	C Header 源文件	14 KB
dl_crcp.c	2024/8/30 11:04	C 文件	3 KB
dl_crcp.h	2024/8/30 11:04	C Header 源文件	21 KB
dl_dac12.c	2024/8/30 11:04	C 文件	5 KB
dl_dac12.h	2024/8/30 11:04	C Header 源文件	44 KB
dl_dma.c	2024/8/30 11:04	C 文件	2 KB
dl_dma.h	2024/8/30 11:04	C Header 源文件	59 KB
dl_flashctl.c	2024/8/30 11:04	C 文件	57 KB
dl_flashctl.h	2024/8/30 11:04	C Header 源文件	138 KB
dl_gpamp.h	2024/8/30 11:04	C Header 源文件	12 KB
dl_gpio.h	2024/8/30 11:04	C Header 源文件	91 KB
dl_j2c.c	2024/8/30 11:04	C 文件	5 KB
dl_j2c.h	2024/8/30 11:04	C Header 源文件	131 KB

4. Create New ti Folder and Paste Files

Go back to the routine path, create a new `ti` folder, and paste all previously copied files into the new `ti` folder.

新加卷 (D:) > ti > mspm0_sdk_2_02_00_05 > empty >

名称	修改日期	类型	大小
gcc	2024/11/29 12:00	文件夹	
iar	2024/11/29 12:00	文件夹	
keil	2024/11/29 12:00	文件夹	
ti	2024/11/29 12:06	文件夹	
ticlang	2024/11/29 12:00	文件夹	
empty.c	2024/11/25 19:48	C 文件	3 KB
empty.syscfg	2024/11/25 19:37	SYSCFG 文件	4 KB
Event.dot	2024/11/15 18:53	Microsoft Word ...	2 KB
README.html	2024/8/30 11:04	Microsoft Edge ...	69 KB
README.md	2024/8/30 11:04	Markdown File	2 KB
ti_msp_dl_config.c	2024/11/25 19:38	C 文件	6 KB
ti_msp_dl_config.h	2024/11/25 19:38	C Header 源文件	6 KB

新加卷 (D:) > ti > mspm0_sdk_2_02_00_05 > empty > ti					在 ti 中搜...
名称	修改日期	类型	大小		
dl_adc12.c	2024/8/30 11:04	C 文件	3 KB		
dl_adc12.h	2024/8/30 11:04	C Header 源文件	69 KB		
dl_aes.c	2024/8/30 11:04	C 文件	9 KB		
dl_aes.h	2024/8/30 11:04	C Header 源文件	40 KB		
dl_aesadv.c	2024/8/30 11:04	C 文件	18 KB		
dl_aesadv.h	2024/8/30 11:04	C Header 源文件	82 KB		
dl_common.c	2024/8/30 11:04	C 文件	3 KB		
dl_common.h	2024/8/30 11:04	C Header 源文件	4 KB		
dl_comp.h	2024/8/30 11:04	C Header 源文件	51 KB		
dl_crc.c	2024/8/30 11:04	C 文件	3 KB		
dl_crc.h	2024/8/30 11:04	C Header 源文件	14 KB		
dl_crcp.c	2024/8/30 11:04	C 文件	3 KB		
dl_crcp.h	2024/8/30 11:04	C Header 源文件	21 KB		
dl_dac12.c	2024/8/30 11:04	C 文件	5 KB		
dl_dac12.h	2024/8/30 11:04	C Header 源文件	44 KB		
dl_dma.c	2024/8/30 11:04	C 文件	2 KB		
dl_dma.h	2024/8/30 11:04	C Header 源文件	59 KB		
dl_flashctl.c	2024/8/30 11:04	C 文件	57 KB		
dl_flashctl.h	2024/8/30 11:04	C Header 源文件	138 KB		
dl_gpamp.h	2024/8/30 11:04	C Header 源文件	12 KB		
dl_gpio.h	2024/8/30 11:04	C Header 源文件	91 KB		
dl_i2c.c	2024/8/30 11:04	C 文件	5 KB		
dl_i2c.h	2024/8/30 11:04	C Header 源文件	131 KB		
dl_iwdt.h	2024/8/30 11:04	C Header 源文件	8 KB		

5. Delete Extra Folders

Delete unnecessary extra folders in the project to reduce the project size.

D:) > ti > mspm0_sdk_2_02_00_05 > empty >			
名称	修改日期	类型	
gcc	2024/11/29 12:00	文件夹	删除
iar	2024/11/29 12:00	文件夹	
keil	2024/11/29 12:00	文件夹	
ti	2024/11/29 12:06	文件夹	
ticlang	2024/11/29 12:00	文件夹	
empty.c	2024/11/25 19:48	C 文件	
empty.syscfg	2024/11/25 19:37	SYSCFG 文件	
Event.dot	2024/11/15 18:53	Microcontroller 文件	
README.html	2024/8/30 11:04	Microcontroller 文件	
README.md	2024/8/30 11:04	Markdown 文件	
ti_msp_dl_config.c	2024/11/25 19:38	C 文件	
ti_msp_dl_config.h	2024/11/25 19:38	C Header 文件	

Complete project structure:

新加卷 (D:) > ti > mspm0_sdk_2_02_00_05 > empty >

名称	修改日期	类型	大小
keil	2024/11/29 12:00	文件夹	
ti	2024/11/29 12:06	文件夹	
empty.c	2024/11/25 19:48	C 文件	3 KB
empty.syscfg	2024/11/25 19:37	SYSCFG 文件	4 KB
Event.dot	2024/11/15 18:53	Microsoft Word ...	2 KB
README.html	2024/8/30 11:04	Microsoft Edge ...	69 KB
README.md	2024/8/30 11:04	Markdown File	2 KB
ti_msp_dl_config.c	2024/11/25 19:38	C 文件	6 KB
ti_msp_dl_config.h	2024/11/25 19:38	C Header 源文件	6 KB


6. Related Configuration in Keil

1. Open the Keil project file.


此电脑 > 软件 (D:) > ti > mspm0_sdk_2_02_00_05 > empty > keil >

名称	修改日期	类型	大小
Objects	2026/8/31 10:54	文件夹	
empty_LP_MSPM0G3519_nortos_k...	2026/8/28 18:27	MAP 文件	59 KB
empty_LP_MSPM0G3519_nortos_k...	2026/8/28 18:40	ADMINISTRAT...	91 KB
empty_LP_MSPM0G3519_nortos_k...	2026/8/28 18:14	UVOPTX 文件	7 KB
empty_LP_MSPM0G3519_nortos_k...	2026/8/28 18:26	Uvision5 Project	15 KB
mspm0g3519.sct	2024/8/30 11:04	Windows Script...	2 KB
startup_mspm0g351x_uvision.s	2024/8/30 11:04	S 文件	11 KB



2. Open Keil project management.

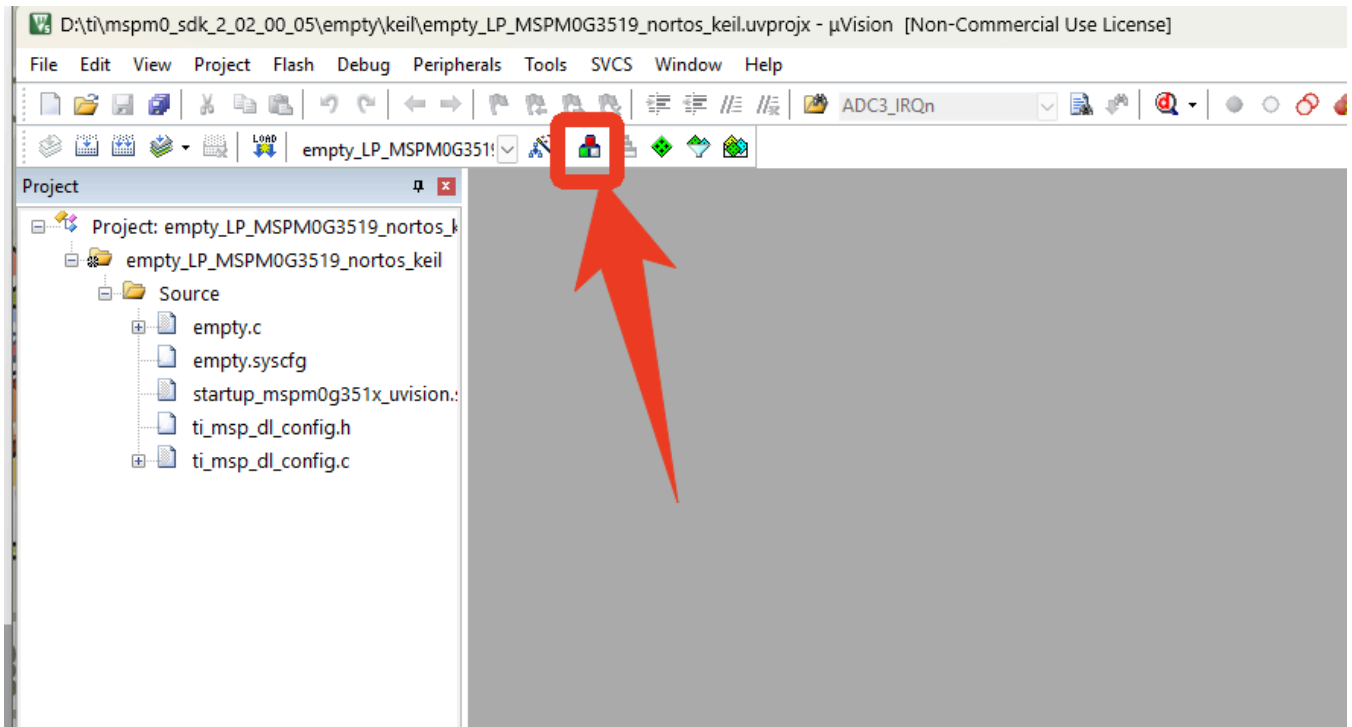



3. In the Keil project, delete files in the `Driverlib` folder (If the folder does not exist, you can skip this step).

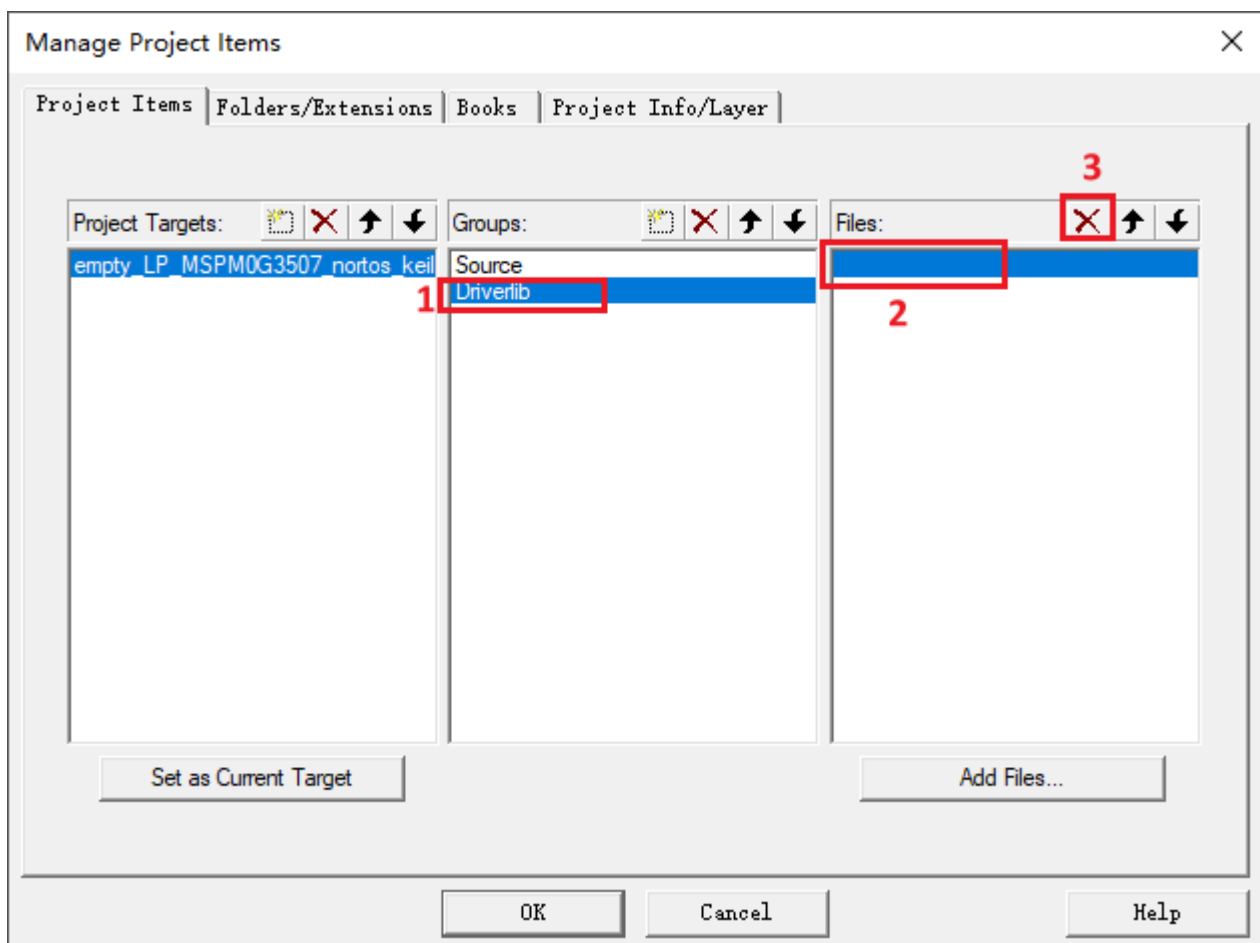


4. Add the previously copied files to the new `Driverlib` folder.

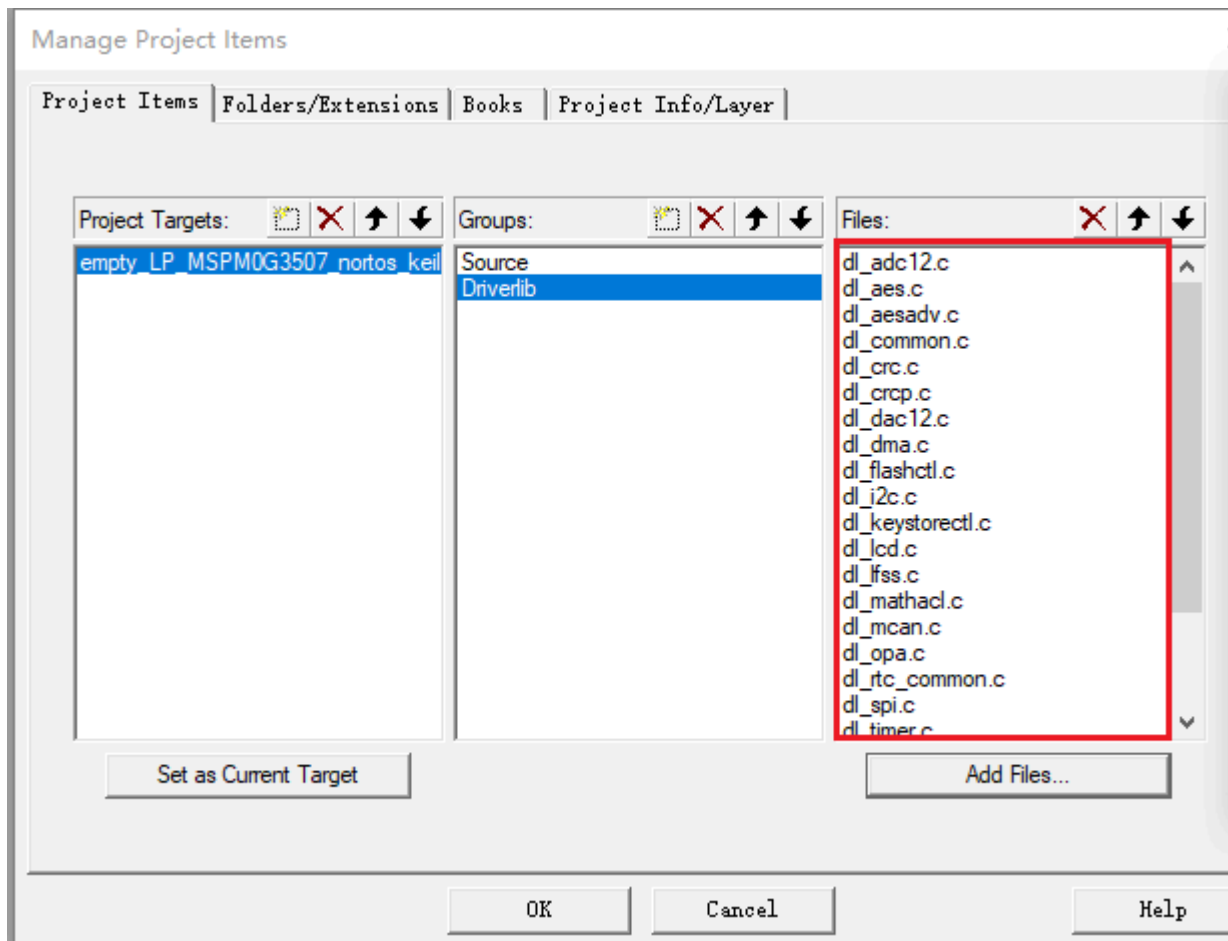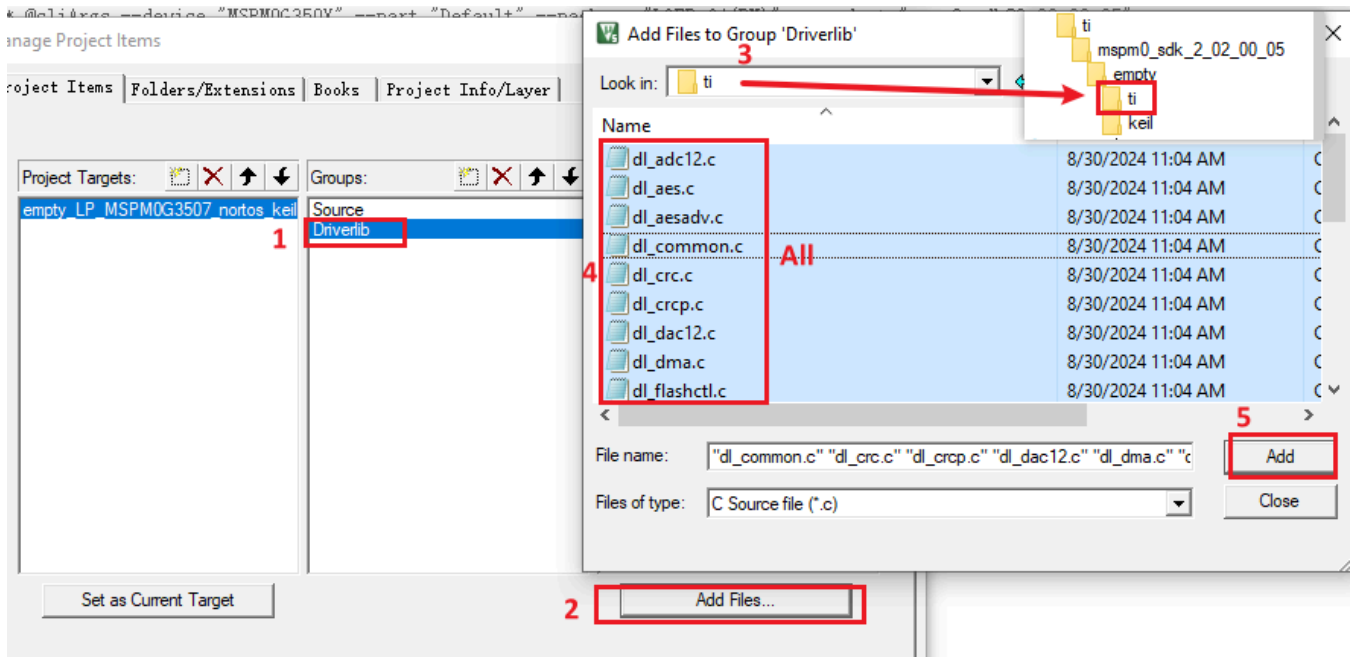

5. Click the "Magic Wand" to update header file paths.

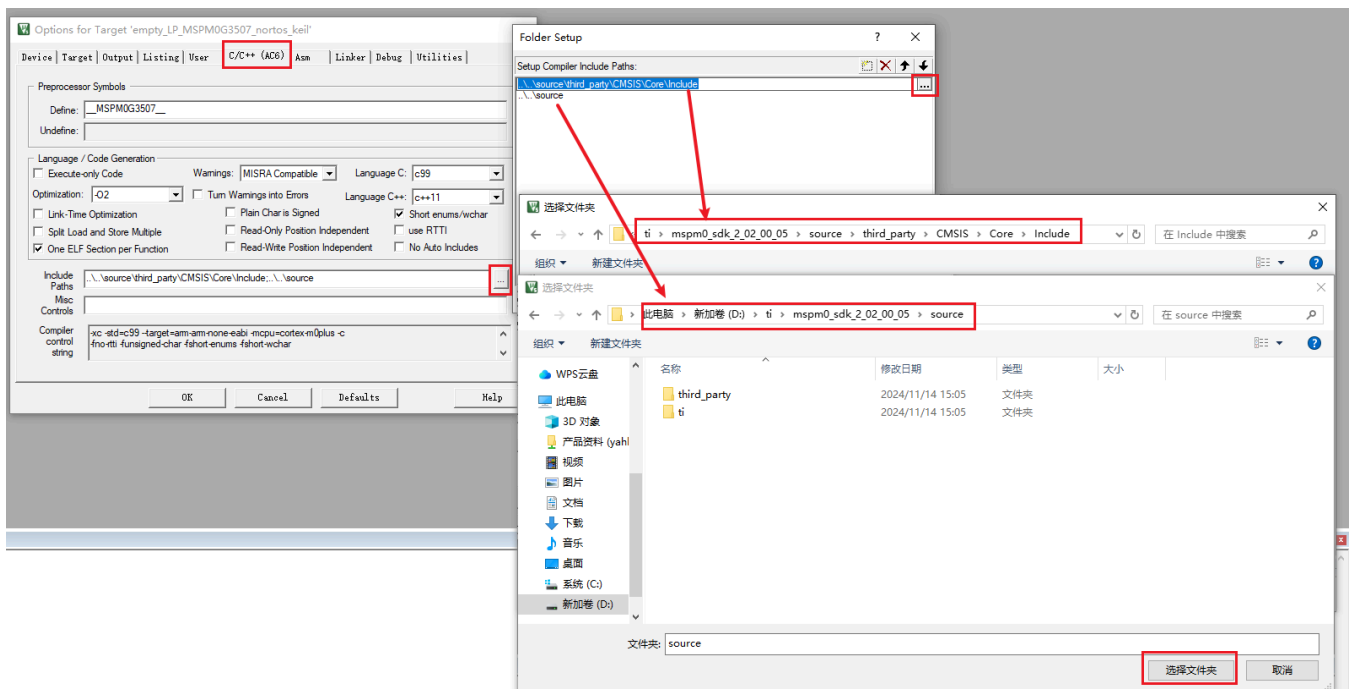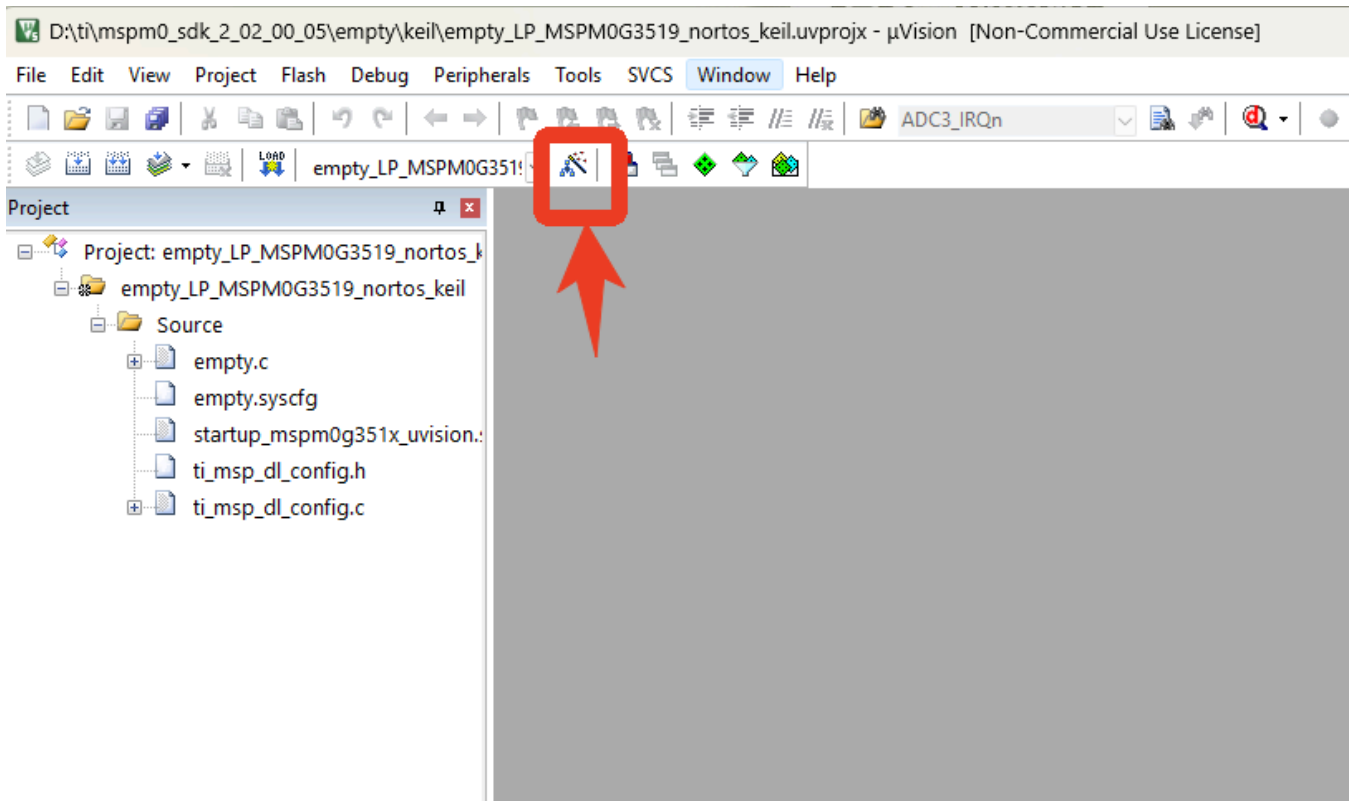

6. Modify the path in User-> Before Build/Rebuild.

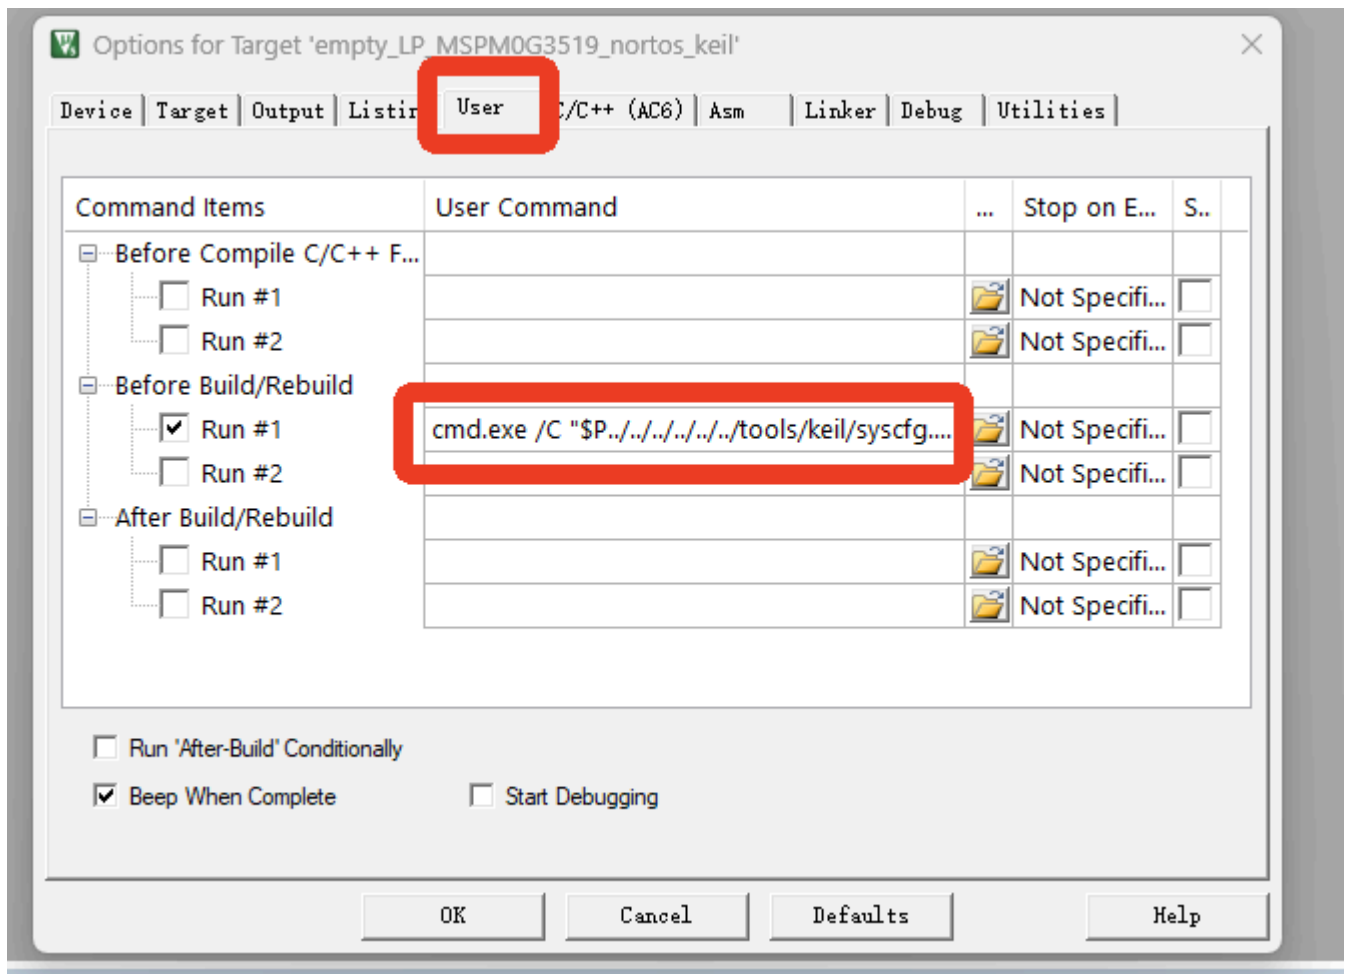


The current path is:


```
cmd.exe /C "$P../../../../../tools/keil/syscfg.bat '$P' empty.syscfg"
```

Actually, the modification method is to point to the /tools/keil/syscfg.bat under the SDK path. ../ represents going back one folder from the project's Keil launch file location. And the tools folder is under the SDK root directory. So it should be modified to the following path:

```
cmd.exe /C "$P../tools/keil/syscfg.bat '$P' empty.syscfg"
```

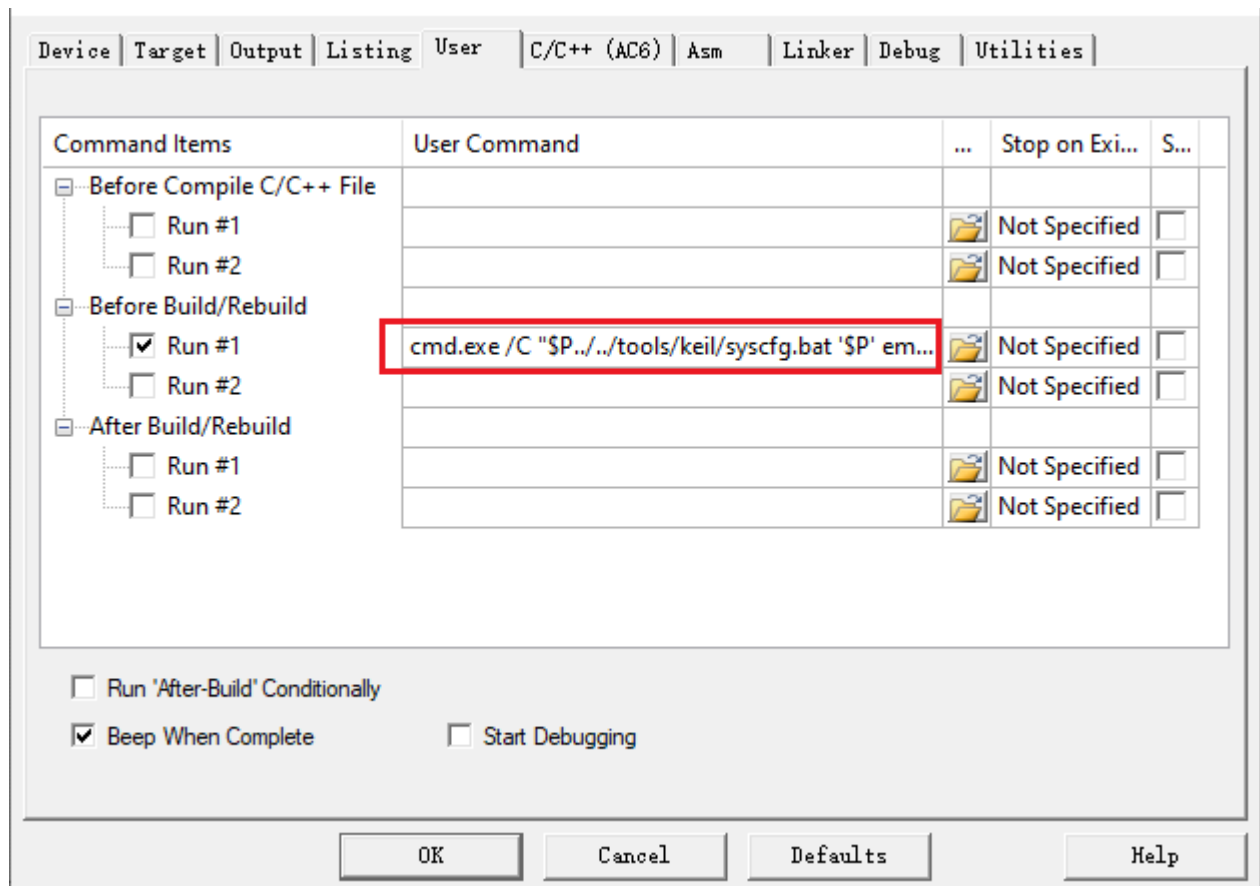

7. Delete the file path in Linker -> Misc controls.

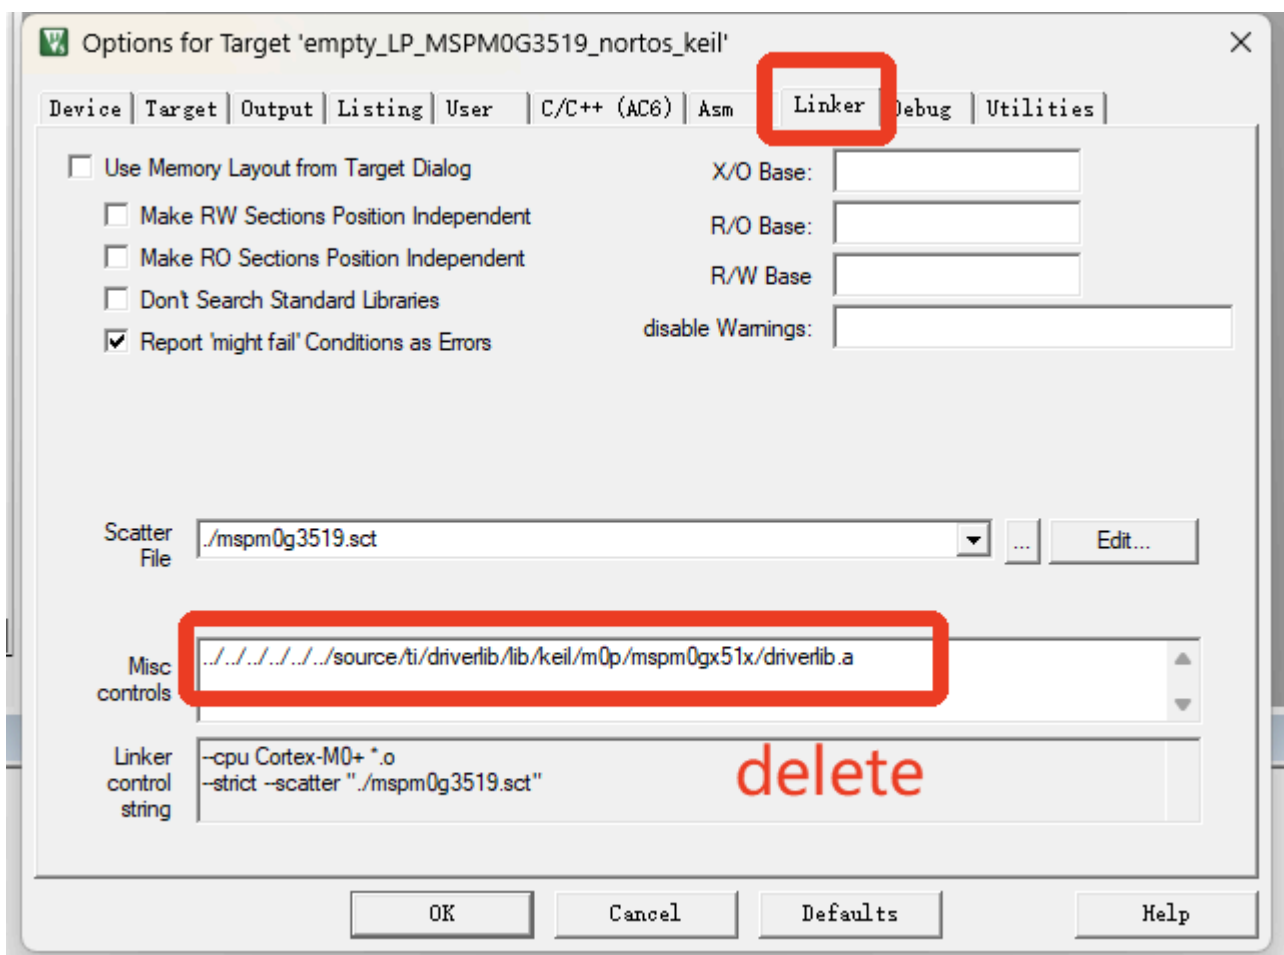

8. After modification, save and compile. There will be no path problems.

Build Output

```
compiling dl_mathacl.c...
compiling dl_opa.c...
compiling dl_rtc_common.c...
compiling dl_spi.c...
compiling dl_flashctl.c...
compiling dl_timer.c...
compiling dl_mcan.c...
compiling dl_trng.c...
compiling dl_vref.c...
compiling dl_uart.c...
linking...
Program Size: Code=328 RO-data=208 RW-data=0 ZI-data=352
FromELF: creating hex file...
".\Objects\empty_LP_MSPM0G3507_nortos_keil.axf" - 0 Error(s), 0 Warning(s).
Build Time Elapsed: 00:00:04
```

<