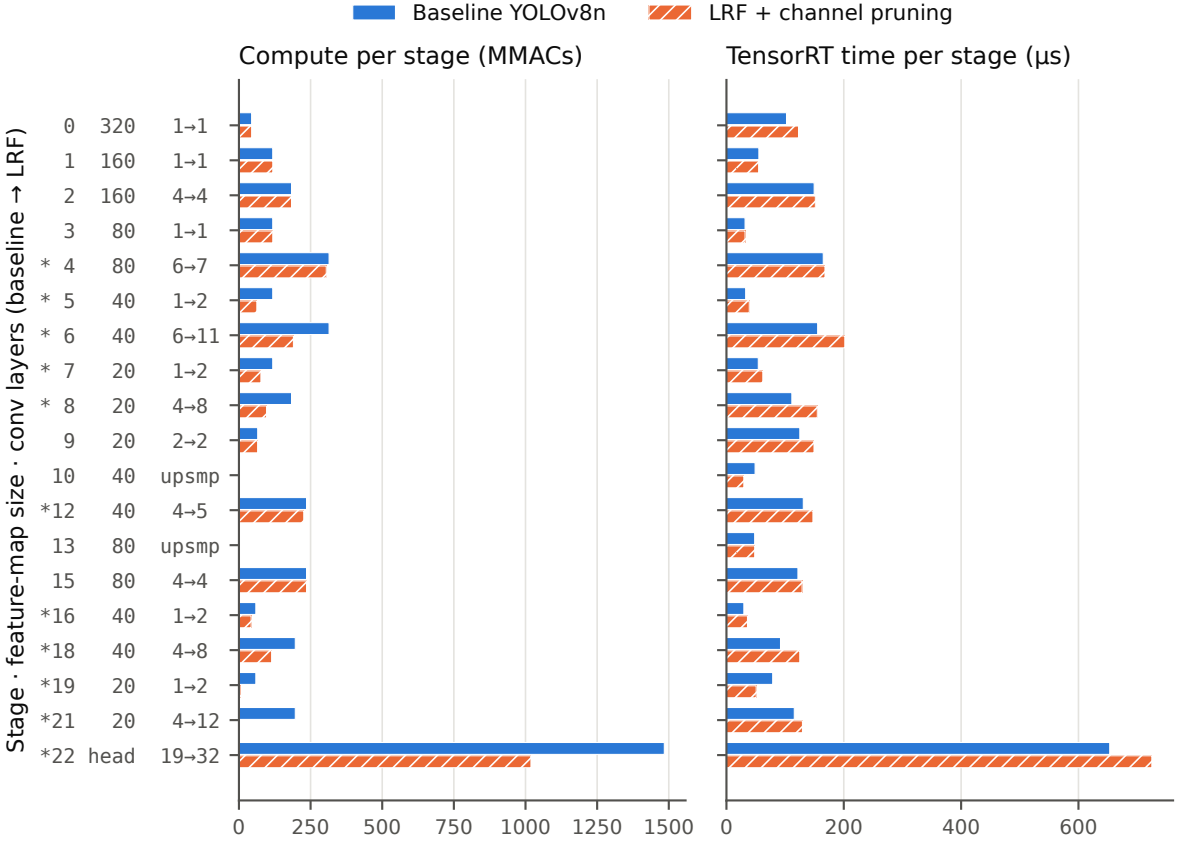

* stage modified by low-rank factorisation and/or channel pruning. TensorRT times are IProfiler per-layer medians (instrumented) of the layers named after each stage; SiLU kernels generated by Myelin carry no stage name and are excluded.