

# Enterprise Message API

## C++ Edition

### 3.6.0.L1

REFINITIV DOMAIN MODEL USAGE GUIDE

Document Version: 3.6.0.1  
Date of issue: October 2020  
Document ID: EMAC360UMRDM.200



© **Refinitiv 2015 - 2020**. All rights reserved.

Republication or redistribution of Refinitiv content, including by framing or similar means, is prohibited without the prior written consent of Refinitiv. 'Refinitiv' and the Refinitiv logo are registered trademarks and trademarks of Refinitiv.

Any software, including but not limited to: the code, screen, structure, sequence, and organization thereof, and its documentation are protected by national copyright laws and international treaty provisions. This manual is subject to U.S. and other national export regulations.

Refinitiv, by publishing this document, does not guarantee that any information contained herein is and will remain accurate or that use of the information will ensure correct and faultless operation of the relevant service or equipment. Refinitiv, its agents, and its employees, shall not be held liable to or through any user for any loss or damage whatsoever resulting from reliance on the information contained herein.

# Contents

|          |   |           |
|----------|---|-----------|
| <b>1</b> | <b>Introduction .....</b>                                 | <b>1</b>  |
| 1.1      | About this Manual .....                                   | 1         |
| 1.2      | Audience .....  | 1         |
| 1.3      | Open Message Model .....                                  | 1         |
| 1.4      | Refinitiv Wire Format .....                               | 1         |
| 1.5      | References .....  | 2         |
| 1.6      | Documentation Feedback .....                              | 2         |
| 1.7      | Conventions .....   | 2         |
| 1.7.1    | <i>Typographic</i> .....                                  | 2         |
| 1.7.2    | <i>General Transport API Syntax</i> .....                 | 3         |
| 1.7.3    | <i>Definitions and Standard Behaviors</i> .....           | 3         |
| 1.8      | Acronyms and Abbreviations .....                          | 4         |
| <b>2</b> | <b>Domain Model Overview .....</b>                        | <b>5</b>  |
| 2.1      | What is a Domain Message Model? .....                     | 5         |
| 2.2      | Refinitiv Domain Models Vs User-Defined Models .....      | 5         |
| 2.2.1    | <i>Refinitiv Domain Models</i> .....                      | 5         |
| 2.2.2    | <i>User-Defined Domain Model</i> .....                    | 6         |
| 2.2.3    | <i>Domain Message Model Creation</i> .....                | 6         |
| 2.3      | Message Concepts .....                                    | 7         |
| 2.4      | Consumer / Interactive Provider Initial Interaction ..... | 8         |
| 2.5      | Sending and Receiving Content .....                       | 9         |
| 2.6      | General Enterprise Message API Concepts .....             | 10        |
| 2.6.1    | <i>Snapshot and Streaming Requests</i> .....              | 10        |
| 2.6.2    | <i>Reissue Requests and Pause/Resume</i> .....            | 10        |
| 2.6.3    | <i>Clearing the Cache on Refreshes</i> .....              | 11        |
| 2.6.4    | <i>Dynamic View</i> .....                                 | 11        |
| 2.6.5    | <i>Batch Request</i> .....                                | 11        |
| 2.6.6    | <i>Posting</i> .....                                      | 11        |
| <b>3</b> | <b>Login Domain .....</b>                                 | <b>12</b> |
| 3.1      | Description .....   | 12        |
| 3.2      | Usage .....   | 13        |
| 3.2.1    | <i>Login Request Message</i> .....                        | 13        |
| 3.2.2    | <i>Login Request Elements</i> .....                       | 14        |
| 3.2.3    | <i>Login Request Domain Representation</i> .....          | 17        |
| 3.2.4    | <i>Login Refresh Message</i> .....                        | 18        |
| 3.2.5    | <i>Login Refresh Elements</i> .....                       | 20        |
| 3.2.6    | <i>Login Refresh Domain Representation</i> .....          | 24        |
| 3.2.7    | <i>Login Status Message</i> .....                         | 25        |
| 3.2.8    | <i>Login Status Elements</i> .....                        | 26        |
| 3.2.9    | <i>Login Status Domain Representation</i> .....           | 26        |
| 3.2.10   | <i>Login Update Message</i> .....                         | 26        |
| 3.2.11   | <i>Login Close Message</i> .....                          | 27        |
| 3.2.12   | <i>Login Generic Message Use</i> .....                    | 27        |
| 3.2.13   | <i>Login Post Message</i> .....                           | 28        |
| 3.2.14   | <i>Login Ack Message</i> .....                            | 29        |
| 3.3      | Data .....  | 30        |
| 3.3.1    | <i>Login Refresh Message Payload</i> .....                | 30        |
| 3.3.2    | <i>Login Generic Message Payloads</i> .....               | 32        |
| 3.4      | Special Semantics .....                                   | 34        |

|          |   |           |
|----------|---|-----------|
| 3.4.1    | Login Direction.....  | 34        |
| 3.4.2    | Initial Login.....  | 34        |
| 3.4.3    | Multiple Logins.....  | 34        |
| 3.4.4    | Group and Service Status.....   | 34        |
| 3.4.5    | Single Open and Allow Suspect Data Behavior.....                                | 35        |
| 3.5      | Specific Usage: RDF Direct Login.....   | 36        |
| 3.6      | Specific Usage: RDMS.....   | 36        |
| 3.7      | Specific Usage: Login Credentials Update Feature .....                          | 36        |
| <b>4</b> | <b>Source Directory Domain .....</b>  | <b>37</b> |
| 4.1      | Description .....   | 37        |
| 4.2      | Usage .....   | 38        |
| 4.2.1    | Source Directory Request Message .....  | 38        |
| 4.2.2    | Source Directory Refresh Message .....  | 40        |
| 4.2.3    | Source Directory Update Message .....   | 41        |
| 4.2.4    | Source Directory Status Message .....   | 42        |
| 4.2.5    | Source Directory Generic Message .....  | 43        |
| 4.3      | Data.....   | 44        |
| 4.3.1    | Source Directory Refresh and Update Payload.....                                | 44        |
| 4.3.2    | Source Directory ConsumerStatus Generic Message Payload .....                   | 52        |
| 4.4      | Special Semantics.....  | 53        |
| 4.4.1    | Multiple Streams .....  | 53        |
| 4.4.2    | Service IDs .....   | 53        |
| 4.4.3    | ServiceState and AcceptingRequests .....  | 53        |
| 4.4.4    | Service and Group Status Values.....  | 54        |
| 4.4.5    | Removing a Service.....   | 54        |
| 4.4.6    | Automatic Request from Enterprise Message API Consumer.....                     | 55        |
| 4.4.7    | Client Requests Non-Existing Service Directory.....                             | 55        |
| <b>5</b> | <b>Dictionary Domain .....</b>  | <b>56</b> |
| 5.1      | Description .....   | 56        |
| 5.2      | Decoding Field List Contents with Field and Enumerated Types Dictionaries ..... | 57        |
| 5.3      | Usage .....   | 58        |
| 5.3.1    | Dictionary Request Message.....   | 58        |
| 5.3.2    | Dictionary Refresh Message.....   | 59        |
| 5.3.3    | Dictionary Status Message .....   | 60        |
| 5.4      | Data.....   | 61        |
| 5.4.1    | Filter.....   | 61        |
| 5.4.2    | Refresh Message Summary Data .....  | 62        |
| 5.4.3    | Response Message Payload.....   | 62        |
| 5.4.4    | DictionaryId.....   | 63        |
| 5.5      | Field Dictionary .....  | 64        |
| 5.5.1    | Field Dictionary Payload .....  | 64        |
| 5.5.2    | Field Dictionary File Format.....   | 66        |
| 5.5.3    | Specific Usage: RDF Direct and FieldDefinition Dictionary .....                 | 70        |
| 5.6      | Enumerated Types Dictionary .....   | 71        |
| 5.6.1    | Enumerated Types Dictionary Payload .....                                       | 71        |
| 5.6.2    | Enumerated Types Dictionary File Format .....                                   | 73        |
| 5.6.3    | Specific Usage: RDF Direct and EnumTable Dictionary.....                        | 75        |
| 5.7      | Special Semantics.....  | 76        |
| 5.7.1    | DictionariesProvided and DictionariesUsed.....                                  | 76        |
| 5.7.2    | Version Information.....  | 76        |
| 5.8      | Other Dictionary Types .....  | 77        |
| 5.9      | Specific Usage: RDMS.....   | 77        |

|          |   |            |
|----------|---|------------|
| <b>6</b> | <b>Market Price Domain .....</b>                                  | <b>78</b>  |
| 6.1      | Description .....   | 78         |
| 6.2      | Usage .....   | 78         |
| 6.2.1    | <i>Market Price Request Message</i> .....                         | 78         |
| 6.2.2    | <i>Market Price Refresh Message</i> .....                         | 80         |
| 6.2.3    | <i>Market Price Update Message</i> .....                          | 81         |
| 6.2.4    | <i>Market Price Status Message</i> .....                          | 83         |
| 6.2.5    | <i>Market Price Post Message</i> .....                            | 83         |
| 6.3      | Data: Response Message Payload .....                              | 84         |
| 6.4      | Special Semantics .....   | 85         |
| 6.4.1    | <i>Snapshots</i> .....  | 85         |
| 6.4.2    | <i>Ripple Fields</i> .....  | 85         |
| 6.5      | Specific Usage: RDF Direct MarketPrice .....                      | 85         |
| 6.6      | Specific Usage: Legacy Records .....                              | 85         |
| <b>7</b> | <b>Market By Order Domain .....</b>                               | <b>86</b>  |
| 7.1      | Description .....   | 86         |
| 7.2      | Usage .....   | 86         |
| 7.2.1    | <i>Market By Order Request Message</i> .....                      | 86         |
| 7.2.2    | <i>Market By Order Refresh Message</i> .....                      | 88         |
| 7.2.3    | <i>Market By Order Update Message</i> .....                       | 89         |
| 7.2.4    | <i>Market By Order Status Message</i> .....                       | 91         |
| 7.2.5    | <i>Market By Order Post Message</i> .....                         | 91         |
| 7.3      | Data .....  | 92         |
| 7.3.1    | <i>Response Message Payload</i> .....                             | 92         |
| 7.3.2    | <i>Summary Data</i> .....   | 93         |
| 7.3.3    | <i>MapEntry Contents</i> .....                                    | 93         |
| 7.4      | Special Semantics .....   | 93         |
| 7.5      | Specific Usage: RDF Direct and Response Message Payload .....     | 93         |
| 7.6      | Specific Usage: RDMS .....  | 94         |
| <b>8</b> | <b>Market By Price Domain .....</b>                               | <b>95</b>  |
| 8.1      | Description .....   | 95         |
| 8.2      | Usage .....   | 95         |
| 8.2.1    | <i>Market By Price Request Message</i> .....                      | 95         |
| 8.2.2    | <i>Market By Price Refresh Message</i> .....                      | 96         |
| 8.2.3    | <i>Market By Price Update Message</i> .....                       | 98         |
| 8.2.4    | <i>Market By Price Status Message</i> .....                       | 99         |
| 8.2.5    | <i>Market By Price Post Message</i> .....                         | 100        |
| 8.3      | Data .....  | 101        |
| 8.3.1    | <i>Response Message Payload</i> .....                             | 101        |
| 8.3.2    | <i>Summary Data</i> .....   | 101        |
| 8.3.3    | <i>MapEntry.Key Contents</i> .....                                | 101        |
| 8.4      | Special Semantics .....   | 102        |
| 8.5      | Specific Usage: RDF Direct and the Response Message Payload ..... | 103        |
| 8.6      | Specific Usage: RDMS .....  | 103        |
| <b>9</b> | <b>Market Maker Domain .....</b>                                  | <b>104</b> |
| 9.1      | Description .....   | 104        |
| 9.2      | Usage .....   | 104        |
| 9.2.1    | <i>Market Maker Request Message</i> .....                         | 104        |
| 9.2.2    | <i>Market Maker Refresh Message</i> .....                         | 106        |
| 9.2.3    | <i>Market Maker Update Message</i> .....                          | 107        |
| 9.2.4    | <i>Market Maker Status Message</i> .....                          | 108        |

|                   |   |            |
|-------------------|---|------------|
| 9.2.5             | <i>Market Maker Post Message</i> .....                            | 109        |
| 9.3               | Data .....  | 110        |
| 9.3.1             | <i>Response Message Payload</i> .....                             | 110        |
| 9.3.2             | <i>Summary Data</i> .....   | 110        |
| 9.3.3             | <i>MapEntry Contents</i> .....                                    | 110        |
| 9.4               | Special Semantics .....   | 111        |
| 9.5               | Specific Usage: RDF Direct and the Response Message Payload ..... | 111        |
| 9.6               | Specific Usage: RDMS .....  | 112        |
| <b>10</b>         | <b>Yield Curve Domain</b> .....                                   | <b>113</b> |
| 10.1              | Description .....   | 113        |
| 10.2              | Usage .....   | 113        |
| 10.2.1            | <i>Yield Curve Request Message</i> .....                          | 113        |
| 10.2.2            | <i>Yield Curve Refresh Message</i> .....                          | 115        |
| 10.2.3            | <i>Yield Curve Update Message</i> .....                           | 116        |
| 10.2.4            | <i>Yield Curve Status Message</i> .....                           | 117        |
| 10.2.5            | <i>Yield Curve Domain Post Message</i> .....                      | 118        |
| 10.3              | Data .....  | 119        |
| 10.3.1            | <i>Response Message Payload</i> .....                             | 119        |
| 10.3.2            | <i>Summary Data</i> .....   | 120        |
| 10.3.3            | <i>Yield Curve Input and Output Entries</i> .....                 | 120        |
| 10.4              | Special Semantics .....   | 120        |
| 10.5              | Specific Usage: ATS .....   | 120        |
| <b>11</b>         | <b>Symbol List Domain</b> .....                                   | <b>121</b> |
| 11.1              | Description .....   | 121        |
| 11.2              | Usage .....   | 121        |
| 11.2.1            | <i>Symbol List Request Message</i> .....                          | 121        |
| 11.2.2            | <i>Symbol List Refresh Message</i> .....                          | 123        |
| 11.2.3            | <i>Symbol List Update Message</i> .....                           | 125        |
| 11.2.4            | <i>Symbol List Status Message</i> .....                           | 126        |
| 11.3              | Data: Response Message Payload .....                              | 127        |
| 11.4              | Special Semantics .....   | 127        |
| 11.5              | Specific Usage .....  | 128        |
| <b>Appendix A</b> | <b>ReqMsg Payload</b> .....                                       | <b>129</b> |
| A.1               | View Definition .....   | 129        |
| A.2               | ItemList .....  | 129        |
| A.3               | Symbol List Behaviors .....                                       | 130        |

# Contents

|            |   |     |
|------------|---|-----|
| Figure 1.  | Open Message Model Consumer and Interactive Provider Initial Interactions ..... | 8   |
| Figure 2.  | General Domain Use.....   | 9   |
| Figure 3.  | Login Request Domain Representation Code Usage Example .....                    | 17  |
| Figure 4.  | Login Refresh Domain Representation Code Usage Example .....                    | 24  |
| Figure 5.  | Login Status Domain Representation Code Usage Example .....                     | 26  |
| Figure 6.  | Login Refresh Message Payload .....   | 30  |
| Figure 7.  | Login Generic Message Payload .....   | 32  |
| Figure 8.  | Source Directory Refresh and Update Message Payload.....                        | 44  |
| Figure 9.  | Source Directory Generic Message Payload .....                                  | 52  |
| Figure 10. | <b>FieldList</b> Referencing Field Dictionary .....                             | 57  |
| Figure 11. | <b>FieldEntry</b> Referencing an Enumerated Types Table.....                    | 57  |
| Figure 12. | Field Dictionary Payload .....  | 64  |
| Figure 13. | Field Dictionary File Format Sample .....                                       | 66  |
| Figure 14. | Field Dictionary Tagged Attributes Sample .....                                 | 66  |
| Figure 15. | Enumerated Types Dictionary Refresh Message Payload.....                        | 71  |
| Figure 16. | MarketPrice Response Message Payload .....                                      | 84  |
| Figure 17. | MarketByOrder Response Message Payload .....                                    | 92  |
| Figure 18. | MarketByPrice Response Message Payload .....                                    | 101 |
| Figure 19. | MarketMaker Response Message Payload .....                                      | 110 |
| Figure 20. | Yield Curve Payload Example.....  | 119 |
| Figure 21. | SymbolList Response Message Payload .....                                       | 127 |
| Figure 22. | SymbolList Request Message Payload Specifying Symbol List Behavior .....        | 130 |

# Contents

|           |  |    |
|-----------|--|----|
| Table 1:  | Acronyms and Abbreviations .....   | 4  |
| Table 2:  | Refinitiv Domain Model Overview .....  | 5  |
| Table 3:  | Message Concepts .....   | 7  |
| Table 4:  | Configure Login Request Message .....  | 13 |
| Table 5:  | Login Request Message .....  | 13 |
| Table 6:  | Login Request <b>Attrib</b> Elements .....                                   | 14 |
| Table 7:  | Login Refresh Message .....  | 18 |
| Table 8:  | Login Refresh <b>Attrib</b> Elements .....                                   | 20 |
| Table 9:  | Login Status Message Member Use .....  | 25 |
| Table 10: | Login Status <b>Attrib</b> Elements .....                                    | 26 |
| Table 11: | Login Close Message Member Use .....   | 27 |
| Table 12: | Login Consumer Connection Status Message Member Use .....                    | 27 |
| Table 13: | RTT Login Generic Message Member Use .....                                   | 28 |
| Table 14: | <b>Vector.SummaryData's</b> ElementList Contents .....                       | 31 |
| Table 15: | ElementList Contents .....   | 31 |
| Table 16: | <b>MapEntry</b> Elements .....   | 32 |
| Table 17: | <b>ElementList</b> <b>ElementEntry's</b> .....                               | 33 |
| Table 18: | SingleOpen and AllowSuspectData Handling .....                               | 35 |
| Table 19: | Source Directory Request Message .....                                       | 38 |
| Table 20: | Source Directory Refresh Message .....                                       | 40 |
| Table 21: | Source Directory Update Message .....  | 41 |
| Table 22: | Source Directory Status Message .....  | 42 |
| Table 23: | Source Directory Generic Message .....                                       | 43 |
| Table 24: | Source Directory <b>Map</b> Contents .....                                   | 44 |
| Table 25: | Source Directory <b>MapEntry</b> Filter Entries .....                        | 45 |
| Table 26: | Source Directory Info Filter Entry Elements .....                            | 46 |
| Table 27: | Source Directory State <b>FilterEntry</b> Elements .....                     | 48 |
| Table 28: | Source Directory Group <b>FilterEntry</b> Elements .....                     | 49 |
| Table 29: | Source Directory Load <b>FilterEntry</b> Elements .....                      | 50 |
| Table 30: | Source Directory Data <b>FilterEntry</b> Elements .....                      | 50 |
| Table 31: | Source Directory Link <b>FilterEntry</b> Map Contents .....                  | 51 |
| Table 32: | Source Directory Generic Message <b>MapEntry</b> Elements .....              | 52 |
| Table 33: | ServiceState and AcceptingRequests .....                                     | 53 |
| Table 34: | Dictionary Request Message .....   | 58 |
| Table 35: | Dictionary Request Message .....   | 59 |
| Table 36: | Dictionary Status Message .....  | 60 |
| Table 37: | Dictionary's <b>Filter</b> .....   | 61 |
| Table 38: | Dictionary <b>summaryData</b> .....  | 62 |
| Table 39: | Field Dictionary Element Entries .....                                       | 65 |
| Table 40: | Field Dictionary File Tag Information .....                                  | 67 |
| Table 41: | Field Dictionary File Column Names and <b>ElementEntry</b> Names .....       | 67 |
| Table 42: | Field Dictionary Type Keywords .....   | 68 |
| Table 43: | Marketfeed to Refinitiv Wire Format Mappings in RDMFieldDictionary .....     | 69 |
| Table 44: | Marketfeed to Refinitiv Wire Format Mappings in RDMFieldDictionary .....     | 70 |
| Table 45: | Element Entries Describing Each Enumerated Type Table .....                  | 72 |
| Table 46: | Enumerated Type Dictionary File Tag Information .....                        | 74 |
| Table 47: | Refinitiv Wire Format EnumType Dictionary File Format Reference Fields ..... | 75 |
| Table 48: | Refinitiv Wire Format EnumType Dictionary File Values .....                  | 75 |
| Table 49: | Other Dictionary Types .....   | 77 |
| Table 50: | Market Price Request Message .....   | 78 |
| Table 51: | Market Price Refresh Message .....   | 80 |



|           |   |     |
|-----------|---|-----|
| Table 52: | Market Price Update Message .....   | 81  |
| Table 53: | Market Price Status Message .....   | 83  |
| Table 54: | Market By Order Request Message .....   | 86  |
| Table 55: | Market By Order Refresh Message .....   | 88  |
| Table 56: | Market By Order Update Message .....  | 89  |
| Table 57: | Market By Order Status Message .....  | 91  |
| Table 58: | Market By Price Request Message .....   | 95  |
| Table 59: | Market By Price Refresh Message .....   | 96  |
| Table 60: | Market By Price Update Message .....  | 98  |
| Table 61: | Market By Price Status Message .....  | 99  |
| Table 62: | Market Maker Request Message .....  | 104 |
| Table 63: | Market Maker Refresh Message .....  | 106 |
| Table 64: | Market Maker Update Message .....   | 107 |
| Table 65: | Market Maker Status Message .....   | 108 |
| Table 66: | Yield Curve Request Message .....   | 113 |
| Table 67: | Yield Curve Refresh Message .....   | 115 |
| Table 68: | Yield Curve Update Message .....  | 116 |
| Table 69: | Yield Curve Status Message .....  | 117 |
| Table 70: | Yield Curve Inputs and Outputs .....  | 120 |
| Table 71: | Symbol List Request Message .....   | 121 |
| Table 72: | Symbol List Refresh Message .....   | 123 |
| Table 73: | Symbol List Update Message .....  | 125 |
| Table 74: | Symbol List Status Message .....  | 126 |
| Table 75: | View Definition in Payload .....  | 129 |
| Table 76: | ItemList in Payload .....   | 129 |
| Table 77: | Request Message Payload for Symbol List Domain Specifying Symbol List Behaviors ..... | 130 |
| Table 78: | <b>:SymbolListBehaviors</b> ElementEntry Contents .....                               | 131 |

# 1 Introduction

## 1.1 About this Manual

This manual describes how the Refinitiv Domain Models are defined in terms of the Open Message Model. Data conforming to Refinitiv Domain Models are available via Refinitiv Real-Time Distribution System, Refinitiv Real-Time, and Refinitiv Data Feed Direct (RDF-D) using the Enterprise Message API.

## 1.2 Audience

This guide is written for software developers who are familiar with the Enterprise Message API and want to develop Enterprise Message API-based applications to access Refinitiv Domain Model-formatted data. Before reading this manual:

- Users should be familiar with Open Message Model concepts and types.
- It may be useful to read the *Enterprise Message API C++ Edition Developers Guide* and be familiar with the example applications provided in the Enterprise Message API package.

## 1.3 Open Message Model

The **Open Message Model** is a collection of message header and data constructs. Some Open Message Model message header constructs, such as the Update message, have implicit market logic associated with them while others, such as the Generic message, allow for free-flowing bi-directional messaging. Open Message Model data constructs can be combined in various ways to model data that ranges from simple (or flat) primitive types to complex multiple-level hierarchal data.

The layout and interpretation of any specific Open Message Model, also referred to as a domain model, is described within that model's definition and is not coupled with the API. The Open Message Model is the flexible tool that provides the building blocks to design and produce domain models to meet the needs of the system and its users. The Enterprise Message API provides structural representations of Open Message Model constructs and manages the Refinitiv Wire Format binary-encoded representation of the Open Message Model. Enterprise Message API users can leverage the provided Open Message Model constructs to consume or provide Open Message Model data throughout their Refinitiv Real-Time Distribution System.

## 1.4 Refinitiv Wire Format

**Refinitiv Wire Format** is the encoded representation of the Open Message Model. Refinitiv Wire Format is a highly-optimized, binary format designed to reduce the cost of data distribution as compared to previous wire formats. Binary encoding represents data in the machine's native manner, enabling further use in calculations or data manipulations. Refinitiv Wire Format allows for serializing Open Message Model message and data constructs in an efficient manner while still allowing rich content types. Refinitiv Wire Format can distribute field identifier-value pair data, self-describing data, as well as more complex, nested hierarchal content.

## 1.5 References

For additional Enterprise Message API documentation, refer to:

- The *Enterprise Message API C++ Edition Developers Guide*
- The *Enterprise Message API C++ Edition Reference Guide*
- The [Refinitiv Developer Community](#)

## 1.6 Documentation Feedback

While we make every effort to ensure the documentation is accurate and up-to-date, if you notice any errors, or would like to see more details on a particular topic, you have the following options:

- Send us your comments via email at [apidocumentation@refinitiv.com](mailto:apidocumentation@refinitiv.com).
- Mark up the PDF using the Comment feature in Adobe Reader. After adding your comments, you can submit the entire PDF to Refinitiv by clicking **Send File** in the **File** menu. Use the [apidocumentation@refinitiv.com](mailto:apidocumentation@refinitiv.com) address.

## 1.7 Conventions

### 1.7.1 Typographic

The Enterprise Message API uses the following typographical conventions:

- The Refinitiv Domain Models are described in terms of Open Message Model concepts. Images and XML example layouts are provided as a reference in relevant sections.
- In-line MISSING VARIABLE: structures, functions, and types are shown in **orange**, **Lucida Console** font.
- Parameters, filenames, and directories are shown in **Bold** font.
- Document titles and variable values are shown in *italics*.
- When included in the body of the text, new concepts are called out in ***Bold, Italics*** the first time they are mentioned.
- Verbose code examples (one or more lines of code) are shown in Lucida Console font against an orange background. Comments in such code samples are formatted in green coloring. For example:

## 1.7.2 General Transport API Syntax

The Enterprise Message API uses the following general API syntax conventions:

- Dot-separated notation indicates data available within a hierarchy. Each period can indicate a MISSING VARIABLE: structure, a data member **Name**, an entry, or an element name.
- **streamId** values are assigned by the application and used across all domain models. Consumer applications assign positive **streamId** values when requesting content and interactive provider applications respond using the same **streamId**. Non-interactive provider applications assign negative **streamId** values.
- **Payload** generically refers to the message payload.
- Integer constants are defined in all capital letters with underscores (e.g., **MMT\_MARKET\_PRICE**, **SERVICE\_INFO\_ID**). In the Enterprise Message API, they can be found in the **refinitiv::ema::rdm namespace** and in the **Access/Include/EmaRdm.h** file.
- The names of Enterprise Message API **FilterId** values (e.g. **SERVICE\_INFO\_ID**) correspond to the flag value enumeration defined for use with the message key's **filter** (e.g., **SERVICE\_INFO\_FILTER**). Names may be shortened for clarity (e.g., **DirectoryInfo**).
- The names of the data members correspond to the method names for both get/set in the Enterprise Message API interface, with the get prefixes removed and the first character always upper case.

## 1.7.3 Definitions and Standard Behaviors

This Enterprise Message API manual uses the following terms and the API illustrates the following default behavior:

- **Not Used** means the attribute is not extensible; the Enterprise Message API may pass-on the information, however there is no guarantee that the data will be passed through the network now or in the future. Use of a “Not Used” attribute may cause problems when interacting with some components.
- **Required** means the data must be provided or set.
- **Conditional** means data might be required depending on a particular scenario or context. Refer to the description for specific details.
- **Recommended** means the data is not strictly required, but should be provided or set by all applications.
- **Optional** means the data may be provided or set, but is not required. This data should be handled and understood by all applications, even if not including it. When present, this information should be passed through the network.
- **Extensible** means the numeric ranges may have more values defined in the future. It means additional Elements can be added to Element Lists.
- If data is not present, the Enterprise Message API assumes the default value.
- Generic message use is not supported within existing, defined Refinitiv Domain Models, except when explicitly defined.
- Posting is assumed to be supported within currently-defined Refinitiv Domain Models, except when otherwise indicated. Posting is not supported on Source Directory and Dictionary domains. Posting within the Login domain must follow off-stream posting rules and target a domain other than Login. Posting on any other allowed domains must follow on-stream posting rules and target that specific domain. For further details about posting, refer to the *Enterprise Message API C++ Edition Developers Guide*.

## 1.8 Acronyms and Abbreviations

| ACRONYM | DEFINITION  |
|---------|---|
| ADH     | Refinitiv Real-Time Advanced Data Hub   |
| ADS     | Refinitiv Real-Time Advanced Distribution Server  |
| API     | Application Programming Interface   |
| ASCII   | American Standard Code for Information Interchange                                      |
| ATS     | Refinitiv Real-Time Advanced Transformation Server                                      |
| DACS    | Data Access Control System  |
| DMM     | Domain Message Model  |
| EMA     | Enterprise Message API  |
| ETA     | Enterprise Transport API  |
| OMM     | Open Message Model  |
| QoS     | Quality of Service  |
| RDF-D   | Refinitiv Datafeed Direct   |
| RDM     | Refinitiv Domain Model  |
| RDP     | Refinitiv Data Platform   |
| RMTES   | Multi-lingual text encoding standard  |
| RSSL    | Refinitiv Source Sink Library   |
| RTT     | Round Trip Time; this definition is used for the round trip latency monitoring feature. |
| RWF     | Refinitiv Wire Format   |
| TS1     | Time Series One   |

**Table 1: Acronyms and Abbreviations**

## 2 Domain Model Overview

### 2.1 What is a Domain Message Model?

A **Domain Message Model** describes a specific arrangement of Open Message Model message and data constructs. A domain message model will define any specialized behaviors associated with the domain or any specific meaning or semantics associated with data contained in the message. Unless a domain model specifies otherwise, any implicit market logic associated with a message still applies (e.g. an Update message indicates that any previously-received data also contained in the Update message is being modified).

### 2.2 Refinitiv Domain Models Vs User-Defined Models

#### 2.2.1 Refinitiv Domain Models

A Refinitiv Domain Model is a domain message model typically provided or consumed by a Refinitiv product, such as the Refinitiv Real-Time Distribution System, Refinitiv Data Feed Direct, or the Refinitiv Data Platform. Some currently-defined Refinitiv Domain Models allow for authenticating to a provider (e.g. Login), exchanging field or enumeration dictionaries (e.g. Dictionary), and providing or consuming various types of market data (e.g. Market Price, Market by Order, Market by Price). Refinitiv's defined models have a domain value of less than 128.

The following table provides a high-level overview of the currently-available Refinitiv Domain Models. The following chapters provide more detailed descriptions for each of these.

| DOMAIN           | PURPOSE  |
|------------------|--|
| Login            | Authenticates users and advertise/request features that are not specific to a particular domain. Use of and support for this domain is required for all Open Message Model applications. This is considered an administrative domain, content is required and expected by many Refinitiv components and conformance to the domain model definition is expected. For further details refer to Chapter 3, Login Domain.  |
| Source Directory | Advertises information about available services and their state, QoS, and capabilities. This domain also conveys any group status and group merge information. Interactive and non-Interactive Open Message Model provider applications require support for this domain. Refinitiv strongly recommends that Open Message Model consumers request this domain. This is considered an administrative domain, and many Refinitiv components expect and require content to conform to the domain model definition. For further details, refer to Chapter 4, Source Directory Domain. |
| Dictionary       | Provides dictionaries that may be needed when decoding data. Though use of the Dictionary domain is optional, Refinitiv recommends that provider applications support the domain's use. Considered an administrative domain, content is required and expected by many Refinitiv components and following the domain model definition is expected. For further details refer to Chapter 5, Dictionary Domain.   |
| Market Price     | Provides access to Level I market information such as trades, indicative quotes and top of book quotes. Content includes information such as volume, bid, ask, net change, last price, high, and low. For further details refer to Chapter 6, Market Price Domain.   |
| Market By Order  | Provides access to Level II full order books. Contains a list of orders (keyed by the order IDs) with related information such as price, whether it is a bid/ask order, size, quote time, and market maker identifier. For further details refer to Chapter 7, Market By Order Domain.   |
| Market By Price  | Provides access to Level II market depth information. Contains a list of price points (keyed by that price and the bid/ask side) with related information. For further details refer to Chapter 8, Market By Price Domain.   |

**Table 2: Refinitiv Domain Model Overview**

| DOMAIN       | PURPOSE  |
|--------------|--|
| Market Maker | Provides access to market maker quotes and trade information. Contains a list of market makers (keyed by that market maker's ID) with related information such as that market maker's bid and asking prices, quote time, and market source.<br>For further details refer to Chapter 9, Market Maker Domain.  |
| Yield Curve  | Provides access to yield curve information. This can contain input information used to calculate a yield curve along with output information (which is the curve itself). A yield curve shows the relation between the interest rate and the term associated with the debt of a borrower. The curve's shape can help to give an idea of future economic activity and interest rates.<br>For further details refer to Chapter 10, Yield Curve Domain. |
| Symbol List  | Provides access to a set of symbol names, typically from an index, service, or cache. Minimally contains symbol names and can optionally contain additional cross-reference information such as permission information, name type, or other venue-specific content.<br>For further details refer to Chapter 11, Symbol List Domain.  |

Table 2: Refinitiv Domain Model Overview (Continued)

### 2.2.2 User-Defined Domain Model

A **User Defined Domain Model** is a domain message model defined by a party other than Refinitiv. These may be defined to solve a specific user or system need in a particular deployment which is not resolvable through the use of a Refinitiv Domain Model. Any user-defined model must use a domain value between 128 and 255. If needed, domain model designers can work with Refinitiv to define their models as standard Refinitiv Domain Models. This allows for the most seamless interoperability with future Refinitiv Domain Model definitions and with other Refinitiv products.

### 2.2.3 Domain Message Model Creation

This document discusses Refinitiv Domain Models capable of flowing through the Enterprise Message API. Enterprise Message API users can leverage the Open Message Model to create their own Domain Message Models in addition to those described in this document. When defining a Domain Message Model, consider the following questions / points:

- Is a new Domain Message Model really needed, or can you express the data in terms of an existing Refinitiv Domain Model?
- The Domain Message Model should be well-defined. Following the design templates used in this document is a good approach. The structure, properties, use cases, and limitations of the Domain Message Model should be specified.
- While the Open Message Model provides building blocks that can structure data in many ways, the semantics of said data must abide by the rules of the Open Message Model. For example, custom Domain Message Models should follow the request, refresh, status, and update semantics implicitly defined by those messages. If more flexible messaging is desired within a custom Domain Message Model, it can be accomplished through the use of a generic message, which allows for more free-form bidirectional messaging after a stream is established.
- **DomainType** values less than 128 are reserved for Refinitiv Domain Models. The **DomainType** of a custom Domain Message Model must be between 128 and 255.
- You might want to work with Refinitiv to define a published Refinitiv Domain Model, rather than use a custom Domain Message Model. This ensures the most seamless interoperability with future Refinitiv Domain Models and other Refinitiv products.

## 2.3 Message Concepts

The following table describes the mapping of Open Message Model concepts with actual interfaces. For clarity and consistency, the Message concept will be referenced throughout the rest of this *Refinitiv Domain Model Usage Guide*.


| MESSAGE CONCEPT               | DESCRIPTION/VALUE   |
|-------------------------------|---|
| Request Message               | <b>ReqMsg</b> whose data type is <b>DataType.ReqMsgEnum</b>         |
| Close Message<br>(Request)    | <b>OmmConsumer.unregister()</b>                                     |
| Refresh Message<br>(Response) | <b>RefreshMsg</b> whose data type is <b>DataType.RefreshMsgEnum</b> |
| Update Message<br>(Response)  | <b>UpdateMsg</b> whose data type is <b>DataType.UpdateMsgEnum</b>   |
| Status message<br>(Response)  | <b>StatusMsg</b> whose data type is <b>DataType.StatusMsgEnum</b>   |
| Post Message                  | <b>PostMsg</b> whose data type is <b>DataType.PostMsgEnum</b>       |
| Generic Message               | <b>GenericMsg</b> whose data type is <b>DataType.GenericMsgEnum</b> |
| Ack Message                   | <b>AckMsg</b> whose data type is <b>DataType.AckMsgEnum</b>         |

**Table 3: Message Concepts**



## 2.4 Consumer / Interactive Provider Initial Interaction

An Open Message Model consumer application can connect to Open Message Model interactive provider applications, including the Refinitiv Real-Time Distribution System, Refinitiv Data Feed Direct, and the Refinitiv Data Platform. This interaction first requires an exchange of login messages between the consumer and provider, where the provider can either accept or reject the consumer. If the consumer is allowed to log in, it may then request the list of services available from the provider. Optionally<sup>1</sup>, the consumer can request any dictionaries it needs to decode data from the provider. After this process successfully completes, the consumer application can begin requesting from non-administrative domains, which provide other content (e.g. Market Price, Market By Order).

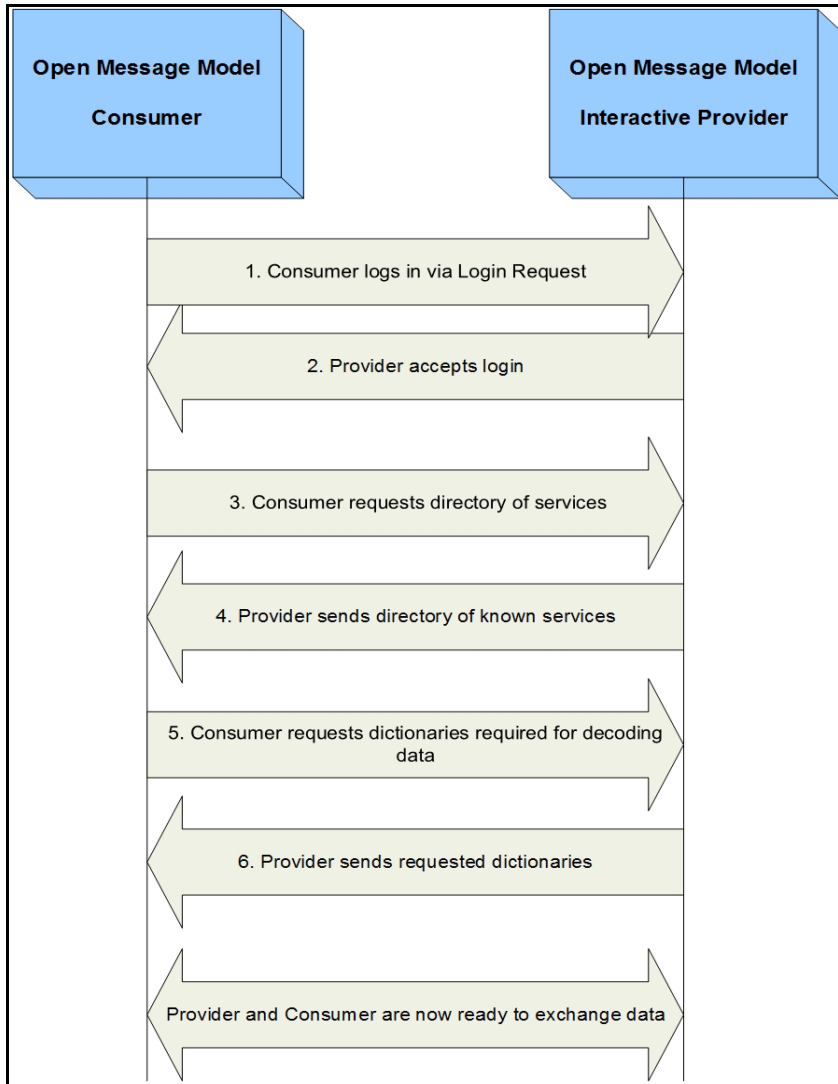

**Figure 1. Open Message Model Consumer and Interactive Provider Initial Interactions**

1. Instead of downloading any needed dictionaries, the application can load them from a local file.

## 2.5 Sending and Receiving Content

Use of non-administrative domains generally follows a specific sequence:

- The consumer sends an **ReqMsg** containing the name of an item it is interested in.
- The provider first responds with an **RefreshMsg** to bring the consumer up to date with all currently available information.
- As data changes, the provider sends **UpdateMsg** (if the consumer requested streaming information).
- When the consumer is no longer interested, it sends an **CloseMsg** to close the stream (or, if the provider needs to close the stream, it uses an **StatusMsg**).

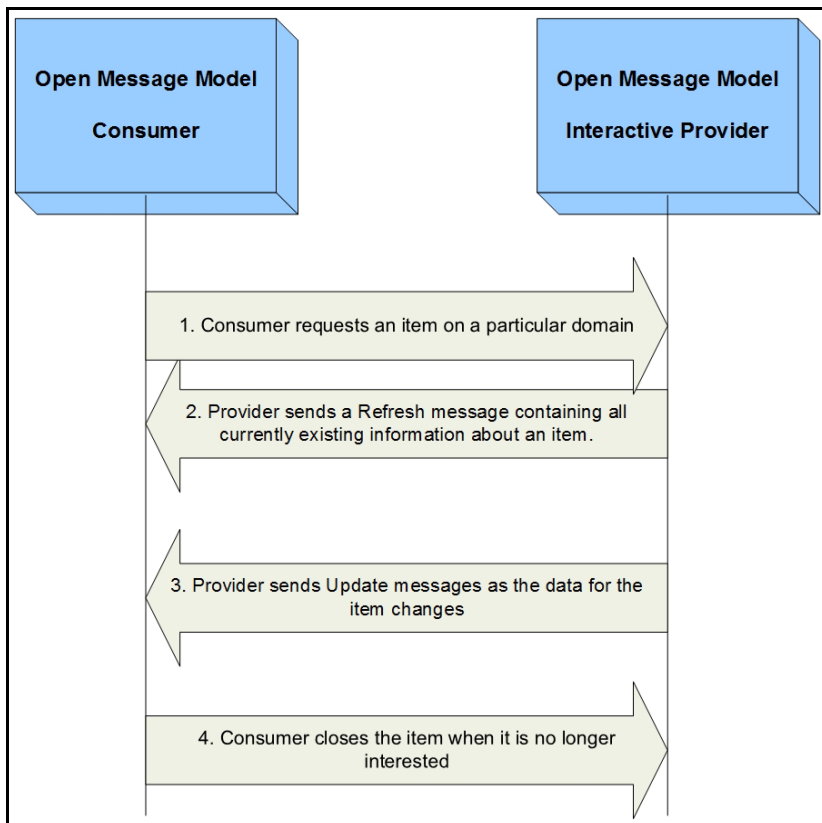


Figure 2. General Domain Use

## 2.6 General Enterprise Message API Concepts

Many domains share a set of common behaviors for handling data. If a specific behavior is not supported on a domain, this should be specified in that domain's detailed description. This section briefly defines these concepts; the *Enterprise Message API C++ Edition Developers Guide* describes them in greater detail.

### 2.6.1 Snapshot and Streaming Requests

Many domains generally support issuing a request message with or without setting the **ReqMsg.InterestAfterRefresh** flag. When the flag is set, the request is known as a “streaming” request, meaning that the refresh will be followed by updates.

When a snapshot request is made, the refresh should have a **StreamState** of **StreamState::NonStreamingEnum**. When the final part of the refresh is received, the stream is considered closed (the final refresh is indicated by the **RefreshMsg.Complete** flag on the **RefreshMsg**). The consumer should be prepared to receive status messages or update messages between the first and final parts of the refresh (if the domain supplies only single part refresh messages, like Market Price, no updates would be delivered on the stream).

### 2.6.2 Reissue Requests and Pause/Resume

A consumer application can request a new refresh and change certain parameters on an already requested stream. To do so, the application sends a subsequent **ReqMsg** on the same stream. This is known as a *reissue*.

A reissue changes the priority of a stream and pauses or resumes data flow.

- To pause streaming data, the application can send a reissue with the **ReqMsg.Pause** flag. Issuing a pause on the Login stream is interpreted as a Pause All request, resulting in all streams being paused.
- To resume data flow on the stream, the application can send a subsequent reissue with the **ReqMsg.InterestAfterRefresh** flag. Issuing a resume on the Login stream is interpreted as a Resume All.

Pause and Resume is provided as a best effort, and data may continue streaming even after a pause has been issued.

For further details on reissue requests, changeable parameters, and Pause and Resume functionality, refer to the *Enterprise Message API C++ Edition Developers Guide*.

### 2.6.3 Clearing the Cache on Refreshes

If you perform a refresh, you might need to clear the cache. To clear the cache, call **RefreshMsg.ClearCache** with a value of **true**. For further details on using the clear cache flag, refer to the *Enterprise Message API C++ Edition Reference Guide*.

```
RefreshMsg().clearCache(true);
```

When clearing a cache, you must observe the following conditions:

- Pass **true** value on all solicited level 1 data refreshes.
- Pass **true** value only in the first part of solicited level 2 data refreshes.
- Calling this function on unsolicited refreshes depends on the application and its intent:
  - If set to **true** on an unsolicited refresh, the cache is cleared and populated with new data.
  - If not set to **true** on the unsolicited refresh, new data is overlaid onto the existing data. In this case, the resulting image / refresh is a superset of fields currently contained in cache combined with the set brought by the current refresh.

### 2.6.4 Dynamic View

A **dynamic view** allows a consumer application to specify a subset of data content in which it is interested. A providing application can choose to supply only this requested subset of content across all response messages. This filtering results in reduced data flow across the connection. View use can be leveraged across all non-administrative domain model types, where specific usage and support should be indicated in the model definition. The provider indicates its support for view requesting via the **SupportViewRequests** Login attribute, as described in Section 3.3.1. For more information on dynamic views, refer to the *Enterprise Message API C++ Edition Developers Guide*.

---

**NOTE:** Currently, the Refinitiv Real-Time Advanced Distribution Server supports view-only on Market Price Level 1 data. As a result, this causes the Enterprise Message API to provide view on Market Price Level 1.

---

### 2.6.5 Batch Request

A **batch request** allows a consumer application to indicate interest in multiple like-item streams with a single **ReqMsg**. A providing application should respond by providing a status on the batch request stream itself and with new individual item streams for each item requested in the batch. Batch requesting can be leveraged across all non-administrative domain model types. The provider indicates its support for batch requests via the **SupportBatchRequests** Login attribute, as described in Section 3.3.1. For more information on batch requests, refer to the *Enterprise Message API C++ Edition Developers Guide*.

### 2.6.6 Posting

**Posting** offers an easy way for an Open Message Model consumer application to publish content to upstream components which can then provide the information. This can be done off-stream using the Login domain or on-stream using any other non-administrative domain. Use **PostMsg** to post content to the system. A **PostMsg** can contain any Open Message Model container type as its payload (but this is often a **Msg**). A provider indicates support for posting via the **SupportOMMPost** Login attribute, as described in Section 3.3.1. For more information on posting, refer to the *Enterprise Message API C++ Edition Reference Guide*.

## 3 Login Domain

### 3.1 Description

The **Login** domain registers a user with the system, after which the user can request<sup>1</sup> or post<sup>2</sup> Refinitiv Domain Model content. A Login request can also be used to authenticate a user with the system.

- A consumer application must log into the system before it can request or post content.
- A non-interactive provider application must log into the system before providing any content.

For further details:

- Section 3.2 details the use of each message within the Login domain.
- Section 3.3 presents the message payloads.
- Section 3.4 includes a brief summary of login handling and authentication.
- Section 3.5 - Section 3.7 cover specific use case scenarios.

---

1. Consumer applications can request content after logging into the system.

2. Consumer applications can post content, which is similar to contribution or unmanaged publication, after logging into the system.

## 3.2 Usage

### 3.2.1 Login Request Message

A Login request message is encoded and sent by Open Message Model consumer and Open Message Model non-interactive provider applications internally in the constructor of this class. This message registers a user with the system. After receiving a successful login response, applications can then begin consuming or providing additional content. An Open Message Model interactive provider can use the Login request information to authenticate users with the Data Access Control System.

You can configure a login request message using the following methods.

| METHOD NAME                       | DESCRIPTION   |
|-----------------------------------|---|
| OmmConsumerConfig.username()      | <b>Required.</b><br>Specifies the user name for login request message.                    |
| OmmConsumerConfig.password()      | Optional<br>Specifies the password for login request message.                             |
| OmmConsumerConfig.position()      | Optional<br>Specifies the position for login request message.                             |
| OmmConsumerConfig.applicationId() | Optional<br>Specifies the authorization application identifier for login request message. |
| OmmConsumerConfig.addAdminMsg()   | Optional<br>Specifies a login request message to override the default login request.      |

**Table 4: Configure Login Request Message**

An initial Login request must be streaming (i.e., a **ReqMsg.InterestAfterRefresh** flag set to **true** is required). After the initial Login stream is established, subsequent Login requests using the same login handle can be sent to obtain additional refresh messages, pause the stream, or resume the stream. If a login stream is paused, this is interpreted as a 'Pause All' request which indicates that all item streams associated with the user should be paused. A login stream is paused by specifying **ReqMsg.Pause** to **true**. To resume data flow on all item streams (also known as a Resume All), users need to call **ReqMsg.InterestAfterRefresh** with **true** value. For more information, refer to the *Enterprise Message API C++ Edition Developers Guide*.

| COMPONENT      | DESCRIPTION / VALUE  |
|----------------|--|
| DomainType     | <b>Required.</b> MMT_LOGIN = 1   |
| Interactions   | <b>Conditional.</b> <ul style="list-style-type: none"> <li>Setting <b>InitialImage</b> to <b>true</b> indicates that an initial image is required.</li> <li>Setting <b>InterestAfterRefresh</b> to <b>true</b> indicates that a streaming request is required. A streaming request is required before any other requests. Non-streaming requests are unsupported.</li> <li>Setting <b>Pause</b> set to <b>true</b> indicates that a pause is required. A pause request is a request to pause all item streams associated with the login. To resume all item streams associated with the login, issue another streaming request.</li> </ul> |
| QoS            | Not used.  |
| worstQos       | Not used.  |
| extendedHeader | Not used.  |
| ServiceId      | Not used.  |

**Table 5: Login Request Message**

| COMPONENT  | DESCRIPTION / VALUE   |
|------------|---|
| NameType   | <p>Optional. Possible values are:</p> <ul style="list-style-type: none"> <li>• <b>USER_NAME</b></li> <li>• <b>USER_EMAIL_ADDRESS</b></li> <li>• <b>USER_TOKEN</b></li> <li>• <b>USER_COOKIE</b></li> <li>• <b>USER_AUTHN_TOKEN</b></li> </ul> <p>If <b>NameType</b> is not set, it is assumed to be <b>USER_NAME</b>.</p> <p>A type of <b>USER_NAME</b> typically corresponds to a Data Access Control System user name. This can be used to authenticate and permission a user. <b>USER_TOKEN</b> is specified when using the AAA API. The user token is retrieved from a AAA API gateway and then passed through the system via the <b>Name</b>. To validate users, a provider can pass this user token to an authentication manager application.</p> <p>If you specify <b>USER_AUTHN_TOKEN</b>, you must also set <b>Name</b> to a single, null character (i.e., a 0x00 binary), and include an <b>AuthenticationToken</b> element in the <b>Attrib</b>. For details on the <b>AuthenticationToken</b>, refer to Section 3.2.2.</p> <p>Both <b>USER_TOKEN</b> and <b>USER_AUTHN_TOKEN</b> can periodically change: when it changes, an application can send a login reissue to pass information upstream.</p> <ul style="list-style-type: none"> <li>• For further details on using <b>USER_TOKEN</b>, refer to the AAA API documentation.</li> <li>• For further details on using <b>USER_AUTHN_TOKEN</b>, refer to the <i>UserAuthn Authentication User Manual</i>.<sup>a</sup></li> </ul> |
| Name       | <b>Required.</b> <b>Name</b> should be populated with appropriate content corresponding to the <b>NameType</b> specification.   |
| Filter     | Not used.   |
| Identifier | Not used.   |
| Attrib     | Optional. Typically an <b>ElementList</b> . Attributes are specified in Section 3.2.2.  |
| Payload    | Not used.   |

Table 5: Login Request Message (Continued)

a. For further details on Refinitiv Data Platform authentication, refer to the *UserAuthn Authentication User Manual*, accessible on [MyRefinitiv](#) in the Data Access Control System product documentation set.

### 3.2.2 Login Request Elements

You can use the Login **Attrib** elements to send additional authentication information and user preferences between components. The **ReqMsg.Attrib ReqMsg.Attrib** is an **ElementList**. The predefined elements available on a Login Request are shown in the following table.

| ELEMENT NAME     | DATA TYPE ENUMERATION | RANGE/ EXAMPLE | DESCRIPTION  |
|------------------|-----------------------|----------------|--|
| AllowSuspectData | UInt                  | 0   1          | <ul style="list-style-type: none"> <li>• <b>1</b>: Indicates that the consumer application allows a <b>OmmState.Suspect</b> state. <b>1</b> is the default setting.</li> <li>• <b>0</b>: Indicates that the consumer application prefers any suspect data result in the stream being closed with an <b>OmmState.ClosedRecover</b> state.</li> </ul> <p>For more information, refer to Section 3.4.5.</p> |

Table 6: Login Request Attrib Elements

| ELEMENT NAME                  | DATA TYPE ENUMERATION | RANGE/ EXAMPLE  | DESCRIPTION  |
|-------------------------------|-----------------------|---|--|
| ApplicationAuthorizationToken | ASCII                 | Sequence of single byte characters from the base36 character set ([0-9][A-Z]) | Indicates that application behaviors was inspected and approved by Refinitiv.<br>For more information on obtaining an application authorization token, contact your Refinitiv representative.  |
| ApplicationId                 | ASCII                 | 1 - 65535<br>e.g., <b>256</b>   | The Data Access Control System application ID. If the server authenticates with the Data Access Control System, the consumer application might need to pass in a valid <b>ApplicationId</b> . This must be unique for each application. IDs from 1 to 256 are reserved for permanent market data applications. These are assigned by Refinitiv and will be uniform across all client systems. IDs from 257 to 65535 are available for site-specific use.   |
| ApplicationName               | ASCII                 | Name of application e.g., <b>Enterprise Message API</b>                       | Identifies the application sending the Login request or response message. When present, the application name in the Login request identifies the consumer, and the application name in the Login response identifies the Open Message Model provider.  |
| AuthenticationExtended        | Buffer                | Any binary buffer   | This is a binary buffer whose content will be passed to the token authenticator as an additional means for verifying a user's identity.  |
| AuthenticationToken           | ASCII                 | Any ASCII String, e.g., <b>HOLDER</b>   | <b>Conditional.</b> <b>AuthenticationToken</b> is a client-generated token that identifies the user when operating in an environment that uses UserAuthn Authentication. On login reissue messages, this field contains a new token intended to replace the previous one about to expire.<br><br>If your Refinitiv Real-Time Distribution System has UserAuthn Authentication enabled, an <b>AuthenticationToken</b> is included in the message. For further details on UserAuthn Authentication, refer to the <i>UserAuthn Authentication User Manual</i> , accessible on <a href="#">MyRefinitiv</a> in the Data Access Control System product documentation set.<br>The default setting is: "" (an empty string). |
| DisableDataConversion         | N/A                   | N/A   | Reserved by Refinitiv.   |
| DownloadConnectionConfig      | UInt                  | 0   1   | Specifies whether to download the configuration: <ul style="list-style-type: none"> <li><b>1</b>: Indicates the user wants to download connection configuration information.</li> <li><b>0</b> (or if absent): Indicates that no connection configuration information is desired. <b>0</b> is the default setting.</li> </ul>  |

Table 6: Login Request Attrib Elements (Continued)



| ELEMENT NAME                 | DATA TYPE ENUMERATION | RANGE/ EXAMPLE  | DESCRIPTION  |
|------------------------------|-----------------------|---|--|
| InstanceId                   | ASCII                 | Any ASCII String, e.g., <b>Instance1</b>                        | <b>InstanceId</b> is used to differentiate applications that run on the same machine. However, because <b>InstanceId</b> is set by the user logging into the system, it does not guarantee uniqueness across different applications on the same machine.   |
| Password                     | ASCII                 | my_password   | Sets the password for logging into the system. This information may be required and encrypted in the future.   |
| Position                     | ASCII                 | ip addr/hostname<br>ip addr/net<br>e.g., <b>192.168.1.1/net</b> | The Data Access Control System position. If the server is authenticating with the Data Access Control System, the consumer application might need to pass in a valid position.   |
| ProvidePermissionExpressions | UInt                  | 0   1   | If specified on the Login Request, this indicates a consumer wants permission expression information to be sent with responses. Permission expressions allow for items to be proxy permissioned by a consumer via content-based entitlements.<br><b>ProvidePermissionExpressions</b> defaults to <b>1</b> .  |
| ProvidePermissionProfile     | UInt                  | 0   1   | When specified on a Login Request, indicates that a consumer desires the permission profile. An application can use the permission profile to perform proxy permissioning.<br><b>ProvidePermissionProfile</b> defaults to <b>1</b> .   |
| Role                         | UInt                  | LOGIN_ROLE_CONS = 0,<br>LOGIN_ROLE_PROV = 1                     | Indicates the role of the application logging onto the system. <ul style="list-style-type: none"> <li>An Open Message Model consumer application should specify its role as <b>LOGIN_ROLE_CONS</b>.</li> <li>An Open Message Model non-interactive provider application should specify its role as <b>LOGIN_ROLE_PROV</b>.</li> <li>Enterprise Message API defaults the role element with a value of 1.</li> </ul> Open Message Model consumer applications typically connect to a different port number than non-interactive provider applications. Role information allows Refinitiv Real-Time Distribution System to detect and inform users of incorrect port use.<br><b>Role</b> defaults to <b>0</b> . |
| RoundTripLatency             | UInt                  | 2   | Indicates whether the consumer supports Round Trip Time (RTT) latency monitoring. The presence of this element indicates that the consumer supports the RTT monitoring feature. Non-interactive providers do not use this element. If the element is missing, the consumer does not support RTT Latency monitoring.  |

Table 6: Login Request Attribute Elements (Continued)

| ELEMENT NAME                      | DATA TYPE<br>ENUMERATION | RANGE/<br>EXAMPLE | DESCRIPTION  |
|-----------------------------------|--------------------------|-------------------|--|
| SingleOpen                        | UInt                     | 0   1             | <ul style="list-style-type: none"> <li><b>1</b>: Indicates the consumer application wants the provider to drive stream recovery.</li> <li><b>0</b>: Indicates that the consumer application will drive stream recovery.</li> </ul> <p>For more information, refer to Section 3.4.5.<br/><b>SingleOpen</b> defaults to <b>1</b>.</p>  |
| SupportProviderDictionaryDownload | UInt                     | 0   1             | <p>Indicates whether the server supports the Provider Dictionary Download feature:</p> <ul style="list-style-type: none"> <li><b>1</b>: The server supports provider dictionary downloads.</li> <li><b>0</b>: The server does not support provider dictionary downloads.</li> </ul> <p>If this element is missing, the server does not support provider dictionary downloads.</p> <p>For more information on the provider dictionary download feature, refer to the <i>Enterprise Message API C++ Edition Developers Guide</i>.<br/><b>SupportProviderDictionaryDownload</b> defaults to <b>0</b>.</p> |

Table 6: Login Request Attribute Elements (Continued)

### 3.2.3 Login Request Domain Representation

The Domain Representation of the Login Request Message is an easy-to-use object which can set up and return an encoded Open Message Model Login Request Message without extensive effort. You can find this object in Enterprise Message API's Login package.

```

OmmConsumerConfig ommConsumerConfig;

ommConsumerConfig.operationModel(
OmmConsumerConfig::UserDispatchEnum );

Login::LoginReq loginRequest;

loginRequest.name("user");
loginRequest.applicationId("127");
loginRequest.position("127.0.0.1/net");
loginRequest.allowSuspectData(true);

ommConsumerConfig.addAdminMsg(loginRequest.getMessage());

```

Figure 3. Login Request Domain Representation Code Usage Example

### 3.2.4 Login Refresh Message

A Login refresh message is encoded using **RefreshMsg** and sent by Open Message Model interactive provider applications. This message is used to respond to a Login Request message after the user's Login is accepted. An Open Message Model provider can use the Login request information to authenticate users with the Data Access Control System. After authentication, a refresh message is sent to convey that the login was accepted. If the login is rejected, a Login status message should be sent as described in Section 3.2.7.

| COMPONENT      | DESCRIPTION / VALUE  |
|----------------|--|
| DomainType     | <b>Required.</b> MMT_LOGIN = 1   |
| State          | Optional.<br>For the Refresh message, when accepting Login: <ul style="list-style-type: none"> <li>• <b>StreamState</b> = OmmState.Open</li> <li>• <b>DataState</b> = OmmState.Ok</li> <li>• <b>StatusCode</b> = OmmState.None</li> </ul>  |
| Solicited      | <b>Required.</b> Specifies whether the refresh was solicited. <ul style="list-style-type: none"> <li>• <b>true</b>: Indicates that the refresh was solicited.</li> <li>• <b>false</b>: Indicates that the refresh was unsolicited.</li> </ul>  |
| Indications    | <ul style="list-style-type: none"> <li>• <b>Required: Complete</b> set to <b>true</b>, which indicates the refresh is complete. The content of a Login Refresh message is expected to be atomic and contained in a single part, therefore <b>RefreshMsg.Complete</b> must be set to <b>true</b>.</li> <li>• Optional: <b>ClearCache</b> set to <b>true</b>, which indicates to clear the cache.</li> </ul> |
| QoS            | Not used.  |
| SeqNum         | Not used.  |
| ItemGroup      | Not used.  |
| PermissionData | Not used.  |
| extendedHeader | Not used.  |
| ServiceId      | Not used.  |
| NameType       | Optional.<br>Possible values: <ul style="list-style-type: none"> <li>• <b>USER_NAME</b></li> <li>• <b>USER_EMAIL_ADDRESS</b></li> <li>• <b>USER_TOKEN</b></li> <li>• <b>USER_AUTHN_TOKEN</b></li> </ul> If <b>NameType</b> is not set then it is assumed to be a <b>NameType</b> of <b>USER_NAME</b> .<br>If present, the value should match the type specified in the Login request.                      |
| Name           | Optional.<br><b>Name</b> should match the <b>Name</b> specified in the Login request and contain appropriate content corresponding to the <b>NameType</b> specification.   |
| Filter         | Not used.  |
| Identifier     | Not used.  |

**Table 7: Login Refresh Message**

| COMPONENT | DESCRIPTION / VALUE  |
|-----------|--|
| Attrib    | Optional.<br>Typically an <b>ElementList</b> . Elements are specified in Section 3.2.5.  |
| Payload   | Optional.<br>Typically present when login requests connection configuration or permission profile information. The payload is sent as an <b>ElementList</b> . For payload details, refer to Section 3.3.1. |

**Table 7: Login Refresh Message (Continued)**

### 3.2.5 Login Refresh Elements

The Login **Attrib** can be used to send additional authentication information and user preferences between components. The **attribContainerType** is an **ElementList**, which can contain any of the following predefined elements (none of which are required):

| ELEMENT NAME               | DATA TYPE ENUMERATION | RANGE/EXAMPLE  | DESCRIPTION  |
|----------------------------|-----------------------|--|--|
| AllowSuspectData           | UInt                  | 0   1  | <p>Sets whether the provider application passes along suspect <b>StreamState</b> information.</p> <ul style="list-style-type: none"> <li><b>1</b>: The provider application passes along suspect <b>StreamState</b> information. <b>1</b> is the default setting.</li> <li><b>0</b>: The provider application does not pass along suspect data.</li> </ul> <p>Any suspect stream will be closed with an <b>OmmState.ClosedRecover</b> state.</p> <p>For more information, refer to Section 3.4.5.</p>                      |
| ApplicationId              | ASCII                 | 1 - 65535<br>e.g., <b>256</b>                              | <p>Specifies the Data Access Control System application ID. If the server authenticates with the Data Access Control System, the consumer application may be required to pass in a valid <b>ApplicationId</b>. This should match whatever was sent in the request. This must be unique for each application. IDs from 1 to 256 are reserved for permanent market data applications. Refinitiv assigns these and they are uniform across all client systems. IDs from 257 to 65535 are available for site-specific use.</p> |
| ApplicationName            | ASCII                 | name of application<br>e.g., <b>Enterprise Message API</b> | <p>Identifies the application sending the Login request or response message. When present, the application name in the Login request identifies the Open Message Model consumer and the application name in the Login response identifies the Open Message Model provider.</p>   |
| AuthenticationErrorCode    | UInt                  | From <b>0</b> to <b>4294967296</b>                         | <p>Specifies the code for a specific Refinitiv Real-Time Distribution System Authentication error (or non-error) condition. <b>0</b> indicates no error condition and is the default setting.</p>  |
| AuthenticationErrorText    | ASCII                 | User-defined value   | <p>Text accompanying and explaining the <b>AuthenticationErrorCode</b>.</p>  |
| AuthenticationExtendedResp | Buffer                | User-defined value   | <p>This is a binary buffer.</p> <p><b>AuthenticationExtendedResp</b> contains additional customer-defined data associated with the <b>AuthenticationToken</b> element sent in the original Login Request.</p>  |
| AuthenticationTTReissue    | UInt                  | User-defined value   | <p>Indicates when a new authentication token needs to be reissued (in UNIX epoch time).</p>  |

**Table 8: Login Refresh Attrib Elements**

| ELEMENT NAME                 | DATA TYPE ENUMERATION | RANGE/EXAMPLE  | DESCRIPTION  |
|------------------------------|-----------------------|--|--|
| Position                     | ASCII                 | ip addr/hostname or ip addr/net<br>e.g.:<br><b>192.168.1.1/net</b> | Specifies the Data Access Control System location. If the server authenticates with the Data Access Control System, the consumer application might be required to pass in a valid position. If present, this should match whatever was sent in the request or be set to the IP address of the connected client.  |
| ProvidePermissionExpressions | UInt                  | 0   1  | If specified on a Login Refresh, indicates that a provider will send permission expression information with its responses.<br><b>ProvidePermissionExpressions</b> is typically present because the login request message requested this information. Permission expressions allow for items to be proxy permissioned by a consumer via content-based entitlements.<br><b>ProvidePermissionExpressions</b> defaults to 1.   |
| ProvidePermissionProfile     | UInt                  | 0   1  | If specified on the Login Refresh, indicates that the permission profile is provided. This is typically present because the login request message requested this information. An application can use the permission profile to perform proxy permissioning.<br><b>ProvidePermissionProfile</b> defaults to 1.  |
| RoundTripLatency             | UInt                  | 2  | Indicates support for <b>RoundTripLatency</b> monitoring by the provider. If the element is missing, the provider might still support the feature.   |
| SingleOpen                   | UInt                  | 0   1  | Specifies whether the provider drives stream recovery:<br><ul style="list-style-type: none"> <li>• <b>1</b>: The provider drives stream recovery. <b>1</b> is the default setting.</li> <li>• <b>0</b>: The provider does not drive stream recovery; it is the responsibility of the downstream application.</li> </ul> For more information, refer to Section 3.4.5.  |
| SupportBatchRequests         | UInt                  | 0, 7   | Indicates whether the provider supports batch messages. Consumers use batch messages to specify multiple items or streams in the same request or close message. For more information on batch requesting, refer to the <i>Enterprise Message API C++ Edition Developers Guide</i> .<br><ul style="list-style-type: none"> <li>• <b>0x0</b> (or if absent): The provider does not support batch messages. <b>0</b> is the default setting.</li> <li>• <b>0x1</b>: The provider supports batch request.</li> <li>• <b>0x2</b>: The provider supports batch reissue.</li> <li>• <b>0x4</b>: The provider supports batch close.</li> </ul> For instance, if value is set to 7, then based on combination of bits set (0x1 + 0x2 + 0x4), provider supports batch request, reissue, and close. |

Table 8: Login Refresh Attri**b** Elements (Continued)

| ELEMENT NAME                      | DATA TYPE ENUMERATION | RANGE/EXAMPLE | DESCRIPTION   |
|-----------------------------------|-----------------------|---------------|---|
| SupportEnhancedSymbolList         | UInt                  | 0   1         | <p>Indicates whether the provider supports enhanced symbol list functionality.</p> <ul style="list-style-type: none"> <li><b>0</b>: The provider does not support Symbol List enhancements. <b>0</b> is the default setting.</li> <li><b>1</b>: The provider supports Symbol List data streams.</li> </ul>  |
| SupportOMMPost                    | UInt                  | 0   1         | <p>Indicates whether the provider supports Open Message Model posting and whether the user is permitted to post:</p> <ul style="list-style-type: none"> <li><b>1</b>: The provider supports Open Message Model posting and the user is permitted.</li> <li><b>0</b>: The provider supports the Open Message Model posting feature, but the user is not permitted. <b>0</b> is the default setting.</li> <li>If absent, the server does not support the Open Message Model Post feature.</li> </ul> <p>For more information on Posting, refer to the <i>Enterprise Message API C++ Edition Developers Guide</i>.</p> |
| SupportOptimizedPauseResume       | UInt                  | 0   1         | <p>Indicates whether the provider supports Optimized Pause and Resume. Optimized Pause and Resume allows for pausing/resuming of individual item streams or pausing all item streams (by pausing the Login stream). For more information on Pause and Resume, refer to the <i>Enterprise Message API C++ Edition Developers Guide</i>.</p> <ul style="list-style-type: none"> <li><b>1</b>: The server supports optimized pause and resume.</li> <li><b>0</b> (or if absent): The server does not support optimized pause and resume. <b>0</b> is the default setting.</li> </ul>                                   |
| SupportPauseResume                | UInt                  | 0   1         | <p>Indicates whether the server supports pause and resume.</p> <ul style="list-style-type: none"> <li><b>1</b>: The server supports pause and resume.</li> <li><b>0</b> (or if absent): The server does not support pause and resume. <b>0</b> is the default setting.</li> </ul>   |
| SupportProviderDictionaryDownload | UInt                  | 0   1         | <p>Indicates whether the server supports the Provider Dictionary Download feature:</p> <ul style="list-style-type: none"> <li><b>1</b>: The server supports the provider dictionary download.</li> <li><b>0</b>: The server does not support the provider dictionary download feature. <b>0</b> is the default setting.</li> </ul> <p>If this element is missing, the server does not support the provider dictionary download feature.</p> <p>For more information on the provider dictionary download feature, refer to the <i>Enterprise Message API C++ Edition Developers Guide</i>.</p>                       |

Table 8: Login Refresh Attri**b** Elements (Continued)

| ELEMENT NAME        | DATA TYPE<br>ENUMERATION | RANGE/EXAMPLE | DESCRIPTION  |
|---------------------|--------------------------|---------------|--|
| SupportStandby      | UInt                     | 0   1         | <p>Indicates whether the provider supports Warm Standby functionality. If supported, a provider can be told to run as an active or a standby server, where the active will behave as usual. The standby will respond to item requests only with the message header and will forward any state changing information. If informed that the active server failed, the standby begins sending responses and assumes active functionality.</p> <ul style="list-style-type: none"> <li><b>1</b>: The provider supports a Warm Standby group setup.</li> <li><b>0</b> (or if absent): The provider does not support warm standby functionality. <b>0</b> is the default setting.</li> </ul> <p>For more information on Warm Standby functionality, refer to Section 3.2.12.</p> |
| SupportViewRequests | UInt                     | 0   1         | <p>Indicates whether the provider supports requesting with Dynamic View information. Using Dynamic Views, a user can request only the specific contents of the response information in which they are interested. For more information on using Dynamic Views, refer to the <i>Enterprise Message API C++ Edition Developers Guide</i>.</p> <ul style="list-style-type: none"> <li><b>1</b>: The provider supports Dynamic Views specified on request messages.</li> <li><b>0</b> (or if absent): The provider does not support Dynamic Views specified on request messages. <b>0</b> is the default setting.</li> </ul>   |

Table 8: Login Refresh Attr**ib** Elements (Continued)



### 3.2.6 Login Refresh Domain Representation

The Domain Representation of the Login Refresh Message is an easy-to-use object which can set up and return an encoded Open Message Model Login Refresh Message without extensive effort. You can find this object in Enterprise Message API's Login package.

```
Login::LoginRefresh loginRefresh = Login::LoginRefresh();

loginRefresh.allowSuspectData(true);
loginRefresh.singleOpen(true);
loginRefresh.name("user");
loginRefresh.solicited(true);
loginRefresh.state( OmmState::OpenEnum, OmmState::OkEnum, OmmState::NoneEnum, "Login accepted" );

ommProvider.submit( loginRefresh.getMessage(), handle);
```

**Figure 4. Login Refresh Domain Representation Code Usage Example**

### 3.2.7 Login Status Message

Open Message Model provider and non-interactive provider applications use the Login status message to convey state information associated with the login stream. Such state information can indicate that a login stream cannot be established or to inform a consumer of a state change associated with an open login stream.

The Login status message can also be used to reject a login request or close an existing login stream. When a login stream is closed via a status, any other open streams associated with the user are also closed as a result.

| COMPONENT      | DESCRIPTION / VALUE  |
|----------------|--|
| DomainType     | <b>Required.</b> MMT_LOGIN = 1   |
| State          | Optional.<br>For Status, when rejecting Login: <ul style="list-style-type: none"> <li>• <b>StreamState</b> = <b>OmmState.Closed</b></li> <li>• <b>DataState</b> = <b>OmmState.Ok</b></li> <li>• <b>StatusCode</b> = <b>OmmState.NotAuthorized</b></li> </ul> For Status, when a user needs to retry a login, for example when the Data Access Control System is not yet connected to a Refinitiv Real-Time Advanced Distribution Server: <ul style="list-style-type: none"> <li>• <b>StreamState</b> = <b>OmmState.ClosedRecover</b></li> <li>• <b>DataState</b> = <b>OmmState.Suspect</b></li> <li>• <b>StatusCode</b> = <b>OmmState.NotAuthorized</b></li> </ul> |
| SeqNum         | Optional.  |
| ItemGroup      | Not used.  |
| PermissionData | Not used.  |
| extendedHeader | Not used.  |
| ServiceId      | Not used.  |
| NameType       | Optional. Possible values: <ul style="list-style-type: none"> <li>• <b>USER_NAME</b></li> <li>• <b>USER_EMAIL_ADDRESS</b></li> <li>• <b>USER_TOKEN</b></li> <li>• <b>USER_COOKIE</b></li> </ul> If present, <b>NameType</b> should match the type specified in the Login request. If <b>NameType</b> is unspecified, it is assumed to be a <b>NameType</b> of <b>USER_NAME</b> .   |
| Name           | Optional. <b>Name</b> should match the one used in the Login request and should contain appropriate content corresponding to the specification.  |
| Filter         | Not used.  |
| Identifier     | Not used.  |
| Attrib         | Optional.<br>Typically an ElementList. For the contents of ElementList, refer to Section 3.2.5.  |
| Payload        | Not used.  |

**Table 9: Login Status Message Member Use**

### 3.2.8 Login Status Elements

The Login **Attrib** can be used to send additional authentication information and user preferences between components. The **attribContainerType** is an **ElementList**, which can contain any of the following predefined elements (none of which are required):

| ELEMENT NAME            | DATA TYPE ENUMERATION | RANGE/EXAMPLE        | DESCRIPTION   |
|-------------------------|-----------------------|----------------------|---|
| AuthenticationErrorCode | UInt                  | From 0 to 4294967296 | Specifies the code for a specific Refinitiv Real-Time Distribution System Authentication error (or non-error) condition. 0 indicates no error condition and is the default setting. |
| AuthenticationErrorText | ASCII                 |                      | Text accompanying and explaining the <b>AuthenticationErrorCode</b> .   |

Table 10: Login Status Attrib Elements

### 3.2.9 Login Status Domain Representation

The Domain Representation of the Login Status Message is an easy-to-use object which can set up and return an encoded Open Message Model Login Status Message without extensive effort. You can find this object in Enterprise Message API's Login package.

```

Login::LoginStatus loginStatus = Login::LoginStatus();

if (requestMsg.hasNameType())
    loginStatus.nameType(requestMsg.getNameType());

if (requestMsg.hasName())
    loginStatus.name(requestMsg.getName());

loginStatus.state( OmmState::ClosedEnum, OmmState::SuspectEnum, OmmState::NotFoundEnum, "Invalid
    domain" );

ommProvider.submit(loginStatus.getMessage(), handle);

```

Figure 5. Login Status Domain Representation Code Usage Example

### 3.2.10 Login Update Message

Update messages are currently not used or supported on a Login stream.

### 3.2.11 Login Close Message

A Login close message is encoded and sent by Open Message Model consumer applications. This message allows a consumer to log out of the system. Closing a login stream is equivalent to a 'Close All' type of message, where all open streams are closed (thus all other streams associated with the user are closed). A provider can log off a user and close all of that user's streams via a Login Status message (for details, refer to Section 3.2.7).

| COMPONENT      | DESCRIPTION / VALUE            |
|----------------|--------------------------------|
| DomainType     | <b>Required.</b> MMT_LOGIN = 1 |
| extendedHeader | Not used.                      |
| Payload        | Not used.                      |

**Table 11: Login Close Message Member Use**

### 3.2.12 Login Generic Message Use

#### 3.2.12.1 Login Consumer Connection Status Message

A Login Consumer Connection Status message is encoded and sent by Open Message Model consumer applications. This message informs an interactive provider of its role in a Warm Standby group (either as an Active or Standby provider). When Active, a provider behaves normally. However, if a provider is Standby, it responds to requests only with a message header (intended to allow a consumer application to confirm the availability of their requested data across active and standby servers), and forwards any state-related messages (i.e., unsolicited refresh messages, status messages). While in Standby mode, a provider should aggregate changes to item streams whenever possible. If the provider is changed from Standby to Active via this message, all aggregated update messages are passed along. When aggregation is not possible, a full, unsolicited refresh message is passed along.

The consumer application is responsible for ensuring that items are available and equivalent across all providers in a warm standby group. This includes managing state and availability differences as well as item group differences.

Content for a Login Consumer Connection Status message is expected to be atomic and contained in a single part, therefore **GenericMsg.Complete** should be present in the Generic message's flags.

| COMPONENT          | DESCRIPTION / VALUE   |
|--------------------|---|
| DomainType         | <b>Required.</b> MMT_LOGIN = 1  |
| <i>Indications</i> | <b>Required.</b><br><b>Complete: true</b> , indicates that the refresh is complete. |
| PartNum            | Not used.   |
| SeqNum             | Not used.   |
| secondarySeqNum    | Not used.   |
| PermissionData     | Not used.   |
| extendedHeader     | Not used.   |
| ServiceId          | Not used.   |
| NameType           | Not used.   |
| Name               | <b>Required.</b> <b>Name</b> must be set to <b>ConsumerConnectionStatus</b> .       |
| Filter             | Not used.   |
| Identifier         | Not used.   |

**Table 12: Login Consumer Connection Status Message Member Use**

| COMPONENT | DESCRIPTION / VALUE   |
|-----------|---|
| Attrib    | Not used.   |
| Payload   | <b>Required.</b> Indicates whether a provider acts as an Active or Standby server. Payload is sent as a <b>Map</b> type. For further details, refer to Section 3.3.2. |

Table 12: Login Consumer Connection Status Message Member Use (Continued)

### 3.2.12.2 RTT Login Generic Message

A Round Trip Time (RTT) Login Generic Message exchange is initiated by the Interactive Provider application. This message must contain the **Ticks** count, which is set by the provider before sending the message to a consumer that supports RTT functionality. The CPU tick count can be retrieved using the **{getTicks}** call. When the consumer receives the RTT message, the consumer automatically sends it back to the interactive provider with the **Ticks** value unchanged. The interactive provider calculates the round trip time by subtracting the **Ticks** value from the message from its current time given by the **{getTicks}** call. In its subsequent RTT requests to the consumer, a provider can include the previously calculated **RoundTripLatency** value, in microseconds.

Handling RTT Login Generic messages on the provider's side should be implemented in the user application. On the consumer side, the Watchlist automatically mirrors the provider's RTT request back to the provider when RTT handling is configured. The consumer can listen for these messages and implement specific business-logic to further handle them.

| COMPONENT       | DESCRIPTION / VALUE  |
|-----------------|--|
| DomainType      | <b>Required.</b> MMT_LOGIN = 1   |
| PartNum         | Not used.  |
| SeqNum          | Not used.  |
| secondarySeqNum | Not used.  |
| PermissionData  | Not used.  |
| extendedHeader  | Not used.  |
| ServiceId       | Not used.  |
| NameType        | Not used.  |
| Name            | Not used.  |
| Filter          | Not used.  |
| Identifier      | Not used.  |
| Attrib          | Not used.  |
| Payload         | <b>Required.</b> Payload is sent as an <b>ElementList</b> type and must contain an <b>ElementEntry</b> with the ticks count that represents the time on the provider's side. Additionally, <b>Payload</b> can contain two optional entries: <b>RoundTripLatency</b> and <b>TcpRetrans</b> . For further details, refer to Section 3.3.2. |

Table 13: RTT Login Generic Message Member Use

### 3.2.13 Login Post Message

Open Message Model consumer applications can encode and send data for any item via Post messages on the item's Login stream. This is known as **off-stream posting** because items are posted without using that item's dedicated stream. Posting an item on its own dedicated stream is referred to as **on-stream posting**.

When an application is posting off-stream, the **PostMsg** requires **Name** and **ServiceId** information. For more details on posting, refer to the *Enterprise Message API C++ Edition Developers Guide*.

### 3.2.14 Login Ack Message

Open Message Model provider applications encode and send acknowledgment messages (**AckMsg**) to acknowledge the receipt of Post messages. This message is used whenever a consumer is posting off-stream and asks for acknowledgments. The acknowledgment contains a positive (ACK) or negative (NACK) code. For more details on posting, see the *Enterprise Message API C++ Edition Developers Guide*.

## 3.3 Data

### 3.3.1 Login Refresh Message Payload

When a Login request message asks for connection configuration information (i.e., **DownloadConnectionConfig = 1**), a provider capable of supplying these details should respond with extended connection information in the **RefreshMsg** payload. This information can be useful for load balancing connections across multiple providers or Refinitiv Real-Time Advanced Distribution Server components. Load balancing can be set up in a manner where some well-known providers act solely as load-balancing servers, monitoring the load and state of other providers and directing consumers to less-loaded providers to handle the information exchange.

The extended connection information contains a list of other providers, along with connection and load-related information, and is formatted as a sorted **Vector** type, where each **VectorEntry** contains an **ElementList**. Each vector entry contains data specific to one provider. The summary data (an **ElementList**) contains information about the number of standby providers to which the consumer should connect. If this value is non-zero, the consumer is expected to support Warm Standby functionality and connect to multiple providers.

The list should be sorted in order of best to worst choice.

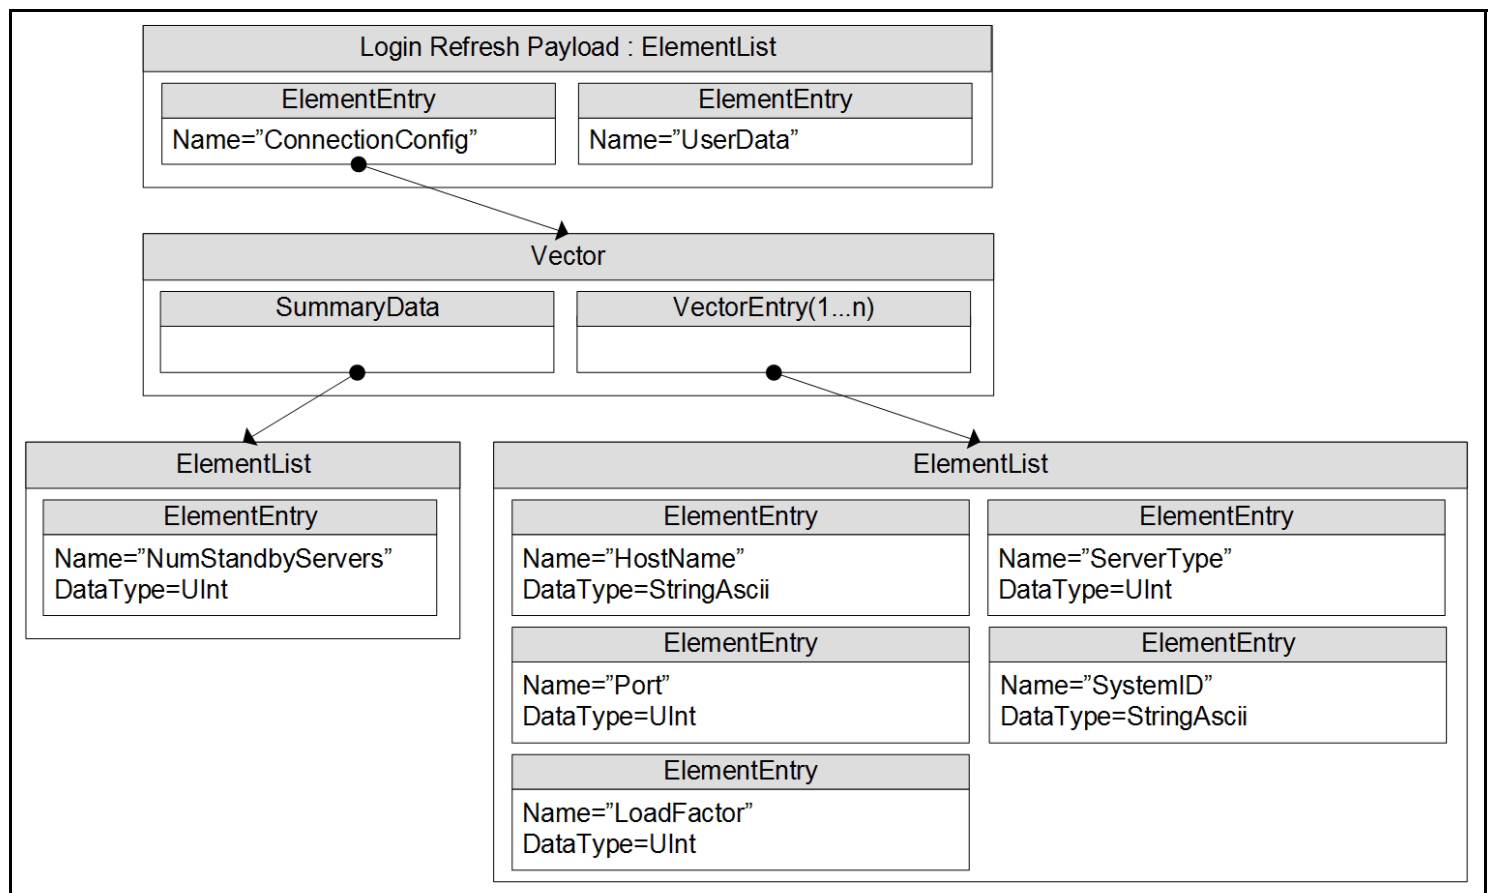


Figure 6. Login Refresh Message Payload

When the payload is present, the summary data **ElementList** must contain the following element (which has no default):

| NAME              | TYPE | RANGE/EXAMPLE           | DESCRIPTION   |
|-------------------|------|-------------------------|---|
| NumStandbyServers | UInt | 0 - 0xFFFFFFFF<br>value | Specifies the number of standby servers to which the client can connect.<br><br>If set to <b>0</b> , only one provider is connected, which serves as the primary connection (i.e., warm standby should not be attempted). |

**Table 14: Vector.SummaryData's ElementList Contents**

Each **VectorEntry** contains an **ElementList**, each list describing a single provider. Possible elements in this list are as follows, with any default behavior included in the description:

| NAME       | TYPE  | RANGE/EXAMPLE                   | DESCRIPTION  |
|------------|-------|---------------------------------|--|
| Hostname   | ASCII | "myHostName"<br>"192.168.1.100" | <b>Conditional</b> . Specifies the candidate provider's IP address or hostname. <b>Hostname</b> is required when a payload is present.   |
| Port       | UInt  | 14002                           | <b>Conditional</b> . Specifies the candidate provider's port number. <b>Port</b> is required when a payload is present.  |
| LoadFactor | UInt  | 0 - 65535                       | Describes the load of the provider, where <b>0</b> is the least loaded and <b>65535</b> is the most loaded. The <b>Vector</b> is expected to be sorted, so a consumer need not traverse the list to find the least loaded; the first <b>VectorEntry</b> should contain an <b>ElementList</b> describing the least-loaded provider.<br><b>LoadFactor</b> defaults to 65535. |
| ServerType | UInt  | 0   1                           | When using a warm standby setup, <b>ServerType</b> specifies the provider's expected behavior: <ul style="list-style-type: none"> <li><b>0</b>: This provider should be the Active server.</li> <li><b>1</b>: This provider should be the Standby server. <b>1</b> is the default setting.</li> </ul>  |
| SystemID   | ASCII |                                 | For future use.  |

**Table 15: ElementList Contents**



3.3.2 Login Generic Message Payloads

3.3.2.1 Login Consumer Connection Status Message Payload

The Login data structure for **Payload** is a Map of ASCII -> ElementList. Each key is a **ServiceName**. Each **ElementList** contains one **ElementEntry**. There is no summary data and typically only one map entry that informs the provider of its warm standby role.

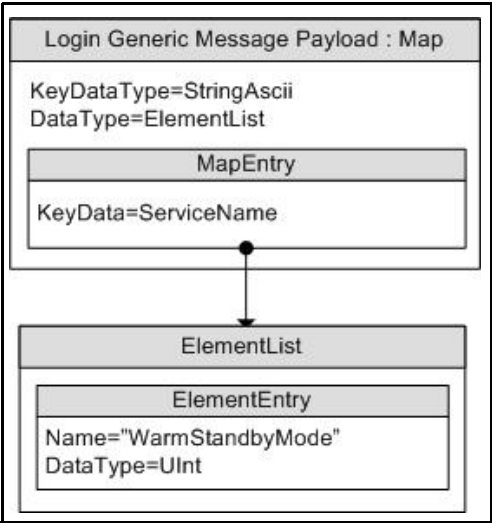



Figure 7. Login Generic Message Payload

| ELEMENT NAME    | DATA TYPE | RANGE/EXAMPLE | DESCRIPTION  |
|-----------------|-----------|---------------|--|
| WarmStandbyMode | UInt      | 0   1         | <b>Required.</b> Informs an interactive provider of its role in a Warm Standby group. <ul style="list-style-type: none"><li>• <b>0</b>: Informs the provider to be an Active server</li><li>• <b>1</b>: Informs the provider to be a Standby server.</li></ul> <b>WarmStandbyMode</b> does not have a default. |

Table 16: MapEntry Elements

3.3.2.2 RTT Login Generic Message Payload

The RTT message payload is an **ElementList**, which must contain an **ElementEntry** with **Ticks** data and, optionally, **ElementEntry**s with latency and TCP retransmission values.

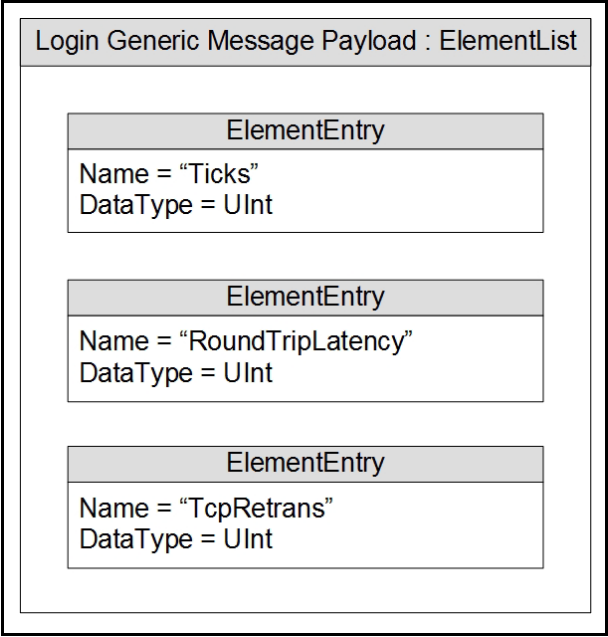

| ELEMENT NAME     | DATA TYPE | RANGE/EXAMPLE                    | DESCRIPTION   |
|------------------|-----------|----------------------------------|---|
| Ticks            | Int       | 0 – 2 <sup>64</sup> - 1   235634 | <b>Required.</b> Specifies the time set by the provider at the time the message was created.  |
| RoundTripLatency | UInt      | 0 – 2 <sup>64</sup> - 1   358    | Specifies the previous Round Trip Latency value (in microseconds) calculated by the provider. |
| TcpRetrans       | UInt      | 0 – 2 <sup>64</sup> - 1   5      | Specifies the current number of retransmissions.  |

Table 17: ElementList ElementEntry

## 3.4 Special Semantics

### 3.4.1 Login Direction

Login Request Messages are always sent from client to server, regardless of which is the provider and which is the consumer. Consumers send a Login Request Message to the providers they connect to, while non interactive provider send a Login Request Message to the consumer server.

### 3.4.2 Initial Login

An Enterprise Message API Consumer sends a login request to an Open Message Model Provider application on behalf of users who are using login attributes specified in **OmmConsumerConfig**. Users can register to get a login handle to receive a login status or use the login handle to reissue and post messages on a login stream.

### 3.4.3 Multiple Logins

Enterprise Message API does not support multiple logins per **OmmConsumer** as login stream is opened internally by Enterprise Message API. If multiple logins are needed in the applications, users need to create additional **OmmConsumer** instances, one per login.

### 3.4.4 Group and Service Status

Group and service status messages do not apply to the Login domain.

### 3.4.5 Single Open and Allow Suspect Data Behavior

The **SingleOpen** and **AllowSuspectData** Elements that are passed via the **Attrib** can effect how state information is processed. When the provider indicates support for SingleOpen behavior, the provider should drive the recovery of item streams. If no provider support is indicated, the consumer should drive any recovery.

The following table shows how a provider can convert messages to honor the consumer's **SingleOpen** and **AllowSuspectData** settings. The first column in the table shows the provider's actual **StreamState** and **DataState**. Each subsequent column shows how this state information can be modified to follow that column's specific **SingleOpen** and **AllowSuspectData** settings. If any **SingleOpen** and **AllowSuspectData** configuration causes a contradiction in behavior (e.g., **SingleOpen** indicates that the provider should handle recovery, but **AllowSuspectData** indicates that the consumer does not want to receive suspect status), **SingleOpen** behavior takes precedence.

The status in the table could be from a Directory STATE filter entry, from a Directory GROUP filter entry, or from an item Status Message. For more information on Status, refer to the *Enterprise Message API C++ Edition Developers Guide*.

**NOTE:** The Enterprise Message API does not perform any special processing based on the **SingleOpen** and **AllowSuspectData** settings. The provider application must perform any necessary conversion.

If **AcceptingRequests** is **FALSE**, new requests should not be made to a provider application, regardless of **ServiceState**. However, even if **AcceptingRequests** is **FALSE**, reissue requests can still be made for any item streams that are currently open to the provider.

The following table uses the abbreviations:

- SS for **StreamState**
- DS for **DataState**

| ACTUAL STATE INFORMATION  | MESSAGE SENT WHEN:<br>SINGLEOPEN = 1<br>ALLOWSUSPECTDATA = 1      | MESSAGE SENT WHEN:<br>SINGLEOPEN = 1<br>ALLOWSUSPECTDATA = 0      | MESSAGE SENT WHEN:<br>SINGLEOPEN = 0<br>ALLOWSUSPECTDATA = 1         | MESSAGE SENT WHEN:<br>SINGLEOPEN = 0<br>ALLOWSUSPECTDATA = 0  |
|---|---|---|--|---|
| SS = OPEN<br>DS = SUSPECT   | SS = OPEN<br>DS = SUSPECT   | SS = OPEN<br>DS = SUSPECT   | SS = OPEN<br>DS = SUSPECT  | SS = CLOSED_RECOVER<br>DS = SUSPECT                           |
| SS = CLOSED_RECOVER<br>DS = SUSPECT   | SS = OPEN<br>DS = SUSPECT   | SS = OPEN<br>DS = SUSPECT   | SS = CLOSED_RECOVER<br>DS = SUSPECT                                  | SS = CLOSED_RECOVER<br>DS = SUSPECT                           |
| New item request when <sup>a</sup> :<br>ServiceState = DOWN<br>AcceptingRequests = TRUE         | SS = OPEN<br>DS = SUSPECT   | SS = OPEN<br>DS = SUSPECT   | SS = CLOSED_RECOVER<br>DS = SUSPECT                                  | SS = CLOSED_RECOVER<br>DS = SUSPECT                           |
| New item requests when <sup>a</sup> :<br>ServiceState = UP<br>AcceptingRequests = TRUE          | SS = OPEN<br>DS = OK or SUSPECT based on individual item's state. | SS = OPEN<br>DS = OK or SUSPECT based on individual item's state. | SS = OPEN<br>DS = OK or SUSPECT based on individual item's state.    | If DS = OK: SS = OPEN<br>if DS = SUSPECT: SS = CLOSED_RECOVER |
| New item requests when <sup>a</sup> :<br>ServiceState = UP or DOWN<br>AcceptingRequests = FALSE | SS = OPEN<br>DS = SUSPECT based on individual item's state        | SS = OPEN<br>DS = SUSPECT based on individual item's state        | SS = CLOSED_RECOVER<br>DS = SUSPECT based on individual item's state | SS = CLOSED_RECOVER<br>DS = SUSPECT                           |
| Connection goes down  | SS = OPEN<br>DS = SUSPECT based on individual item's state        | SS = OPEN<br>DS = SUSPECT based on individual item's state        | SS = CLOSED_RECOVER<br>DS = SUSPECT based on individual item's state | SS = CLOSED_RECOVER<br>DS = SUSPECT                           |

**Table 18: SingleOpen and AllowSuspectData Handling**

a. For more information, refer to Source Directory information in Chapter 4, Source Directory Domain.

### 3.5 Specific Usage: RDF Direct Login

When sending a Login Request message to an RDF Direct, the **Name** can be an ASCII string composed of printable characters. The Name is used for scoping some RDF Direct's configuration. The **NameType** must be **USER\_NAME**.

In the **Attrib's ElementList**, **SingleOpen**, **AllowSuspectData**, and **ProvidePermissionExpressions** are supported. **ApplicationId**, **Position**, **Password**, and **ProvidePermissionProfile** are ignored.

The request and response message **Payloads** have no data.

RDF Direct supports only one login per connection.

### 3.6 Specific Usage: RDMS

When sending a Login to a Data Access Control System-enabled Refinitiv Real-Time Distribution System deployment, **Name** should be a valid username in the Data Access Control System. The **Attrib** containing **ApplicationId** and **Position** will also be used for Data Access Control System authorization. **Name** is used for scoping aspects of the Refinitiv Real-Time Distribution System configuration. **NameType** must be **USER\_NAME**.

In the **Attrib's ElementList**, **ApplicationId**, **Position**, **SingleOpen**, **AllowSuspectData**, and **ProvidePermissionExpressions** are supported. **Password** and **ProvidePermissionProfile** are ignored. They may be echoed to the consumer, but the values are not necessarily correct.

Request and response message **Payloads** have no data.

Refinitiv Real-Time Distribution System supports only one login per connection.

### 3.7 Specific Usage: Login Credentials Update Feature

Internally Enterprise Message API stores all login credentials (e.g., user name, name type, login attributes), so it can use them later during connection recovery phase. These credentials can be changed by the application at any point in time after a connection and login is established. To change login credentials, an application needs to reissue a login request message with the new credentials. This new request message must meet the following criteria:

- A new user name parameter, different from the one specified on a prior request or reissue, must be specified.
- The **NameType** parameter must be specified as **USER\_TOKEN** on all, the initial request and all subsequent reissues.
- The Interactions set in the reissue must match the original **InteractionType**.

If all of the above conditions/criteria are met, Enterprise Message API will send the reissue with the new login credentials to the server and will internally store the new/updated login credentials to be used later during connection recovery. If all of the above conditions/criteria are not met, Enterprise Message API will apply the standard login reissue processing. If no new/updated login credentials are specified by application, during the connection recovery phase Enterprise Message API will use the previously used ones.

## 4 Source Directory Domain

### 4.1 Description

The *Source Directory* domain model conveys:

- Information about all available services and their capabilities. This includes information about domain types supported within a service, the service's state, the quality of service, and any item group information associated with the service. Each service is associated with a unique **ServiceName** or **ServiceId**.
- Status information associated with item groups. This allows a single message to change the state of all associated items, avoiding the need to send a status message for each individual item. The consumer is responsible for applying any changes to its open items. For details, refer to Section 4.3.1.2 and Section 4.3.1.3.
- Source Mirroring information between a Refinitiv Real-Time Advanced Data Hub and Open Message Model interactive provider applications exchanged via a specifically-formatted generic message as described in Section 4.2.5.

## 4.2 Usage

### 4.2.1 Source Directory Request Message

A Directory request message is encoded using **ReqMsg** with default or user-configured values and sent internally by **OmmConsumer** in the constructor of this class. A consumer can request information about all services by omitting **ServiceName** or **ServiceId** information, or specify a **ServiceName** or **ServiceId** to request information about only that service. Because the Source Directory domain uses a **FilterList**, a consumer can indicate the specific source related information in which it is interested via a **Filter**. Each bit-value represented in the filter corresponds to an information set that can be provided in response messages. A consumer can change the requested filter via a reissue. For more details about the **FilterList** type, refer to the *Enterprise Message API C++ Edition Reference Guide*.

Users can configure a directory request message using the **OmmConsumerConfig.addAdminMsg()** to override the default directory request.

Refinitiv recommends that a consumer application minimally request **SERVICE\_INFO\_FILTER** and **SERVICE\_STATE\_FILTER** for the Source Directory:

- The Info filter contains the **ServiceName** and **ServiceId** data for all available services. When an appropriate service is discovered by the Open Message Model consumer, the **ServiceName** or **ServiceId** associated with the service is used on subsequent requests to that service.
- The State filter contains status data for the service. Status data informs the Consumer whether the service is up (and available) or down (and unavailable).

| COMPONENT      | DESCRIPTION / VALUE  |
|----------------|--|
| DomainType     | <b>Required.</b> MMT_DIRECTORY = 4   |
| Interactions   | <b>Required.</b> <ul style="list-style-type: none"> <li>• <b>InitialImage: true</b>, indicates initial image is required</li> <li>• <b>InterestAfterRefresh: true</b>, indicates streaming request is required</li> </ul> Only streaming and non-streaming requests are supported. If you need to send a ConsumerStatus generic message over the Directory stream, you must specify the interaction as "Streaming" in the request.   |
| QoS            | Not used.  |
| worstQos       | Not used.  |
| priorityClass  | Not used.  |
| priorityCount  | Not used.  |
| extendedHeader | Not used.  |
| NameType       | Not used.  |
| Name           | Not used.  |
| Filter         | <b>Required.</b> Specifies a filter indicating the specific data in which a consumer is interested. Available categories include: <ul style="list-style-type: none"> <li>• <b>SERVICE_INFO_FILTER = 0x01</b></li> <li>• <b>SERVICE_STATE_FILTER = 0x02</b></li> <li>• <b>SERVICE_GROUP_FILTER = 0x04</b></li> <li>• <b>SERVICE_LOAD_FILTER = 0x08</b></li> <li>• <b>SERVICE_DATA_FILTER = 0x10</b></li> <li>• <b>SERVICE_LINK_FILTER = 0x20</b></li> </ul> For details on the contents of each filter entry, refer to Section 4.3.1.1. |

**Table 19: Source Directory Request Message**

| COMPONENT   | DESCRIPTION / VALUE  |
|-------------|--|
| ServiceName | <p>Optional.</p> <ul style="list-style-type: none"> <li>If present, the directory request is for the specified service.</li> <li>If neither the <b>ServiceId</b> nor the <b>ServiceName</b> is specified, then the request is for the entire directory.</li> </ul> <p><b>NOTE:</b> If the application requests a specific service, it should set either the <b>ServiceId</b> or <b>ServiceName</b> of the service, but not both.</p> |
| ServiceId   | <p>Optional.</p> <ul style="list-style-type: none"> <li>If present, the directory request is for the specified service.</li> <li>If neither the <b>ServiceId</b> nor the <b>ServiceName</b> is specified, then the request is for the entire directory.</li> </ul> <p><b>NOTE:</b> If the application requests a specific service, it should set either the <b>ServiceId</b> or <b>ServiceName</b> of the service, but not both.</p> |
| Identifier  | Not used.  |
| Attrib      | Not used.  |
| Payload     | Not used.  |

Table 19: Source Directory Request Message (Continued)



## 4.2.2 Source Directory Refresh Message

A Directory Refresh Message is encoded using a **RefreshMsg** and sent by Open Message Model provider and non-interactive provider applications. This message provides information about currently-known services, as well as additional details ranging from state information to provided domain types.

| COMPONENT      | DESCRIPTION / VALUE   |
|----------------|---|
| DomainType     | <b>Required.</b> MMT_DIRECTORY = 4  |
| State          | <b>Required.</b> Indicates stream and data state information.   |
| Solicited      | <b>Required.</b> Specifies whether the refresh was solicited. Available values are: <ul style="list-style-type: none"> <li><b>true</b>: Indicates the refresh was solicited.</li> <li><b>false</b>: Indicates the refresh was unsolicited.</li> </ul>   |
| Indications    | <b>Conditional.</b> <ul style="list-style-type: none"> <li><b>Complete: true</b>, indicates refresh complete</li> <li><b>ClearCache: true</b>, indicates clear cache</li> <li><b>DoNotCache: true</b>, indicates this refresh message must not be cached.</li> </ul> For more details, refer to the FilterEntries in Section 4.3.1. |
| QoS            | Not used.   |
| SeqNum         | Optional. A user-specified, item-level sequence number that the application can use to sequence messages within this stream.  |
| ItemGroup      | Not used.   |
| PermissionData | Not used.   |
| extendedHeader | Not used.   |
| ServiceId      | Not used.   |
| NameType       | Not used.   |
| Name           | Not used.   |
| Filter         | <b>Required.</b> Identifies the filtered entries provided in this response. When possible, this should match the filter set in the consumer's request. For additional details, refer to the <b>Filter</b> member in Section 4.2.1.  |
| Identifier     | Not used.   |
| Attrib         | Not used.   |
| Payload        | <b>Required.</b> The payload contains data about available services in the form of a <b>Map</b> where each entry's key is one <b>ServiceName</b> . For additional details, refer to Section 4.3.1.  |

**Table 20: Source Directory Refresh Message**

### 4.2.3 Source Directory Update Message

A Source Directory Update Message is encoded using an **UpdateMsg** and sent by Open Message Model provider and non-interactive provider applications. An Update message can:

- Indicate the addition or removal of services from the system or changes to existing services.
- Convey item group status information via the State and Group filter entries. For more information about item group use, refer to the *Enterprise Message API C++ Edition Developers Guide*.

| COMPONENT      | DESCRIPTION / VALUE   |
|----------------|---|
| DomainType     | <b>Required.</b> MMT_DIRECTORY = 4  |
| Indications    | <b>Conditional.</b> <ul style="list-style-type: none"> <li>• <b>DoNotCache: true</b>, indicates this update message must not be cached.</li> <li>• <b>DoNotConflate: true</b>, indicates this update message must not be conflated.</li> </ul> For more details, refer to the FilterEntries in Section 4.3.1. |
| UpdateTypeNum  | Not used.   |
| SeqNum         | Optional. A user-specified, item-level sequence number that the application can use to sequence messages in this stream.  |
| ConflatedCount | Not used.   |
| ConflatedTime  | Not used.   |
| PermissionData | Not used.   |
| extendedHeader | Not used.   |
| ServiceId      | Not used.   |
| NameType       | Not used.   |
| Name           | Not used.   |
| Filter         | Optional. The <b>Filter</b> indicates which filter entries are provided in this response. For an update, this conveys only the ID values associated with filter entries present in the update payload. For more details, refer to the <b>Filter</b> member in Section 4.2.1.                                  |
| Identifier     | Not used.   |
| Attrib         | Not used.   |
| Payload        | <b>Required.</b> The payload contains only the changed information associated with the provided services. For more details, refer to Section 4.3.1.   |

**Table 21: Source Directory Update Message**

#### 4.2.4 Source Directory Status Message

A Source Directory status message is encoded using a **StatusMsg** and sent by both Open Message Model interactive provider and non-interactive provider applications. This message conveys state change information associated with a source directory stream. Such state information can indicate that a directory stream cannot be established or to inform a consumer of a state change associated with an open directory stream. The Directory Status message can also be used to close an existing directory stream.

| COMPONENT      | DESCRIPTION / VALUE  |
|----------------|--|
| DomainType     | <b>Required.</b> MMT_DIRECTORY = 4   |
| State          | Optional. Contains stream and data state information for the directory stream. <ul style="list-style-type: none"> <li>StreamState</li> <li>DataState</li> <li>StatusCode</li> </ul>  |
| ItemGroup      | Not used.  |
| Indications    | Optional.<br><b>ClearCache: true</b> , Indicates the application should clear its cache<br>For more details, refer to the FilterEntries described in Section 4.3.1.  |
| PermissionData | Optional. If present, this is the new permissioning information associated with all contents on the stream.  |
| extendedHeader | Not used.  |
| ServiceId      | Not used.  |
| NameType       | Not used.  |
| Name           | Not used.  |
| Filter         | <b>Required.</b> The filter represents the filter entries being provided in this response. When possible, this should match the filter as set in the consumer's request.<br>For additional details, refer to the <b>Filter</b> member in |
| Identifier     | Not used.  |
| Attrib         | Not used.  |
| Payload        | Not used.  |

**Table 22: Source Directory Status Message**

### 4.2.5 Source Directory Generic Message

A Source Directory Generic message is encoded and sent by a Refinitiv Real-Time Advanced Data Hub when using a 'hot standby' configuration. When running in hot standby mode, the Refinitiv Real-Time Advanced Data Hub can leverage source mirroring and use a generic message to convey usage information to upstream providers. A generic message can inform providers whether the Refinitiv Real-Time Advanced Data Hub is an active server without a standby (**ActiveNoStandby**), an active server with a standby (**ActiveWithStandby**) or a standby provider (**Standby**). This message is mainly for informational purposes, and allows a provider to better understand their role in a hot standby environment (the provider does not require a return action or acknowledgment).

A provider indicates each service's ability to process this message via the **AcceptingConsumerStatus** element in its Source Directory responses (refer to Section 4.3.1.1).

| COMPONENT       | DESCRIPTION / VALUE  |
|-----------------|--|
| DomainType      | <b>Required.</b> MMT_DIRECTORY = 4   |
| PartNum         | Not used.  |
| SeqNum          | Optional. A user-specified, item-level sequence number that the application can use to sequence messages in this stream.   |
| secondarySeqNum | Not used.  |
| PermissionData  | Not used.  |
| extendedHeader  | Not used.  |
| NameType        | Not used.  |
| Name            | <b>Required.</b> The name of this message must be <b>ConsumerStatus</b> .  |
| Filter          | Not used.  |
| Identifier      | Not used.  |
| Attrib          | Not used.  |
| Payload         | <b>Required.</b> The payload is a <b>Map</b> whose entries contain the Source Mirroring status for each service. For the full structure, refer to Section 4.3.2. |


**Table 23: Source Directory Generic Message**

## 4.3 Data

### 4.3.1 Source Directory Refresh and Update Payload

A list of services is represented by a **Map**. Each **MapEntry** represents a known service and is uniquely identified by its **ServiceId** (i.e., its key).

The information about each service is represented as a **FilterList**. Each **FilterEntry** contains one of six different categories of information. These categories should correspond to the **Filter** member of the refresh or update. These categories are described in Table 25.

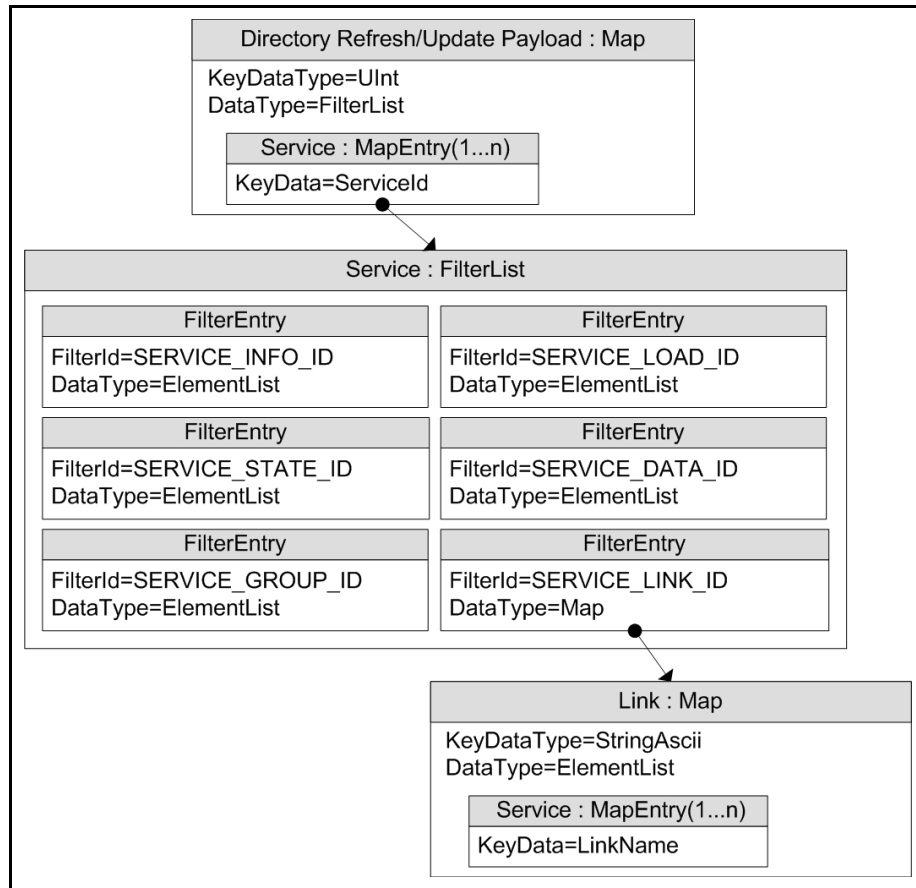

**Figure 8. Source Directory Refresh and Update Message Payload**

| KEY TYPE              | CONTAINER TYPE | PERMISSION DATA | DESCRIPTION  |
|-----------------------|----------------|-----------------|--|
| UInt for a service ID | FilterList     | Not used        | Contains information for each known service. The key is the service's <b>ServiceId</b> . |

**Table 24: Source Directory Map Contents**

There are six categories of information about a service, each represented by one **FilterEntry**. Categories can be added or updated in update messages (note that the clear action **FilterEntry.Clear** is not used, and that the Info category should not change) for Directory and Dictionary domain message models as part of a reissue. None of these categories use permission data. In the following table, the description for each **FilterEntry** includes whether the content is extensible.

| FILTERENTRY ID<br>(CORRESPONDING FILTER BIT-VALUE) | TYPE        | DESCRIPTION   |
|--|-------------|---|
| SERVICE_INFO_ID=<br>(SERVICE_INFO_FILTER=)         | ElementList | <p><b>Provider applications must be able to provide this information.</b></p> <p>Identifies a service and its available data. This content is extensible.</p> <p>Refer to.</p>  |
| SERVICE_STATE_ID<br>(SERVICE_STATE_FILTER=)        | ElementList | <p><b>Provider applications must be able to provide this information.</b></p> <p>Describes the current state of a service (i.e., the service's current ability to provide data). Can also change the status of all items associated with this service. This content is not extensible.</p> <p>The effects of this category occur immediately. Therefore, the initiating <b>UpdateMsg</b> should set <b>DoNotConflate</b> to <b>true</b>.</p> <p>Refer to.</p>               |
| SERVICE_GROUP_ID=<br>(SERVICE_GROUP_FILTER=)       | ElementList | <p>Manages group information. Can change the status of a group of items or merge items from one group to another. This content is not extensible.</p> <p>The effects of this category occur immediately and only affect existing items. Therefore, the initiating <b>UpdateMsg</b> should set <b>DoNotConflate</b> and <b>DoNotCache</b> to <b>true</b>.</p> <p>Refer to.</p>   |
| SERVICE_LOAD_ID=<br>(SERVICE_LOAD_FILTER=)         | ElementList | <p>Information about the current allowable workload of this service, including how many items are currently being serviced. This content is extensible.</p> <p>Optionally, the initiating <b>UpdateMsg</b> can set <b>DoNotConflate</b> to <b>true</b>.</p> <p>Refer to.</p>  |
| SERVICE_DATA_ID=<br>(SERVICE_DATA_FILTER=)         | ElementList | <p>Includes broadcast data that applies to all items requested from that service. This information is typically provided in a dedicated <b>UpdateMsg</b> and sent independently of other filter entries. The data filter is commonly used with ANSI Page-based data. This content is extensible.</p> <p>Flag values <b>DoNotConflate</b> and <b>DoNotCache</b> can optionally be set to <b>true</b> to prevent conflation and caching of this content.</p> <p>Refer to.</p> |
| SERVICE_LINK_ID<br>(SERVICE_LINK_FILTER)           | Map         | <p>Provides information about individual upstream sources that provide data for this service. This is primarily used by systems that aggregate sources (such as the Refinitiv Real-Time Advanced Data Hub) for identification and load balancing, and is not required to be processed by a consumer application. This content is not extensible.</p> <p>Refer to.</p>   |

Table 25: Source Directory MapEntry Filter Entries

### 4.3.1.1 Source Directory Info Filter Entry

The Info filter entry (**SERVICE\_INFO\_FILTER**, **SERVICE\_INFO\_ID**) conveys information that identifies a service and the content it can provide. This includes information about provided domain types (e.g., Market Price, Market By Order), available QoS, and the names of any dictionaries required to parse the published content.

The Info **FilterEntry** should be present when a service is first added, and should not be changed as long as the service remains in the list.

**NOTE:** The Refinitiv Real-Time Advanced Data Hub does not track services that are brought down. If you bring up a service after having brought it down, you must again include the Info filter entry.

If a FilterEntry element uses a default value, it is included in the element's description.

| ELEMENT NAME         | TYPE           | RANGE/<br>EXAMPLE     | DESCRIPTION   |
|----------------------|----------------|-----------------------|---|
| Name                 | ASCII          | e.g., IDN_RDF         | <b>Required.</b> Specifies the service's name. This will match the concrete service name or the service group name that is in the <b>Map . Key</b> .  |
| Vendor               | ASCII          | e.g., Refinitiv       | Specifies the name of the vendor that provides the data for this service.   |
| IsSource             | UInt           | 0   1                 | Specifies whether the service aggregates content from multiple sources. Available values are: <ul style="list-style-type: none"> <li><b>0:</b> The service aggregates multiple sources into a single service. This is the default behavior.</li> <li><b>1:</b> The service is provided directly by the original publisher</li> </ul>                          |
| Capabilities         | Array of UInt  | e.g., [5, 6]          | <b>Required.</b> Lists the domains which this service can provide. Note that the UInt MessageType is extensible, using values defined in this guide (i.e., 1-255).<br>For example, a list containing <b>MMT_DICTIONARY (5)</b> and <b>MMT_MARKET_PRICE (6)</b> indicates a consumer can request dictionaries and Market Price data from this service.         |
| DictionariesProvided | Array of ASCII | e.g., RWFFId          | Lists the Dictionary names that this service can provide. A consumer can obtain these dictionaries by requesting them by name on the <b>MMT_DICTIONARY</b> domain.<br>For details, refer to Chapter 5, Dictionary Domain.   |
| DictionariesUsed     | Array of ASCII | e.g., RWFFId, RWFEnum | <b>Conditional.</b> Lists the Dictionary names that might be required to fully process data from this service. Whether or not the dictionary is required depends on the consumer's needs. For example: if the consumer is not a display application, it might not need an Enumerated Types Dictionary.<br>For details, refer to Chapter 5, Dictionary Domain. |

**Table 26: Source Directory Info Filter Entry Elements**

| ELEMENT NAME               | TYPE         | RANGE/<br>EXAMPLE              | DESCRIPTION  |
|----------------------------|--------------|--------------------------------|--|
| QoS                        | Array of QoS | e.g., Real-time,<br>TickByTick | <p>Specifies the available Qualities of Service (QoS).</p> <ul style="list-style-type: none"> <li>If the data comes from one source, there will usually be only one QoS.</li> <li>If there are multiple sources, more than one QoS may be available.</li> </ul> <p>The default QoS is <b>Realtime, Tick-By-Tick</b>. Thus, if a QoS is not provided, the Transport API assumes the service provides a QoS of <b>Realtime, Tick-By-Tick</b>. For more information about QoS use and handling, refer to the <i>Enterprise Message API C++ Edition Reference Guide</i>.</p> |
| SupportsQoSRange           | UInt         | 0   1                          | <p>Indicates whether the provider supports a QoS range when requesting an item.</p> <p>If supported, a consumer can indicate an acceptable range via <b>ReqMsg.Qos</b>.</p> <ul style="list-style-type: none"> <li><b>0</b>: The provider does not support QoS range requests. This is the default behavior.</li> <li><b>1</b>: The provider supports QoS range requests.</li> </ul>   |
| ItemList                   | ASCII        |                                | <p>Specifies the name of a SymbolList (i.e., a specific item requested to get the names of all items available for this service). If it is not present, this feature is not supported. The consumer requests this item via the <b>MMT_SYMBOL_LIST</b> domain (See Chapter 11, Symbol List Domain).</p>   |
| SupportsOutOfBandSnapshots | UInt         | 0   1                          | <p>Indicates whether Snapshot requests can still be made after reaching the <b>OpenLimit</b> (refer to Section 4.3.1.4).</p> <ul style="list-style-type: none"> <li><b>0</b>: Snapshot requests cannot be made if the <b>OpenLimit</b> is reached.</li> <li><b>1</b>: Snapshot requests can be made even when the <b>OpenLimit</b> is reached. This is the default behavior.</li> </ul>  |
| AcceptingConsumerStatus    | UInt         | 0   1                          | <p>Indicates whether a service can accept and process messages related to Source Mirroring (refer to Section 4.2.4).</p> <ul style="list-style-type: none"> <li><b>0</b>: The service cannot accept and process messages related to Source Mirroring.</li> <li><b>1</b>: The service can accept and process messages related to Source Mirroring. This is the default behavior.</li> </ul>   |

Table 26: Source Directory Info Filter Entry Elements (Continued)



### 4.3.1.2 Source Directory State Filter Entry

The State filter entry (**SERVICE\_STATE\_FILTER**, **SERVICE\_STATE\_ID**) conveys information about the current state of a service. This information usually has some bearing on the availability of data from a service. If a service becomes temporarily unavailable or becomes available again, consumers are informed via updates to this category.

A State filter entry should be present in the initial refresh, and then updated whenever needed.

**NOTE:** The Refinitiv Real-Time Advanced Data Hub does not track services that are brought down. If you bring up a service after having brought it down, you must include the Info filter entry (refer to Section 4.3.1.1).

The Status element can change the state of items provided by this service. Prior to changing a service status, Refinitiv recommends that you issue item or group status messages to update item states. For example, before bringing down a service, a provider application should change the **Status** element of all items to **OmmState.ClosedRecover**.

Any default behavior is explained in the Element's description.

| ELEMENT NAME      | TYPE  | RANGE/EXAMPLE   | DESCRIPTION  |
|-------------------|-------|---|--|
| ServiceState      | UInt  | 0   1   | <b>Required.</b> Indicates whether the original provider of the data is available to respond to new requests. Changes to <b>ServiceState</b> do not affect streams that are already open. Available values are: <ul style="list-style-type: none"> <li><b>0</b>: Service is Down</li> <li><b>1</b>: Service is Up</li> </ul> Refer toSection 4.4.3 .   |
| AcceptingRequests | UInt  | 0   1   | Indicates whether the immediate provider can accept new requests and/or handle reissue requests on already open streams. Existing streams remain unaffected, however new requests may be rejected. <b>AcceptingRequests</b> defaults to <b>1</b> . Available values are: <ul style="list-style-type: none"> <li><b>0</b>: The provider cannot accept new requests on existing streams.</li> <li><b>1</b>: The provider can accept new requests on existing streams.</li> </ul> Refer toSection 4.4.3 . |
| Status            | State | e.g., OmmState.Open, OmmState.Ok, OmmState.None, "OK" | Specifies a status change to apply to all items provided by this service. It is equivalent to sending a <b>StatusMsg</b> for each item.<br><br>The <b>streamState</b> is only allowed to be <b>OmmState.Open</b> or <b>OmmState.ClosedRecover</b> .<br>This status only applies to item streams that have received a refresh or status of <b>OPEN/OK</b> .<br>Refer to Section 4.4.4.1.  |

**Table 27: Source Directory State FilterEntry Elements**

### 4.3.1.3 Source Directory Group Filter Entry

The Group filter entry (**SERVICE\_GROUP\_FILTER**, **SERVICE\_GROUP\_ID**) conveys item group status and item group merge information. Every item stream is associated with an item group as defined by the **ItemGroup** provided with the item's **RefreshMsg** or **StatusMsg**. If some kind of change impacts all items within the same group, only a single group status message need be provided. For more information on item group use and handling, see the *Enterprise Message API C++ Edition Developers Guide*.

If multiple group **FilterEntry**s are received in a single **FilterList**, then they should be applied in the order in which they were received.

Any default behavior is explained in the Element's description.

| ELEMENT NAME  | TYPE   | RANGE/EXAMPLE  | DESCRIPTION  |
|---------------|--------|--|--|
| Group         | Buffer | e.g., 1.26.102   | <p><b>Required.</b> Specifies the <b>ItemGroup</b> with which this information is associated.</p> <p>This is typically represented as a series of 2-byte unsigned integers (i.e., two-byte unsigned integers written directly next to each other in the buffer). The example provided in the <b>RANGE / EXAMPLE</b> column of this table shows such a series, with inserted dots to help indicate two-byte value. When encoded into a buffer, do not include these dots.</p>   |
| MergedToGroup | Buffer | e.g., 1.26.110   | Changes all items whose group currently matches the <b>Group</b> element to the specified <b>MergedToGroup</b> .   |
| Status        | State  | e.g.,<br>StreamState::OpenEnum,<br>DataState::OkEnum,<br>StatusCode::NoneEnum,<br>"OK" | <p>A status change to be applied to all items whose <b>ItemGroup</b> matches the <b>Group</b> element. It is equivalent to sending a <b>StatusMsg</b> to each item.</p> <ul style="list-style-type: none"> <li>The <b>streamState</b> is only allowed to be <b>OmmState.Open</b> or <b>OmmState.ClosedRecover</b>.</li> <li>If you need to convey group status <b>text</b> or <b>code</b> information without changing the data state, use the value <b>DataState::NoChangeEnum</b>.</li> <li>If present in the same message as a <b>MergedToGroup</b> element, this change should be applied before the merge.</li> </ul> <p>This change only applies to item streams that have received a refresh or status with a state of <b>OPEN/OK</b>.<br/>Refer to Section 4.4.4.2</p> |

**Table 28: Source Directory Group FilterEntry Elements**

#### 4.3.1.4 Source Directory Load Filter Entry

The Load filter entry (**SERVICE\_LOAD\_FILTER**, **SERVICE\_LOAD\_ID**) conveys information about the service's workload. If multiple services can provide desired data, a consumer can use service workload information to help decide which to use. None of these elements are required, nor have a default value.

| ELEMENT NAME | TYPE | RANGE/EXAMPLE | DESCRIPTION   |
|--------------|------|---------------|---|
| OpenLimit    | UInt | 0 – MAXUINT   | Maximum number of streaming items that the client is allowed to open for this service.<br>If the service supports out-of-band snapshots, snapshot requests do not count against this limit (refer to Section 4.3.1.1).  |
| OpenWindow   | UInt | 0 - MAXUINT   | Maximum number of outstanding requests (i.e., requests for items not yet open) that the service will allow at any given time.<br>If <b>OpenWindow</b> is <b>0</b> , the behavior is the same as setting <b>AcceptingRequests</b> to <b>0</b> and no open item request is accepted. The provider should not assume that the <b>OpenWindow</b> becomes effective immediately.   |
| LoadFactor   | UInt | 0-65,535      | A number indicating the current workload on the source providing the data.<br>This number and the means of its calculation vary based on the system (i.e., bandwidth usage, CPU usage, number of clients, etc). The only requirements are that: <ul style="list-style-type: none"> <li>The <b>LoadFactor</b> should be calculated the same way for all services in a system.</li> <li>A more heavily-loaded service should have a higher <b>LoadFactor</b> than one that is less loaded.</li> </ul> |

Table 29: Source Directory Load FilterEntry Elements

#### 4.3.1.5 Source Directory Data Filter Entry

The Data filter entry (**SERVICE\_DATA\_FILTER**, **SERVICE\_DATA\_ID**) conveys information that should be applied to all items associated with the service. This is commonly used for services that provide ANSI Page-based data. These elements has do not have a default value.

| ELEMENT NAME | TYPE          | RANGE/EXAMPLE  | DESCRIPTION   |
|--------------|---------------|--|---|
| Type         | UInt          | <ul style="list-style-type: none"> <li>Time(1)</li> <li>Alert (2)</li> <li>Headline (3)</li> <li>Status (4)</li> <li>Reserved values : 0 - 1023</li> </ul> | <b>Conditional.</b> You must include <b>Type</b> when data is present. Explains the content of the <b>Data</b> .  |
| Data         | Any Data Type |  | Data that should be applied to all items from the service; commonly used for services providing ANSI Page-based data. The contents of this element should be applied as an update to every item open for this stream. After the data fans out, it does not need to be cached as part of the source directory. |

Table 30: Source Directory Data FilterEntry Elements

#### 4.3.1.6 Source Directory Link Filter Entry

The Link filter entry (**SERVICE\_LINK\_FILTER**, **SERVICE\_LINK\_ID**) conveys information about the upstream sources that provide data to a service.

This information is represented as a **Map**, where each **MapEntry** represents one upstream source. The map entry key is the name associated with the communication link, and is of type **ASCII**. This name is scoped globally, and if multiple sources have the same name, they are assumed to be identical and the aggregating system will balance requests among them.

A typical consumer application can treat this entry as mainly informational. The consumer should use the **State** category to make programmatic decisions about service availability and status.

Any default behavior is explained in the Element's description.

| ELEMENT NAME | TYPE  | RANGE/EXAMPLE | DESCRIPTION   |
|--------------|-------|---------------|---|
| Type         | UInt  | 1   2         | Indicates whether the upstream source is interactive or broadcast. This does not describe whether the service itself is interactive or broadcast. <ul style="list-style-type: none"> <li><b>1</b>: The upstream source is interactive (this is the default).</li> <li><b>2</b>: The upstream source is a broadcast source.</li> </ul> |
| LinkState    | UInt  | 0   1         | <b>Required.</b> Indicates whether the upstream source is up or down <ul style="list-style-type: none"> <li><b>0</b>: The upstream source is down.</li> <li><b>1</b>: The upstream source is up.</li> </ul>   |
| LinkCode     | UInt  | 0 - 3         | Provides additional information about the upstream source. <ul style="list-style-type: none"> <li><b>0</b>: None (this is the default)</li> <li><b>1</b>: Ok</li> <li><b>2</b>: RecoveryStarted</li> <li><b>3</b>: RecoveryCompleted</li> </ul>   |
| Text         | ASCII | N/A           | Explains the <b>LinkState</b> and <b>LinkCode</b> . Text defaults to "".  |

**Table 31: Source Directory Link FilterEntry Map Contents**

### 4.3.2 Source Directory ConsumerStatus Generic Message Payload

**NOTE:** **GenericMsg**(s) are supported for the **DIRECTORY** Refinitiv Domain Model only for sending / receiving information related to ConsumerStatus/Source Mirroring Mode.

The directory data structure for the ConsumerStatus message is a **Map**. Each **MapEntry** sends status to one service and is uniquely identified by **ServiceId** (its key). Each entry contains an **ElementList** with one **ElementEntry** that indicates how the provider is used. **MapEntry**s do not use permission data.

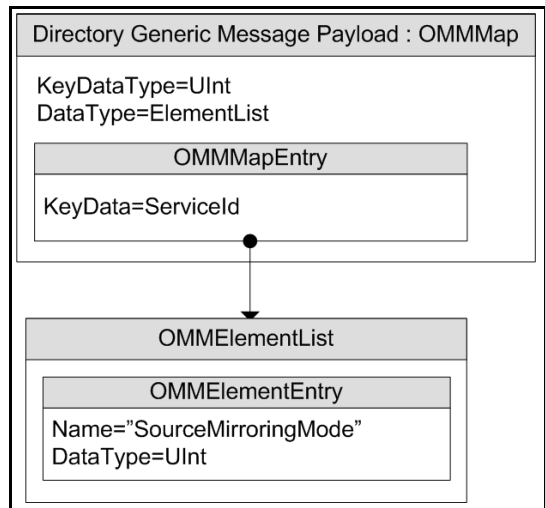


Figure 9. Source Directory Generic Message Payload

| ELEMENT NAME        | TYPE | RANGE/EXAMPLE | DESCRIPTION   |
|---------------------|------|---------------|---|
| SourceMirroringMode | UInt | 0 - 2         | <p><b>Required.</b> Indicates how the downstream component uses the service. There is no default setting. <b>SourceMirroringMode</b> can have any of the following values:</p> <ul style="list-style-type: none"> <li><b>0:</b> ActiveNoStandby. The downstream device uses the data from this service, and does not receive it from any other service.</li> <li><b>1:</b> ActiveWithStandby. The downstream device uses the data from this service, but also receives it from another service.</li> <li><b>2:</b> Standby. The downstream device receives data from this service, but actually uses data from another service.</li> </ul> <p>A reply from the provider application is not needed because this is for informational use only.</p> |

Table 32: Source Directory Generic Message MapEntry Elements

## 4.4 Special Semantics

### 4.4.1 Multiple Streams

Unlike other `MessageModelTypes`, two directory streams can be open with identical message key information. It is also permissible to change an open stream's filter.

### 4.4.2 Service IDs

Most Refinitiv Domain Model messages can be associated with a service (although Login and Directory typically are not). For better bandwidth utilization, the RSSL transport optimizes the service name into a two byte service ID. The **ServiceId** is only unique within a single channel.

### 4.4.3 ServiceState and AcceptingRequests

The **ServiceState** and **AcceptingRequests** elements in the State filter entry work together to indicate the ability of a particular service to provide data:

- **ServiceState** indicates whether the source of the data is accepting requests.
- **AcceptingRequests** indicates whether the immediate upstream provider (the provider to which the consumer is directly connected) can accept new requests. If **False**, new requests are rejected while existing streams remain unaffected (reissue requests can still be made for any item streams that are currently open to the provider).

The values of **ServiceState** and **AcceptingRequests** do not affect existing streams and do not imply anything about the data quality of existing streams.

| SERVICESTATE | ACCEPTINGREQUESTS | MEANING   |
|--------------|-------------------|---|
| Up(1)        | Yes (1)           | New requests and reissue requests can be successfully processed.  |
| Up(1)        | No (0)            | Although the source of data is available, the immediate provider is not accepting new requests. However, reissue requests on already open streams can be processed. |
| Down (0)     | Yes (1)           | The source of data is not available. The immediate provider, however, can accept the request and forward it when the source becomes available.                      |
| Down (0)     | No (0)            | Neither the source nor the immediate provider is accepting new requests.  |

**Table 33: ServiceState and AcceptingRequests**

#### 4.4.4 Service and Group Status Values

The **Status** elements in the State and Group FilterEntries are transient. Their values should be applied to all existing streams. The values should not be cached and should not affect any new requests.

##### 4.4.4.1 Service Status

Providers can use a directory's **ServiceState.Status** element to efficiently change the state of all of a service's existing streams with a single message. The **ServiceState.Status** does not apply to requests that are currently pending a first refresh or status response (for details, refer to Section 2.3) message. Enterprise Message API consumer implementation normally fans out state from the Status Element to all items associated with the service. When Enterprise Message API does this, it will not forward this Element to the application. Instead, the application receives a **StatusMsg** for each item from the service. The other elements from the **ServiceState** FilterEntry will still be sent to the application.

##### 4.4.4.2 Group Status

The Group FilterEntry can be used to efficiently change the state of a large number of items with a single message. The **Group.Status** does not apply to requests that are currently pending a first refresh or status response message. Enterprise Message API consumer implementation normally fans out group messages to all items associated with the group. When Enterprise Message API does this, it will not forward this FilterEntry to the application. Instead, the application will receive a **StatusMsg** for each item in the group.

#### 4.4.5 Removing a Service

If a provider needs to remove a service from the list of known services, it should send the service's **MapEntry** with the action set to **MapEntry.Delete**. A consumer should place all open items associated with this service in the **OmmState.ClosedRecover**.

All services associated with a Source Directory stream are removed if:

- The connection between the provider and consumer is closed or lost
- The provider sends a state of **OmmState.Closed** or **OmmState.ClosedRecover** on the Source Directory stream.
- The provider sends a message with a **ClearCache** on a **StatusMsg** on the Source Directory stream.

If any of these events occurs, all of the items for the service(s) are automatically cleaned up and considered to have a ClosedRecover status.

---

**NOTE:** Though not best practice, some applications may continue to store service information, even after a service is removed. If this is the case, the application should advertise the service as **Down** and not accepting requests.

---

#### 4.4.6 Automatic Request from Enterprise Message API Consumer

Enterprise Message API internal consumer implementation will always automatically request a Directory with the **Filter** set to **SERVICE\_INFO\_FILTER**, **SERVICE\_STATE\_FILTER**, or **SERVICE\_GROUP\_FILTER**. This ensures that Enterprise Message API can:

- Map service IDs to names
- Fanout SERVICE\_STATE\_ID.Status and SERVICE\_GROUP\_ID.Status
- Apply SERVICE\_GROUP\_ID.MergedToGroup

The Directory request is sent after the Login is successful. Response message for this directory request are not forwarded to the consumer application. If the consumer wants source directory information, it is required to make its own request for the Directory.

#### 4.4.7 Client Requests Non-Existing Service Directory

If the client sends a directory request without specifying service name or service ID, the directory response includes all available services. If the client specifies a service name or service ID in a directory request, it receives the directory response for just the requested service. If the requested service name or service ID is not available, Enterprise Message API should send a service directory containing an empty map entry in the payload. If the service becomes available later, the client receives an update message which contains the required service information.



## 5 Dictionary Domain

### 5.1 Description

---

**NOTE:** `GenericMsg`(s) are not supported for the Dictionary domain model.

---

The Open Message Model can optimize bandwidth usage by reducing or removing the need to constantly communicate well-known information (e.g., names and data types associated with information in a **FieldList**). Using these techniques, information is instead contained in a field dictionary, where the field list contains only **FieldId** references to information in the dictionary.

A provider application can indicate any dictionaries needed to parse published content. To reconstruct omitted information, consumer applications reference required dictionaries when decoding. Dictionaries may be available locally (i.e., in a file) or available for request over the network from an upstream provider.

The following dictionaries provide domain models for network requests:

- **Field Dictionary:** Stores data referenced by the **FieldList**. Each **FieldId** in a **FieldEntry** corresponds to an entry in the Field Dictionary, which provides information such as the field's name (e.g., **BID**) and data type (e.g., **Int**). Additional information (such as rippling fields and expected cache-sizing requirements) are also present.
- **Enumerated Types Dictionary:** Contains tables defining values for enumerated values of type **Enum**. Each table indicates the **FieldId** values of all fields that use the data in the table, as well as the possible enumerated values. For example, a field indicating the currency of an item will use a table listing enumerations of various currencies. If a consumer decodes the value of that field (e.g., **840**), it can cross reference that value with its copy of the table. The entry the consumer finds will contain a string that the consumer can print (e.g. **USD**), and possibly a more meaningful description as well.

## 5.2 Decoding Field List Contents with Field and Enumerated Types Dictionaries

By itself, a **FieldEntry** contains only the **FieldId** and its associated encoded value in **Data**. Because the Enterprise Message API internally stores pre-decoded data, an application can easily decode a **FieldEntry** (without cross-referencing the **FieldId** to the correct Field Dictionary to determine its type).

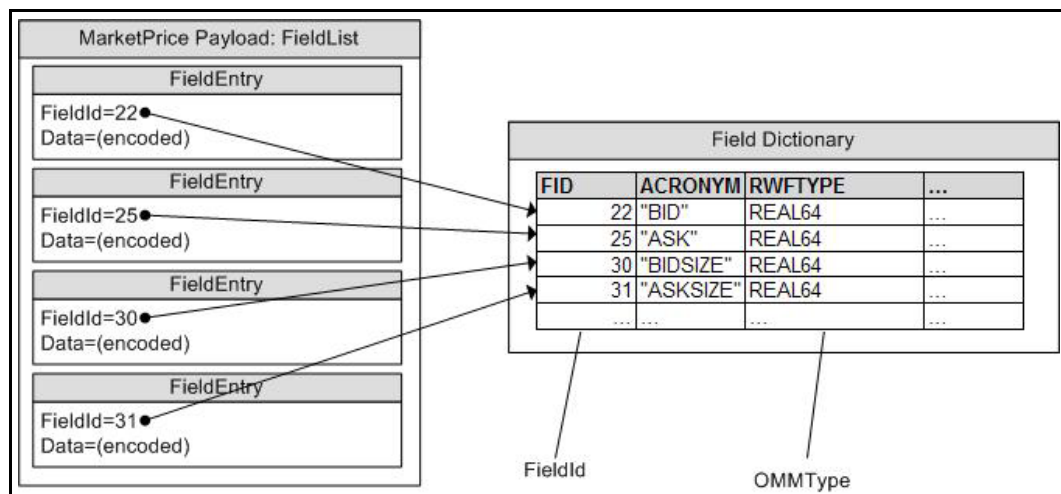


Figure 10. FieldList Referencing Field Dictionary

If the field's type is **DataTypeEnum::EnumEnum**, there may be a table of values in the corresponding Enumerated Types Dictionary. The consumer can then reference that information.

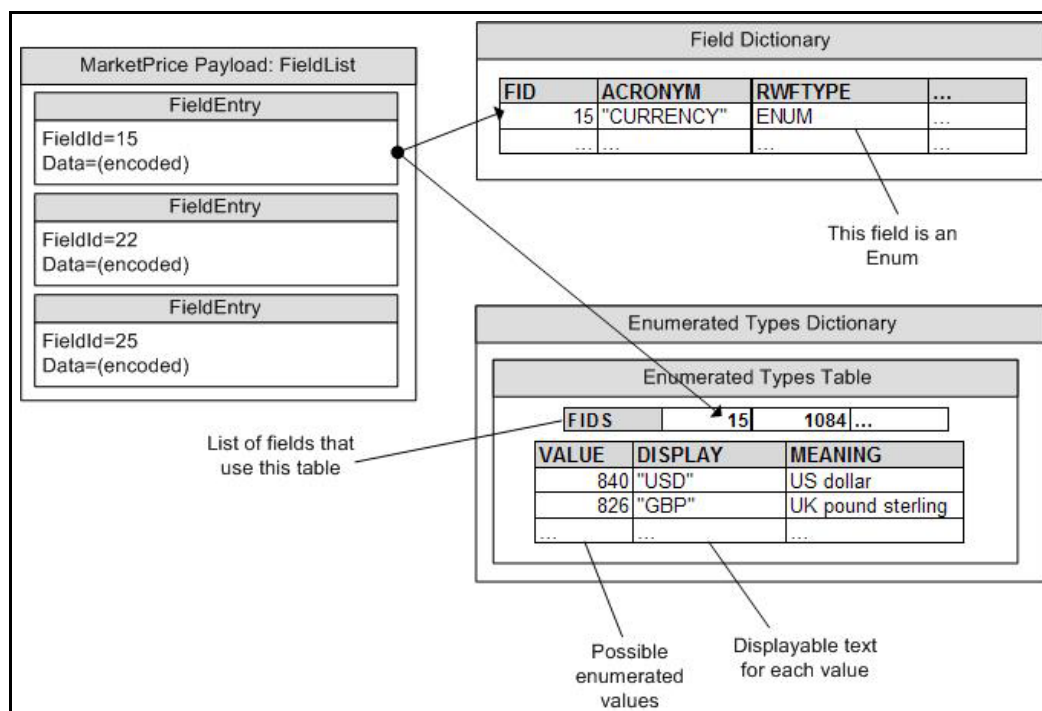


Figure 11. FieldEntry Referencing an Enumerated Types Table

The consumer, having decoded the enumerated value (e.g., **840**), finds the correct table that defines the field and looks up the enumerated value in that table. The value will have a displayable string associated with it (e.g., **USD**).

## 5.3 Usage

### 5.3.1 Dictionary Request Message

A dictionary request message is encoded using **ReqMsg** and sent internally by the **OmmConsumer** in the constructor of this class. The request indicates the name of the desired dictionary and how much information from that dictionary is needed.

Users can configure dictionary request messages using **OmmConsumerConfig.addAdminMsg()** to override the default dictionary request.

Though updates are not sent on dictionary streams, Refinitiv recommends that the consumer make a streaming request (setting **ReqMsg.InterestAfterRefresh** to **true**) so that it is notified whenever the dictionary version changes.

| COMPONENT      | DESCRIPTION / VALUE   |
|----------------|---|
| DomainType     | <b>Required.</b> MMT_DICTIONARY = 5   |
| Interactions   | <b>Required.</b> <ul style="list-style-type: none"> <li><b>InitialImage: true</b>, Indicates an initial image is required.</li> <li><b>InterestAfterRefresh: true</b>, Indicates a streaming request is required.</li> </ul> After receiving <b>RefreshComplete</b> , the consumer can only receive a <b>Status response</b> message. An <b>Update response</b> message will never be received. Pause request is not supported.   |
| QoS            | Not used.   |
| worstQos       | Not used.   |
| priorityClass  | Not used.   |
| priorityCount  | Not used.   |
| Priority       | Optional.   |
| extendedHeader | Not used.   |
| ServiceName    | <b>Required.</b> Specifies the <b>ServiceName</b> of the service from which the consumer requests the dictionary.<br><b>NOTE:</b> The application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.  |
| ServiceId      | <b>Required.</b> Specifies the <b>ServiceId</b> of the service from which the consumer requests the dictionary.<br><b>NOTE:</b> The application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.  |
| NameType       | Not used.   |
| Name           | <b>Required.</b> Specifies the <b>Name</b> of the desired dictionary as seen in the Source Directory response (refer to Section 4.3.1.1).   |
| Filter         | <b>Required.</b> The filter represents the desired verbosity of the dictionary. The consumer should set the <b>Filter</b> according to how much information is needed: <ul style="list-style-type: none"> <li><b>DICTIONARY_INFO = 0x00</b>: Provides version information only.</li> <li><b>DICTIONARY_MINIMAL = 0x03</b>: Provides information needed for caching.</li> <li><b>DICTIONARY_NORMAL = 0x07</b>: Provides all information needed for decoding.</li> <li><b>DICTIONARY_VERBOSE = 0x0F</b>: Provides all information (including comments).</li> </ul> Providers are not required to support the <b>MINIMAL</b> and <b>VERBOSE</b> filters.<br>For further details on <b>Filter</b> , refer to Section 5.4.1. |
| Identifier     | Not used.   |
| Attrib         | Not used.   |
| Payload        | Not used.   |

**Table 34: Dictionary Request Message**

### 5.3.2 Dictionary Refresh Message

A dictionary request message is encoded using **ReqMsg** and sent internally by the **OmmConsumer** in the constructor of this class. The request indicates the name of the desired dictionary and how much information from that dictionary is needed.

Users can configure dictionary request messages using **OmmConsumerConfig.addAdminMsg()** to override the default dictionary request.

Though updates are not sent on dictionary streams, Refinitiv recommends that the consumer make a streaming request (setting **ReqMsg.InterestAfterRefresh** to **true**) so that it is notified whenever the dictionary version changes.

| COMPONENT      | DESCRIPTION / VALUE   |
|----------------|---|
| DomainType     | <b>Required.</b> MMT_DICTIONARY = 5   |
| Interactions   | <b>Required.</b> <ul style="list-style-type: none"> <li><b>InitialImage: true</b>, Indicates an initial image is required.</li> <li><b>InterestAfterRefresh: true</b>, Indicates a streaming request is required.</li> </ul> After receiving <b>RefreshComplete</b> , the consumer can only receive a <b>Status response</b> message. An <b>Update response</b> message will never be received. Pause request is not supported.   |
| QoS            | Not used.   |
| worstQos       | Not used.   |
| priorityClass  | Not used.   |
| priorityCount  | Not used.   |
| Priority       | Optional.   |
| extendedHeader | Not used.   |
| ServiceName    | <b>Required.</b> Specifies the <b>ServiceName</b> of the service from which the consumer requests the dictionary.<br><b>NOTE:</b> The application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.  |
| ServiceId      | <b>Required.</b> Specifies the <b>ServiceId</b> of the service from which the consumer requests the dictionary.<br><b>NOTE:</b> The application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.  |
| NameType       | Not used.   |
| Name           | <b>Required.</b> Specifies the <b>Name</b> of the desired dictionary as seen in the Source Directory response (refer to Section 4.3.1.1).   |
| Filter         | <b>Required.</b> The filter represents the desired verbosity of the dictionary. The consumer should set the <b>Filter</b> according to how much information is needed: <ul style="list-style-type: none"> <li><b>DICTIONARY_INFO = 0x00</b>: Provides version information only.</li> <li><b>DICTIONARY_MINIMAL = 0x03</b>: Provides information needed for caching.</li> <li><b>DICTIONARY_NORMAL = 0x07</b>: Provides all information needed for decoding.</li> <li><b>DICTIONARY_VERBOSE = 0x0F</b>: Provides all information (including comments).</li> </ul> Providers are not required to support the <b>MINIMAL</b> and <b>VERBOSE</b> filters.<br>For further details on Filter, refer to Section 5.4.1. |
| Identifier     | Not used.   |
| Attrib         | Not used.   |
| Payload        | Not used.   |

**Table 35: Dictionary Request Message**

### 5.3.3 Dictionary Status Message

A dictionary status message is encoded using **StatusMsg** and sent by Open Message Model Interactive and non-interactive provider applications. This message can indicate changes to a dictionary's version.

| COMPONENT          | DESCRIPTION / VALUE   |
|--------------------|---|
| DomainType         | <b>Required.</b> MMT_DICTIONARY = 5   |
| State              | Optional. Contains stream and data state information for the dictionary stream.   |
| ItemGroup          | Not used.   |
| <i>Indications</i> | Optional: <ul style="list-style-type: none"> <li>• <b>ClearCache: true</b>, Indicates the application should clear the cache</li> </ul> |
| PermissionData     | <b>Conditional.</b> Used if the provided dictionary requires permissioning.   |
| extendedHeader     | Not used.   |
| ServiceId          | Not used.   |
| NameType           | Not used.   |
| Name               | Not used.   |
| Filter             | Not used.   |
| Identifier         | Not used.   |
| Attrib             | Not used.   |
| Payload            | Not used.   |

**Table 36: Dictionary Status Message**

## 5.4 Data

### 5.4.1 Filter

While Dictionary's Filters values correlate to a bitmap, the Enterprise Message API supports only the combinations in the following table. For example, a Dictionary's **Filter** cannot be **0x2** or **0x6**.

Dictionary providers are required to support **DICTIONARY\_INFO** and **DICTIONARY\_NORMAL** filters. **Filter** can be changed for Directory and Dictionary domain message models as part of a reissue. It cannot be changed in other domain message models. If an unsupported **Filter** is requested, the provider may do either of the following:

- Change the **Filter** in response message to a supported one.
- Send a Closed State in the response message.

| MASK                   | PROVIDER MUST SUPPORT<br>IN RESPONSE MESSAGE | DESCRIPTION   |
|------------------------|--|---|
| DICTIONARY_INFO=0x0    | Yes  | Dictionary summary information, such as DictionaryType and version. The response <b>Payload.SummaryData</b> will contain data but the response payload will contain no entries. |
| DICTIONARY_MINIMAL=0x3 | No   | DICTIONARY_INFO plus the minimum data needed to cache or convert data.  |
| DICTIONARY_NORMAL=0x7  | Yes  | DICTIONARY_MINIMAL plus all other data, except descriptions and comments.   |
| DICTIONARY_VERBOSE=0xF | No   | All available data.   |

**Table 37: Dictionary's Filter**

### 5.4.2 Refresh Message Summary Data

A dictionary's SummaryData is an **ElementList** that can be used by a consumer to find out if it needs an updated dictionary or if it needs the dictionary at all. SummaryData is extensible and can include other elements.

| NAME         | TYPE  | RANGE/EXAMPLE  | DESCRIPTION   |
|--------------|-------|--|---|
| Version      | ASCII | "1.0.1"  | <p><b>Required.</b> Specifies the version of the provided dictionary.<br/>For additional details on dictionary versions, refer to Section 5.7.2.</p> <p><b>NOTE:</b> The Enumerated Types dictionaries populate the Version element using information from the <b>DT_Version</b> tag.</p> |
| Type         | UInt  | <p>Total range is from 0 to 255, where values 0 - 127 are reserved and values 28-255 are extensible.</p> <ul style="list-style-type: none"> <li>• <b>DICTIONARY_FIELD_DEFINITIONS</b> = 1</li> <li>• <b>DICTIONARY_ENUM_TABLES</b> = 2</li> <li>• <b>DICTIONARY_RECORD_TEMPLATES</b> = 3</li> <li>• <b>DICTIONARY_DISPLAY_TEMPLATES</b> = 4</li> <li>• <b>DICTIONARY_DATA_DEFINITIONS</b> = 5</li> <li>• <b>DICTIONARY_STYLE_SHEET</b> = 6</li> <li>• <b>DICTIONARY_REFERENCE</b> = 7</li> </ul> | <b>Required.</b> Indicates the type of dictionary contained in the payload.   |
| DictionaryId | Int   | <p>Total range is from -16383 to 16383, where:</p> <ul style="list-style-type: none"> <li>• Values 0 to 16383 are reserved by Refinitiv</li> <li>• The value <b>1</b> corresponds to the <b>RDMFieldDictionary</b>.</li> <li>• The value <b>0</b> signifies 'Unspecified'</li> <li>• Values -1 to -16383 are Extensible</li> </ul>   | <p>Enterprise Message API can use <b>DictionaryId</b> in field lists and series to associate fields with field definitions or enumerations. Refer to Section 5.4.4.</p> <p><b>DictionaryId</b> defaults to <b>0</b>.</p>  |
| RT_Version   | ASCII | "1.0.1"  | <p>Optionally sent only with the enumerated type dictionary.</p> <p><b>RT_Version</b> identifies which field dictionary should be used with this enumerated type dictionary.</p>  |
| DT_Version   | ASCII | "1.0.1"  | <p>Optionally sent only with the enumerated type dictionary.</p> <p><b>DT_Version</b> conveys the display template version.</p>   |

**Table 38: Dictionary summaryData**

### 5.4.3 Response Message Payload

The Response Message (refer to Section 2.3) payload can vary widely, based on its DictionaryType. The payload is typically a Series of ElementLists, but can also be XML or Opaque data. For further details on the response message payloads, refer to Section 5.5.1 and Section 5.6.1.

Some DictionaryTypes also have external file representations of their data. For details about the data of each DictionaryType, refer to Section 5.5.2 and Section 5.6.2.

### 5.4.4 DictionaryId

The first **FieldList** provided for an item always has a **DictionaryId**. While a **FieldList** can be parsed without a Dictionary, to interpret the data, the **FieldList**'s **DictionaryId** must be associated with a Dictionary. The **DictionaryId** (provided in a Dictionary response message's **Payload.SummaryData**) associates a **FieldList**'s **DictionaryId** to a “family” of Dictionaries.

A Dictionary family includes a single FieldDefinition Dictionary. Enumeration tables for a single FieldDefinition Dictionary must be consolidated into a single EnumTable Dictionary that has the same **DictionaryId** as the FieldDefinition Dictionary. The Dictionary family may also include a single RecordTemplate Dictionary and a single DisplayTemplate Dictionary.

The **DictionaryId** is **0** for StyleSheet and Reference. A **DictionaryId** setting of **0** means unspecified, so the Dictionary is not used for parsing, interpreting, or displaying **FieldLists**. For example, a “TimeZone” reference dictionary may include table information about every world time zone. Because timezone information is not needed to parse **FieldLists**, there is no need to assign a **DictionaryId** to the “TimeZone” Dictionary. Thus, the value of its **DictionaryId** is set to **0** (i.e., unspecified).

**DictionaryIds** are globally scoped can have the range of -16383 to 16383. Though **DictionaryIds** 0 through 16383 are reserved for use by Refinitiv, applications can provide their own dictionaries by selecting a **DictionaryId** between -1 and -16383. If a single **FieldList** needs to use fields defined in two dictionaries, the **FieldList** can specify a dictionary switch using 0 for the Field ID. For details, refer to the *Enterprise Message API C++ Edition Developers Guide*.



5.5 Field Dictionary

5.5.1 Field Dictionary Payload

The payload of a Field Dictionary Refresh Message consists of a **Series** where each series entries contains a **ElementList**. Each **SeriesEntry** represents a row of information in the dictionary. The **ElementList** contained in each series entry provides information about an element of the row.

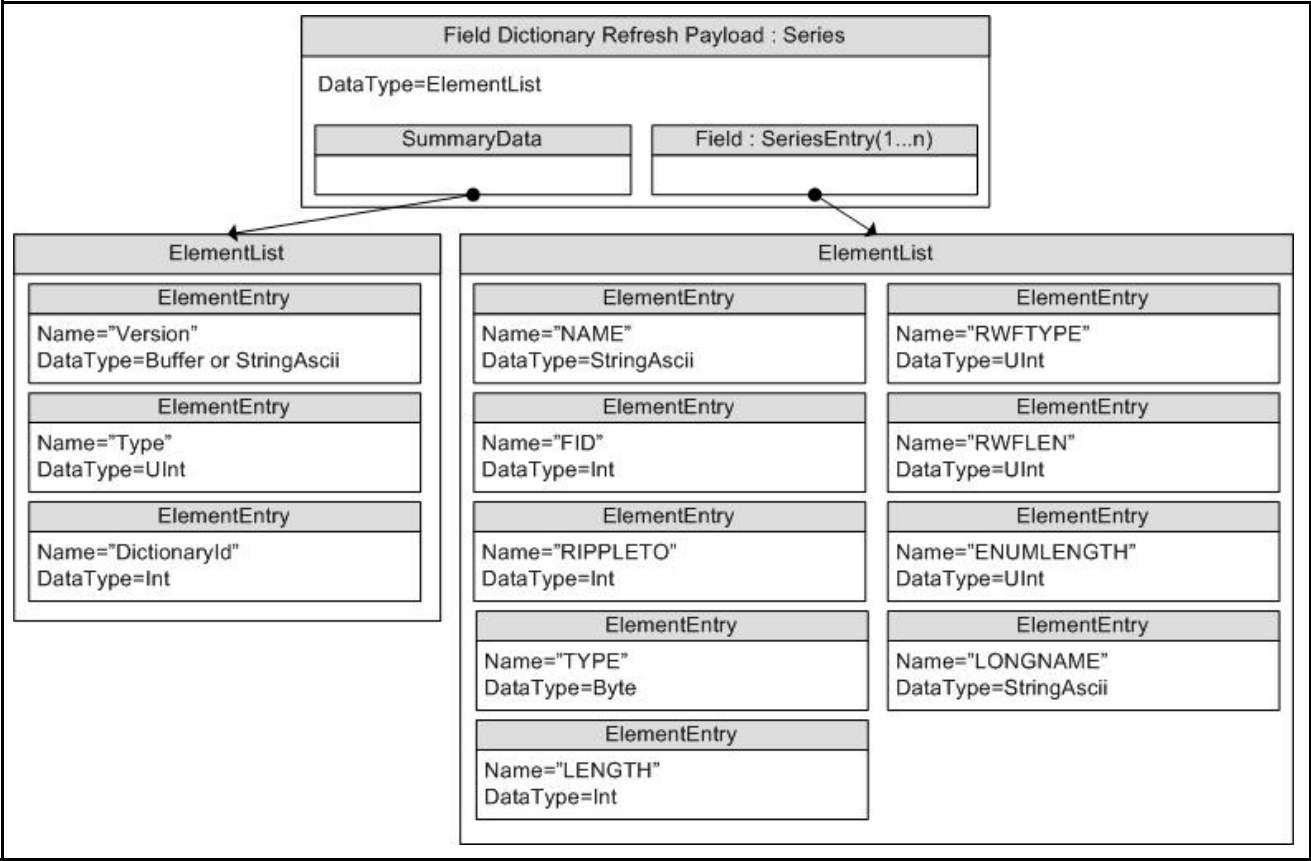


Figure 12. Field Dictionary Payload

Element entries do not have default values.

| NAME                | TYPE  | LEAST<br>VERBOSITY | RANGE/EXAMPLE      | DESCRIPTION  |
|---------------------|-------|--------------------|--------------------|--|
| NAME                | ASCII | MINIMAL            | e.g., "PROD_PERM"  | Equivalent to the field's <b>ACRONYM</b> (i.e., Short Name).   |
| FID                 | Int   | MINIMAL            | -32768 to 32767    | The field's <b>FieldId</b> .   |
| RIPPLETO            | Int   | MINIMAL            | -32768 to 32767    | If the field ripples, this is the <b>FieldId</b> of the field it ripples to.<br>A value of <b>0</b> indicates no rippling.<br>For a description of rippling, refer to the <i>Enterprise Message API C++ Edition Developers Guide</i> .                                     |
| TYPE <sup>a</sup>   | Int   | MINIMAL            | e.g., INTEGER      | The data type of the field for the Marketfeed format.  |
| LENGTH <sup>a</sup> | UInt  | MINIMAL            | 0 to 65535         | The maximum string length of the field for the Marketfeed format.  |
| RWFTYPE             | UInt  | MINIMAL            | e.g., Int          | The data type ( <b>DataType</b> ) of the field.  |
| RWFLEN              | UInt  | MINIMAL            | 0 to 65535         | The maximum length needed to cache the encoded value (the value found in the <b>FieldEntry</b> 's <b>encData</b> buffer). This is only a suggestion and is not enforced.<br>A length of 0 implies that the maximum possible size for that type should be used for caching. |
| ENUMLENGTH          | UInt  | NORMAL             | 0 to 65535         | Used for fields of type <b>Enum</b> . This is the length of the <b>DISPLAY</b> element in its Enumerated Types table (See Section 5.6.1).  |
| LONGNAME            | ASCII | NORMAL             | e.g., "PERMISSION" | Equivalent to the field's <b>DDE ACRONYM</b> (i.e., Long Name).  |

**Table 39: Field Dictionary Element Entries**

a. These elements are specific to the Marketfeed format and can be used in converting to or from it. They can otherwise be ignored.

### 5.5.2 Field Dictionary File Format

The **RDMFieldDictionary** file format is a plain-text table. Each row represents one field, and each column a datum about that field. Each row is separated with a line break and columns are separated by whitespace. Lines beginning with an exclamation point (!) are comments and are ignored.

| !ACRONYM   | DDE ACRONYM       | FID | RIPPLES TO | FIELD TYPE   | LENGTH  | RWF TYPE     | RWF LEN |
|------------|-------------------|-----|------------|--------------|---------|--------------|---------|
| PROD_PERM  | "PERMISSION"      | 1   | NULL       | INTEGER      | 5       | UINT64       | 2       |
| RDNDISPLAY | "DISPLAYTEMPLATE" | 2   | NULL       | INTEGER      | 3       | UINT32       | 1       |
| DSPLY_NAME | "DISPLAY NAME"    | 3   | NULL       | ALPHANUMERIC | 16      | RMTES_STRING | 16      |
| RDN_EXCHID | "IDN EXCHANGE ID" | 4   | NULL       | ENUMERATED   | 3 ( 3 ) | ENUM         | 1       |
| TIMACT     | "TIME OF UPDATE"  | 5   | NULL       | TIME         | 5       | TIME         | 5       |
| TRDPRC_1   | "LAST "           | 6   | TRDPRC_2   | PRICE        | 17      | REAL64       | 7       |
| TRDPRC_2   | "LAST 1"          | 7   | TRDPRC_3   | PRICE        | 17      | REAL64       | 7       |
| TRDPRC_3   | "LAST 2"          | 8   | TRDPRC_4   | PRICE        | 17      | REAL64       | 7       |
| TRDPRC_4   | "LAST 3"          | 9   | TRDPRC_5   | PRICE        | 17      | REAL64       | 7       |
| TRDPRC_5   | "LAST 4"          | 10  | NULL       | PRICE        | 17      | REAL64       | 7       |

**Figure 13. Field Dictionary File Format Sample**

Several tagged attributes are available at the beginning of the file. These attributes provide versioning information about the dictionary in the file and are processed when loading from a file-based dictionary. Some of this information is conveyed along with the domain model representation of the dictionary. Tags may be added as future dictionary versions become available.

For the **RDMFieldDictionary**, an example of these tags are shown below.

|               |                    |
|---------------|--------------------|
| !tag Filename | RWF.DAT            |
| !tag Desc     | RDFD RWF field set |
| !tag Type     | 1                  |
| !tag Version  | 4.00.14            |
| !tag Build    | 002                |
| !tag Date     | 18-Nov-2010        |

**Figure 14. Field Dictionary Tagged Attributes Sample**

### 5.5.2.1 Field Dictionary Tag Attributes

The following table describes tag attributes and indicates whether they are used when encoding the domain representation of the file.

| TAG ATTRIBUTE | DESCRIPTION  |
|---------------|--|
| Filename      | The original name of the file as created by Refinitiv. This typically will not match the current name of the file, <b>RDMFieldDictionary</b> .<br><b>Filename</b> is not used when encoding the domain representation of the field dictionary.                               |
| Desc          | Describes the dictionary.<br><b>Desc</b> is not used when encoding the domain representation of the field dictionary.  |
| Type          | Stores the dictionary type associated with this dictionary. For a field dictionary, this should be <b>DICTIONARY_FIELD_DEFINITIONS = 1</b> . Other types are defined in Section 5.4.<br><b>Type</b> is used when encoding the domain representation of the field dictionary. |
| Version       | Stores version information associated with this dictionary.<br><b>Version</b> is used when encoding the domain representation of the field dictionary.   |
| Build         | Stores internal build information.<br><b>Build</b> is not used when encoding the domain representation of the field dictionary.  |
| Date          | Stores dictionary release date information.<br><b>Date</b> is not used when encoding the domain representation of the field dictionary.  |

**Table 40: Field Dictionary File Tag Information**

### 5.5.2.2 Field Dictionary Columns

The columns in the field dictionary correspond to the **ElementEntry** names used while encoding and decoding the Field Dictionary:

| COLUMN NAME IN FILE | REFINITIV WIRE FORMAT ELEMENT NAME | NOTES  |
|---------------------|------------------------------------|--|
| ACRONYM             | NAME                               | The abbreviated name corresponding to the field.   |
| DDE ACRONYM         | LONGNAME                           | A longer version of the name represented by the Acronym.   |
| FID                 | FID                                | The Field Identifier value.  |
| RIPPLES TO          | RIPPLETO                           | The file format uses the <b>ACRONYM</b> of the target field, rather than the rows <b>FieldId</b> .<br>If the field does not ripple, this should be <b>NULL</b> . |
| FIELD TYPE          | TYPE                               | The Marketfeed type associated with this field.  |
| LENGTH              | LENGTH (ENUMLength)                | The Marketfeed length associated with the field.   |
| RWF TYPE            | RWFTYPE                            | The Refinitiv Wire Format type ( <b>DataType</b> ) associated with the field.  |
| RWF LEN             | RWFLEN                             | A caching length hint associated with this field.  |

**Table 41: Field Dictionary File Column Names and ElementEntry Names**

### 5.5.2.3 RWFTYPE Keywords

The following keywords are supported for the RWFTYPE:

| KEYWORD                              | DATA TYPE   |
|--------------------------------------|-------------|
| ANSI_PAGE <sup>a</sup>               | ANSI_Page   |
| ARRAY <sup>a</sup>                   | Array       |
| ASCII_STRING                         | ASCII       |
| BUFFER                               | Buffer      |
| DATE                                 | Date        |
| DATETIME <sup>a</sup>                | DateTime    |
| DOUBLE <sup>a</sup>                  | Double      |
| ELEMENT_LIST, ELEM_LIST <sup>a</sup> | ElementList |
| ENUM                                 | Enum        |
| FIELD_LIST <sup>a</sup>              | FieldList   |
| FILTER_LIST <sup>a</sup>             | FilterList  |
| FLOAT <sup>a</sup>                   | Float       |
| INT, INT32, INT64                    | Int         |
| MAP <sup>a</sup>                     | Map         |
| OPAQUE                               | Opaque      |
| QOS <sup>a</sup>                     | QoS         |
| REAL, REAL32, REAL64                 | Real        |
| RMTES_STRING                         | RMTES       |
| SERIES <sup>a</sup>                  | Series      |
| STATUS <sup>a</sup>                  | Stream      |
| TIME                                 | Time        |
| UINT, UINT32, UINT64                 | UInt        |
| UTF8_STRING                          | UTF8        |
| VECTOR <sup>a</sup>                  | Vector      |
| XML <sup>a</sup>                     | XML         |

**Table 42: Field Dictionary Type Keywords**

a. Type is Refinitiv Wire Format-Only and does not have a Marketfeed equivalent.

### 5.5.2.4 FIELD TYPE Keywords

The **RDMFieldDictionary**'s **RWFTYPE** and **RWFLEN** are derived from the field dictionaries used in Marketfeed. Valid keywords for the Marketfeed Field Type are **INTEGER**, **ALPHANUMERIC**, **ENUMERATED**, **TIME**, **TIME\_SECONDS**, **DATE**, or **PRICE**.

Three following Refinitiv Wire Format types and values help ensure that data is not truncated when converted from Marketfeed to Refinitiv Wire Format. If converting Refinitiv Wire Format to Marketfeed, an Open Message Model provider application should ensure that Refinitiv Wire Format data does not overflow the Marketfeed length.

For **ALPHANUMERIC** types, if the data does not require **RMTES**, then the **ASCII\_STRING** type should be used instead of the **RMTES\_STRING** type.

Fields that cannot be converted to Marketfeed should have the Marketfeed type **NONE** and length **0**.

The table below lists the mappings from **FIELD TYPE** to the **RWFTYPE** keyword. All are used in **RDMFieldDictionary** and are safe.

| FIELD TYPE   | LENGTH    | RWFTYPE      | RWFLEN | NOTES   |
|--------------|-----------|--------------|--------|---|
| ALPHANUMERIC | 14        | ASCII_STRING | 14     | RIC/SYMBOL  |
| ALPHANUMERIC | 21        | ASCII_STRING | 21     | RIC/SYMBOL  |
| ALPHANUMERIC | 28        | ASCII_STRING | 28     | RIC/SYMBOL  |
| ALPHANUMERIC | 1-255     | RMTES_STRING | 1-255  | length <= 3 is technically ASCII  |
| ENUMERATED   | 2-3 (1-8) | ENUM         | 1      | Enum values 0 - 255   |
| ENUMERATED   | 5 (3-8)   | ENUM         | 2      | Enum values 0 - 65535   |
| BINARY       | 3         | UINT32       | 2      | Base64 encoded 2-byte unsigned int  |
| BINARY       | 4         | UINT32       | 3      | Base64 encoded 3-byte unsigned int  |
| BINARY       | 43        | BUFFER       | 32     | Base64 encoded buffer   |
| BINARY       | 171       | BUFFER       | 128    | Base64 encoded buffer   |
| DATE         | 11        | DATE         | 4      | Day, month, year  |
| TIME_SECONDS | 8         | TIME         | 5      | Time in hour, minute, second, and millisecond   |
| TIME         | 5         | TIME         | 5      | Time in hour, minute, and second  |
| PRICE        | 17        | REAL         | 9      | <b>Real</b> can represent values with fractional denominators, trailing zeros, or up to 14 decimal positions. |
| INTEGER      | 15        | REAL         | 7      | Signed integer value, where trailing zero values can be optimized off of the wire.                            |
| INTEGER      | 3         | UINT         | 1      | unsigned int 0 - 255  |
| INTEGER      | 5         | UINT         | 2      | unsigned int 0 - 65535  |
| INTEGER      | 10        | UINT         | 5      | unsigned int 0 - ( $2^{40}-1$ )   |
| INTEGER      | 15        | UINT         | 8      | unsigned int 0 - ( $2^{64}-1$ )   |
| INTEGER      | 15        | UINT         | 4      | unsigned int 0 - ( $2^{32}-1$ )   |

**Table 43: Marketfeed to Refinitiv Wire Format Mappings in RDMFieldDictionary**

### 5.5.2.5 Custom FIDs

There are a couple of recommendations for custom Field IDentifiers:

| FIELD TYPE | LENGTH | RWF TYPE | RWF LEN | NOTES   |
|------------|--------|----------|---------|---|
| PRICE      | 17     | REAL     | 9       | <b>Real</b> can represent values with fractional denominators, trailing zeros, or up to 14 decimal positions. |
| INTEGER    | 15     | INT      | 8       | Signed integer value that has one sign bit and 63 value bits.   |

**Table 44: Marketfeed to Refinitiv Wire Format Mappings in RDMFieldDictionary**

### 5.5.3 Specific Usage: RDF Direct and FieldDefinition Dictionary

The FieldDefinition Dictionary provided by RDF Direct is named “RWFFId”. It has a **DictionaryId** of 1.

All DataMasks are supported. DictionaryVerbose will return the same data as DictionaryNormal.

The response **Payload.SummaryData** includes Version, Type, and DictionaryId.

The RWFFId dictionary only uses the following types: INT32, INT64, INT, UINT32, UINT64, UINT, REAL32, REAL64, REAL, DATE, TIME, ENUM, BUFFER, ASCII\_STRING, RMTES\_STRING.

## 5.6 Enumerated Types Dictionary

### 5.6.1 Enumerated Types Dictionary Payload

The payload of an Enumerated Types Dictionary Refresh Message consists of a **Series** with each series entry (**SeriesEntry**) containing an **ElementList** and representing a table in the dictionary. The **ElementList** in each entry contains information about each Enumerated Type in the table.

Each **ElementEntry** has a type of **Array**, where there is one element for each column in the file: **VALUE**, **DISPLAY**, and **MEANING**. The content of each **Array** corresponds to one Enumerated Type, so each array should contain the same number of entries.

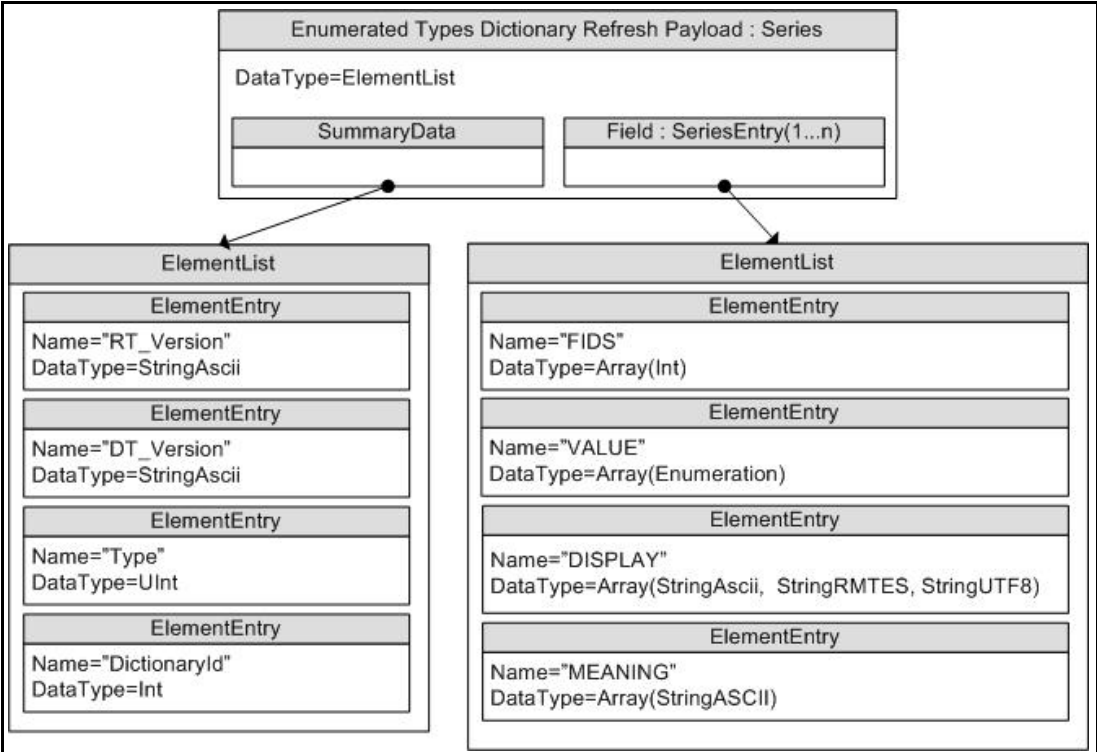


Figure 15. Enumerated Types Dictionary Refresh Message Payload



| NAME    | TYPE  | LEAST<br>VERBOSITY | EXAMPLE<br>LIST                      | DESCRIPTION   |
|---------|---|--------------------|--------------------------------------|---|
| FIDS    | Array of Int  | NORMAL             | 15, 1084,<br>1085,...                | The <b>FieldId</b> 's of all fields that reference this table. These fields should have type <b>Enum</b> in the Field Dictionary and use the values given in the <b>VALUE</b> list. The <b>OmmArray.FixedWidth</b> should be 2 because each <b>FieldId</b> is a two-byte, signed integer value. |
| VALUE   | Array of Enum                                       | NORMAL             | 826, 840, ...                        | Includes values that correspond to each Enumerated Type. <b>FieldEntries</b> that use the table contain these values. The <b>OmmArray.FixedWidth</b> should be 2 since each enum is a two-byte, unsigned integer value.   |
| DISPLAY | Array of StringASCII,<br>StringRMTEs, or StringUTF8 | NORMAL             | "GBP", "USD",...                     | Brief, displayable names for each Enumerated Type. When special characters are needed, the DISPLAY column uses a hexadecimal value identified by using hash marks instead of quotation marks (e.g., <b>#42FE#</b> ).  |
| MEANING | Array of ASCII                                      | VERBOSE            | "UK pound sterling", "US Dollar",... | A longer description of each Enumerated Type.   |
|         |   |                    |                                      | <b>NOTE:</b> Providers do not need to provide this array (even when verbosity is <b>VERBOSE</b> ).  |

Table 45: Element Entries Describing Each Enumerated Type Table

## 5.6.2 Enumerated Types Dictionary File Format

The **enumtype.def** file format is a plain-text set of tables. Rows are separated by lines and columns are separated by whitespace (excepting quoted strings, as illustrated in Section 5.6.1). Lines that begin with an exclamation point (!) are comments and are ignored.

The file contains a set of tables, each with two sections:

1. A section with the list of **FieldId** values corresponding to all fields that use the table.
2. A section with the table of enumerated values and their respective display data.

### 5.6.2.1 Enumerated Types Dictionary File Example

```
! ACRONYM      FID
! -----      ---
BIG_FIGURE     6207
PIPS_POS       6208
! VALUE        DISPLAY    MEANING
! -----      -
    0          "INT"      whole number
    1          "1DP"      1 decimal place
    2          "2DP"      2 decimal places
    3          "3DP"      3 decimal places
    4          "4DP"      4 decimal places
    5          "5DP"      5 decimal places
    6          "6DP"      6 decimal places
    7          "7DP"      7 decimal places
!
! ACRONYM      FID
! -----      ---
MATUR_UNIT     2378
!
! VALUE        DISPLAY    MEANING
! -----      -
    0          "  "      Undefined
    1          "Yr "      Years
    2          "Mth"      Months
    3          "Wk "      Weeks
    4          "Day"      Days
```

**Code Example 1: Enumerated Types Dictionary File Format Sample**

### 5.6.2.2 Tagged Attributes

Several tagged attributes are available at the beginning of the file. These attributes provide version information about the dictionary contained in the file and are processed while loading from a file-based dictionary. Some of this information is conveyed along with the domain model representation of the dictionary. Tags may be added as future dictionary versions become available.

For the **enumtype.def**, an example of these tags are as follows:

```
!tag Filename      ENUMTYPE.001
!tag Desc          IDN Marketstream enumerated tables
!tag Type          2
!tag RT_Version    4.20.17
!tag DT_Version    15.41
!tag Date          5-Feb-2017
```

#### Code Example 2: Enumerated Types Dictionary Tagged Attribute Sample

The following table describes the tag attributes and indicates which are used when encoding the domain representation of the file.

| TAG ATTRIBUTE | DESCRIPTION   |
|---------------|---|
| Date          | Includes information regarding the dictionary release date.<br><b>Date</b> is not used when encoding the domain representation of the field dictionary.   |
| Desc          | A Description of the dictionary.<br><b>Desc</b> is not used when encoding the domain representation of the field dictionary.  |
| DT_Version    | The version of the display template version.<br><b>DT_Version</b> is used when encoding the domain representation of the field dictionary. For device compatibility purposes, this value is sent as both Version and DT_Version.  |
| Filename      | The original name of the file as created by Refinitiv. This typically does not match the current name of the file, <b>enumtype.def</b> .<br><b>Filename</b> not used when encoding the domain representation of the field dictionary.                                       |
| RT_Version    | The version of the field dictionary associated with this enumerated type dictionary.<br><b>RT_Version</b> is used when encoding the domain representation of the field dictionary.  |
| Type          | The dictionary type associated with this dictionary. For an enumerated types dictionary, this should be <b>DICTIONARY_ENUM_TABLES = 2</b> . Other types are defined in Section 5.4.<br><b>Type</b> is used when encoding the domain representation of the field dictionary. |

**Table 46: Enumerated Type Dictionary File Tag Information**

### 5.6.2.3 Reference Fields Section

The first section lists all fields that use the table. These fields should have the type **Enum** in their corresponding Field Dictionary and have matching names.

| NAME    | REFINITIV WIRE FORMAT ELEMENT NAME                                   |
|---------|--|
| ACRONYM | n/a (The name of the field is not sent with the dictionary payload). |
| FID     | FIDS   |

**Table 47: Refinitiv Wire Format EnumType Dictionary File Format Reference Fields**

### 5.6.2.4 Values Table Section

The second section lists the value of each enumerated type and its corresponding display data.

| NAME    | REFINITIV WIRE FORMAT ELEMENT NAME | NOTES   |
|---------|------------------------------------|---|
| VALUE   | VALUE                              | The unsigned, integer value corresponding to the enumerated value.  |
| DISPLAY | DISPLAY                            | Quoted alphanumeric for the expanded string value.<br>In cases where special characters are needed, the DISPLAY column uses a hexadecimal value, which is identified by using hash marks instead of quotation marks, e.g. <b>#42FE#</b> . |
| MEANING | MEANING                            | The meaning column is not required over the network and typically not provided.   |

**Table 48: Refinitiv Wire Format EnumType Dictionary File Values**

### 5.6.3 Specific Usage: RDF Direct and EnumTable Dictionary

The RDF Direct EnumTable Dictionary uses the name “RWFFEnum”. It has a **DictionaryId** of **1** to match the RWFFId Dictionary.

RDF Direct uses the standard file representation described in Section 5.5.2. The file does not include a **DictionaryId** or a Version number, so most existing enumtype.def parsers can parse the RWF FieldDictionary file without changes.

## 5.7 Special Semantics

### 5.7.1 DictionariesProvided and DictionariesUsed

The Directory's DirectoryInfo **FilterEntry** (refer to Section 4.3.1.1) includes two elements related to Dictionaries: **DictionariesProvided** and **DictionariesUsed**. Both elements contain an **Array** of **ASCII** dictionary names. These names can be used in **Name** to request the dictionaries.

► **To dynamically discover dictionaries while minimizing the amount of data downloaded:**

1. Parse the "DictionariesUsed" from each desired service in the Directory.
2. Parse the "DictionariesProvided" from every service in the Directory.
3. Make a streaming request for each Dictionary Name listed in **DictionariesUsed** from the service that lists the **DictionaryName** in **DictionariesProvided**. The **Filter** of each **ReqMsg** should be set to **DICTIONARY\_INFO** so as to request only the dictionary's basic information (because dictionaries tend to be large, this setting prevents unnecessary network traffic).
4. For each Dictionary response, parse the **summaryData** in the payload to obtain the dictionary's Type and Version.
  - If a dictionary is of an unneeded type, that dictionary stream can be closed.
  - If a dictionary is needed, a reissue request can be made where the **Filter** requests a higher verbosity (e.g. **DICTIONARY\_NORMAL**).
  - Version information can be used to determine if the consumer needs to update its dictionary.

### 5.7.2 Version Information

The version of a dictionary is normally available in Summary Data in the payload of a **RefreshMsg**. All available verboisities are expected to include this information. The verbosity **DICTIONARY\_INFO** can be used to request only the version information (as the many fields in dictionaries tend to result in large messages).

This information normally comes in the form of a **ASCII** containing a dotted-decimal version number, indicating first the major version, followed by the minor version, and possibly followed by a third (informational) micro-version. For example, in the string **1.2.3**:

- **1** is the major version
- **2** is the minor version
- **3** is the micro-version

#### 5.7.2.1 Version Information Usage

Version information has a couple of uses:

- The **minor** version changes whenever a dictionary adds new fields, but does not modify existing fields. This means the consumer can still use the previous dictionary with its data (though the consumer is unable to decode any new fields). Also, if the consumer has multiple dictionaries with the same major version available, it can use the minor version information to determine which is the latest (and therefore will be able to decode all fields regardless of the data's source).
- The **major** version changes if the dictionary changes in a way that is not compatible with previous versions (such as changing an existing field). This means that data encoded using a dictionary with one major version cannot be decoded using a dictionary with a different major version. If a consumer learns that its provider has changed to a dictionary with a different major version, it must retrieve the new dictionary before again decoding data.

### 5.7.2.2 Handling Dictionary Version Changes

To keep consumers informed of changes, Refinitiv recommends that dictionary requests be streaming even though updates are not used for this domain.

If the dictionary's minor version changes, a provider may advertise it via a **StatusMsg** with a **State** of **OmmState.Open/OmmState.Suspect**. The consumer may then reissue its dictionary request to obtain the latest version.

If a dictionary's major version is changed, the provider should disconnect all consumers to ensure that the consumers' content and dictionary are entirely resynchronized.

## 5.8 Other Dictionary Types

The Dictionary domain is intended to be used for other versionable data that updates very rarely. This section briefly describes the other reserved dictionary types.

None of these dictionary types are currently used, nor is there any domain model specification associated with any of them at this time.

| DICTIONARY TYPE | DESCRIPTION  |
|-----------------|--|
| DisplayTemplate | A <b>DisplayTemplate</b> dictionary contains specifications that describe how and where to display fields on a screen.   |
| DataDefinition  | A <b>DataDefinition</b> dictionary contains specifications for ElementListDefs and FieldListDefs that can be used for decoding FieldLists and ElementLists that have been optimized with SetDefinitions. |
| StyleSheet      | A <b>StyleSheet</b> dictionary contains an XSLT or CSS style sheet.  |
| Reference       | A <b>Reference</b> dictionary is a table of reference information provided as a Series. This information is not used for parsing, interpreting, caching, or displaying data.                             |

**Table 49: Other Dictionary Types**

## 5.9 Specific Usage: RDMS

Refinitiv Real-Time Distribution System currently support only a single **DictionaryId**'s family. If the provider doesn't specify it then it is interpreted to be 1.

## 6 Market Price Domain

### 6.1 Description

The **Market Price** domain provides access to Level I market information such as trades, indicative quotes, and top-of-book quotes. All information is sent as a **FieldList**. Field-value pairs contained in the field list include information related to that item (i.e., net change, bid, ask, volume, high, low, or last price).

**NOTE:** **GenericMsg**(s) are not supported in the **MMT\_MARKET\_PRICE** Refinitiv Domain Model.

### 6.2 Usage

#### 6.2.1 Market Price Request Message

A Market Price request message is encoded using **ReqMsg** and sent by Open Message Model consumer applications. The request specifies the name and attributes of an item in which the consumer is interested.

To receive updates, a consumer can make a “streaming” request by setting **ReqMsg.InterestAfterRefresh** to **true**. If the method is not set, the consumer requests a “snapshot,” and the refresh ends the request (though updates might be received in either case if the refresh has multiple parts).

To stop updates, a consumer can pause an item (if the provider supports the pause feature). For additional details, refer to the *Enterprise Message API C++ Edition Developers Guide*.

| COMPONENT      | DESCRIPTION / VALUE   |
|----------------|---|
| DomainType     | <b>Required.</b> <b>MMT_MARKET_PRICE = 6</b>  |
| Interactions   | <b>Required.</b> <ul style="list-style-type: none"> <li><b>InitialImage: true</b>, indicates that an initial image is required.</li> <li><b>InterestAfterRefresh: true</b>, indicates that a streaming request is required.</li> <li><b>Pause: true</b>, indicates that a pause is required.</li> </ul>   |
| Indications    | Optional.<br><b>ConflatedInUpdates: true</b> , indicates conflated updates is required<br>Batch and View request are specified in the <b>Payload</b> .  |
| QoS            | Optional. Indicates the QoS at which the consumer wants the stream serviced. If both <b>QoS</b> and <b>worstQoS</b> are specified, this request can be satisfied by a range of QoS.   |
| worstQoS       | Optional. Used with the <b>QoS</b> member to define a range of acceptable QoS. When the provider encounters such a range, it should attempt to provide the best QoS it can within that range.<br><b>worstQoS</b> should only be used on services that claim to support it via the <b>SupportsQoSRange</b> item in the Source Directory response (refer to Section 4.3.1.1). |
| Priority       | Optional. Indicates the class and count associated with stream priority.  |
| extendedHeader | Not used.   |
| ServiceId      | <b>Required.</b> Specifies the ID of the service from which the consumer wishes to request the item.<br><b>NOTE:</b> The application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.   |
| NameType       | Optional. When consuming from Refinitiv sources, typically set to <b>INSTRUMENT_NAME_RIC = 1</b> (the “Reuters Instrument Code”). If unspecified, <b>NameType</b> defaults to <b>INSTRUMENT_NAME_RIC = 1</b> .  |

**Table 50: Market Price Request Message**

| COMPONENT   | DESCRIPTION / VALUE  |
|-------------|--|
| Name        | <b>Required.</b> Specifies the name of the requested item.   |
|             | <b>NOTE:</b> Not used for Batch Item request.  |
| ServiceName | <b>Required.</b> Specifies the name of the service from which the consumer wishes to request the item.   |
|             | <b>NOTE:</b> The application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.  |
| Filter      | Not used.  |
| Identifier  | Not used.  |
| Attrib      | Not used.  |
| Payload     | Optional. When features such as View or Batch are leveraged, the payload can contain information relevant to that feature. For more detailed information, refer to the Appendix A. |

Table 50: Market Price Request Message (Continued)



## 6.2.2 Market Price Refresh Message

A Market Price Refresh Message is encoded using **RefreshMsg** and sent by Open Message Model provider and non-interactive provider applications. This message sends all currently available information about the item to the consumer.

**FieldList** in the payload should include all fields that may be present in subsequent updates, even if those fields are currently blank. When responding to a View request, this refresh should contain all fields that were requested by the specified view. If for any reason the provider wishes to send new fields, it must first send an unsolicited refresh with both the new and currently-present fields.

**NOTE:** All solicited or unsolicited refresh messages in the Market Price domain must be atomic. The Market Price domain does not allow for multi-part refresh use. The provider should only send the **Name** and **ServiceName** in the first Refresh response message. However if **MsgKeyInUpdates** is set to **true**, then the **Name** and **ServiceName** must be provided for every Refresh response messages.

| COMPONENT      | DESCRIPTION / VALUE  |
|----------------|--|
| DomainType     | <b>Required.</b> MMT_MARKET_PRICE = 6  |
| State          | <b>Required.</b> Includes the state of the stream and data.  |
| Solicited      | <b>Required.</b> Indicates whether the refresh was solicited. Possible settings are: <ul style="list-style-type: none"> <li><b>true:</b> The refresh was solicited.</li> <li><b>false:</b> The refresh was unsolicited.</li> </ul>   |
| Indications    | <b>Required.</b> Available settings include: <ul style="list-style-type: none"> <li><b>Complete: true,</b> Indicates that the refresh is complete.</li> <li><b>DoNotCache: true,</b> Indicates that the refresh message should not be cached.</li> <li><b>ClearCache: true,</b> Indicates to clear the cache.</li> </ul> |
| QoS            | Optional. Specifies the QoS at which the stream is provided.   |
| SeqNum         | Optional. A user-specified, item-level sequence number which can be used by the application for sequencing messages within this stream.  |
| ItemGroup      | Optional. Associates the item with an Item Group (refer to Section 4.3.1.3).   |
| PermissionData | Optional. Specifies the permission information associated with content on this stream.   |
| extendedHeader | Not used.  |
| ServiceName    | <b>Required.</b> Specifies the name of the service from which the consumer wishes to request the item.<br><b>NOTE:</b> The application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.  |
| ServiceId      | <b>Required.</b> Specifies the ID of the service that provides the item.<br><b>NOTE:</b> The application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.  |
| NameType       | Optional. <b>NameType</b> should match the <b>NameType</b> specified in the request. If unspecified, <b>NameType</b> defaults to <b>INSTRUMENT_NAME_RIC = 1</b> .  |
| Name           | <b>Required.</b> This should match the requested name.   |
| Filter         | Not used.  |
| Identifier     | Not used.  |
| Attrib         | Not used.  |
| Payload        | <b>Required.</b> This should consist of a <b>FieldList</b> containing all fields associated with the item.   |

**Table 51: Market Price Refresh Message**

### 6.2.3 Market Price Update Message

A Market Price Update Message is encoded using **UpdateMsg** and sent by Open Message Model provider and non-interactive provider applications. The Market Price Update Message conveys any changes to an item's data.

**NOTE:** The provider should only send the **Name** and **NameType** in the first Refresh response message. However if **MsgKeyInUpdates** is set to **true**, then the **Name** and **NameType** must be provided for every Update response message.

| COMPONENT      | DESCRIPTION / VALUE   |
|----------------|---|
| DomainType     | <b>Required.</b> MMT_MARKET_PRICE = 6   |
| UpdateTypeNum  | <b>Required.</b> Indicates the general content of the update: <ul style="list-style-type: none"> <li>INSTRUMENT_UPDATE_UNSPECIFIED = 0</li> <li>INSTRUMENT_UPDATE_QUOTE = 1</li> <li>INSTRUMENT_UPDATE_TRADE = 2</li> <li>INSTRUMENT_UPDATE_NEWS_ALERT = 3</li> <li>INSTRUMENT_UPDATE_VOLUME_ALERT = 4</li> <li>INSTRUMENT_UPDATE_ORDER_INDICATION = 5</li> <li>INSTRUMENT_UPDATE_CLOSING_RUN = 6</li> <li>INSTRUMENT_UPDATE_CORRECTION = 7</li> <li>INSTRUMENT_UPDATE_MARKET_DIGEST = 8</li> <li>INSTRUMENT_UPDATE_QUOTES_TRADE = 9</li> <li>INSTRUMENT_UPDATE_MULTIPLE = 10</li> <li>INSTRUMENT_UPDATE_VERIFY = 11</li> </ul> |
| Indications    | <b>Conditional.</b> <ul style="list-style-type: none"> <li>If <b>UpdateTypeNum</b> is set to be <b>INSTRUMENT_UPDATE_CORRECTION=7</b> or <b>UPDVERIFY</b>, <b>DoNotRipple</b> must be set to <b>true</b></li> <li><b>DoNotCache: true</b>, Indicates the application should not cache this update message.</li> <li><b>DoNotConflate: true</b>, Indicates the application should not conflate updates.</li> </ul>   |
| QoS            | Optional. Specifies the QoS at which the stream is provided.  |
| SeqNum         | Optional. A user-specified, item-level sequence number which can be used by the application for sequencing messages within this stream.   |
| ConflatedCount | Optional. If a provider sends a conflated update, <b>ConflatedCount</b> specifies the number of updates in the conflation.<br>The consumer indicates interest in this information by setting the <b>ReqMsg.ConflatedInUpdates</b> to <b>true</b> in the request.  |
| ConflatedTime  | Optional. If a provider sends a conflated update, <b>ConflatedTime</b> specifies the time interval (in milliseconds) over which data is conflated.<br>The consumer indicates interest in this information by setting the <b>ReqMsg.ConflatedInUpdates</b> to <b>true</b> in the request.  |
| ItemGroup      | Optional. Associates the item with an Item Group (refer to Section 4.3.1.3).  |
| PermissionData | Optional. Specifies permissioning information associated with only the contents of this update.   |
| extendedHeader | Not used.   |
| ServiceId      | <b>Conditional.</b> <b>ServiceId</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> on the request. Specifies the ID of the service that provides the data.<br><b>NOTE:</b> The application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.  |

**Table 52: Market Price Update Message**

| COMPONENT   | DESCRIPTION / VALUE  |
|-------------|--|
| NameType    | <b>Conditional.</b> <b>NameType</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> on the request. <b>NameType</b> should match the name type specified on the request. If <b>NameType</b> is unspecified, its value defaults to <b>INSTRUMENT_NAME_RIC = 1</b> .                          |
| Name        | <b>Conditional.</b> <b>Name</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> on the request. <b>Name</b> specifies the name of the item being provided.  |
| ServiceName | <b>Conditional.</b> <b>ServiceName</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> on the request. Specifies the name of the service that provides the data.<br><b>NOTE:</b> The application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both. |
| Filter      | Not used.  |
| Identifier  | Not used.  |
| Attrib      | Not used.  |
| Payload     | <b>Required.</b> This should consist of a <b>FieldList</b> with any changed data.  |

Table 52: Market Price Update Message (Continued)

## 6.2.4 Market Price Status Message

A Market Price Status Message is encoded using **StatusMsg** and sent by Open Message Model provider and non-interactive provider applications. The status message conveys state change information associated with an item stream.

**NOTE:** The provider should only send the **Name** and **NameType** in the first Refresh response message. However if **MsgKeyInUpdates** is set to **true**, then the **Name** and **NameType** must be provided for every Status response message.

| COMPONENT      | DESCRIPTION / VALUE  |
|----------------|--|
| DomainType     | <b>Required.</b> MMT_MARKET_PRICE = 6  |
| State          | Optional. Specifies the current state information associated with the data and stream.   |
| ItemGroup      | Optional. Associates the item with an Item Group (refer to Section 4.3.1.3).   |
| PermissionData | Optional. Specifies permissioning information associated with only the contents of this message.   |
| extendedHeader | Not used.  |
| ServiceId      | <b>Conditional.</b> <b>ServiceId</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> on the request. Specifies the ID of the service that provides the data.<br><b>NOTE:</b> The application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.     |
| NameType       | <b>Conditional.</b> <b>NameType</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> on the request. <b>NameType</b> should match the name type specified on the request. If <b>NameType</b> is unspecified, its value defaults to <b>INSTRUMENT_NAME_RIC = 1</b> .                          |
| Name           | <b>Conditional.</b> <b>Name</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> on the request. <b>Name</b> specifies the name of the item being provided.  |
| ServiceName    | <b>Conditional.</b> <b>ServiceName</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> on the request. Specifies the name of the service that provides the data.<br><b>NOTE:</b> The application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both. |
| Filter         | Not used.  |
| Identifier     | Not used.  |
| Attrib         | Not used.  |
| Payload        | Not used.  |

**Table 53: Market Price Status Message**

## 6.2.5 Market Price Post Message

If support is specified by the provider, consumer applications can post Market Price data. For more information on posting, refer to the *Enterprise Message API C++ Edition Developers Guide*.

### 6.3 Data: Response Message Payload

Market Price data is conveyed as an **FieldList**, where each **FieldEntry** corresponds to a piece of information and its current value. The field list should be decoded by checking **FieldEntry.LoadType** and retrieving a specific type. For more information, refer to the *Enterprise Message API C++ Edition Developers Guide*.

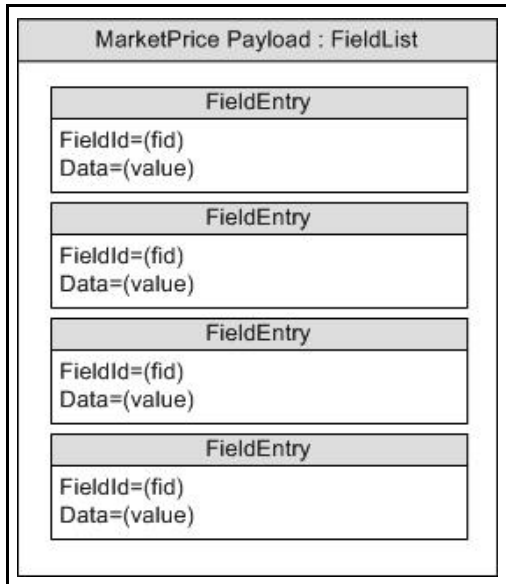


Figure 16. MarketPrice Response Message Payload

## 6.4 Special Semantics

### 6.4.1 Snapshots

MarketPrice is one of a few message model types that support a true snapshot. If a non-streaming request is made, then the **UpdateMsg** will not be sent. Status messages could be received before the single Refresh response message (for details refer to Section 2.3) is received. For streaming and snapshot streams, the Refresh response message will always be a single message and it will have **RefreshMsg.Complete** is set to **true**.

### 6.4.2 Ripple Fields

Some fields in a **FieldList** are defined as ripple fields. When the value of a ripple field changes, the former value automatically becomes the new value of another field. The change to the second field may, in turn, cause another field to be changed to reflect the second field's former value. Whether or not fields are rippled is determined by the value of **DoNotRipple**.

When a refresh message is received, all of the ripple fields delivered by the Venue/Exchange are present in the refresh message. However, the consuming application must set ripple behavior for fields not in the refresh message. In some cases, the values delivered for the “ripple-to” Fields in the refresh may be empty, but they must be present.

It is a responsibility of the Consumer application to ripple the Fields. The Enterprise Message API does NOT ripple fields on behalf of the consumer application. The Open Message Model **FieldList** concept supports rippling. However, the **FieldList** class does not cache, so it cannot ripple fields.

## 6.5 Specific Usage: RDF Direct MarketPrice

RDF Direct uses MarketPrice for SIAC Level 1, NASDAQ Level 1, and OPRA Level 1 data. The Refresh is provided in a single message. It contains all of the fields, even if they are blank.

## 6.6 Specific Usage: Legacy Records

MarketPrice can also be used for data structured like IDN records, such as:

- Page Records for reference page records and TS1 historical data.
- Chains for indices and ranked lists.
- Segment Chains for time & sales and news stories.

## 7 Market By Order Domain

### 7.1 Description

The **Market By Order** domain provides access to Level II full order books. The list of orders is sent in the form of a **Map**. Each **MapEntry** represents one order (using the order's Id as its key) and contains a **FieldList** describing information related to that order (such as price, whether it is a bid/ask order, size, quote time, and market maker identifier).

---

**NOTE:** **GenericMsg(s)** are not supported for **MMT\_MARKET\_BY\_ORDER** Refinitiv Domain Models.

---

### 7.2 Usage

#### 7.2.1 Market By Order Request Message

A Market By Order request message is encoded using **ReqMsg** and sent by Open Message Model consumer applications. The request specifies the name of the item in which a consumer is interested.

To receive updates, the consumer makes a “streaming” request by setting the **ReqMsg.InterestAfterRefresh** to **true**. If the method is not set, the consumer is requesting a “snapshot,” and the refresh should end the request. Updates may be received in either case if the refresh has multiple parts.

To stop updates, a consumer can pause an item if the provider supports this functionality. For additional details, refer to the *Enterprise Message API C++ Edition Developers Guide*.

| COMPONENT      | DESCRIPTION / VALUE   |
|----------------|---|
| DomainType     | <b>Required.</b> <b>MMT_MARKET_BY_ORDER = 7</b>   |
| Interactions   | <b>Required.</b> <ul style="list-style-type: none"> <li><b>InitialImage: true</b>, Indicates that an initial image is required.</li> <li><b>InterestAfterRefresh: true</b>, Indicates that a streaming request is required.</li> <li><b>Pause: true</b>, Indicates that a pause is required.</li> </ul>   |
| Indications    | Optional.<br><b>ConflatedInUpdates: true</b> , indicates conflated updates is required.   |
| QoS            | Optional. Indicates the QoS at which the consumer wants the stream serviced. If both <b>QoS</b> and <b>worstQoS</b> are specified, this request can be satisfied by a range of qualities of service.  |
| worstQoS       | Optional. Used with the <b>QoS</b> member to define a range of acceptable Qualities of Service. When encountering such a range, the provider should attempt to provide the best QoS it can within that range. This should only be used on services that claim to support it via the <b>SupportsQoSRange</b> item in the Source Directory response (refer to Section 4.3.1.1). |
| Priority       | Optional. Indicates the class and count associated with stream priority.  |
| extendedHeader | Not used.   |
| ServiceId      | <b>Required.</b> This should be the ID associated with the service from which the consumer wants to request the item.<br><b>NOTE:</b> A consumer should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.   |
| ServiceName    | <b>Required.</b> This should be the name of the service from which the consumer wishes to request data.<br><b>NOTE:</b> A consumer should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.   |

**Table 54: Market By Order Request Message**

| COMPONENT  | DESCRIPTION / VALUE  |
|------------|--|
| NameType   | Optional. When consuming from Refinitiv sources, <b>NameType</b> is typically set to <b>INSTRUMENT_NAME_RIC = 1</b> (the “Reuters Instrument Code”). If absent, the Enterprise Message API assumes a setting of <b>INSTRUMENT_NAME_RIC = 1</b> . |
| Name       | <b>Required</b> . Specifies the requested item’s name.   |
|            | <b>NOTE:</b> Not used for Batch Item requests.   |
| Filter     | Not used.  |
| Identifier | Not used.  |
| Attrib     | Not used.  |
| Payload    | Optional. When features such as View or Batch are leveraged, the payload can contain information relevant to that feature. For more detailed information, refer to Appendix A.   |

Table 54: Market By Order Request Message (Continued)



## 7.2.2 Market By Order Refresh Message

A Market By Order refresh message is encoded using **RefreshMsg** and sent by Open Message Model interactive provider and non-interactive provider applications. A Market By Order refresh may be sent in multiple parts. It is possible for update and status messages to be delivered between parts of a refresh message, regardless of whether the request is streaming or non-streaming.

**NOTE:** The provider should send the **Name** and **ServiceName** only in the first Refresh response message. However if **MsgKeyInUpdates** is set to **true**, then the **Name** and **ServiceName** must be provided for every Refresh response message.

| COMPONENT      | DESCRIPTION / VALUE  |
|----------------|--|
| DomainType     | <b>Required.</b> MMT_MARKET_BY_ORDER = 7   |
| State          | <b>Required.</b> The state of the stream and data.   |
| Solicited      | <b>Required.</b> Indicated whether the refresh was solicited. Available values are: <ul style="list-style-type: none"> <li><b>true:</b> The refresh was solicited.</li> <li><b>false:</b> The refresh was unsolicited.</li> </ul>                |
| Indications    | Optional. <ul style="list-style-type: none"> <li><b>DoNotCache: true</b>, indicate do not cache this refresh message</li> <li><b>ClearCache: true</b>, indicate clear cache</li> <li><b>Complete: true</b>, indicate refresh complete</li> </ul> |
| PartNum        | Optional. Specifies the part number of a multi-part refresh.   |
| QoS            | Optional. Specifies the QoS at which the stream is provided.   |
| SeqNum         | Optional. A user-specified, item-level sequence number which can be used by the application for sequencing messages within this stream.  |
| ItemGroup      | Optional. Associates the item with an Item Group (refer to Section 4.3.1.3).   |
| PermissionData | Optional. Specifies permission information associated with content on this stream.   |
| extendedHeader | Not used.  |
| ServiceId      | <b>Required.</b> Specifies the ID of the service that provides the item.<br><b>NOTE:</b> The provider should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.   |
| NameType       | Optional. <b>NameType</b> should match the <b>NameType</b> specified in the request. If absent, <b>NameType</b> is assumed to be <b>INSTRUMENT_NAME_RIC = 1</b> .  |
| Name           | <b>Required.</b> <b>Name</b> should match the requested item's name.   |
| ServiceName    | <b>Required.</b> Specifies the name of the service that provides the item.<br><b>NOTE:</b> The provider should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.   |
| Filter         | Not used.  |
| Identifier     | Not used.  |
| Attrib         | Not used.  |
| Payload        | <b>Required.</b> An order book is represented by a <b>Map</b> , where each entry ( <b>MapEntry</b> ) contains information ( <b>FieldList</b> ) that corresponds to an order.   |

**Table 55: Market By Order Refresh Message**

### 7.2.3 Market By Order Update Message

A Market By Order update message is encoded using **UpdateMsg** and sent by Open Message Model interactive provider and non-interactive provider applications. The provider can send an update message to add, update, or remove order information. Updates may be received between the first Refresh and the RefreshComplete. It is the consuming application's responsibility to determine if the update is applicable to the data that has previously been sent in a refresh.

**NOTE:** The provider should only send the **Name** and **ServiceName** in the first Refresh response message. However if **MsgKeyInUpdates** is set to **true**, then the **Name** and **ServiceName** must be provided for every Update response messages.

| COMPONENT      | DESCRIPTION / VALUE   |
|----------------|---|
| DomainType     | <b>Required.</b> MMT_MARKET_BY_ORDER = 7  |
| UpdateTypeNum  | <b>Required.</b> Indicates the general content of the update. Typically sent as one of the following: <ul style="list-style-type: none"> <li>INSTRUMENT_UPDATE_UNSPECIFIED = 0</li> <li>INSTRUMENT_UPDATE_QUOTE = 1</li> </ul>  |
| Indications    | Optional: <ul style="list-style-type: none"> <li><b>DoNotCache: true</b>, Indicates that the application should not cache this update message.</li> <li><b>DoNotConflate: true</b>, Indicates that the application should not conflate this update message.</li> </ul>  |
| SeqNum         | Optional. A user-specified, item-level sequence number which can be used by the application for sequencing messages within this stream.   |
| ConflatedCount | Optional. If a provider sends a conflated update, <b>ConflatedCount</b> informs the consumer as to how many updates were included in the conflation.<br>The consumer indicates interest in this information by setting the <b>ReqMsg.ConflatedInUpdates</b> to <b>true</b> in the request.                    |
| ConflatedTime  | Optional. If a provider sends a conflated update, <b>ConflatedTime</b> informs the consumer as to the interval (in milliseconds) over which data was conflated.<br>The consumer indicates interest in this information by setting the <b>ReqMsg.ConflatedInUpdates</b> to <b>true</b> in the request.         |
| PermissionData | Optional. <b>PermissionData</b> contains permissioning information associated only with the contents of this update.  |
| extendedHeader | Not used.   |
| ServiceName    | <b>Conditional.</b> <b>ServiceName</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> . <b>ServiceName</b> specifies the name of the service that provides the data.<br><b>NOTE:</b> The application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both. |
| ServiceId      | <b>Conditional.</b> <b>ServiceId</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> . <b>ServiceId</b> specifies the ID of the service that provides the data.<br><b>NOTE:</b> The application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.       |
| NameType       | <b>Conditional.</b> <b>NameType</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> . <b>NameType</b> must match the name type in the item's request message (typically <b>INSTRUMENT_NAME_RIC = 1</b> ).  |
| Name           | Optional (Required if <b>MsgKeyInUpdates</b> was set to <b>true</b> ). <b>Name</b> specifies the name of the item being provided.   |
| Filter         | Not used.   |
| Identifier     | Not used.   |

**Table 56: Market By Order Update Message**

| COMPONENT | DESCRIPTION / VALUE   |
|-----------|---|
| Attrib    | Not used.   |
| Payload   | <b>Required.</b> The order book is represented by a <b>Map</b> , where each map entry ( <b>MapEntry</b> ) holds information ( <b>FieldList</b> ) corresponding to an order. |

**Table 56: Market By Order Update Message (Continued)**

### 7.2.4 Market By Order Status Message

A Market By Order status message is encoded using **StatusMsg** and sent by Open Message Model interactive provider and non-interactive provider applications. This message conveys state change information associated with an item stream.

**NOTE:** The provider should only send the **Name** and **ServiceName** in the first Refresh response message. However **MsgKeyInUpdates** is set to **true**, then the **Name** and **ServiceName** must be provided for every Status response messages.

| COMPONENT      | DESCRIPTION / VALUE  |
|----------------|--|
| DomainType     | <b>Required.</b> MMT_MARKET_BY_ORDER = 7   |
| State          | Optional. Specifies the current state information associated with the data and stream.   |
| Indications    | Optional:<br><b>ClearCache:</b> <b>true</b> , Indicates to clear the cache.  |
| SeqNum         | Optional. A user-specified, item-level sequence number which can be used by the application for sequencing messages within this stream.  |
| ItemGroup      | Optional. The provider may use this to change the item's <b>ItemGroup</b> (for details, refer to Section 4.3.1.3).   |
| PermissionData | Optional. <b>PermissionData</b> specifies any new permissioning information associated with all of the stream's contents.  |
| extendedHeader | Not used.  |
| ServiceName    | <b>Conditional.</b> <b>ServiceName</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> ). Specifies the name of the service providing data.<br><b>NOTE:</b> The application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.                      |
| ServiceId      | <b>Conditional.</b> <b>ServiceId</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> ). <b>ServiceId</b> specifies the ID of the service that provides the item.<br><b>NOTE:</b> The application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both. |
| NameType       | <b>Conditional.</b> <b>NameType</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> . <b>NameType</b> must match the name type in the item's request message. If not specified, <b>NameType</b> defaults to <b>INSTRUMENT_NAME_RIC = 1</b> .  |
| Name           | Optional (Required if <b>MsgKeyInUpdates</b> was set to <b>true</b> ). <b>Name</b> specifies the name of the item being provided.  |
| Filter         | Not used.  |
| Identifier     | Not used.  |
| Attrib         | Not used.  |
| Payload        | Not used.  |

**Table 57: Market By Order Status Message**

### 7.2.5 Market By Order Post Message

If support is specified by the provider, consumer applications can post Market By Order data. For more information on posting, refer to the *Enterprise Message API C++ Edition Developers Guide*.

## 7.3 Data

### 7.3.1 Response Message Payload

The payload is a **Map**. Refreshes for this **Map** may be in multiple response messages. The bandwidth of the refresh messages can be optimized by putting multiple **MapEntry** in each response messages. For optimal performance the packed map entries in each response message should use less than 6000 bytes. If the data is split into multiple response messages, then a **Map.TotalCountHint** should be provided to optimize downstream caching. Because the fields in each **MapEntry** are the same, bandwidth can be further optimized by DataDefinitions.

**NOTE:** There are two possible usage scenarios:

- Pattern 1: ORDER\_PRC, ORDER\_SIDE and ORDER\_SIZE.
- Pattern 2.1: BID and BIDSIZE, or Pattern 2.2: ASK and ASKSIZE.

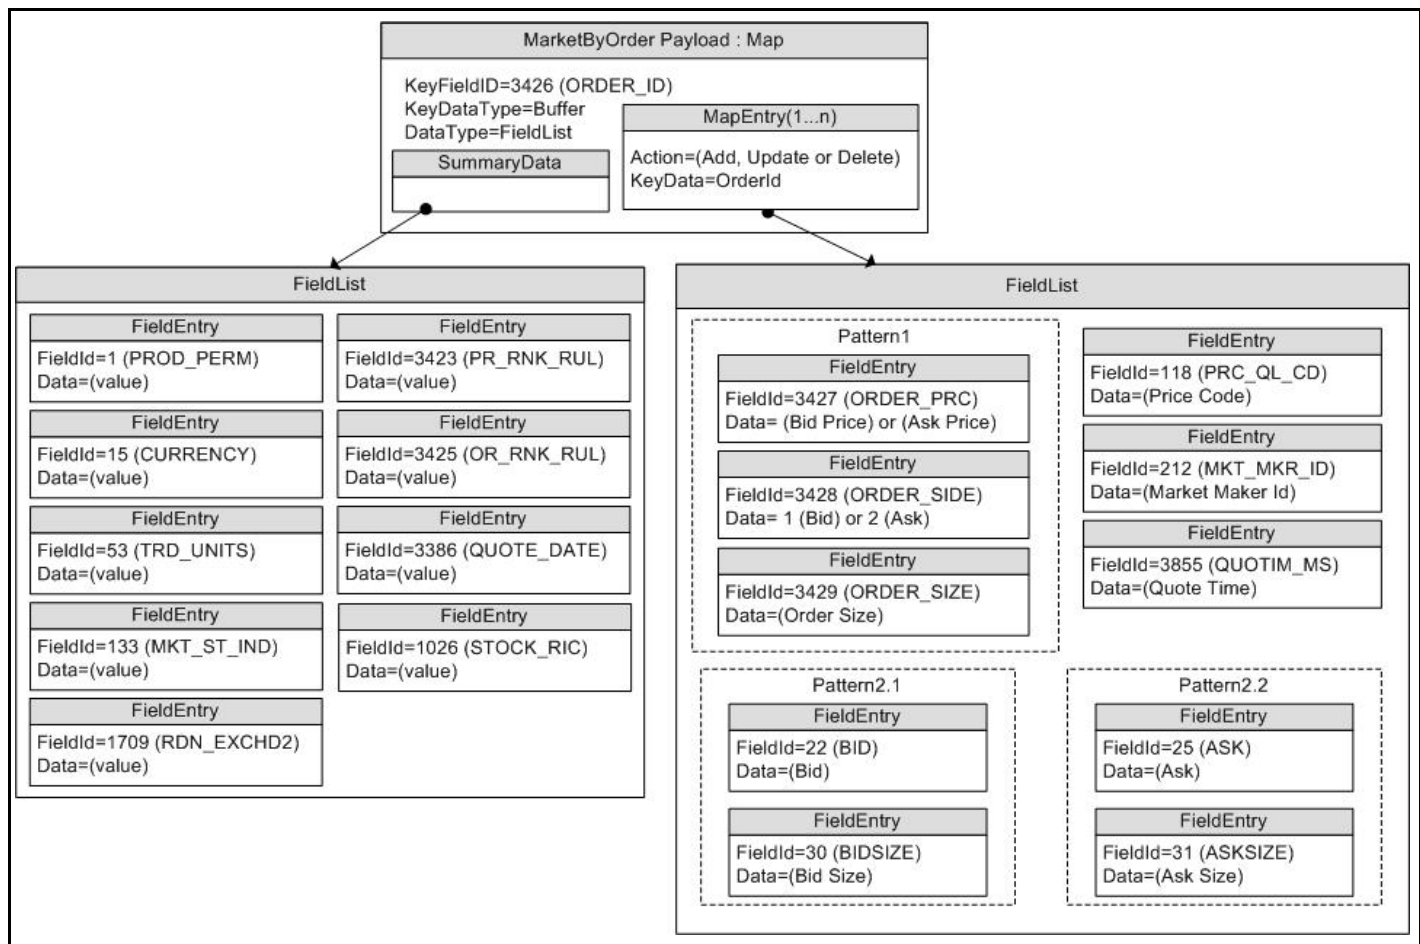


Figure 17. MarketByOrder Response Message Payload

### 7.3.2 Summary Data

The **Map.SummaryData** only needs to be present for the first refresh part. Typical fields in the **summaryData** include:

- Permission information (**PROD\_PERM**)
- Currency of the orders (**CURRENCY**)
- Trade Units for the precision at which order prices are set (**TRD\_UNITS**)
- Market State (**MKT\_ST\_IND**)
- Identifier of the exchange on which the orders were placed (**RDN\_EXCHD2**)
- Price Ranking Rules (**PR\_RNK\_RUL**)
- Order Ranking Rules (**OR\_RNK\_RUL**)
- Quote Date (**QUOTE\_DATE**)
- RIC of the underlying equity (**STOCK\_RIC**)

### 7.3.3 MapEntry Contents

The **MapEntry.Key** is a Buffer, Ascii, or Rmtes that contains the Order ID. The **MapEntry.KeyFieldId** may be set to **ORDER\_ID**, so the information does not have to be repeated in the **MapEntry.Value**.

The **MapEntry.Value** is a **FieldList** that typically contains the following information about the order:

- Order Price and Side (**BID**, **ASK**, or **ORDER\_PRC** and **ORDER\_SIDE**)
- Order Size (**BIDSIZE**, **ASKSIZE**, or **ORDER\_SIZE**)
- Price Qualifiers (**PRC\_QL\_CD**, **PRC\_QL2**)
- Market Maker Identifier (**MKT\_MKR\_ID** or **MMID**)
- Quote Time (**QUOTIM\_MS**)

## 7.4 Special Semantics

None.

## 7.5 Specific Usage: RDF Direct and Response Message Payload

RDF Direct uses MarketByOrder for several markets, including NASDAQ TotalView, Archipelago ECN order book, and Instinet ECN order book.

The payload is a **Map**. Each Refresh for this **Map** includes summary data and a single **MapEntry**. Updates are not sent for any map entry until after the message is sent with **RefreshMsg.Complete** set to **true**. Since each response message includes only one map entry, DataDefinitions are not used to reduce bandwidth. The **Map.TotalCountHint** is not provided.

The **Map.SummaryData** is sent in every Refresh, even if it does not change. The fields used are from the RWFFld Field Dictionary:

- **PROD\_PERM** (1): Integer for permission information.
- **CURRENCY** (15): Enumeration of currency for the orders.
- **TRD\_UNITS** (53): Enumeration of trade units for the precision for which order prices are set.
- **MKT\_ST\_IND** (133): Enumeration of market state.
- **RDN\_EXCHD2** (1709): Enumeration of exchange on which the orders were placed.
- **PR\_RNK\_RUL** (3423): Enumeration of price ranking rules.
- **OR\_RNK\_RUL** (3425): Enumeration of order ranking rules.

- STOCK\_RIC (1026): RIC of the underlying equity.

The **MapEntry.Key** is a buffer that contains the Order ID. The **Map.KeyFieldId** is not set, but this may be changed in the future.

The **MapEntry.Data** is a field list that contains some or all of the following information about the order:

- ORDER\_PRC (3427) & ORDER\_SIDE (3428): Real and Enumeration for the order price & side (buy or sell/bid or ask).
- ORDER\_SIZE (3429): Real for the order size.
- ORDER\_ID (3426): Same value as the **MapEntry.KeyData**. This may be removed in the future by setting the **Map.KeyFieldId** to ORDER\_ID (3426).
- QUOTIM\_MS (3855): Quote Time in millisecond since GMT of the current day in the GMT time zone.

The **FieldList.DictId** is 0, so it should be ignored.

## 7.6 Specific Usage: RDMS

For the most part, MarketByOrder data from Refinitiv Real-Time Distribution System is the same as it is from the original source of the data (e.g., Refinitiv Data Feed Direct). However, if caching is enabled in an Refinitiv Real-Time Distribution System component, there are two differences.

- The number of messages packed into each Refresh response message may be different.
- An updated response message might be delivered between Refresh response messages and before the message with **RefreshMsg.Complete** set **true**. It is the consumer applications responsibility to apply the indicated changes.

## 8 Market By Price Domain

### 8.1 Description

**Market By Price** provides access to Level II market depth information. The list of price points is sent in a **Map**. Each entry represents one price point (using that price and bid/ask side as its key) and contains a **FieldList** that describes information related to that price point.

**NOTE:** **GenericMsg(s)** are not supported for the **MMT\_MARKET\_BY\_PRICE** Refinitiv Domain Model.

### 8.2 Usage

#### 8.2.1 Market By Price Request Message

A Market By Price request message is encoded using **ReqMsg** and sent by Open Message Model consumer applications. The request specifies the name of an item in which the consumer is interested.

To receive updates, a consumer can make a “streaming” request by setting **ReqMsg.InterestAfterRefresh** to **true**. If the flag is not set, the consumer requests a “snapshot” and the refresh should end the request (updates may be received in either case if the refresh has multiple parts).

A consumer can pause an item to stop updates (if the provider supports such functionality). For more information, refer to the *Enterprise Message API C++ Edition Developers Guide*.

| COMPONENT      | DESCRIPTION / VALUE  |
|----------------|--|
| DomainType     | <b>Required.</b> <b>MMT_MARKET_BY_PRICE = 8</b>  |
| Interactions   | <b>Conditional.</b> <ul style="list-style-type: none"> <li><b>InitialImage: true</b>, indicates that an initial image is required.</li> <li><b>InterestAfterRefresh: true</b>, indicates that a streaming request is required.</li> <li><b>Pause: true</b>, indicates that a pause is required.</li> </ul>   |
| Indications    | Optional.<br><b>ConflatedInUpdates: true</b> , indicates that conflated updates are required.<br>Batch and View requests are specified in the Payload.   |
| QoS            | Optional. Indicates the QoS at which the consumer wants the stream serviced. If both <b>QoS</b> and <b>worstQoS</b> are specified, this request can be satisfied by a range of QoS.  |
| worstQoS       | Optional. Used with <b>QoS</b> to define a range of acceptable QoS. When the provider encounters such a range, it should attempt to provide the best QoS possible within that range.<br>This should only be used on services that claim to support it via the <b>SupportsQoSRange</b> item in the Source Directory response (for further details, refer to Section 4.3.1.1). |
| Priority       | Optional. Indicates the class and count associated with stream priority.   |
| extendedHeader | Not used.  |
| ServiceName    | <b>Required.</b> Specifies the name of the service from which the consumer wishes to request data.<br><b>NOTE:</b> The application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.  |
| ServiceId      | <b>Required.</b> Specifies the ID of the service that provides the requested item.<br><b>NOTE:</b> The application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.  |

**Table 58: Market By Price Request Message**



| COMPONENT  | DESCRIPTION / VALUE   |
|------------|---|
| NameType   | Optional. Typically set to <b>INSTRUMENT_NAME_RIC = 1</b> (the “Reuters Instrument Code”) when consuming from Refinitiv sources. If absent, its default value is <b>INSTRUMENT_NAME_RIC = 1</b> . |
| Name       | <b>Required</b> . Specifies the name of the requested item.   |
| Filter     | Not used.   |
| Identifier | Not used.   |
| Attrib     | Not used.   |
| Payload    | Optional. When features such as View or Batch are leveraged, the payload can contain information relevant to that feature.<br>For further details, refer to the Appendix A.                       |

Table 58: Market By Price Request Message (Continued)

## 8.2.2 Market By Price Refresh Message

A Market By Price refresh message is encoded using **RefreshMsg** and sent by Open Message Model interactive provider and non-interactive provider applications.

A Market By Price refresh may be sent in multiple parts. Both update and status messages can be delivered between parts of a refresh message, regardless of streaming or non-streaming request.

**NOTE:** The provider should send **Name** and **ServiceName** only in the first Refresh response message, unless **MsgKeyInUpdates** is set to **true**, in which case **Name** and **ServiceName** must be provided in each Refresh response message.

| COMPONENT      | DESCRIPTION / VALUE   |
|----------------|---|
| DomainType     | <b>Required</b> . <b>MMT_MARKET_BY_PRICE = 8</b>  |
| State          | <b>Required</b> . Indicates the state of the stream and data.   |
| Solicited      | <b>Required</b> . Indicates whether the refresh message was solicited. <ul style="list-style-type: none"> <li><b>true</b>: The refresh message is solicited.</li> <li><b>false</b>: The refresh message is unsolicited.</li> </ul>  |
| Indications    | <b>Conditional</b> . <ul style="list-style-type: none"> <li><b>DoNotCache: true</b>, indicates that the application should not cache this refresh message.</li> <li><b>ClearCache: true</b>, indicates that the application should clear its cache.</li> <li><b>Complete: true</b>, indicates that this is the last message in the refresh complete.</li> </ul> |
| PartNum        | Optional. Specifies the part number of a multi-part refresh.  |
| QoS            | Optional. Specifies the QoS at which the stream is provided.  |
| SeqNum         | Optional. A user-specified, item-level sequence number which can be used by the application for sequencing messages within this stream.   |
| ItemGroup      | Optional. Associates the item with an Item Group (for further information, refer to Section 4.3.1.3).   |
| PermissionData | Optional. If present, specifies permission information associated with the stream’s content.  |
| extendedHeader | Not used.   |

Table 59: Market By Price Refresh Message

| COMPONENT   | DESCRIPTION / VALUE  |
|-------------|--|
| ServiceName | <b>Required.</b> Specifies the name of the service that provides the item.<br><b>NOTE:</b> The consumer application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both. |
| ServiceId   | <b>Required.</b> Specifies the ID of the service that provides the item.<br><b>NOTE:</b> The consumer application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.   |
| NameType    | Optional. <b>NameType</b> should match the <b>NameType</b> specified in the request. If absent, this value is assumed to be <b>INSTRUMENT_NAME_RIC = 1</b> .   |
| Name        | <b>Required.</b> <b>Name</b> should match the name specified in the request.   |
| Filter      | Not used.  |
| Identifier  | Not used.  |
| Attrib      | Not used.  |
| Payload     | <b>Required.</b> The order book is represented by a <b>Map</b> , where each entry ( <b>MapEntry</b> ) contains a <b>FieldList</b> which has information about a price point.                                   |

Table 59: Market By Price Refresh Message (Continued)

### 8.2.3 Market By Price Update Message

A Market By Price update message is encoded using **UpdateMsg** and sent by Open Message Model interactive provider and non-interactive provider applications. The provider can send an update message to add, update, or remove price point information. Updates will not be received before images. True snapshots are supported.

**NOTE:** The provider should send **Name** and **ServiceName** only in the first Refresh response message. However if **MsgKeyInUpdates** is set to **true**, then **Name** and **ServiceName** must be provided for every Update response message.

| COMPONENT      | DESCRIPTION / VALUE   |
|----------------|---|
| DomainType     | <b>Required.</b> MMT_MARKET_BY_PRICE = 8  |
| UpdateTypeNum  | <b>Required.</b> Indicates the general content of the update. Typically sent as one of the following: <ul style="list-style-type: none"> <li>INSTRUMENT_UPDATE_UNSPECIFIED = 0</li> <li>INSTRUMENT_UPDATE_QUOTE = 1</li> </ul>  |
| Indications    | Optional. <ul style="list-style-type: none"> <li><b>DoNotCache:</b> <b>true</b>, indicates to not cache the update message.</li> <li><b>DoNotConflate:</b> <b>true</b>, indicates to not conflate the update message.</li> </ul>  |
| QoS            | Optional. Specifies the QoS at which the stream is provided.  |
| SeqNum         | Optional. A user-specified, item-level sequence number which can be used by the application for sequencing messages within this stream.   |
| ConflatedCount | Optional. If a provider sends a conflated update, <b>ConflatedCount</b> specifies how many updates were included in the conflation.<br>The consumer indicates interest in this information by setting the <b>ReqMsg.ConflatedInUpdates</b> flag in the request.   |
| ConflatedTime  | Optional. If a provider sends a conflated update, <b>ConflatedTime</b> specifies the time interval (in milliseconds) over which data is conflated.<br>The consumer indicates interest in this information by setting the <b>ReqMsg.ConflatedInUpdates</b> flag in the request.                                    |
| PermissionData | Optional. Specifies permissioning information for the update's content.   |
| extendedHeader | Not used.   |
| ServiceName    | <b>Conditional.</b> <b>ServiceName</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> on the request. Specifies the name of the service that provides the data.<br><b>NOTE:</b> The provider application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both. |
| ServiceId      | <b>Conditional.</b> <b>ServiceId</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> on the request. Specifies the ID of the service that provides the item.<br><b>NOTE:</b> The provider application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.     |
| NameType       | <b>Conditional.</b> <b>NameType</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> on the request. <b>NameType</b> should match the <b>NameType</b> specified in the item's request message. If <b>NameType</b> is not specified, it uses the default <b>INSTRUMENT_NAME_RIC = 1</b> .              |
| Name           | <b>Conditional.</b> <b>Name</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> on the request) Specifies the name of the item being provided.   |
| Filter         | Not used.   |

**Table 60: Market By Price Update Message**

| COMPONENT  | DESCRIPTION / VALUE  |
|------------|--|
| Identifier | Not used.  |
| Attrib     | Not used.  |
| Payload    | <b>Required.</b> MarketByPrice is represented by a <b>Map</b> , where each entry contains a <b>FieldList</b> containing information about a price point. |

Table 60: Market By Price Update Message (Continued)

## 8.2.4 Market By Price Status Message

A Market By Price status message is encoded using **StatusMsg** and sent by Open Message Model interactive provider and non-interactive provider applications. This message conveys state change information associated with an item stream.

**NOTE:** The provider should send **Name** and **ServiceName** only in the first Refresh response message, unless **MsgKeyInUpdates** is set to **true**, in which case **Name** and **ServiceName** must be provided for every Status response message.

| COMPONENT      | DESCRIPTION / VALUE   |
|----------------|---|
| DomainType     | <b>Required.</b> MMT_MARKET_BY_PRICE = 8  |
| State          | Optional. Specifies current state information associated with the data and stream.  |
| Indications    | Optional.<br><b>ClearCache:</b> <b>true</b> , Indicates to clear the cache.   |
| QoS            | Optional. Specifies the QoS at which the stream is provided.  |
| ItemGroup      | Optional. Specifies the item's <b>ItemGroup</b> (the provider can use this component to change the item's <b>ItemGroup</b> ).   |
| PermissionData | Optional. Specifies new permissioning information associated with all contents on the stream.   |
| extendedHeader | Not used.   |
| ServiceName    | <b>Conditional.</b> <b>ServiceName</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> on the request. Specifies the name of the service that provides the data.<br><b>NOTE:</b> The provider application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both. |
| ServiceId      | <b>Conditional.</b> <b>ServiceId</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> on the request. Specifies the ID of the service that provides the item.<br><b>NOTE:</b> The provider application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.     |
| NameType       | <b>Conditional.</b> <b>NameType</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> on the request. <b>NameType</b> should match the <b>NameType</b> specified in the item's request message. If <b>NameType</b> is not specified, it uses the default <b>INSTRUMENT_NAME_RIC = 1</b> .              |
| Name           | <b>Conditional.</b> <b>Name</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> on the request. Specifies the name of the item being provided.   |
| Filter         | Not used.   |
| Identifier     | Not used.   |

Table 61: Market By Price Status Message

| COMPONENT | DESCRIPTION / VALUE |
|-----------|---------------------|
| Attrib    | Not used.           |
| Payload   | Not used.           |

**Table 61: Market By Price Status Message (Continued)**

### 8.2.5 Market By Price Post Message

If supported by the provider, consumer applications can post Market By Price data. For more information on posting, refer to the *Enterprise Message API C++ Edition Developers Guide*.

## 8.3 Data

### 8.3.1 Response Message Payload

The payload is a **Map**. Refreshes for this **Map** may be in multiple Response messages. The bandwidth of the refresh messages can be optimized by putting multiple **MapEntry** in each response message. For optimal performance the packed map entries in each response message should use less than 6000 bytes. If the data is split into multiple messages, then a **Map.TotalCountHint** should be provided to optimize downstream caching. Since the fields in each map entry are the same, bandwidth can be further optimized by DataDefinitions.

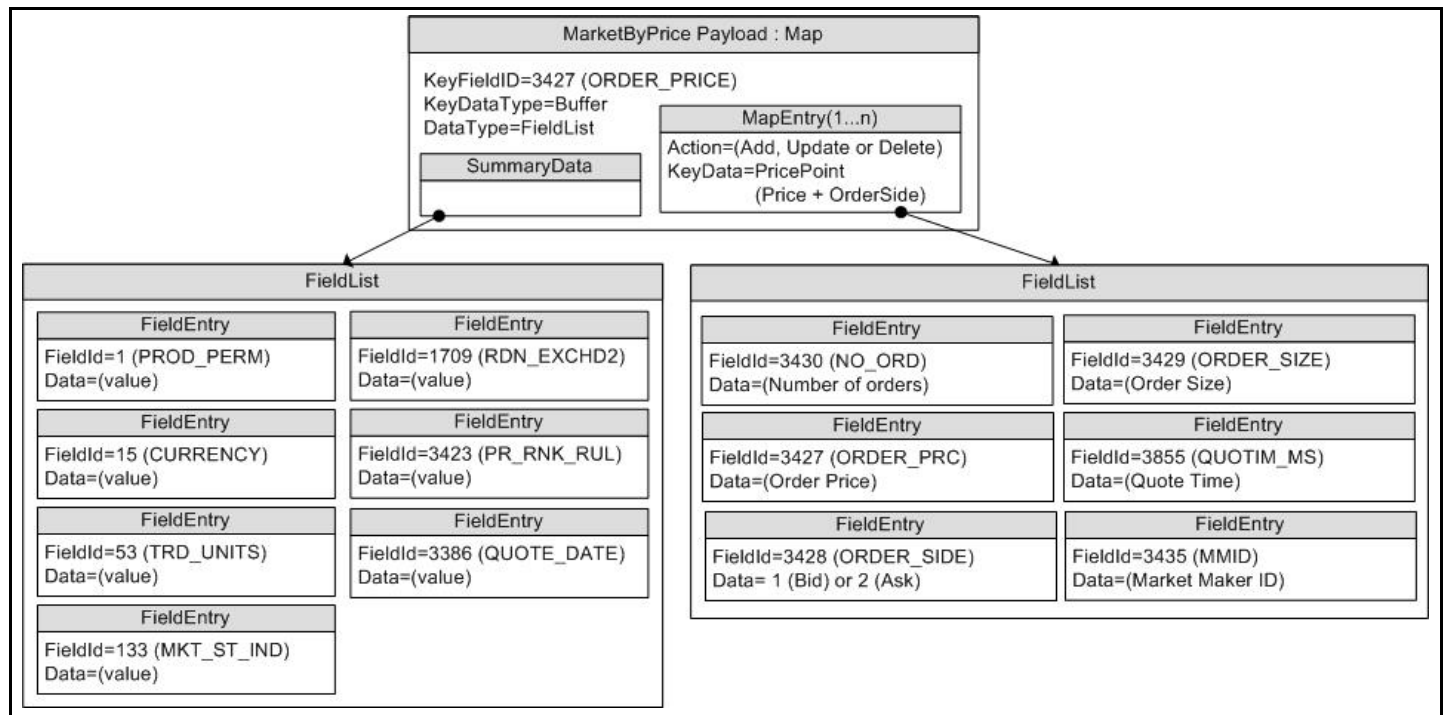


Figure 18. MarketByPrice Response Message Payload

### 8.3.2 Summary Data

The **Map.SummaryData** needs to be present only for the first refresh part, which typically includes:

- Permission information (**PROD\_PERM**)
- Currency of the orders (**CURRENCY**)
- Trade Units for the precision with which order prices are set (**TRD\_UNITS**)
- Market State (**MKT\_ST\_IND**)
- The identifier of the exchange on which the orders were placed (**RDN\_EXCHD2**)
- Price Ranking Rules (**PR\_RNK\_RUL**)
- Quote Date (**QUOTE\_DATE**)

### 8.3.3 MapEntry.Key Contents

The **MapEntry.Key**'s data is a **Buffer** that contains a combination of the price and order side, thus each key is unique within its map. The **MapEntry.Key**'s data should be treated as a single entity and is not meant to be parsed.

**MapEntry.Data** is a **FieldList** that contains some or all of the following information about the price point:

- Order Price & Side (**BID**, **ASK**, or **ORDER\_PRC** and **ORDER\_SIDE**)
- Order Size (**BIDSIZE**, **ASKSIZE**, or **ORDER\_SIZE**)
- Number of aggregated orders (**NO\_ORD**)
- Quote Time (**QUOTIM\_MS**)
- A map containing the Market Makers (**MMID**) and optionally a field list with each of the market makers' positions at the Order Price point.

## 8.4 Special Semantics

None

## 8.5 Specific Usage: RDF Direct and the Response Message Payload

RDF Direct uses MARKET\_BY\_PRICE for several markets, including NYSE OpenBook, Archipelago ECN market depth, and Instinet ECN market depth.

The payload is a **Map**. Each refresh message for this **Map** includes SummaryData and up to 50 map entries. Updates are not sent for any map entry until after the **RefreshMsg.Complete** is set to **true**. DataDefinitions are not used to reduce bandwidth. **Map.TotalCountHint** is not provided.

**Map.SummaryData** is sent in every refresh message, even if it does not change. The fields used are from the RWFFld Field Dictionary:

- PROD\_PERM (1): Integer for permission information
- CURRENCY (15): Enumeration of currency for the orders
- TRD\_UNITS (53): Enumeration of trade Units for the precision for which order prices are set
- MKT\_ST\_IND (133): Enumeration of market state
- RDN\_EXCHD2 (1709): Enumeration of exchange on which the orders were placed

The **MapEntry.Key**'s data is a Buffer that contains the combination of price and order side (**B** for buy or **S** for Sell), so each key is unique within its map. The **MapEntry.Key**'s data should be treated as a single entity and is not meant to be parsed.

The **MapEntry.Value** is a **FieldList** that contains the following information about the price point:

- NO\_ORD (3430): Integer for the Number of Orders aggregated into this **MapEntry**
- ORDER\_PRC (3427) & ORDER\_SIDE (3428): Real and Enumeration for the order price & side (buy or sell/bid or ask)
- ORDER\_SIZE (3429): Real for the aggregated size of the order at this price
- QUOTIM\_MS (3855): Quote Time in millisecond since GMT of the current day in the GMT time zone
- Some venues may provide an extra field that contains a map. The **MapEntry.KeyData** will have a **KeyFieldId** which is MMID (3435). If the positions of each market maker are available, then the MapEntry.Value will contain a **FieldList**. The field list will contain a single field with the position of that market maker. If positions for each market maker are not available, **MapEntry.Value**'s data type will be NoData.

The **FieldList.DictId** is 0, so it should be ignored.

## 8.6 Specific Usage: RDMS

For the most part, MarketByPrice data from Refinitiv Real-Time Distribution System is the same as it is from the original source of the data (e.g. RDF Direct). However, if caching is enabled in an Refinitiv Real-Time Distribution System component, there are two differences.

- The number of messages packed into each Refresh response message may be different.
- Updated response messages may be delivered between Refresh response messages, before the **RespMsg.Complete** is set to **true**. It is the consumer applications responsibility to apply the indicated changes.



## 9 Market Maker Domain

### 9.1 Description

The **Market Maker** domain provides access to market maker quotes and trade information. The list of market makers is sent in the form of a **Map**. Each **MapEntry** represents one market maker (using that market maker's ID as its key) and contains a **FieldList** describing information such as that market maker's bid and ask prices, quote time, and market source.

---

**NOTE:** **GenericMsg(s)** are not supported for the **MMT\_MARKET\_MAKER** Refinitiv Domain Model.

---

### 9.2 Usage

#### 9.2.1 Market Maker Request Message

A Market Maker request message is encoded using **ReqMsg** and sent by Open Message Model consumer applications. The request specifies the name of an item in which the consumer is interested.

To receive updates, a consumer can make a “streaming” request by setting the **ReqMsg.InterestAfterRefresh** to **true**. If the flag is not set, the consumer requests a “snapshot,” and the final part of the refresh indicates all responses have been received for the snapshot. Updates may be received in either case if the refresh has multiple parts.

To stop updates, a consumer can pause an item (if the provider supports this functionality). For more information, refer to the *Enterprise Message API C++ Edition Developers Guide*.

| COMPONENT      | DESCRIPTION / VALUE  |
|----------------|--|
| DomainType     | <b>Required.</b> <b>MMT_MARKET_MAKER = 9</b>   |
| Interactions   | <b>Conditional.</b> Use the appropriate interactions according to your messaging needs: <ul style="list-style-type: none"> <li><b>InitialImage: true</b>, indicates that an initial image is required.</li> <li><b>InterestAfterRefresh: true</b>, indicates that a streaming request is required.</li> <li><b>Pause: true</b>, indicates that a pause is required.</li> </ul> |
| Indications    | Optional.<br><b>ConflatedInUpdates: true</b> , indicates that conflated updates are required.<br>Batch and View request are specified in the <b>Payload</b> .  |
| QoS            | Optional. Indicates the QoS at which the consumer wants the stream serviced. If both <b>QoS</b> and <b>worstQos</b> are specified, this request can be satisfied by a range of QoS.  |
| worstQos       | Optional. Used with <b>QoS</b> to define a range of acceptable QoS. If the provider encounters such a range, it should attempt to provide the best possible QoS within that range.<br>This should only be used on services that claim to support it via the <b>SupportsQosRange</b> item in the Source Directory response (for details, refer to Section 4.3.1.1).             |
| Priority       | Optional. Indicates the class and count associated with stream priority.   |
| extendedHeader | Not used.  |
| ServiceName    | <b>Required.</b> Specifies the name of the service from which the consumer wishes to request the item.<br><b>NOTE:</b> The consumer application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.   |

**Table 62: Market Maker Request Message**

| COMPONENT  | DESCRIPTION / VALUE   |
|------------|---|
| ServiceId  | <b>Required.</b> Specifies the ID of the service that provides the requested item.  |
|            | <b>NOTE:</b> The consumer application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.  |
| NameType   | Optional. When consuming from Refinitiv sources, <b>NameType</b> is typically set to <b>INSTRUMENT_NAME_RIC = 1</b> (the "Reuters Instrument Code"). If absent, its value reverts to the default, which is <b>INSTRUMENT_NAME_RIC = 1</b> . |
| Name       | <b>Required.</b> Specifies the name of the requested item.  |
|            | <b>NOTE:</b> Not used for Batch Item request.   |
| Filter     | Not used.   |
| Identifier | Not used.   |
| Attrib     | Not used.   |
| Payload    | Optional. When features such as View or Batch are leveraged, the payload can contain information relevant to that feature. For more details, refer to Appendix A.   |

Table 62: Market Maker Request Message (Continued)

## 9.2.2 Market Maker Refresh Message

A Market Maker refresh message is encoded using **RefreshMsg** and sent by Open Message Model interactive provider and non-interactive provider applications.

The Market Maker refresh can be sent in multiple parts. Keep in mind that both update and status messages can be delivered between parts of a refresh message, regardless of streaming or non-streaming request.

**NOTE:** The provider should send the **Name** and **ServiceName** only in the first Refresh response message. However if **MsgKeyInUpdates** is set to **true**, then the **Name** and **ServiceName** must be provided for every Refresh response message.

| COMPONENT      | DESCRIPTION / VALUE  |
|----------------|--|
| DomainType     | <b>Required.</b> MMT_MARKET_MAKER = 9  |
| State          | <b>Required.</b> Indicates the state of the stream and data.   |
| Solicited      | <b>Required.</b> Indicates whether the refresh was solicited. Available values are: <ul style="list-style-type: none"> <li><b>true:</b> The message was solicited.</li> <li><b>false:</b> The message was unsolicited.</li> </ul>  |
| Indications    | <b>Conditional.</b> <ul style="list-style-type: none"> <li><b>DoNotCache: true,</b> indicates that the application should not cache.</li> <li><b>ClearCache: true,</b> indicates that the application should clear the cache.</li> <li><b>Complete: true,</b> indicates that the message is the final one in the refresh.</li> </ul> |
| PartNum        | Optional. Specifies the part number of a multi-part refresh.   |
| QoS            | Optional. Specifies the QoS at which the stream is provided.   |
| SeqNum         | Optional. A user-specified, item-level sequence number which can be used by the application for sequencing messages within this stream.  |
| ItemGroup      | <b>Required.</b> Associates the item with an Item Group (refer to Section 4.3.1.3).  |
| PermissionData | Optional. Specifies permission information associated with this stream's content.  |
| extendedHeader | Not used.  |
| ServiceName    | <b>Required.</b> Specifies the name of the service that provides the item.<br><b>NOTE:</b> The provider application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.   |
| ServiceId      | <b>Required.</b> Specifies the ID of the service that provides the item.<br><b>NOTE:</b> The provider application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.   |
| NameType       | Optional. <b>NameType</b> should match the <b>NameType</b> specified in the request. If absent, <b>NameType</b> defaults to <b>INSTRUMENT_NAME_RIC = 1</b> .   |
| Name           | <b>Required.</b> A symbol for the Market Maker item.   |
| Filter         | Not used.  |
| Identifier     | Not used.  |
| Payload        | <b>Required.</b> A Market Maker is represented by a <b>Map</b> , where each entry ( <b>MapEntry</b> ) contains an <b>FieldList</b> which has information about a market maker.   |

**Table 63: Market Maker Refresh Message**

### 9.2.3 Market Maker Update Message

A Market Maker update message is encoded using **UpdateMsg** and sent by Open Message Model interactive provider and non-interactive provider applications. Updates will not be received before images, and a true snapshot is supported.

The provider can send an update message to add, update, or remove market maker information.

**NOTE:** The provider should send the **Name** and **ServiceName** only in the first Refresh response message. However if **MsgKeyInUpdates** is set to **true**, then the **Name** and **ServiceName** must be provided for every Update response message.

| COMPONENT      | DESCRIPTION / VALUE  |
|----------------|--|
| DomainType     | <b>Required.</b> MMT_MARKET_MAKER = 9  |
| UpdateTypeNum  | <b>Required.</b> Indicates the general content of the update. Typically sent as one of the following: <ul style="list-style-type: none"> <li>INSTRUMENT_UPDATE_UNSPECIFIED = 0</li> <li>INSTRUMENT_UPDATE_QUOTE = 1</li> </ul>   |
| Indications    | Optional: <ul style="list-style-type: none"> <li><b>DoNotCache: true</b>, specifies that the update message should not be cached.</li> <li><b>DoNotConflate: true</b>, specifies that the update message should not be conflated.</li> </ul>   |
| PartNum        | Not used.  |
| QoS            | Optional. Specifies the QoS at which the stream is provided.   |
| SeqNum         | Optional. A user-specified, item-level sequence number which can be used by the application for sequencing messages within this stream.  |
| ConflatedCount | Optional. If a provider sends a conflated update, <b>ConflatedCount</b> specifies how many updates are in the conflation.<br>The consumer indicates interest in this information by setting <b>ReqMsg.ConflatedInUpdates</b> to true in the request.   |
| ConflatedTime  | Optional. If a provider sends a conflated update, <b>ConflatedTime</b> specifies the time interval (in milliseconds) over which data is conflated.<br>The consumer indicates interest in this information by setting <b>ReqMsg.ConflatedInUpdates</b> to true in the request.  |
| PermissionData | Optional. Specifies permissioning information associated only with the contents of this update.  |
| extendedHeader | Not used.  |
| ServiceName    | <b>Conditional.</b> <b>ServiceName</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> . <b>ServiceName</b> specifies the name of the service that provides the data.<br><b>NOTE:</b> The provider application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both. |
| ServiceId      | <b>Conditional.</b> <b>ServiceId</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> . <b>ServiceId</b> specifies the ID of the service that provides the item.<br><b>NOTE:</b> The provider application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.       |
| NameType       | <b>Conditional.</b> <b>NameType</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> . <b>NameType</b> must match the name type in the item's request message (typically <b>INSTRUMENT_NAME_RIC = 1</b> ). If absent, <b>NameType</b> defaults to <b>INSTRUMENT_NAME_RIC = 1</b> .                         |

**Table 64: Market Maker Update Message**

| COMPONENT  | DESCRIPTION / VALUE  |
|------------|--|
| Name       | <b>Conditional.</b> <b>Name</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> . <b>Name</b> specifies the name of the item being provided.                                  |
| Filter     | Not used.  |
| Identifier | Not used.  |
| Attrib     | Not used.  |
| Payload    | <b>Required.</b> A Market Maker is represented by a <b>Map</b> , where each entry ( <b>MapEntry</b> ) contains a <b>FieldList</b> which in turn contains information about a market maker. |

Table 64: Market Maker Update Message (Continued)

## 9.2.4 Market Maker Status Message

A Market Maker status message is encoded and sent by Open Message Model interactive provider and non-interactive provider applications. This message conveys state change information associated with an item stream.

**NOTE:** The provider should send the **Name** and **ServiceName** only in the first Refresh response message. However if **MsgKeyInUpdates** is set to **true**, then the **Name** and **ServiceName** must be provided for every Status response message.

| COMPONENT      | DESCRIPTION / VALUE  |
|----------------|--|
| DomainType     | <b>Required.</b> <b>MMT_MARKET_MAKER = 9</b>   |
| State          | Optional. Specifies current state information associated with the data and stream.   |
| Indications    | Optional.<br><b>ClearCache:</b> <b>true</b> , indicates that the application should clear the cache.   |
| QoS            | Optional. Specifies the QoS at which the stream is provided.   |
| ItemGroup      | Optional. The provider can use this component to change the items' <b>ItemGroup</b> .  |
| PermissionData | Optional. Specifies new permissioning information associated with all of the stream's contents.  |
| extendedHeader | Not used.  |
| ServiceName    | <b>Conditional.</b> <b>ServiceName</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> . <b>ServiceName</b> specifies the name of the service that provides the data.<br><b>NOTE:</b> The provider application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both. |
| ServiceId      | <b>Conditional.</b> <b>ServiceId</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> . <b>ServiceId</b> specifies the ID of the service that provides the item.<br><b>NOTE:</b> The provider application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.       |
| NameType       | <b>Conditional.</b> <b>NameType</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> . <b>NameType</b> must match the name type in the item's request message (typically <b>INSTRUMENT_NAME_RIC = 1</b> ). If absent, <b>NameType</b> defaults to <b>INSTRUMENT_NAME_RIC = 1</b> .                         |
| Name           | <b>Conditional.</b> <b>Name</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> . <b>Name</b> specifies the name of the item being provided.  |

Table 65: Market Maker Status Message

| COMPONENT  | DESCRIPTION / VALUE |
|------------|---------------------|
| Filter     | Not used.           |
| Identifier | Not used.           |
| Attrib     | Not used.           |
| Payload    | Not used.           |

**Table 65: Market Maker Status Message (Continued)**

### 9.2.5 Market Maker Post Message

If the provider supports Market Maker post messages, consumer applications can post Market Maker data. For more information on posting, refer to the *Enterprise Message API C++ Edition Developers Guide*.

## 9.3 Data

### 9.3.1 Response Message Payload

The payload is a **Map**. Refreshes for this **Map** may be in multiple response messages. The bandwidth of the Refresh response messages can be optimized by putting multiple **MapEntry** in each Response message. For optimal performance the packed map entries in each response message should use less than 6000 bytes. If the data is split into multiple messages, then a **Map.TotalCountHint** should be provided to optimize downstream caching. Because the fields in each map entry are identical, bandwidth can be further optimized by DataDefinitions.

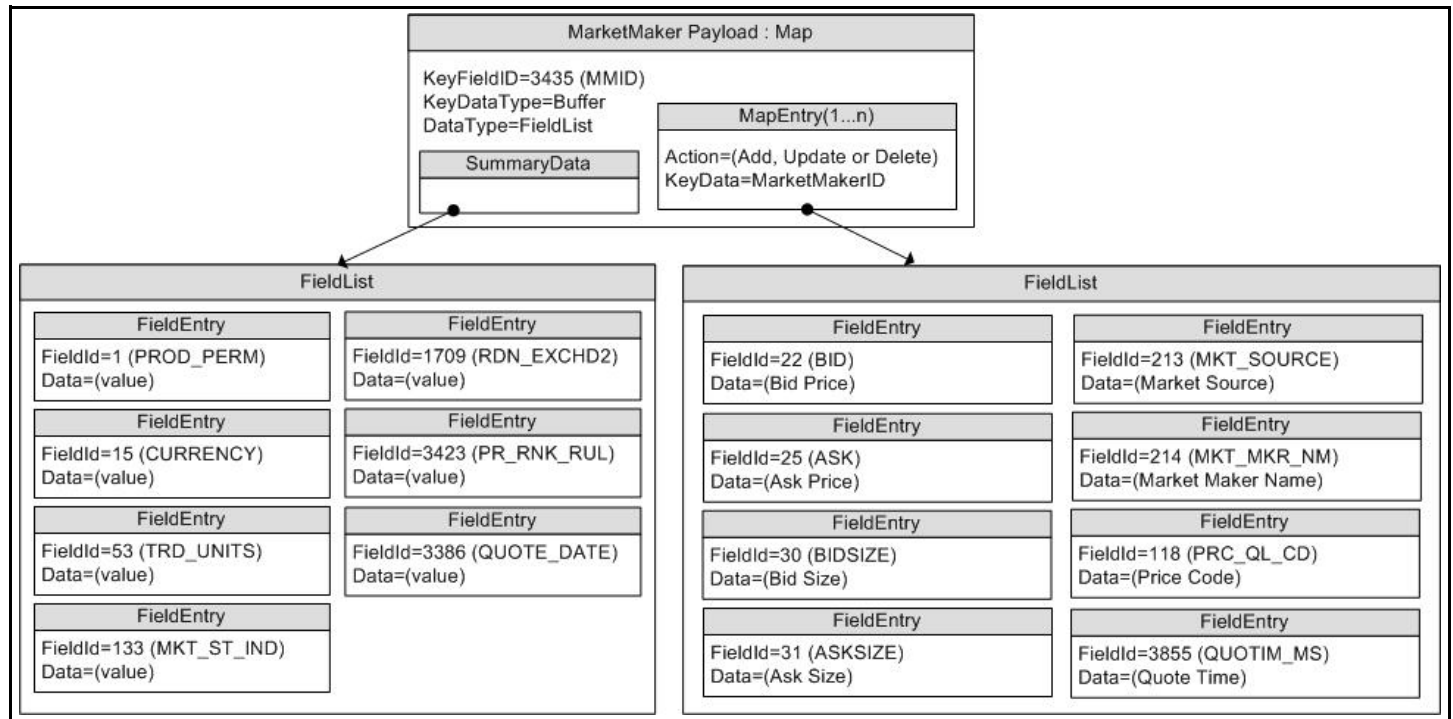


Figure 19. MarketMaker Response Message Payload

### 9.3.2 Summary Data

The **Map.SummaryData** only needs to be present in the first refresh part. Typical fields in the **Map.SummaryData** include:

- Permission information (**PROD\_PERM**)
- Currency of the orders (**CURRENCY**)
- Trade Units for the precision at which order prices are set (**TRD\_UNITS**)
- Identifier of the exchange on which the orders were placed (**RDN\_EXCHD2**)
- Market State indicating the state of the market (**MKT\_ST\_IND**)
- Price ranking rules (**PR\_RNK\_RUL**)
- Quote Date (**QUOTE\_DATE**)

### 9.3.3 MapEntry Contents

Each **MapEntry.key**'s data is a **Buffer** that contains a unique market maker's ID. The **Map.KeyFieldId** may be set to MMID or MKT\_MKR\_ID, so the information does not have to be repeated in the **MapEntry.Data**.

Each **MapEntry** houses a **FieldList** that contains information about the market maker.

The field list typically includes:

- Bid (**BID**)
- Ask (**ASK**)
- Bid Size (**BIDSIZE**)
- Ask Size (**ASKSIZE**)
- Market Source (**MKT\_SOURCE**)
- Market Maker Name (**MKT\_MKR\_NM**)
- Price Qualifiers (**PRC\_QL\_CD** and **PRC\_QL2**)
- Quote Time (**QUOTIM\_MS**)

## 9.4 Special Semantics

None.

## 9.5 Specific Usage: RDF Direct and the Response Message Payload

RDF Direct uses MARKET\_MAKER for NASDAQ Market Makers.

The payload is a **Map**. Each Refresh message for this **Map** includes SummaryData and up to 50 **MapEntry**s. Updates are not sent for any map entry until after the **RefreshMsg.Complete** is sent with a value of **true**. DataDefinitions are not used to reduce bandwidth. The **Map.TotalCountHint** is not provided.

**Map.SummaryData** is sent in every refresh, even if it does not change. The fields used are from the RWFFld Field Dictionary:

- PROD\_PERM (1): Integer for permission information
- CURRENCY (15): Enumeration of currency for the orders
- TRD\_UNITS (53): Enumeration of trade Units for the precision for which order prices are set
- MKT\_ST\_IND (133): Enumeration of market state
- RDN\_EXCHD2 (1709): Enumeration of exchange on which the orders were placed
- PR\_RNK\_RUL (3423): Enumeration of price ranking rules

The **MapEntry.Key**'s Data is a Buffer containing a unique market maker ID. The **MapEntry.KeyFieldId** is not set, but this may be changed in the future.

The **MapEntry.Data** is a **FieldList** that contains some or all of the following information about the order:

- BID (22): Real with the best bid price from this market maker
- ASK (25): Real with the best ask price from this market maker
- BIDSIZE (30): Real with the size of the best bid
- ASKSIZE (31): Real with the size of the best ask
- MKT\_MKR\_ID (212): RmtesString with the Market Maker ID. This may be removed in the future by setting the **Map.KeyFieldId** to MKT\_MKR\_ID (212) or MMID (3435).
- MKT\_SOURCE (213): Enumeration with the Exchange or City of the quote
- MKT\_MKR\_NM (214): RmtesString with the Market Maker Name
- PRC\_QL\_CD (118): Enumeration for first price qualifier
- PRC\_QL2 (131): Enumeration for second price qualifier
- QUOTIM\_MS (3855): Quote Time in millisecond since GMT of the current day in the GMT time zone



The **FieldList.DictId** is 0, so it should be ignored.

## 9.6 Specific Usage: RDMS

For the most part, MarketMaker data from Refinitiv Real-Time Distribution System is the same as it is from the original source of the data (e.g., Refinitiv Data Feed Direct). However, if caching is enabled in an Refinitiv Real-Time Distribution System component, there will be two differences.

The number of messages packed into each Refresh response message may be different.

An Update response message may be delivered between Refresh response messages, before **RefreshMsg.Complete** is sent with a **true** value. It is up to the consumer application to apply the indicated changes.

# 10 Yield Curve Domain

## 10.1 Description

The **Yield Curve** domain shows the relation between the interest rate and the term (time to maturity) associated with the debt of a borrower. The shape of a yield curve can help give an idea of future economic activity and interest rates. Information is sent as a **FieldList**, where some **FieldEntry**'s can contain more complex types such as **Vector**, **Array**, or **ElementList**.

This chapter documents the Yield Curve domain as provided by the Refinitiv Real-Time Advanced Transformation Server.

**NOTE:** The **MMT\_YIELD\_CURVE** Refinitiv Domain Model does not support **GenericMsg(s)**.

## 10.2 Usage

### 10.2.1 Yield Curve Request Message

A Yield Curve request message is encoded using **ReqMsg** and sent by Open Message Model consumer applications. The request specifies the name and attributes of the curve in which the consumer is interested.

To receive updates, the consumer makes a “streaming” request by setting the **ReqMsg.InterestAfterRefresh** to **true**. If the flag is not set, the consumer requests a “snapshot,” and the final part of the refresh (i.e., the refresh has the **RefreshMsg.Complete** flag set) indicates all responses have been received for the snapshot. Updates may be received in either case if the refresh has multiple parts.

To stop updates, a consumer can pause an item (if the provider supports the pause feature). For additional details, refer to the *Enterprise Message API C++ Edition Developers Guide*.

| COMPONENT      | DESCRIPTION / VALUE   |
|----------------|---|
| DomainType     | <b>Required.</b> <b>MMT_YIELD_CURVE = 22</b>  |
| Interactions   | <b>Conditional.</b> <ul style="list-style-type: none"> <li><b>InitialImage: true</b>, requests an initial image.</li> <li><b>InterestAfterRefresh: true</b>, requests streaming updates.</li> <li><b>Pause: true</b>, requests that the application pause the item.</li> </ul>  |
| Indications    | Optional.<br><b>ConflatedInUpdates: true</b> , requests that the application send conflated updates.<br>Batch and View request are specified in the <b>Payload</b> .  |
| QoS            | Optional. Indicates the QoS at which the consumer wants the stream serviced. If both <b>QoS</b> and <b>worstQos</b> are specified, this request can be satisfied by a range of QoS.   |
| worstQos       | Optional. Used with the <b>QoS</b> member to define a range of acceptable QoS. When the provider encounters such a range, it should attempt to provide the best QoS it can within that range.<br><b>worstQos</b> should only be used on services that claim to support it via the <b>SupportsQosRange</b> item in the Source Directory response (refer to Section 4.3.1.1). |
| Priority       | Optional. Indicates class and count associated with stream priority.  |
| extendedHeader | Not used.   |
| ServiceName    | <b>Required.</b> Specifies the name of the service from which the consumer wishes to request the item.<br><b>NOTE:</b> The application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.   |

**Table 66: Yield Curve Request Message**

| COMPONENT  | DESCRIPTION / VALUE  |
|------------|--|
| ServiceId  | <b>Required.</b> Specifies the ID of the service that provides the requested item.   |
|            | <b>NOTE:</b> The application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.  |
| NameType   | Optional. When consuming from Refinitiv sources, typically set to <b>INSTRUMENT_NAME_RIC = 1</b> (the “Reuters Instrument Code”). If this is not specified, <b>NameType</b> defaults to <b>INSTRUMENT_NAME_RIC = 1</b> . |
| Name       | <b>Required.</b> Specifies the name of the requested item.   |
|            | <b>NOTE:</b> Not used for Batch Item request.  |
| Filter     | Not used.  |
| Identifier | Not used.  |
| Attrib     | Not used.  |
| Payload    | Optional. When leveraging such features as View or Batch, the payload can contain information relevant to that feature.<br>For more information, refer to Appendix A.  |

Table 66: Yield Curve Request Message (Continued)

## 10.2.2 Yield Curve Refresh Message

A Yield Curve Refresh Message is encoded using **RefreshMsg** and sent by Open Message Model provider and non-interactive provider applications. This message sends all currently available information about the item to the consumer.

**FieldList** in the payload should include all fields that might be present in subsequent updates, even if those fields are currently blank. When responding to a View request, this refresh should contain all fields requested by the specified view. If for any reason the provider wishes to send new fields, it must first send an unsolicited refresh with both the new and currently-present fields.

**NOTE:** The provider should send the **Name** and **ServiceName** only in the first Refresh response message. However if **MsgKeyInUpdates** is set to **true**, then the **Name** and **ServiceName** must be provided for every Refresh response message.

| COMPONENT      | DESCRIPTION / VALUE   |
|----------------|---|
| DomainType     | <b>Required.</b> MMT_YIELD_CURVE = 22   |
| State          | <b>Required.</b> Includes the state of the stream and data.   |
| Solicited      | <b>Required.</b> Indicates whether the refresh was solicited. Available values are: <ul style="list-style-type: none"> <li><b>true:</b> The message was solicited.</li> <li><b>false:</b> The message was unsolicited.</li> </ul>   |
| Indications    | <b>Conditional.</b> <ul style="list-style-type: none"> <li><b>DoNotCache: true,</b> indicates that the application should not cache this refresh message.</li> <li><b>ClearCache: true,</b> indicates that the application should clear the cache.</li> <li><b>Complete: true,</b> indicates that the message is the final one in the refresh.</li> </ul> |
| PartNum        | Optional. Specifies the part number of a multi-part refresh.  |
| QoS            | Optional. Specifies the QoS at which the stream is provided.  |
| SeqNum         | Optional. A user-specified, item-level sequence number which can be used by the application for sequencing messages within this stream.   |
| ItemGroup      | <b>Required.</b> Associates the item with an Item Group (refer to Section 4.3.1.3).   |
| PermissionData | Optional. Specifies permission information associated with content on this stream.  |
| extendedHeader | Not used.   |
| ServiceName    | <b>Required.</b> Specifies the name of the service that provides the item.<br><b>NOTE:</b> The application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.   |
| ServiceId      | <b>Required.</b> Specifies the ID of the service that provides the item.<br><b>NOTE:</b> The application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.   |
| NameType       | Optional. Should match the <b>NameType</b> specified in the request. If this is not specified, <b>NameType</b> defaults to <b>INSTRUMENT_NAME_RIC = 1</b> .   |
| Name           | <b>Required.</b> This should match the requested name.  |
| Filter         | Not used.   |
| Identifier     | Not used.   |
| Attrib         | Not used.   |

**Table 67: Yield Curve Refresh Message**

| COMPONENT | DESCRIPTION / VALUE   |
|-----------|---|
| Payload   | <b>Required.</b> This should consist of a <b>FieldList</b> containing all fields associated with the item. Some <b>FieldEntry</b> s are sent as more complex types such as <b>Vector</b> and <b>Array</b> . Encoding and decoding applications should be aware of this and ensure proper handling of these types. |

Table 67: Yield Curve Refresh Message (Continued)

### 10.2.3 Yield Curve Update Message

A Yield Curve Update Message is encoded using **UpdateMsg** and sent by Open Message Model provider and non-interactive provider applications. It conveys any changes to an item's data. Updates may be received between the first Refresh and the RefreshComplete. It is the consuming application's responsibility to determine if the update is applicable to the data that has previously been sent in a refresh.

**NOTE:** The provider should send the **Name** and **ServiceName** only in the first Refresh response message. However if **MsgKeyInUpdates** is set to **true**, then the **Name** and **ServiceName** must be provided for every Refresh response message.

| COMPONENT      | DESCRIPTION / VALUE  |
|----------------|--|
| DomainType     | <b>Required.</b> MMT_YIELD_CURVE = 22  |
| UpdateTypeNum  | <b>Required.</b> Indicates the general content of the update. Typically sent as one of the following: <ul style="list-style-type: none"> <li>INSTRUMENT_UPDATE_UNSPECIFIED = 0</li> <li>INSTRUMENT_UPDATE_QUOTE = 1</li> </ul>   |
| Indications    | <b>Conditional.</b> <ul style="list-style-type: none"> <li><b>DoNotCache: true</b>, indicates that the application should not cache this update message.</li> <li><b>DoNotConflate: true</b>, indicates that the application should not conflate the update message.</li> </ul>                          |
| SeqNum         | Optional. A user-specified, item-level sequence number which the application can use to sequence messages in this stream.  |
| PartNum        | Not used.  |
| ConflatedCount | Optional. If the provider sends a conflated update, <b>ConflatedCount</b> specifies how many updates are in the conflation.<br>The consumer indicates interest in this information by setting the <b>ReqMsg.ConflatedInUpdates</b> to <b>true</b> in the request.  |
| ConflatedTime  | Optional. If a provider is sending a conflated update, <b>ConflatedTime</b> specifies the time interval (in milliseconds) over which data is conflated.<br>The consumer indicates interest in this information by setting the <b>ReqMsg.ConflatedInUpdates</b> to <b>true</b> in the request.            |
| PermissionData | Optional. Permissioning information associated with only the contents of this update.  |
| extendedHeader | Not used.  |
| ServiceName    | <b>Conditional.</b> <b>ServiceName</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> on the request. Specifies the name of the service that provides the data.<br><b>NOTE:</b> The application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both. |
| ServiceId      | <b>Conditional.</b> <b>ServiceId</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> on the request. Specifies the ID of the service that provides the item.<br><b>NOTE:</b> The application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.     |

Table 68: Yield Curve Update Message

| COMPONENT  | DESCRIPTION / VALUE   |
|------------|---|
| NameType   | <b>Conditional.</b> <b>NameType</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> on the request. Should match the <b>NameType</b> specified on the request. If this is not specified, <b>NameType</b> defaults to <b>INSTRUMENT_NAME_RIC = 1</b> .  |
| Name       | <b>Conditional.</b> <b>Name</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> on the request. Specifies the name of the item being provided.   |
| Filter     | Not used.   |
| Identifier | Not used.   |
| Attrib     | Not used.   |
| Payload    | <b>Required.</b> This should consist of a <b>FieldList</b> containing all fields associated with the item. Some <b>FieldEntry</b> s are sent as more complex types such as <b>Vector</b> and <b>Array</b> . Encoding and decoding applications should be aware of this and ensure proper handling of these types. |

Table 68: Yield Curve Update Message (Continued)

### 10.2.4 Yield Curve Status Message

A Yield Curve status message is encoded using **StatusMsg** and sent by Open Message Model interactive provider and non-interactive provider applications. This message conveys state change information associated with an item stream.

**NOTE:** The provider should send the **Name** and **ServiceName** only in the first Refresh response message. However if **MsgKeyInUpdates** is set to **true**, then the **Name** and **ServiceName** must be provided for every Status response message.

| COMPONENT      | DESCRIPTION / VALUE  |
|----------------|--|
| DomainType     | <b>Required.</b> <b>MMT_YIELD_CURVE = 22</b>   |
| State          | Optional. Current state information associated with the data and stream.   |
| Indications    | Optional.<br><b>ClearCache: true</b> , indicates that the cache should be cleared.   |
| QoS            | Optional. Specifies the QoS at which the stream is provided.   |
| ItemGroup      | Optional. The provider can use this component to change the item's <b>ItemGroup</b> .  |
| PermissionData | Optional. Specifies new permissioning information associated with all contents on the stream.  |
| extendedHeader | Not used.  |
| ServiceName    | <b>Conditional.</b> <b>ServiceName</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> on the request. Specifies the name of the service that provides the data.<br><b>NOTE:</b> The application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both. |
| ServiceId      | <b>Conditional.</b> <b>ServiceId</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> on the request. Specifies the ID of the service that provides the item.<br><b>NOTE:</b> The application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.     |
| NameType       | <b>Conditional.</b> <b>NameType</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> on the request). Should match the <b>NameType</b> specified on the request. If this is not specified, <b>NameType</b> defaults to <b>INSTRUMENT_NAME_RIC = 1</b> .                                      |

Table 69: Yield Curve Status Message

| COMPONENT  | DESCRIPTION / VALUE  |
|------------|--|
| Name       | <b>Conditional.</b> <b>Name</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> on the request). Specifies the name of the item being provided. |
| Filter     | Not used.  |
| Identifier | Not used.  |
| Attrib     | Not used.  |
| Payload    | Not used.  |

Table 69: Yield Curve Status Message (Continued)

### 10.2.5 Yield Curve Domain Post Message

If supported by the provider, consumer applications can post Yield Curve data. For more information on posting, refer to the *Enterprise Message API C++ Edition Developers Guide*.

## 10.3 Data

### 10.3.1 Response Message Payload

The payload of a Yield Curve Refresh or Update is a **FieldList**. Some **FieldEntry** contents contain primitive type information to help describe the curve. Examples include the Curve Type (**CRV\_TYPE**), the Algorithm used to calculate the curve (**CRV\_ALGTHM**), and the Interpolation (**INTER\_MTHD**) and Extrapolation (**EXTRP\_MTHD**) methods. Because the fields in each **Vector** are the same, bandwidth can be further optimized by DataDefinitions.

Other **FieldEntry**'s contain more complex information. The more complex entries are broken down into:

- Input Entries which define the different input data used to calculate the yield curve. Inputs are represented using non-sorted **Vector** types. Examples of curve inputs would be cash rates (**CASH\_RATES**), future prices (**FUTR\_PRCs**), and swap rates (**SWAP\_RATES**).
- Output Entries which define the output of the yield curve calculation. Outputs are represented using non-sorted **Vector** types. An example of curve outputs would be the Yield Curve (**YLD\_CURVE**) itself.
- Extra Meta Data (**EX\_MET\_DAT**) which provides general data about the yield curve. This is represented using a **ElementList** type. Extra meta data allows users to provide additional curve descriptions without needing to define new fields. Some examples of meta data would be curve creation time or the curve's owner.

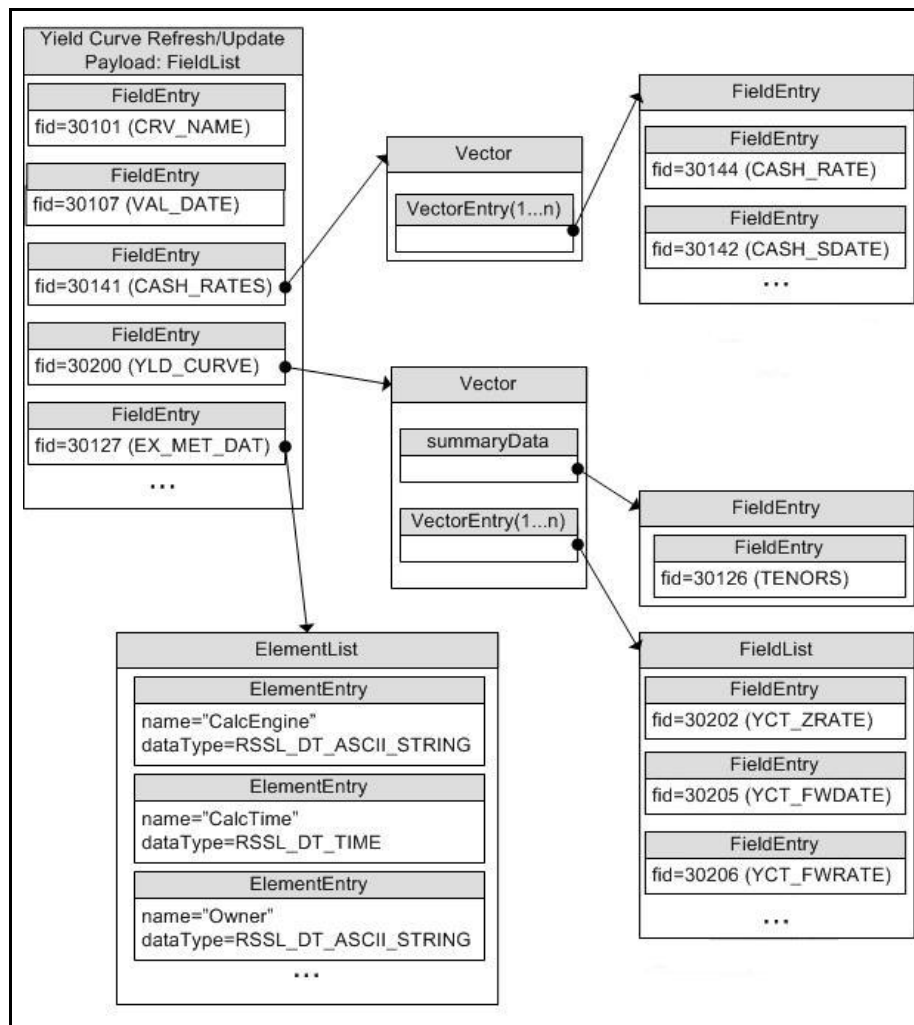


Figure 20. Yield Curve Payload Example



### 10.3.2 Summary Data

For **Vector** types, **summaryData** can be included to provide information specific to the **Vector**'s contents. Any **summaryData** needs to be present only for the first refresh part that contains the **Vector**. Typical **summaryData** fields include tenors (**TENORS**).

### 10.3.3 Yield Curve Input and Output Entries

Each **VectorEntry** houses a **FieldList** that contains specific information about the respective input or output. The field list should be decoded by checking the **FieldEntry** data type.

- For more information on dictionary use, refer to Section 5.2.
- For more information about use of the **Vector** and **FieldList** container types, refer to the *Enterprise Message API C++ Edition Developers Guide*.

The following table contains additional information about input and output entries (all of which are of the **Vector** container type with a container entry type of **FieldList**).

| NAME          | FIELD NAME | TYPE   | DESCRIPTION   |
|---------------|------------|--------|---|
| Cash Rates    | CASH_RATES | Input  | Contains cash rate data used to calculate the yield curve output. This typically includes information like settlement date ( <b>CASH_SDATE</b> ), maturity date ( <b>CASH_MDATE</b> ), and basis ( <b>CASH_BASIS</b> ).                                       |
| Future Prices | FUTR_PRCs  | Input  | Contains future pricing data used to calculate the yield curve output; typically including data such as settlement date ( <b>FUTR_SDATE</b> ), maturity date ( <b>FUTR_MDATE</b> ), and basis ( <b>FUTR_BASIS</b> ).  |
| Swap Rates    | SWAP_RATES | Input  | Contains swap rate data used to calculate the yield curve output; typically including data such as settlement date ( <b>SWAP_SDATE</b> ), maturity date ( <b>SWAP_MDATE</b> ), swap rate value ( <b>SWAP_RATE_VAL</b> ), and roll date ( <b>SWAP_RDATE</b> ). |
| Spread Rates  | SPRD_RATES | Input  | Contains spread rate data used to calculate yield curve output; typically including data such as spread frequency ( <b>SPRD_FREQ</b> ), maturity date ( <b>SPRD_MDATE</b> ), spread rate ( <b>SPRD_RATE</b> ), and roll date ( <b>SPRD_RDATE</b> ).           |
| Yield Curve   | YLD_CURVE  | Output | Contains calculated Yield Curve data; typically including data such as zero rate ( <b>YCT_ZRATE</b> ), forward rate ( <b>YCT_FWRATE</b> ), and discount factor ( <b>YCT_DISFAC</b> ).   |

**Table 70: Yield Curve Inputs and Outputs**

## 10.4 Special Semantics

None

## 10.5 Specific Usage: ATS

When an application consumes Yield Curve data, the dictionary used by the application must contain certain required Field Identifiers. For further details, refer to the Refinitiv Real-Time Advanced Transformation Server documentation.

# 11 Symbol List Domain

## 11.1 Description

The **Symbol List** domain provides access to a set of symbol names, typically from an index, service, or cache. Content is encoded as a **Map**, with each symbol represented by a map entry and where the symbol name is the entry key. An entry's payload is optional, but when present the payload is a **FieldList** that contains additional cross-reference information such as permission information, name type, or other venue-specific content.

**NOTE:** **GenericMsg**(s) are not supported for **MMT\_SYMBOL\_LIST** Refinitiv Domain Model.

## 11.2 Usage

### 11.2.1 Symbol List Request Message

A Symbol List request message is encoded and sent by Open Message Model consumer applications.

The consumer can make a streaming request (set **ReqMsg.InterestAfterRefresh** to **true**) to receive updates, typically associated with item additions or removals from the list.

| COMPONENT      | DESCRIPTION / VALUE  |
|----------------|--|
| DomainType     | <b>Required.</b> <b>MMT_SYMBOL_LIST = 10</b>   |
| Interactions   | <b>Conditional.</b> <ul style="list-style-type: none"> <li><b>InitialImage: true</b>, indicates that an initial image is required.</li> <li><b>InterestAfterRefresh: true</b>, indicates that a streaming request is required.</li> <li><b>Pause: true</b>, indicates that a pause is required.</li> </ul> |
| Indications    | Optional.<br><b>ConflateInUpdates: true</b> , indicates that conflated updates are required.<br>Batch and View requests are specified in the <b>Payload</b> .  |
| QoS            | Not used.  |
| worstQos       | Not used.  |
| Priority       | Optional. Indicates class and count associated with stream priority.   |
| extendedHeader | Not used.  |
| ServiceName    | <b>Required.</b> Specifies the name of the service from which the consumer wants to request the item.<br><b>NOTE:</b> The consumer application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.  |
| ServiceId      | <b>Required.</b> Specifies the ID of the service that provides the requested item.<br><b>NOTE:</b> The consumer application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.   |
| NameType       | Optional. <b>NameType</b> should match name type specified in the request. When consuming from Refinitiv sources, <b>NameType</b> is typically set to <b>INSTRUMENT_NAME_RIC = 1</b> (the "Reuters Instrument Code"). If absent, <b>NameType</b> defaults to <b>INSTRUMENT_NAME_RIC = 1</b> .              |

**Table 71: Symbol List Request Message**

| COMPONENT  | DESCRIPTION / VALUE  |
|------------|--|
| Name       | <b>Required.</b> Specifies the name of the requested item.   |
|            | <b>NOTE:</b> Not used for Batch Item requests.   |
| Filter     | Not used.  |
| Identifier | Not used.  |
| Attrib     | Not used.  |
| Payload    | Optional. When leveraging such features as View, Batch, or behaviors related to the Symbol List Request, the payload can contain information relevant to that feature. For more detailed information, refer to Appendix A. |

**Table 71: Symbol List Request Message (Continued)**

## 11.2.2 Symbol List Refresh Message

A Symbol List refresh Message is encoded using **RefreshMsg** and sent by Open Message Model provider and non-interactive provider applications. This message sends a list of item names to the consumer.

A Symbol List refresh can be sent in multiple parts. Update and status messages can be delivered between parts of a refresh message, regardless of streaming or non-streaming request.

**NOTE:** The provider should send the **Name** and **ServiceName** only in the first Refresh response message. However if **MsgKeyInUpdates** is set to **true**, then the **Name** and **ServiceName** must be provided for every Refresh response message.

| COMPONENT      | DESCRIPTION / VALUE  |
|----------------|--|
| DomainType     | <b>Required.</b> MMT_SYMBOL_LIST = 10  |
| State          | <b>Required.</b> Indicates the state of the stream and data.   |
| Solicited      | <b>Required.</b> Indicates whether the refresh was solicited. Available values are: <ul style="list-style-type: none"> <li><b>true:</b> The message was solicited.</li> <li><b>false:</b> The message was unsolicited.</li> </ul>  |
| Indications    | <b>Conditional.</b> <ul style="list-style-type: none"> <li><b>DoNotCache: true,</b> requests that the application not cache this refresh message.</li> <li><b>ClearCache: true,</b> requests that the application clear the cache.</li> <li><b>Complete: true,</b> indicates that this message completes the refresh.</li> </ul> |
| PartNum        | Optional. Specifies the part number of a multi-part refresh.   |
| QoS            | Optional. Specifies the quality of service at which the stream is provided.  |
| SeqNum         | Optional. A user-specified, item-level sequence number which can be used by the application for sequencing messages within this stream.  |
| ItemGroup      | Optional. Associates the item with an Item Group (refer to Section 4.3.1.3).   |
| PermissionData | Optional. Specifies the permission information associated with content on this stream.   |
| extendedHeader | Not used.  |
| ServiceName    | <b>Required.</b> Specifies the name of the service from which the consumer wants to request the item.<br><b>NOTE:</b> The consumer application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.  |
| ServiceId      | <b>Required.</b> Specifies the ID of the service that provides the item.<br><b>NOTE:</b> The consumer application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.   |
| NameType       | Optional. <b>NameType</b> should match the <b>NameType</b> specified in the request. If absent, it is assumed to be <b>INSTRUMENT_NAME_RIC = 1</b> .   |
| Name           | <b>Required.</b> <b>Name</b> should match the requested name.  |
| Filter         | Not used.  |
| Identifier     | Not used.  |

**Table 72: Symbol List Refresh Message**

| COMPONENT | DESCRIPTION / VALUE  |
|-----------|--|
| Attrib    | Not used.  |
| Payload   | <b>Required.</b> The payload contains a <b>Map</b> where each entry represents an item in the list. Each map entry contains a <b>FieldList</b> or <b>ElementList</b> with additional info about that item. |

**Table 72: Symbol List Refresh Message (Continued)**

### 11.2.3 Symbol List Update Message

A Symbol List Update Message is encoded using **UpdateMsg** and sent by Open Message Model provider and non-interactive provider applications. It adds or removes items from the list. Updates will not be received before images, and a true snapshot is supported.

**NOTE:** The provider should send the **Name** and **ServiceName** only in the first Refresh response message. However if **MsgKeyInUpdates** is set to **true**, then the **Name** and **ServiceName** must be provided for every Update response message.

| COMPONENT      | DESCRIPTION / VALUE  |
|----------------|--|
| DomainType     | <b>Required.</b> MMT_SYMBOL_LIST = 10  |
| Indications    | <b>Conditional.</b> <ul style="list-style-type: none"> <li><b>DoNotCache:</b> <b>true</b>, indicates to not cache this update message.</li> <li><b>DoNotConflate:</b> <b>true</b>, indicates to not conflate the update message.</li> </ul>  |
| QoS            | Optional. Specifies the quality of service at which the stream is provided.  |
| UpdateTypeNum  | Not used.  |
| SeqNum         | Optional. A user-specified, item-level sequence number which can be used by the application for sequencing messages within this stream.  |
| ConflatedCount | Optional. If a provider sends a conflated update, <b>ConflatedCount</b> specifies how many updates are in the conflation.<br>The consumer indicates interest in this information by setting the <b>ReqMsg.ConflatedInUpdates</b> is set to <b>true</b> in the request.   |
| ConflatedTime  | Optional. If a provider sends a conflated update, <b>ConflatedTime</b> specifies the time interval (in milliseconds) over which data is conflated.<br>The consumer indicates interest in this information by setting the <b>ReqMsg.ConflatedInUpdates</b> is set to <b>true</b> in the request.                        |
| PermissionData | Optional. Specifies the permission information associated with only the contents of this update.   |
| extendedHeader | Not used.  |
| ServiceName    | <b>Conditional.</b> <b>ServiceName</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> . <b>ServiceName</b> specifies the name of the service that provides the data.<br><b>NOTE:</b> The provider application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both. |
| ServiceId      | <b>Conditional.</b> <b>ServiceId</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> . Specifies the ID of the service that provides the item.<br><b>NOTE:</b> The provider application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.                        |
| NameType       | <b>Conditional.</b> <b>NameType</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> . Set this to match the <b>NameType</b> in the item's request message (typically <b>INSTRUMENT_NAME_RIC = 1</b> ). If absent, it is assumed to be <b>INSTRUMENT_NAME_RIC = 1</b> .                                    |
| Name           | <b>Conditional.</b> <b>Name</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> . Specifies the name of the item being provided.  |
| Filter         | Not used.  |
| Identifier     | Not used.  |
| Attrib         | Not used.  |

**Table 73: Symbol List Update Message**

| COMPONENT | DESCRIPTION / VALUE   |
|-----------|---|
| Payload   | <b>Required.</b> The payload contains a <b>Map</b> , where each entry represents an item in the list. Each map entry contains a <b>FieldList</b> with additional information about that item. |

Table 73: Symbol List Update Message (Continued)

### 11.2.4 Symbol List Status Message

A Symbol List status message is encoded using **StatusMsg** and sent by Open Message Model interactive provider and non-interactive provider applications. This message conveys state change information associated with an item stream.

**NOTE:** The provider should send the **Name** and **ServiceName** only in the first Refresh response message. However if **MsgKeyInUpdates** is set to **true**, then the **Name** and **ServiceName** must be provided for every Status response message.

| COMPONENT      | DESCRIPTION / VALUE  |
|----------------|--|
| DomainType     | <b>Required.</b> MMT_SYMBOL_LIST = 10  |
| State          | Optional. Current state information associated with the data and stream.   |
| Indications    | <b>Conditional.</b><br><b>ClearCache:</b> <b>true</b> , indicates to clear the cache.  |
| QoS            | Optional. Specifies the quality of service at which the stream is provided.  |
| ItemGroup      | Optional. The provider can use this to change the item's <b>ItemGroup</b> .  |
| PermissionData | Optional. Specifies new permissioning information associated with the stream's contents.   |
| extendedHeader | Not used.  |
| ServiceName    | <b>Conditional.</b> <b>ServiceName</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> . <b>ServiceName</b> specifies the name of the service that provides the data.<br><b>NOTE:</b> The provider application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both. |
| ServiceId      | <b>Conditional.</b> <b>ServiceId</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> . Specifies the ID of the service that provides the item.<br><b>NOTE:</b> The provider application should set either the <b>ServiceName</b> or <b>ServiceId</b> of the service, but not both.                        |
| NameType       | <b>Conditional.</b> <b>NameType</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> . <b>NameType</b> should match the name type specified on the request. If it is not specified, <b>NameType</b> defaults to <b>INSTRUMENT_NAME_RIC = 1</b> .   |
| Name           | <b>Conditional.</b> <b>Name</b> is required if <b>MsgKeyInUpdates</b> was set to <b>true</b> . Specifies the name of the item being provided.  |
| Filter         | Not used.  |
| Identifier     | Not used.  |
| Attrib         | Not used.  |
| Payload        | Not used.  |


Table 74: Symbol List Status Message

### 11.3 Data: Response Message Payload

The Symbol List payload is a **Map**. Each **MapEntry** key is an `AsciiString` symbol. The entry's payload can be empty or contain a **FieldList** which can contain additional information (i.e., permission data and cross-reference information). This information should not update frequently.

A **FieldList** typically includes the fields:

- **PROV\_SYMB** (3422): Contains the original symbol as provided by the exchange
- **PROD\_PERM** (1): Stores permission information

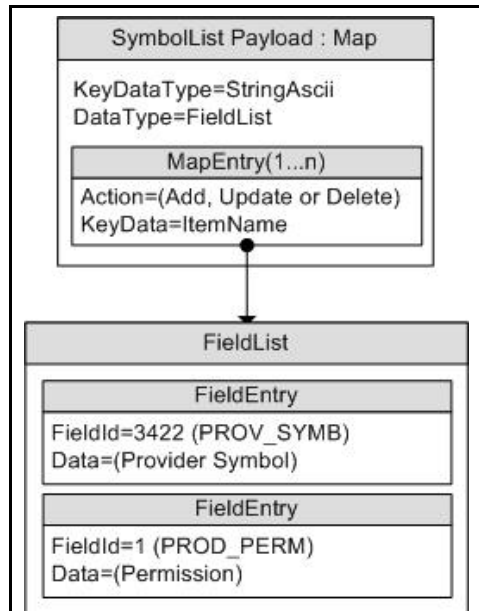

**Figure 21. SymbolList Response Message Payload**

### 11.4 Special Semantics

None



## 11.5 Specific Usage

The payload is a **Map**. No **SummaryData** is provided. Each Refresh message includes up to 150 **MapEntry**s. **DataDefinitions** are not used to reduce bandwidth. The **Map.TotalCountHint** is not provided. The **Map.KeyFieldId** is currently not set.

Each **MapEntry**'s key is a **Buffer** that can be used as a request's **Name** to make a request for an instrument. Each **MapEntry**'s value is a **FieldList** that contains the following information:

- **PROV\_SYMB** (3422): Original symbol provided by the exchange
- **PROD\_PERM** (1): Permission information

The OPRA Venue's SymbolList, **0#OPRA** is a hierarchical SymbolList of SymbolLists. Nested SymbolLists start with **Z#**. For details, refer to the *RDF Direct OPRA Venue Guide*.

# Appendix A ReqMsg Payload

## A.1 View Definition

The client application can specify interest in a specific subset of fields or elements (known as a 'View'). This is done by encoding an array of the desired fields or elements in the request message payload. The response Message will contain a list of the requested fields or elements and possibly some others depending on factors such as aggregation and the ability of the provider to supply the requested view. Unless otherwise specified, this is supported on any non-administrative Refinitiv Domain Model and any user defined DMM. For more information, refer to the *Enterprise Message API C++ Edition Developers Guide*. When requesting a new view or changing a view, at a minimum, the request message payload contains an element list with the following entries (any default behavior is included in the element's description):

| ELEMENT NAME | TYPE                           | RANGE/EXAMPLES  | DESCRIPTION  |
|--------------|--------------------------------|---|--|
| :ViewType    | UInt                           | 1   2   | <b>Conditional</b> . Specifies the content type of the <b>:ViewData</b> array.<br>Required when specifying a view or when reissuing while wanting to keep the same view.<br>Not required when re-issuing to remove a view. In this case, do not send a payload or view.<br>Available values are: <ul style="list-style-type: none"><li>1 = VT_FIELD_ID_LIST (this is the default)</li><li>2 = VT_ELEMENT_NAME_LIST</li></ul> |
| :ViewData    | Array of Int or Array of ASCII | An Array of desired entries whose content matches the type as specified by <b>:ViewType</b> .<br>e.g., a <b>:ViewType</b> of VT_FIELD_ID_LIST uses an array of field IDs. | <b>Required</b> . Field Ids will be encoded as an array of 2 byte fixed length field identifiers.<br>Element names will be variable length Ascii string fields.<br><b>:ViewData</b> does not use a default value.  |

Table 75: View Definition in Payload

## A.2 ItemList

The client application can specify interest in multiple items by using a single batch request message. To do this, encode a list of item names in the request message payload. This is supported on any non-administrative Refinitiv Domain Model and any user defined DMM. For further details, refer to *Enterprise Message API C++ Edition Reference Guide*.

For batch request messages, the payload contains, at a minimum, an element list which includes the following element entry:

| ELEMENT NAME | TYPE           | RANGE/EXAMPLES | DESCRIPTION  |
|--------------|----------------|----------------|--|
| :ItemList    | Array of ASCII | 1 to Array max | <b>Required</b> . A list of item names in which the client registers interest.<br><b>:ItemList</b> does not use a default value. |

Table 76: ItemList in Payload

### A.3 Symbol List Behaviors

The client application can specify interest in getting data along with names belonging to the symbol list while requesting a symbol list. By specifying interest in data along with names, a client application does not need to open individual items belonging to symbol list and the items will be opened and data will be provided. To do this, encode a request message payload with an element list that has an element entry which specifies symbol list behavior.

For Symbol List request messages that specify interest in data, refer to Section A.3.1.

For further details, refer to *Enterprise Message API C++ Edition Reference Guide*.

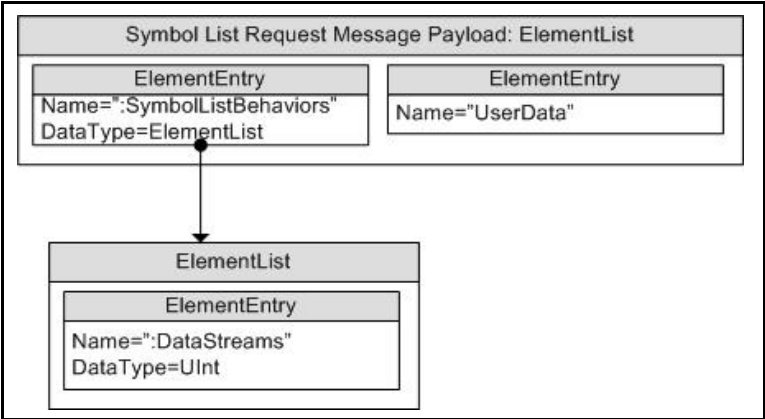


Figure 22. SymbolList Request Message Payload Specifying Symbol List Behavior

#### A.3.1 Element List Contents

To encode a Symbol List request message that specifies interest in data, include an element list with the following element entry:

| ELEMENT NAME         | TYPE        | DEFAULT   | DESCRIPTION  |
|----------------------|-------------|---|--|
| :SymbolListBehaviors | ElementList | ElementList containing ElementEntry of <b>DataStreams</b> set to 0. | Indicates any expected data behavior of individual items that will be opened from the symbol list.<br>If this element is absent, individual streams will not be opened.<br>The contents of <b>:SymbolListBehaviors</b> are extensible. |

Table 77: Request Message Payload for Symbol List Domain Specifying Symbol List Behaviors

### A.3.2 Contents of :SymbolListBehaviors

The following is the contents of the **:SymbolListBehaviors** element entry.

| ELEMENT NAME | TYPE | RANGE | DESCRIPTION   |
|--------------|------|-------|---|
| :DataStreams | UInt | 0 - 2 | <p>Indicates whether the consumer wants the individual items of the symbol list to be opened as streaming or non-streaming or not opened at all. For more information refer to the <i>Enterprise Message API C++ Edition Developers Guide</i>.</p> <p><b>:DataStreams</b> uses the following bit-masks:</p> <ul style="list-style-type: none"><li>• <b>0x0</b>: The consumer is interested only in getting the names and no data on the individual items of the symbol list. This is the default behavior.</li><li>• <b>0x1</b>: The consumer is interested in getting the individual items of the symbol list opened as streaming.</li><li>• <b>0x2</b>: The consumer is interested in getting the individual items of the symbol list opened as snap-shots.</li></ul> |

Table 78: **:SymbolListBehaviors** ElementEntry Contents

Z

© 2015 - 2020 Refinitiv. All rights reserved.

Republication or redistribution of Refinitiv content, including by framing or similar means, is prohibited without the prior written consent of Refinitiv. 'Refinitiv' and the Refinitiv logo are registered trademarks and trademarks of Refinitiv.

Any third party names or marks are the trademarks or registered trademarks of the relevant third party.

Document ID: EMAC360UMRDM.200  
Date of issue: October 2020

