

# Accessing Data from Sensor Observation Services: the **sos4R** Package

Daniel Nüst\*

daniel.nuest@uni-muenster.de  
<http://www.nordholmen.net/sos4r>

March 22, 2011

## Abstract

The sos4R package provides simple yet powerful access to OGC Sensor Observation Service instances. The package supports both encapsulation and abstraction from the service interface for novice users as well as powerful request building for specialists.

sos4R is motivated by the idea to close the gap between the Sensor Web and tools for (geo-)statistical analyses. It implements the core profile of the SOS specification and supports temporal, spatial, and thematic filtering of observations. This document briefly introduces the SOS specification. The package's features are explained extensively: exploration of service metadata, request building with filters, function exchangeability, result data transformation.

The package is published under GPL 2 license within the geostatistics community of 52 °North Initiative for Geospatial Open Source Software.

## Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
1.1	Related Specifications	2
1.2	Terms and Definitions	3
<b>2</b>	<b>Supported Features</b>	<b>4</b>
2.1	Supported Implementations	5
<b>3</b>	<b>Default Options</b>	<b>5</b>
<b>4</b>	<b>Creating a SOS connection</b>	<b>7</b>
<b>5</b>	<b>SOS Operations</b>	<b>9</b>
5.1	GetCapabilities	9
5.1.1	Exploring the Capabilities Document	9
5.1.2	Spatial Reference Systems	11
5.1.3	Plotting SOS and Offerings	12

---

\*Institute for Geoinformatics, University of Muenster, Germany.

5.2	DescribeSensor . . . . .	13
5.3	GetObservation . . . . .	15
5.3.1	Metadata Extraction for Request Building . . . . .	15
5.3.2	Basic Request . . . . .	21
5.3.3	Response Subsetting . . . . .	23
5.3.4	Result Extraction . . . . .	25
5.3.5	Temporal Filtering . . . . .	73
5.3.6	Spatial Filtering . . . . .	75
5.3.7	Feature Filtering . . . . .	76
5.3.8	Value Filtering . . . . .	77
5.3.9	Result Exporting . . . . .	78
5.3.10	Spatial Reference Systems . . . . .	79
5.4	GetObservationById . . . . .	79
<b>6</b>	<b>Changing Handling Functions</b>	<b>82</b>
6.1	Include and Exclude Functions . . . . .	83
6.2	Encoders . . . . .	84
6.3	Parsers/Decoders . . . . .	84
6.4	Data Converters . . . . .	87
<b>7</b>	<b>Exception Handling</b>	<b>91</b>
7.1	OWS Service Exceptions . . . . .	91
7.2	Inspect Requests and Verbose Printing . . . . .	92
<b>8</b>	<b>Getting Started</b>	<b>93</b>
8.1	Demos . . . . .	93
8.2	Services . . . . .	94
<b>9</b>	<b>Getting Support</b>	<b>95</b>
<b>10</b>	<b>Developing sos4R</b>	<b>95</b>
<b>11</b>	<b>Acknowledgements</b>	<b>96</b>
<b>12</b>	<b>References</b>	<b>96</b>

## 1 Introduction

The **sos4R** package provides classes and methods for retrieving data from an OGC Sensor Observation Service (Na, 2007). The goal of this package is to provide easy access with a low entry threshold for everyone to information available via SOSs. The complexity of the service interface shall be shielded from the user as much as possible, while still leaving enough possibilities for advanced users. This package uses S4 classes and methods style (Chambers, 1998).

At the current state, the output is fixed to a standard data.frame with attributed columns for metadata. In future releases a tighter integration is planned with upcoming space-time packages regarding data structures and classes.

The motivation to write this package was born out of perceiving a missing link between the Sensor Web community (known as Sensor Web Enablement

(SWE) Initiative<sup>1</sup> in the OGC realm) and the community of (geo-)statisticians. While the relatively young SWE standards get adopted more by data owners (like governmental organizations), we see a high but unused potential for more open data and spatio-temporal analyses based on it. **sos4R** can help enabling this.

The project is part of the geostatistics community<sup>2</sup> of the 52 °North Initiative for Geospatial Open Source Software<sup>3</sup>. **sos4R** is available, or will be available soon, on CRAN<sup>4</sup> (the Comprehensive R Archive Network).

On the package home page, <http://www.nordholmen.net/sos4r/>, you can stay updated with the development blog, find example code and services, and download source packages.

This software is released under a GPL 2 license<sup>5</sup> and contributions are very welcome—please see section 10.

The package **sos4R** is loaded by

```
> library("sos4R")
```

This document was build for **package version 0.2-01**.

## 1.1 Related Specifications

The Open Geospatial Consortium<sup>6</sup> (OGC) is an organisation which provides standards for handling geospatial data on the internet, thereby ensuring interoperability. The Sensor Observation Service (SOS) is such a standard and provides a well-defined interface for data warehousing of measurements and observations made by all kinds of sensors. This vignette describes the classes, methods and functions provided by **sos4R** to request these observations from a SOS.

Providing data via web services is more powerful than local file copies (with issues like being outdated, redundancy, ...). Flexible filtering of data on the service side reduces download size. That is why SOS operations can comprise flexible subsetting in temporal, spatial and thematical domain. For example “Get measurements from sensor urn:mySensor:001 for the time period from 01/12/2010 to 31/12/2010 where the air temperature below zero degrees”.

In general, the SOS supports two methods of requesting data: (i) HTTP GET as defined in the OOSTethys best practice document<sup>7</sup> with key-value-pair (KVP) encoding of request, and (ii) POST as defined in the standard document with requests encoded in eXtensible Markup Language (XML). Both request types always returns XML documents as response.

Standards that are referenced, respectively used, by SOS are as follows.

**Observations and Measurements (O&M)** O&M (Cox, 2007) defines the markup of sensor measurements results. An observation consists of infor-

---

<sup>1</sup><http://www.opengeospatial.org/projects/groups/sensorweb>

<sup>2</sup><http://52north.org/communities/geostatistics/>

<sup>3</sup><http://52north.org/>

<sup>4</sup><http://cran.r-project.org/>

<sup>5</sup><http://www.gnu.org/licenses/gpl-2.0.html>

<sup>6</sup><http://www.opengeospatial.org/>

<sup>7</sup>This best-practice paper takes the place of a section in the specification that was left out by mistake. It is well established and (loosely) followed by several SOS implementations. See <http://www.oostethys.org/best-practices/best-practices-get>.

mation about the observed geographic feature, the time of observation, the sensor, the observed phenomenon, and the observation's actual result.

**Sensor Model Language (SensorML)** SensorML (Botts, 2007) is used for sensor metadata descriptions (calibration information, inputs and outputs, maintainer).

**Geography Markup Language (GML)** (Portele, 2003) defines markup for geographical features (points, lines, polygons, ...).

**SweCommon** SWE Common defines data markup. It is contained in the SensorML specification (see above).

**Filter Encoding** Filter Encoding (Vretanos, 2005) defines operators and operands for filtering values.

**OWS Common** OGC Web Services Common (Whiteside, 2007) models service related elements that are reusable across several service specifications, like exception handling.

## 1.2 Terms and Definitions

The OGC has a particular set of well-defined terms that might differ from usage of words in specific domains. The most important are as follows<sup>8</sup>.

**Feature of Interest (FOI)** The FOI represents the geo-object, for which measurements are made by sensors. It is ordinarily used for the spatial referencing of measuring points, i.e. the geoobject has coordinates like latitude, longitude and height. The feature is project specific and can be anything from a point (e.g. the position of a measuring station) or a real-world object (e.g. the region that is observed).

**Observation** The observation delivers a measurement (result) for a property (phenomenon) of an observed object (FOI). The actual value is created by a sensor or procedure. The phenomenon was measured at a specific time (sampling time) and the value was generated at a specific point in time (result time). These often coincide so in practice the sampling time is often used as the point in time of an observation.

**Offering** The offering is a logical collection of related observations (similar to a layer in mapping applications) which a service offers together.

**Phenomenon** A phenomenon is a property (physical value) of a geographical object, e.g. air temperature, wind speed, concentration of a pollutant in the atmosphere, reflected radiation in a specific frequency band (colours).

**Procedure** A procedure creates the measurement value of an observation. The source can be a reading from a sensor, simulation or a numerical process.

A more extensive discussion is available in the the O&M specification (Cox, 2007). The Annex B of that document contains the examples of applying some terms to specific domains, aerosol analysis and earth observations, which are repeated here for elaboration in table 1.

---

<sup>8</sup>Based on [http://de.wikipedia.org/wiki/Sensor\\_Observation\\_Service](http://de.wikipedia.org/wiki/Sensor_Observation_Service)

O&M	Particulate Matter 2.5 Concentrations	Earth Observations
Observation::result	35 ug/m3	observation value, measurement value
Observation::procedure	U.S. EPA Federal Reference Method for PM 2.5	method, sensor
Observation::observedProperty	Particulate Matter 2.5	parameter, variable
Observation::featureOfInterest	troposphere	media (air, water, ...), Global Change Master Directory “Topic”

Table 1: Domain specific variants of O&M terms.

## 2 Supported Features

The package provides accessor functions for the supported parameters. It is recommended to access options from the lists returned by these functions instead of hard-coding them into scripts.

This section only lists the possibilities. Explanations follow in this document or can be found in the SOS specification.

```
> SosSupportedOperations()
```

```
[1] "GetCapabilities"      "DescribeSensor"      "GetObservation"
[4] "GetObservationById"
```

```
> SosSupportedServiceVersions()
```

```
[1] "1.0.0"
```

```
> SosSupportedConnectionMethods()
```

```
GET    POST
"GET"  "POST"
```

```
> SosSupportedResponseFormats()
```

```
[1] "text/xml;subtype="om/1.0.0""
[2] "text/xml;subtype="sensorML/1.0.1""
[3] "text/csv"
```

The response format “text/csv” is not standard conform, but used by services as a well established alternative to XML encodings.

```
> SosSupportedResponseModes()
```

```
[1] "inline"
```

```
> SosSupportedResultModels()
```

```
[1] "om:Measurement" "om:Observation"
```

The output of the following calls are named lists (the name being the same as the value) which are simplified here for brevity using `toString()`.

```
> SosSupportedSpatialOperators()
```

```
[1] "BBOX, Contains, Intersects, Overlaps"
```

```
> SosSupportedTemporalOperators()
```

```
[1] "TM_After, TM_Before, TM_During, TM_Equals"
```

## 2.1 Supported Implementations

**sos4R** supports the core profile of the SOS specification. But the possible markups for observations is extremely manifold due to the flexibility of the O&M specification. Sadly, there is no common application profile for certain types of observations, like simple measurements.

Therefore, the undocumented profile of the **52°North SOS implementation**<sup>9</sup> was used as a guideline. It is not documented outside of the source code. Observations returned by instances of this implementation are most likely to be processed out of the box.

In the author's experience, **OOSThetys SOS implementations**<sup>10</sup> utilise the same or at least very similar profile, so responses of these service instances are probably parsed without further work as well.

An incomplete list of **tested services** can be found in section 8. Please share your experiences with other SOS implementations with the developers and users of **sos4R** (see section 9).

## 3 Default Options

Two kinds of default values can be found in (function calls in) **sos4R**: (i) default depending on other function parameters, and (ii) global defaults. Global defaults can be inspected (not changed!) using the following functions. If you want to use a different value please change the respective argument in function calls.

```
> SosDefaultConnectionMethod()
```

```
[1] "POST"
```

```
> SosDefaults()
```

```
$sosDefaultCharacterEncoding
```

```
[1] "UTF-8"
```

```
$sosDefaultDescribeSensorOutputFormat
```

```
[1] "text/xml;subtype=&quot;sensorML/1.0.1&quot;;"
```

---

<sup>9</sup><http://52north.org/communities/sensorweb/sos/>

<sup>10</sup><http://www.oostethys.org/>

```

$sosDefaultGetCapSections
[1] "All"

$sosDefaultGetCapAcceptFormats
[1] "text/xml"

$sosDefaultGetCapOwsVersion
[1] "1.1.0"

$sosDefaultGetObsResponseFormat
[1] "text/xml;subtype="om/1.0.0";"

$sosDefaultTimeFormat
[1] "%Y-%m-%dT%H:%M:%OS"

$sosDefaultFilenameTimeFormat
[1] "%Y-%m-%d_%H-%M-%OS"

$sosDefaultTempOpPropertyName
[1] "om:samplingTime"

$sosDefaultTemporalOperator
[1] "TM_During"

$sosDefaultSpatialOpPropertyName
[1] "urn:ogc:data:location"

$sosDefaultColumnNameFeatureIdentifier
[1] "feature"

$sosDefaultColumnNameLat
[1] "lat"

$sosDefaultColumnNameLon
[1] "lon"

$sosDefaultColumnNameSRS
[1] "SRS"

```

The process of data download also comprises (i) building requests, (ii) decoding responses, and (iii) applying the correct R data type to the respective data values. This mechanism is explained in detail in see section 6. The package comes with a set of predefined encoders, decoders and converters (output not shown here as it is very extensive).

```

> SosEncodingFunctions()
> SosParsingFunctions()
> SosDataFieldConvertingFunctions()

```

## 4 Creating a SOS connection

The method `SOS(...)` is a construction method for classes encapsulating a connection to a SOS. It prints out a short statement when the connection was successfully established (i.e. the capabilities document was received) and returns an object of class `SOS`.

Created SOS for URL `http://v-swe.uni-muenster.de:8080/WeatherSOS/sos`

```
> mySOS <- SOS(url = "http://v-swe.uni-muenster.de:8080/WeatherSOS/sos")
```

To create a SOS connection you only need the URL of the service (i.e. the URL which can be used for HTTP GET or POST requests). The service connection created above is used for all examples throughout this document.

All parameters except the service endpoint are optional and use default settings (see also section 3):

- **method**: The transport protocol. Currently available are GET, POST, the default is POST. GET is less powerful, especially regarding filtering operations. Section 6.4 contains an example of such a connection, whereas the majority of examples is based on a POST connection.
- **version**: The service version. Currently available version(s) is/are 1.0.0.
- **parsers**: The list of parsing functions. See section 6.3.
- **encoders**: The list of encoding functions. See section 6.2.
- **dataFieldConverters**: The list of conversion functions. See section 6.4.
- **curlHandle, curlOptions**: Settings of the package **RCurl**, which is used for HTTP connections. Please consult the package specification before using this.
- **timeFormat**: The time format to be used for decoding and encoding time character strings to and from POSIXt classes, the default is
- **verboseOutput**: Trigger parameter for extensive debugging information on the console, see section 7.2.
- **switchCoordinates**: Switches all coordinates that are encountered during the **parsing phase**, such as in an element like `<gml:lowerCorner>117.3 -41.5</gml:lowerCorner>`.

There are accessor methods for the slots of the class. The encoders, parsers and converters are described extensively in section 6.

```
> sosUrl(mySOS)
> sosTitle(mySOS)
> sosAbstract(mySOS)
> sosVersion(mySOS)
> sosTimeFormat(mySOS)
> sosMethod(mySOS)
```



```

> sosEncoders(mySOS)
> sosParsers(mySOS)
> sosDataFieldConverters(mySOS)

```

Print and summary methods are available for important classes, like SOS.

```

> mySOS

```

```

Object of class SOS_1.0.0 -- version: 1.0.0 , method: POST , url: http://v-swe.uni-muenster.de:8080/WeatherSOS/sos
      Title: IFGI WeatherSOS  -- Abstract: SOS for weather observations at IFGI, Muenster

```

```

> summary(mySOS)

```

```

Object of class SOS_1.0.0
[[version:]]      [1] "1.0.0"
[[url:]]          [1] "http://v-swe.uni-muenster.de:8080/WeatherSOS/sos"
[[title:]]        [1] "IFGI WeatherSOS"
[[method:]]       [1] "POST"
[[abstract:]]     [1] "SOS for weather observations at IFGI, Muenster, Germany (SVN: 90"
[[time:]]         [1] "2008-02-14T11:03:02.000+01:00 --> 2011-03-22T03:00:00.000+01:00"
[[offerings:]]    [1] 9
[[procedures:]]   [1] 21
[[observed properties:]] [1] 9

```

## 5 SOS Operations

**sos4R** implements the SOS core profile of version 1.0.0 comprising the operations `GetCapabilities`, `DescribeSensor` and `GetObservation`. This document focusses on the practical usage of the operations, so the reader is referred to the specification document for details.

The methods mirroring the SOS operations all contain debugging parameters `inspect` and `verbose` as described in section 7.2.

### 5.1 GetCapabilities

The `GetCapabilities` operations is automatically conducted during the connecting to a SOS instance. The response is the **capabilities document**, which contains a detailed description of the services capabilities. It's sections describe: service identification, service provider, operations metadata (parameter names, ...), filter capabilities, and contents (a list of offering descriptions). Please see section 8.2.3 of the SOS specification for details. If you want to inspect the original capabilities document it can be re-requested using

```
> sosCapabilitiesDocumentOriginal(sos = mySOS)
```

The actual operation can be started with the following function. It returns an object of class `SosCapabilities` which can be accessed later on by the function `sosCaps()` from an object of class `SOS`.

```
> getCapabilities(sos = mySOS)
```

The parameters of the operation are:

- `sos`: The SOS connection to request the capabilities document from.
- `inspect` and `verbose`: See section 7.2.

#### 5.1.1 Exploring the Capabilities Document

The respective **parts of the capabilities document** are modelled as R classes and can be accessed with these functions:

```
> sosServiceIdentification(mySOS)
> sosServiceProvider(mySOS)
> sosFilter_Capabilities(mySOS)
> sosContents(mySOS)
```

The first four functions extract clearly structured, self-explanatory parts of the document, so no further discussion is made here. The contents part however is described in detail in section 5.3.1, as it can (and should) be used to extract query parameters.

The function `sosTime(...)` returns the time period for which observations are available within the service. To be precise, it accesses the `ows:Range` element of the parameter `eventTime` in the description of the `GetObservation` operation.

```
> sosTime(mySOS)
```

```
Object of class OwsRange; spacing: NA, rangeClosure: NA  
FROM 2008-02-14T11:03:02.000+01:00 TO 2011-03-22T03:00:00.000+01:00
```

The operations supported by the SOS are listed in the `ows:OperationsMetadata` element, which is modelled as an R class, `OwsOperationsMetadata`, which contains a list of objects of class `OwsOperation` which in turn describe the allowed parameter values for calls to the operation. The operations metadata and individual operations can be inspected with the following functions.

```
> sosOperationsMetadata(mySOS)  
> sosOperation(mySOS, "GetCapabilities")  
> sosOperation(mySOS, sosGetCapabilitiesName)
```

The allowed response formats (the file format/encoding of the response), the response modes (for example inline or as attachment) and the result models (a qualified XML name of the root element of the response) differ for every operation of the service. The following accessor methods return either (i) a list (named by the operation names) of vectors (with the actual allowed parameter values), or (ii) with the `unique` parameter set to `TRUE`, a unique list of all allowed values. Please be aware that these are not allowed for all operations, not are all options supported by **sos4R**.

```
> sosResponseFormats(mySOS)  
> sosResponseMode(mySOS)  
> sosResultModels(mySOS)
```

Some exemplary outputs of the operations are as follows (unnamed lists are simplified with `toString()`). Note the missing values for some operations (where options are not required they might not be available).

```
> sosResponseMode(mySOS, unique = TRUE)
```

```
[1] "inline, resultTemplate"
```

```
> sosResultModels(mySOS)[1:3]
```

```
$GetCapabilities  
NULL
```

```
$GetObservation  
$GetObservation[[1]]  
[1] "om:Observation"
```

```
$GetObservation[[2]]  
[1] "om:Measurement"
```

```
$GetObservation[[3]]  
[1] "om:CategoryObservation"
```

```
$GetObservation[[4]]  
[1] "om:SpatialObservation"
```

```

$DescribeSensor
NULL

> sosResponseMode(mySOS)[[sosGetObservationByIdName]]

[1] "inline, resultTemplate"

> sosResultModels(mySOS)[[sosGetObservationName]][3:4]

[1] "om:Observation, om:Measurement, om:CategoryObservation, om:SpatialObservation"

> sosResponseFormats(mySOS)[[sosGetObservationByIdName]]

[1] "text/xml;subtype=\"om/1.0.0\", application/zip"

```

### 5.1.2 Spatial Reference Systems

For future analyses, but also for correct plotting, one must know the coordinate reference system (CRS) or spatial reference system (SRS)<sup>11</sup> or the returned data. You can get this information using the method `sosGetCRS()` from various objects.

The function utilizes the EPSG code<sup>12</sup> in GML attributes like `srsName="urn:ogc:def:crs:EPSG:4326"` to initialize an object of class `CRS` from the package `sp`. For `SOS` and `codeSosObservationOffering` objects these are taken from the bounding box given in the `gml:boundedBy` element.

```

> sosGetCRS("urn:ogc:def:crs:EPSG:4326")

CRS arguments:
+init=epsg:4326 +proj=longlat +ellps=WGS84 +datum=WGS84 +no_defs
+towgs84=0,0,0

> # returns the CRS of each offering based on the CRS
> # used in the element gml:boundedBy:
> sosGetCRS(mySOS)[1:3]

$RAIN_GAUGE
CRS arguments:
+init=epsg:4326 +proj=longlat +ellps=WGS84 +datum=WGS84 +no_defs
+towgs84=0,0,0

$LUMINANCE
CRS arguments:
+init=epsg:4326 +proj=longlat +ellps=WGS84 +datum=WGS84 +no_defs
+towgs84=0,0,0

$HUMIDITY
CRS arguments:
+init=epsg:4326 +proj=longlat +ellps=WGS84 +datum=WGS84 +no_defs
+towgs84=0,0,0

```

<sup>11</sup>[http://en.wikipedia.org/wiki/Spatial\\_referencing\\_system](http://en.wikipedia.org/wiki/Spatial_referencing_system)

<sup>12</sup><http://www.epsg-registry.org/>

```
> sosGetCRS(sosOfferings(mySOS)[[1]])
```

CRS arguments:

```
+init=epsg:4326 +proj=longlat +ellps=WGS84 +datum=WGS84 +no_defs
+towgs84=0,0,0
```

More examples for `sosGetSRS()` can be found in section [5.3.10](#).

### 5.1.3 Plotting SOS and Offerings

The content of the capabilities document allows the plotting of a service's offerings. The following example uses the packages **maps**, **mapdata** and **maptools** to create a background map. Plotting functions exist for objects of class **SOS** (see Figure [5.1.3](#)) and **SosObservationOffering**, so offerings can also be plotted separately.

```
> # background map:
> library(maps); library(mapdata); library(maptools)
> data(worldHiresMapEnv)
> crs <- sosGetCRS(mySOS)[[1]]
> worldHigh <- pruneMap(map(database = "worldHires",
+                           region = c("Germany", "Austria"), plot = FALSE))
> worldHigh.lines <- map2SpatialLines(worldHigh, proj4string = crs)
> # the plot:
> plot(worldHigh.lines, col = "grey50")
> plot(mySOS, add = TRUE, lwd = 3)
> title(main = paste("Offerings by '", sosTitle(mySOS), "'", sep = ""),
+       sub = toString(names(sosOfferings(mySOS))))
```

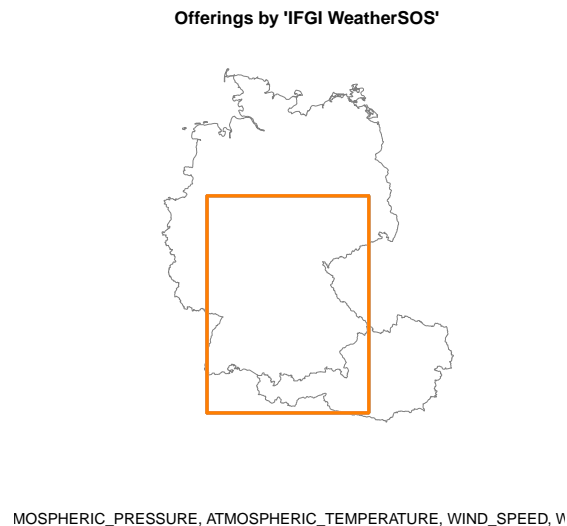


Figure 1: Plot of a SOS object.

See the demos (section [8.1](#)) for more detailed examples of plotting.

## 5.2 DescribeSensor

The DescribeSensor operation is specified in clause 8.3 of the SOS specification and its response is modeled in Sensor Model Language<sup>13</sup> (SensorML) and Transducer Markup Language<sup>14</sup> (TML) specifications.

The DescribeSensor operation is useful for obtaining detailed information of sensor characteristics encoded in either SensorML or TML. The sensor characteristics can include lists and definitions of observables supported by the sensor. [...]

The parameters of the operation are as follows. Please see section 2 and 5.1.1 of this document for supported values respectively allowed values of request parameters.

- **sos**: The SOS connection to request a sensor description from.
- **procedure**: The identifier of the sensor, so one of the character strings returned by `sosProcedures(...)`.
- **outputFormat**: The format in which the sensor description is to be returned. The default is `text/xml;subtype='sensorML/1.0.1'`.
- **inspect** and **verbose**: See section 7.2.
- **saveOriginal**: Saves a copy of the response document in the current working directory. See section 5.4 for an example. Accepts boolean values (TRUE will automatically create file name with time stamp) or character string to be used as file name.

A simple example is as follows.

```
> sensor.1.1 <- describeSensor(sos = mySOS,  
+                             procedure = sosProcedures(obj = mySOS)[[1]][[1]])
```

Object of class SensorML (wraps unparsed XML, see @xml for details).

```
ID: urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
coordinates: 51.9412, 7.6103, 200  
description: Weather station located on the roof of the
```

```
Insititute for Geoinformatics of the University Münster, G
```

All additional information presented in the following depends on compliance of the sensor description with the SensorML Profile for Discovery<sup>15</sup>).

The coordinates data frame of a sensor description can be accessed with the common method `sosCoordinates()`.

```
> sosCoordinates(sensor.1.1)
```

Other useful parts of the sensor description can be accessed at runtime:

```
> sosId(sensor.1.1)
```

---

<sup>13</sup><http://www.opengeospatial.org/standards/sensorml>

<sup>14</sup><http://www.opengeospatial.org/standards/tml>

<sup>15</sup>[http://portal.opengeospatial.org/files/?artifact\\_id=37944](http://portal.opengeospatial.org/files/?artifact_id=37944)

```

[1] "urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93"

> sosName(sensor.1.1)

[1] "IFGI HWS 1"

> sosAbstract(sensor.1.1)

[1] "Weather station located on the roof of the\n\t\t\t\tInsititute for Geoinformatics of

This includes the coordinates with unit and reference system information
in the attributes of the returned object. The observed bounding box is also
available.

> sensor.1.1.coords <- sosCoordinates(sensor.1.1)

urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93 51.9412 y
urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93 7.6103 x
urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93 200 z

> attributes(sensor.1.1.coords)

$names
[1] "y" "x" "z"

$row.names
[1] "urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93"

$class
[1] "data.frame"

$referenceFrame
[1] "urn:ogc:def:crs:EPSG:4326"

$uom
$uom$y
[1] "deg"

$uom$x
[1] "deg"

$uom$z
[1] "m"

$name
$name$y
[1] "latitude"

```

```

$name$x
[1] "longitude"

$name$z
[1] "altitude"

> sosBoundedBy(sensor.1.1)

              min      max
coords.lon  7.608445  7.612007
coords.lat  51.939795  51.941978

```

The coordinates also allow the plotting of the sensor positions (see Figure 5.2). Here it is assumed that the spatial reference system of the SOS is the same for data from the first offering and the sensor positions!

```

> library(maps); library(mapdata); library(maptools)
> data(worldHiresMapEnv)
> # get sensor descriptions
> procs <- unique(unlist(sosProcedures(mySOS)))
> procs.descr <- lapply(X = procs, FUN = describeSensor, sos = mySOS)
> sensors.crs <- unique(sosGetCRS(procs.descr))[[1]]
> worldHigh <- pruneMap(map(database = "worldHires",
+                             region = c("Germany", "Austria"), plot = FALSE))
> worldHigh.lines <- map2SpatialLines(worldHigh, proj4string = sensors.crs)
> plot(worldHigh.lines, col = "grey50")
> for(x in procs.descr)
+   plot(x, add = TRUE, pch = 19)
> text(sosCoordinates(procs.descr)[c("x", "y")],
+       labels = sosId(procs.descr), pos = 4)
> title(main = paste("Sensors of", sosTitle(mySOS)))

```

### 5.3 GetObservation

The GetObservation operation is specified in clause 8.4 of the SOS specification. In this section, all matters around requesting data are explained — from extracting query parameters from metadata, and sending the request, till finally extracting data values and coordinates from the response.

A few utility functions exist to minize a user’s amount of work to create usual requests. They accept normal R types as input and return the respective class from **sos4R** with useful default settings. These function’s names follow the pattern with **sosCreate** [name of object] () and exist for spatial and temporal filters.

#### 5.3.1 Metadata Extraction for Request Building

It is recommended to extract the identifiers of procedures et cetera that are to be used for queries from the metadata description provided by the service, the capabilities document (see section 5.1. This often ensures forward compatibility and minimizes typing errors. The offerings are the “index” of the service and therefore we concentrate on the contents section of the capabilities here.



### Sensors of IFGI WeatherSOS

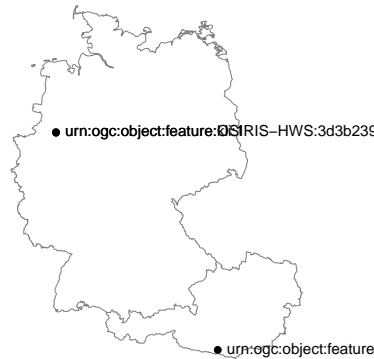


Figure 2: Plot of procedure positions and identifiers

The class `SosContents` simply contains a list of objects of the class `SosObservationOffering` which one can get directly from the connection object:

```
> sosOfferings(mySOS)
> sosOfferings(mySOS, name = "Rain")
```

The output when printing this list is quite extensive, so we concentrate on just on element of it in the following examples. Printing and summary methods are available of objects of the class `SosObservationOffering`.

```
> summary(sosOfferings(mySOS)[[1]])
```

```
Object of class SosObservationOffering
[[id:]]           [1] "RAIN_GAUGE"
[[name:]]         [1] "Rain"
[[time:]]         [1] "2008-11-20 15:35:22 --> 2011-03-22 03:00:00"
[[bbox:]]         [1] "urn:ogc:def:crs:EPSG:4326, 46.611644 7.6103, 51.9412 13.883498"
[[fois:]]         [1] 2
[[procs:]]        [1] 2
[[obsProps:]]     [1] 1
```

The offerings list is named with the offering identifier, so the following statements return the same list.

```
> sosOfferingIds(mySOS)
> names(sosOfferings(mySOS))
> sosName(sosOfferings(mySOS))
```

The offering identifier is used in the example below to extract the offering description of temperature measurements. The offerings list is a standard R list, so all subsetting operations are possible.

**Note:** The order of the offering list (as all other lists, e.g. procedures or observed properties) is not guaranteed to be the same upon every connection to a service. So indexing by name (though counteracting the mentioned forward compatibility, as names might change) is recommended at at least one point in the analysis so that changes in the contents of a service result in an error.

```
> off.temp <- sosOfferings(mySOS)[["ATMOSPHERIC_TEMPERATURE"]]
```

```
Object of class SosObservationOffering; id: ATMOSPHERIC_TEMPERATURE , name: Temperature
time: GmlTimePeriod: [ GmlTimePosition [ time: 2008-11-20 15:20:22 ]
--> GmlTimePosition [ time: 2011-03-22 03:00:00 ] ]
procedure(s): urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2
observedProperty(s): urn:ogc:def:property:OGC::Temperature
feature(s)OfInterest: urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-1
responseFormat(s): text/xml;subtype="om/1.0.0", application/zip , responseMode(s)
intendedApplication: NA
resultModel(s): ns:Measurement, ns:Observation
boundedBy: urn:ogc:def:crs:EPSG:4326, 46.611644 7.6103, 51.9412 13.883498
```

Metadata about the whole **offering** are identifier, name, and spatial and temporal extends.

```
> off.temp.id <- sosId(off.temp)
```

```
[1] "ATMOSPHERIC_TEMPERATURE"
```

```
> off.temp.name <- sosName(off.temp)
```

```
[1] "Temperature of the atmosphere"
```

The offerings also contains metadata about the format and model that are supported.

```
> sosResultModels(off.temp)
```

```
      resultModel      resultModel
"ns:Measurement" "ns:Observation"
```

```
> sosResponseMode(off.temp)
```

```
      responseMode      responseMode
      "inline" "resultTemplate"
```

```
> sosResponseFormats(off.temp)
```

```
      responseFormat      responseFormat
"text/xml;subtype=\"om/1.0.0\"" "application/zip"
```

The **spatial extend** is given as a rectangular bounding box with two coordinates. The structure of the bounding box is kept flexible, as it simply returns a named list of lower and upper corner.

```
> off.temp.boundedBy <- sosBoundedBy(off.temp)
```

```
$srsName
[1] "urn:ogc:def:crs:EPSG:4326"
```

```
$lowerCorner
[1] "46.611644 7.6103"
```

```
$upperCorner
[1] "51.9412 13.883498"
```

The optional attribute `bbox` can be used to obtain a bounding box matrix as used by package `sp`.

```
> off.temp.boundedBy.bbox <- sosBoundedBy(off.temp, bbox = TRUE)

           min      max
coords.lon 7.61030 13.88350
coords.lat 46.61164 51.94120
```

The **temporal extend** is modeled as an object of the respective class of the element in the offering description, which normally is a `gml:TimePeriod`, but does not have to be. The last two statements in the following snippet show how one can access the actual data and what their class is.

```
> off.temp.time <- sosTime(off.temp)

GmlTimePeriod: [ GmlTimePosition [ time: 2008-11-20 15:20:22 ]
--> GmlTimePosition [ time: 2011-03-22 03:00:00 ] ]

> str(off.temp.time)

Formal class 'GmlTimePeriod' [package "sos4R"] with 9 slots
 ..@ begin      : NULL
 ..@ beginPosition:Formal class 'GmlTimePosition' [package "sos4R"] with 4 slots
 .. .. ..@ time      : POSIXlt[1:1], format: "2008-11-20 15:20:22"
 .. .. ..@ frame     : chr NA
 .. .. ..@ calendarEraName : chr NA
 .. .. ..@ indeterminatePosition: chr NA
 ..@ end        : NULL
 ..@ endPosition :Formal class 'GmlTimePosition' [package "sos4R"] with 4 slots
 .. .. ..@ time      : POSIXlt[1:1], format: "2011-03-22 03:00:00"
 .. .. ..@ frame     : chr NA
 .. .. ..@ calendarEraName : chr NA
 .. .. ..@ indeterminatePosition: chr NA
 ..@ duration    : chr NA
 ..@ timeInterval : NULL
 ..@ frame       : chr NA
 ..@ relatedTimes : list()
 ..@ id          : chr NA
NULL

> off.temp.time@beginPosition@time
```

```
[1] "2008-11-20 15:20:22"

> off.temp.time@endPosition@time

[1] "2011-03-22 03:00:00"

> class(off.temp.time@endPosition@time)

[1] "POSIXlt" "POSIXt"
```

The structure of these elements is very flexible (with some of optional elements) and not self-explanatory. Therefore the parameter `convert` can be used to try to create R objects and return these instead. Please be aware that this might not work for temporal elements returned by all service.

```
> off.temp.time.converted <- sosTime(off.temp, convert = TRUE)

$begin
[1] "2008-11-20 15:20:22"

$end
[1] "2011-03-22 03:00:00"

> str(off.temp.time.converted)

List of 2
 $ begin: POSIXlt[1:1], format: "2008-11-20 15:20:22"
 $ end  : POSIXlt[1:1], format: "2011-03-22 03:00:00"
NULL
```

Furthermore the offering comprises **lists of procedures**, **observed properties**, and **features of interest**. In our example the feature and procedure identifiers are the same — this does not have to be the case.

**Important Note:** The order of these lists is not guaranteed to be the same upon every connection to a service.

```
> sosProcedures(off.temp)

[1] "urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93"
[2] "urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111"
[3] "urn:ogc:object:feature:kli:1"

> sosObservedProperties(off.temp)

$observedProperty
[1] "urn:ogc:def:property:OGC::Temperature"

> sosFeaturesOfInterest(off.temp)

$featureOfInterest
[1] "urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93"

$featureOfInterest
[1] "urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111"
```

All of the above can not only be requested for single offerings but also for complete SOS connections or for lists of offerings. The following examples only print out a part of the returned lists.

```
> sosProcedures(mySOS) [1:2]

$RAIN_GAUGE
[1] "urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93"
[2] "urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111"

$LUMINANCE
[1] "urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93"
[2] "urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111"

> sosObservedProperties(mySOS) [1:2]

$RAIN_GAUGE
$RAIN_GAUGE$observedProperty
[1] "urn:ogc:def:property:OGC::Precipitation1Hour"

$LUMINANCE
$LUMINANCE$observedProperty
[1] "urn:ogc:def:property:OGC::Luminance"

> sosFeaturesOfInterest(mySOS) [1:2]

$RAIN_GAUGE
$RAIN_GAUGE$featureOfInterest
[1] "urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93"

$RAIN_GAUGE$featureOfInterest
[1] "urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111"

$LUMINANCE
$LUMINANCE$featureOfInterest
[1] "urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93"

$LUMINANCE$featureOfInterest
[1] "urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111"

Also (parts of) a list of offerings are possible with these functions:

> sosProcedures(sosOfferings(mySOS) [4:5])

    ATMOSPHERIC_PRESSURE
[1,] "urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93"
[2,] "urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111"
[3,] "urn:ogc:object:feature:kli:1"
    ATMOSPHERIC_TEMPERATURE
[1,] "urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93"
[2,] "urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111"
[3,] "urn:ogc:object:feature:kli:1"
```

```
> sosObservedProperties(sosOfferings(mySOS)[4:5])
```

```
$ATMOSPHERIC_PRESSURE
```

```
$ATMOSPHERIC_PRESSURE$observedProperty
```

```
[1] "urn:ogc:def:property:OGC::BarometricPressure"
```

```
$ATMOSPHERIC_TEMPERATURE
```

```
$ATMOSPHERIC_TEMPERATURE$observedProperty
```

```
[1] "urn:ogc:def:property:OGC::Temperature"
```

```
> sosFeaturesOfInterest(sosOfferings(mySOS)[3:4])
```

```
HUMIDITY
```

```
featureOfInterest "urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93"
```

```
featureOfInterest "urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111"
```

```
ATMOSPHERIC_PRESSURE
```

```
featureOfInterest "urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93"
```

```
featureOfInterest "urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111"
```

Please carefully inspect the structure in each case, as these functions will return named lists of lists and not combine procedures from different offerings. Consequently, some procedures could appear several times, but the association to the offering is still intact which is preferred at this stage.

### 5.3.2 Basic Request

```
> getObservation(sos = mySOS, offeringy = myOffering, ...)
```

The mandatory attributes are `sos`, `offering`, `observedProperty` and `responseFormat`. The other parameters are set to NA and not used when building the request.

Please see section 8.4.2 of the SOS specification for details, and section 2 and 5.1.1 of this document for supported values respectively allowed values of request parameters. Note that different implementations might respond differently to missing parameters.

- `sos`: The service connection to be used, an object of class `SOS`.
- `offering`: The offering to be used, either the identifier as a character string or an object of class `SosObservationOffering`.
- `observedProperty`: The observed property of the desired observations. The default is all observed property of the offering, `sosObservedProperties(obj = offering)`.
- `responseFormat`: The format of the response document. The default is `text/xml;subtype='om/1.0.0'`.
- `srsName`: The name of the spatial reference system that should be used for the geometries in the response.

- **eventTime**: A list of objects of class `SosEventTime` which specify the time period(s) for which observations are requested. See section 5.3.5 for more information.
- **procedure**: A list of procedure identifiers for which observations are requested. See section 5.3.6 for more information.
- **featureOfInterest**: An object of class `SosFeatureOfInterest` which specifies the feature for which observations are requested. See sections 5.3.6 and 5.3.7 for more information.
- **result**: An object of class `OgcComparisonOps` for result filtering with filter expressions from Filter Encoding. See section 5.3.8 for more information.
- **resultModel**: The qualified XML name of the root element of the response, e.g. `om:Measurement`. The available models of a service can be found in the service metadata using `sosResultModel(...)`.
- **responseMode**: The response mode defines the form of the response, e.g. inline, out-of-band, or attached. The available models of a service can be found in the service metadata using `sosResponseMode(...)`.
- **BBOX**: A bounding box to be used only in HTTP GET connections (parameter is discarded for POST connections). The format must one character string with `minlon,minlat,maxlon,maxlat,srsURI?`, the spatial reference system is optional.
- **latest**: A boolean parameter to request the latest observation only (see example below) — this is not standard conform but only supported by 52°North SOS.
- **saveOriginal**: Saves a copy of the response document in the current working directory. See section 5.4 for an example. Accepts boolean values (`TRUE` will automatically create file name with time stamp) or character string to be used as file name.

The returned data of all `GetObservation` operations is an XML document of type `om:Observation`, `om:Measurement`, or `om:ObservationCollection` which holds a list of the former two. All three of these have corresponding S4 classes, namely `OmObservation`, `OmMeasurement`, or `OmObservationCollection`.

The most straightforward (and most simple to use) methods to query certain observations are to request one (or several) specific **observed property** (phenomenon) or **procedure** (sensor). Note that the procedures and observed properties have to match the given offering.

```
> obs.temp.procedure.1 <- getObservation(sos = mySOS,
+   offering = off.temp,
+   procedure = sosProcedures(off.temp)[[2]])
> obs.temp.offering.34 <- getObservation(sos = mySOS,
+   offering = off.temp,
+   procedure = sosProcedures(off.temp)[3:4],
+   observedProperty =
+   sosObservedProperties(mySOS)[3:4])
```

These request would potentially retrieve a lot of data, since there is no temporal limitation. The following examples are based on a request for about one day of temperature data stored in the object `obs.temp`. How this can be achieved is described in section 5.3.5.

```
[sos4R] Received response (size: 27056 bytes), starting parsing ...
[sos4R] Finished getObservation to http://v-swe.uni-muenster.de:8080/WeatherSOS/sos
--> received 2 observation(s) having 191 result values [ 96, 95 ].
[sos4R] Original document saved: obs.temp.xml
```

### 5.3.3 Response Subsetting

Subsetting of elements in an `OmObservationCollection` can be done just like in a normal list (in fact, it just wraps at list of observations at this point), i.e. with the operators `[` and `[[`.

```
> length(obs.temp)

[1] 2

> obs.temp[[1]]

Object of class OmObservation;
  procedure: urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111
 observedProperty: NA
   foi: urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111
 samplingTime: GmlTimePeriod: [ GmlTimePosition [ time: 2009-08-20 00:02:00 ]
                               --> GmlTimePosition [ time: 2009-08-20 23:47:00 ] ]
 result dimensions: 96, 3

> obs.temp[2:3]

$OmObservation
Object of class OmObservation;
  procedure: urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
 observedProperty: NA
   foi: urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
 samplingTime: GmlTimePeriod: [ GmlTimePosition [ time: 2009-08-20 00:15:00 ]
                               --> GmlTimePosition [ time: 2009-08-20 23:45:00 ] ]
 result dimensions: 95, 3

$<NA>
NULL

> summary(obs.temp)

Object of class OmObservationCollection
[[members:]]           [1] 2
[[bounded by:]]        [1] "urn:ogc:def:crs:EPSG:4326, 46.611644 7.6103, 51.9412 1
[[procedures:]]         [1] 2
[[obs. props:]]         [1] 1
[[features:]]           [1] 2
```



```
> summary(obs.temp[[1]])

Object of class OmObservation
[[samplingTime:]]          [1] 1
[[procedures:]]            [1] 1
[[obs. props:]]            [1] 1
[[features:]]              [1] 1
[[result summary:]]
      Time
Min.   :2009-08-20 00:02:00
1st Qu.:2009-08-20 05:58:15
Median :2009-08-20 11:54:30
Mean   :2009-08-20 11:54:30
3rd Qu.:2009-08-20 17:50:45
Max.   :2009-08-20 23:47:00

                                     feature
urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111:96
```

```
urn:ogc:def:property:OGC::Temperature
Min.   :16.80
1st Qu.:19.50
Median :22.70
Mean   :23.11
3rd Qu.:27.60
Max.   :28.40
```

**Observation collection indexing** is possible with identifiers of procedure(s), observed property(ies), and feature(s) of interest.

```
> index.foiId <- sosFeatureIds(obs.temp)[[1]]
> index.foiId

[1] "urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111"

> obs.temp[index.foiId]

$OmObservation
Object of class OmObservation;
  procedure: urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111
 observedProperty: NA
   foi: urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111
 samplingTime: GmlTimePeriod: [ GmlTimePosition [ time: 2009-08-20 00:02:00 ]
      --> GmlTimePosition [ time: 2009-08-20 23:47:00 ] ]
 result dimensions: 96, 3

> index.obsProp <- sosObservedProperties(off.temp)
> obs.temp[index.obsProp]
```

```
list()

> index.proc <- sosProcedures(obs.temp)[1:4]
> index.proc.alternative1 <- sosProcedures(off.temp)[1:4]
> index.proc.alternative2 <- sosProcedures(mySOS)
> obs.temp[index.proc]

$OmObservation
Object of class OmObservation;
  procedure: urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111
  observedProperty: NA
  foi: urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111
  samplingTime: GmlTimePeriod: [ GmlTimePosition [ time: 2009-08-20 00:02:00 ]
    --> GmlTimePosition [ time: 2009-08-20 23:47:00 ] ]
  result dimensions: 96, 3

$OmObservation
Object of class OmObservation;
  procedure: urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
  observedProperty: NA
  foi: urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
  samplingTime: GmlTimePeriod: [ GmlTimePosition [ time: 2009-08-20 00:15:00 ]
    --> GmlTimePosition [ time: 2009-08-20 23:45:00 ] ]
  result dimensions: 95, 3
```

### 5.3.4 Result Extraction

**Data Values** can be extracted from observations, measurements and observation collections with the function `sosResult(...)`. The function returns an object of class `data.frame`. In the case of collections, it automatically binds the data frames (you can turn this off by adding `bind = FALSE` as a parameter).

```
> obs.temp.result.2 <- sosResult(obs.temp[[2]])
```

	Time
1	2009-08-20 00:15:00
2	2009-08-20 00:30:00
3	2009-08-20 00:45:00
4	2009-08-20 01:00:00
5	2009-08-20 01:15:00
6	2009-08-20 01:30:00
7	2009-08-20 01:45:00
8	2009-08-20 02:00:00
9	2009-08-20 02:15:00
10	2009-08-20 02:30:00
11	2009-08-20 02:45:00
12	2009-08-20 03:00:00
13	2009-08-20 03:15:00
14	2009-08-20 03:30:00
15	2009-08-20 03:45:00
16	2009-08-20 04:00:00

17 2009-08-20 04:15:00  
18 2009-08-20 04:30:00  
19 2009-08-20 04:45:00  
20 2009-08-20 05:00:00  
21 2009-08-20 05:15:00  
22 2009-08-20 05:30:00  
23 2009-08-20 05:45:00  
24 2009-08-20 06:00:00  
25 2009-08-20 06:15:00  
26 2009-08-20 06:30:00  
27 2009-08-20 06:45:00  
28 2009-08-20 07:00:00  
29 2009-08-20 07:15:00  
30 2009-08-20 07:30:00  
31 2009-08-20 07:45:00  
32 2009-08-20 08:00:00  
33 2009-08-20 08:15:00  
34 2009-08-20 08:30:00  
35 2009-08-20 08:44:00  
36 2009-08-20 09:00:00  
37 2009-08-20 09:15:00  
38 2009-08-20 09:30:00  
39 2009-08-20 09:45:00  
40 2009-08-20 10:00:00  
41 2009-08-20 10:15:00  
42 2009-08-20 10:30:00  
43 2009-08-20 10:45:00  
44 2009-08-20 11:00:00  
45 2009-08-20 11:15:00  
46 2009-08-20 11:30:00  
47 2009-08-20 11:45:00  
48 2009-08-20 12:00:00  
49 2009-08-20 12:15:00  
50 2009-08-20 12:30:00  
51 2009-08-20 12:45:00  
52 2009-08-20 13:00:00  
53 2009-08-20 13:15:00  
54 2009-08-20 13:30:00  
55 2009-08-20 13:45:00  
56 2009-08-20 14:00:00  
57 2009-08-20 14:15:00  
58 2009-08-20 14:30:00  
59 2009-08-20 14:45:00  
60 2009-08-20 15:00:00  
61 2009-08-20 15:15:00  
62 2009-08-20 15:30:00  
63 2009-08-20 15:45:00  
64 2009-08-20 16:00:00  
65 2009-08-20 16:15:00  
66 2009-08-20 16:30:00

67 2009-08-20 16:45:00  
 68 2009-08-20 17:00:00  
 69 2009-08-20 17:15:00  
 70 2009-08-20 17:30:00  
 71 2009-08-20 17:45:00  
 72 2009-08-20 18:00:00  
 73 2009-08-20 18:15:00  
 74 2009-08-20 18:30:00  
 75 2009-08-20 18:45:00  
 76 2009-08-20 19:00:00  
 77 2009-08-20 19:15:00  
 78 2009-08-20 19:30:00  
 79 2009-08-20 19:45:00  
 80 2009-08-20 20:00:00  
 81 2009-08-20 20:15:00  
 82 2009-08-20 20:30:00  
 83 2009-08-20 20:45:00  
 84 2009-08-20 21:00:00  
 85 2009-08-20 21:15:00  
 86 2009-08-20 21:30:00  
 87 2009-08-20 21:45:00  
 88 2009-08-20 22:00:00  
 89 2009-08-20 22:15:00  
 90 2009-08-20 22:30:00  
 91 2009-08-20 22:45:00  
 92 2009-08-20 23:00:00  
 93 2009-08-20 23:15:00  
 94 2009-08-20 23:30:00  
 95 2009-08-20 23:45:00

feature

1 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
 2 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
 3 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
 4 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
 5 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
 6 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
 7 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
 8 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
 9 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
 10 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
 11 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
 12 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
 13 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
 14 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
 15 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
 16 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
 17 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
 18 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
 19 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
 20 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93



```

71 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
72 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
73 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
74 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
75 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
76 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
77 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
78 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
79 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
80 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
81 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
82 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
83 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
84 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
85 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
86 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
87 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
88 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
89 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
90 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
91 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
92 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
93 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
94 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
95 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
   urn:ogc:def:property:OGC::Temperature
1                                     22.5
2                                     22.2
3                                     22.0
4                                     21.9
5                                     21.5
6                                     21.0
7                                     21.0
8                                     20.5
9                                     20.5
10                                    20.4
11                                    20.1
12                                    19.8
13                                    19.5
14                                    19.3
15                                    19.0
16                                    18.8
17                                    18.6
18                                    18.4
19                                    18.5
20                                    18.4
21                                    18.2
22                                    18.0
23                                    18.0
24                                    17.9

```

25	18.1
26	18.0
27	18.2
28	18.6
29	18.8
30	20.6
31	21.6
32	22.5
33	23.4
34	24.5
35	25.2
36	26.2
37	26.8
38	28.0
39	29.0
40	30.0
41	30.6
42	31.7
43	31.3
44	31.6
45	31.9
46	32.8
47	32.6
48	33.9
49	32.4
50	33.3
51	33.2
52	34.2
53	34.0
54	34.6
55	35.2
56	35.7
57	34.1
58	34.6
59	37.0
60	37.7
61	37.8
62	37.8
63	37.6
64	36.9
65	36.0
66	35.8
67	35.3
68	34.9
69	34.9
70	34.4
71	34.0
72	33.6
73	33.5
74	33.2

75	33.2
76	33.2
77	34.0
78	34.0
79	33.2
80	32.2
81	31.6
82	30.9
83	26.1
84	25.3
85	24.6
86	24.3
87	23.8
88	23.1
89	23.2
90	23.0
91	22.8
92	22.6
93	22.6
94	19.7
95	19.4

```
> obs.temp.result.2
```

	Time
1	2009-08-20 00:15:00
2	2009-08-20 00:30:00
3	2009-08-20 00:45:00
4	2009-08-20 01:00:00
5	2009-08-20 01:15:00
6	2009-08-20 01:30:00
7	2009-08-20 01:45:00
8	2009-08-20 02:00:00
9	2009-08-20 02:15:00
10	2009-08-20 02:30:00
11	2009-08-20 02:45:00
12	2009-08-20 03:00:00
13	2009-08-20 03:15:00
14	2009-08-20 03:30:00
15	2009-08-20 03:45:00
16	2009-08-20 04:00:00
17	2009-08-20 04:15:00
18	2009-08-20 04:30:00
19	2009-08-20 04:45:00
20	2009-08-20 05:00:00
21	2009-08-20 05:15:00
22	2009-08-20 05:30:00
23	2009-08-20 05:45:00
24	2009-08-20 06:00:00
25	2009-08-20 06:15:00



26 2009-08-20 06:30:00  
27 2009-08-20 06:45:00  
28 2009-08-20 07:00:00  
29 2009-08-20 07:15:00  
30 2009-08-20 07:30:00  
31 2009-08-20 07:45:00  
32 2009-08-20 08:00:00  
33 2009-08-20 08:15:00  
34 2009-08-20 08:30:00  
35 2009-08-20 08:44:00  
36 2009-08-20 09:00:00  
37 2009-08-20 09:15:00  
38 2009-08-20 09:30:00  
39 2009-08-20 09:45:00  
40 2009-08-20 10:00:00  
41 2009-08-20 10:15:00  
42 2009-08-20 10:30:00  
43 2009-08-20 10:45:00  
44 2009-08-20 11:00:00  
45 2009-08-20 11:15:00  
46 2009-08-20 11:30:00  
47 2009-08-20 11:45:00  
48 2009-08-20 12:00:00  
49 2009-08-20 12:15:00  
50 2009-08-20 12:30:00  
51 2009-08-20 12:45:00  
52 2009-08-20 13:00:00  
53 2009-08-20 13:15:00  
54 2009-08-20 13:30:00  
55 2009-08-20 13:45:00  
56 2009-08-20 14:00:00  
57 2009-08-20 14:15:00  
58 2009-08-20 14:30:00  
59 2009-08-20 14:45:00  
60 2009-08-20 15:00:00  
61 2009-08-20 15:15:00  
62 2009-08-20 15:30:00  
63 2009-08-20 15:45:00  
64 2009-08-20 16:00:00  
65 2009-08-20 16:15:00  
66 2009-08-20 16:30:00  
67 2009-08-20 16:45:00  
68 2009-08-20 17:00:00  
69 2009-08-20 17:15:00  
70 2009-08-20 17:30:00  
71 2009-08-20 17:45:00  
72 2009-08-20 18:00:00  
73 2009-08-20 18:15:00  
74 2009-08-20 18:30:00  
75 2009-08-20 18:45:00

76 2009-08-20 19:00:00  
77 2009-08-20 19:15:00  
78 2009-08-20 19:30:00  
79 2009-08-20 19:45:00  
80 2009-08-20 20:00:00  
81 2009-08-20 20:15:00  
82 2009-08-20 20:30:00  
83 2009-08-20 20:45:00  
84 2009-08-20 21:00:00  
85 2009-08-20 21:15:00  
86 2009-08-20 21:30:00  
87 2009-08-20 21:45:00  
88 2009-08-20 22:00:00  
89 2009-08-20 22:15:00  
90 2009-08-20 22:30:00  
91 2009-08-20 22:45:00  
92 2009-08-20 23:00:00  
93 2009-08-20 23:15:00  
94 2009-08-20 23:30:00  
95 2009-08-20 23:45:00

feature

1 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
2 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
3 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
4 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
5 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
6 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
7 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
8 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
9 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
10 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
11 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
12 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
13 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
14 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
15 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
16 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
17 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
18 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
19 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
20 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
21 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
22 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
23 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
24 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
25 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
26 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
27 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
28 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93  
29 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93



```

80 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
81 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
82 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
83 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
84 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
85 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
86 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
87 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
88 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
89 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
90 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
91 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
92 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
93 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
94 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
95 urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
   urn:ogc:def:property:OGC::Temperature
1      22.5
2      22.2
3      22.0
4      21.9
5      21.5
6      21.0
7      21.0
8      20.5
9      20.5
10     20.4
11     20.1
12     19.8
13     19.5
14     19.3
15     19.0
16     18.8
17     18.6
18     18.4
19     18.5
20     18.4
21     18.2
22     18.0
23     18.0
24     17.9
25     18.1
26     18.0
27     18.2
28     18.6
29     18.8
30     20.6
31     21.6
32     22.5
33     23.4

```

34	24.5
35	25.2
36	26.2
37	26.8
38	28.0
39	29.0
40	30.0
41	30.6
42	31.7
43	31.3
44	31.6
45	31.9
46	32.8
47	32.6
48	33.9
49	32.4
50	33.3
51	33.2
52	34.2
53	34.0
54	34.6
55	35.2
56	35.7
57	34.1
58	34.6
59	37.0
60	37.7
61	37.8
62	37.8
63	37.6
64	36.9
65	36.0
66	35.8
67	35.3
68	34.9
69	34.9
70	34.4
71	34.0
72	33.6
73	33.5
74	33.2
75	33.2
76	33.2
77	34.0
78	34.0
79	33.2
80	32.2
81	31.6
82	30.9
83	26.1

84	25.3
85	24.6
86	24.3
87	23.8
88	23.1
89	23.2
90	23.0
91	22.8
92	22.6
93	22.6
94	19.7
95	19.4

```
> obs.temp.result <- sosResult(obs.temp[1:2])
```

	Time
OmObservation.1	2009-08-20 00:02:00
OmObservation.2	2009-08-20 00:17:00
OmObservation.3	2009-08-20 00:32:00
OmObservation.4	2009-08-20 00:47:00
OmObservation.5	2009-08-20 01:02:00
OmObservation.6	2009-08-20 01:17:00
OmObservation.7	2009-08-20 01:32:00
OmObservation.8	2009-08-20 01:47:00
OmObservation.9	2009-08-20 02:02:00
OmObservation.10	2009-08-20 02:17:00
OmObservation.11	2009-08-20 02:32:00
OmObservation.12	2009-08-20 02:47:00
OmObservation.13	2009-08-20 03:02:00
OmObservation.14	2009-08-20 03:17:00
OmObservation.15	2009-08-20 03:32:00
OmObservation.16	2009-08-20 03:47:00
OmObservation.17	2009-08-20 04:02:00
OmObservation.18	2009-08-20 04:17:00
OmObservation.19	2009-08-20 04:32:00
OmObservation.20	2009-08-20 04:47:00
OmObservation.21	2009-08-20 05:02:00
OmObservation.22	2009-08-20 05:17:00
OmObservation.23	2009-08-20 05:32:00
OmObservation.24	2009-08-20 05:47:00
OmObservation.25	2009-08-20 06:02:00
OmObservation.26	2009-08-20 06:17:00
OmObservation.27	2009-08-20 06:32:00
OmObservation.28	2009-08-20 06:47:00
OmObservation.29	2009-08-20 07:02:00
OmObservation.30	2009-08-20 07:17:00
OmObservation.31	2009-08-20 07:32:00
OmObservation.32	2009-08-20 07:47:00
OmObservation.33	2009-08-20 08:02:00
OmObservation.34	2009-08-20 08:17:00

OmObservation.35	2009-08-20	08:32:00
OmObservation.36	2009-08-20	08:47:00
OmObservation.37	2009-08-20	09:02:00
OmObservation.38	2009-08-20	09:17:00
OmObservation.39	2009-08-20	09:32:00
OmObservation.40	2009-08-20	09:47:00
OmObservation.41	2009-08-20	10:02:00
OmObservation.42	2009-08-20	10:17:00
OmObservation.43	2009-08-20	10:32:00
OmObservation.44	2009-08-20	10:47:00
OmObservation.45	2009-08-20	11:02:00
OmObservation.46	2009-08-20	11:17:00
OmObservation.47	2009-08-20	11:32:00
OmObservation.48	2009-08-20	11:47:00
OmObservation.49	2009-08-20	12:02:00
OmObservation.50	2009-08-20	12:17:00
OmObservation.51	2009-08-20	12:32:00
OmObservation.52	2009-08-20	12:47:00
OmObservation.53	2009-08-20	13:02:00
OmObservation.54	2009-08-20	13:17:00
OmObservation.55	2009-08-20	13:32:00
OmObservation.56	2009-08-20	13:47:00
OmObservation.57	2009-08-20	14:02:00
OmObservation.58	2009-08-20	14:17:00
OmObservation.59	2009-08-20	14:32:00
OmObservation.60	2009-08-20	14:47:00
OmObservation.61	2009-08-20	15:02:00
OmObservation.62	2009-08-20	15:17:00
OmObservation.63	2009-08-20	15:32:00
OmObservation.64	2009-08-20	15:47:00
OmObservation.65	2009-08-20	16:02:00
OmObservation.66	2009-08-20	16:17:00
OmObservation.67	2009-08-20	16:32:00
OmObservation.68	2009-08-20	16:47:00
OmObservation.69	2009-08-20	17:02:00
OmObservation.70	2009-08-20	17:17:00
OmObservation.71	2009-08-20	17:32:00
OmObservation.72	2009-08-20	17:47:00
OmObservation.73	2009-08-20	18:02:00
OmObservation.74	2009-08-20	18:17:00
OmObservation.75	2009-08-20	18:32:00
OmObservation.76	2009-08-20	18:47:00
OmObservation.77	2009-08-20	19:02:00
OmObservation.78	2009-08-20	19:17:00
OmObservation.79	2009-08-20	19:32:00
OmObservation.80	2009-08-20	19:47:00
OmObservation.81	2009-08-20	20:02:00
OmObservation.82	2009-08-20	20:17:00
OmObservation.83	2009-08-20	20:32:00
OmObservation.84	2009-08-20	20:47:00

OmObservation.85	2009-08-20	21:02:00
OmObservation.86	2009-08-20	21:17:00
OmObservation.87	2009-08-20	21:32:00
OmObservation.88	2009-08-20	21:47:00
OmObservation.89	2009-08-20	22:02:00
OmObservation.90	2009-08-20	22:17:00
OmObservation.91	2009-08-20	22:32:00
OmObservation.92	2009-08-20	22:47:00
OmObservation.93	2009-08-20	23:02:00
OmObservation.94	2009-08-20	23:17:00
OmObservation.95	2009-08-20	23:32:00
OmObservation.96	2009-08-20	23:47:00
OmObservation.110	2009-08-20	00:15:00
OmObservation.210	2009-08-20	00:30:00
OmObservation.310	2009-08-20	00:45:00
OmObservation.410	2009-08-20	01:00:00
OmObservation.510	2009-08-20	01:15:00
OmObservation.610	2009-08-20	01:30:00
OmObservation.710	2009-08-20	01:45:00
OmObservation.810	2009-08-20	02:00:00
OmObservation.97	2009-08-20	02:15:00
OmObservation.101	2009-08-20	02:30:00
OmObservation.111	2009-08-20	02:45:00
OmObservation.121	2009-08-20	03:00:00
OmObservation.131	2009-08-20	03:15:00
OmObservation.141	2009-08-20	03:30:00
OmObservation.151	2009-08-20	03:45:00
OmObservation.161	2009-08-20	04:00:00
OmObservation.171	2009-08-20	04:15:00
OmObservation.181	2009-08-20	04:30:00
OmObservation.191	2009-08-20	04:45:00
OmObservation.201	2009-08-20	05:00:00
OmObservation.211	2009-08-20	05:15:00
OmObservation.221	2009-08-20	05:30:00
OmObservation.231	2009-08-20	05:45:00
OmObservation.241	2009-08-20	06:00:00
OmObservation.251	2009-08-20	06:15:00
OmObservation.261	2009-08-20	06:30:00
OmObservation.271	2009-08-20	06:45:00
OmObservation.281	2009-08-20	07:00:00
OmObservation.291	2009-08-20	07:15:00
OmObservation.301	2009-08-20	07:30:00
OmObservation.311	2009-08-20	07:45:00
OmObservation.321	2009-08-20	08:00:00
OmObservation.331	2009-08-20	08:15:00
OmObservation.341	2009-08-20	08:30:00
OmObservation.351	2009-08-20	08:44:00
OmObservation.361	2009-08-20	09:00:00
OmObservation.371	2009-08-20	09:15:00
OmObservation.381	2009-08-20	09:30:00



OmObservation.391 2009-08-20 09:45:00  
OmObservation.401 2009-08-20 10:00:00  
OmObservation.411 2009-08-20 10:15:00  
OmObservation.421 2009-08-20 10:30:00  
OmObservation.431 2009-08-20 10:45:00  
OmObservation.441 2009-08-20 11:00:00  
OmObservation.451 2009-08-20 11:15:00  
OmObservation.461 2009-08-20 11:30:00  
OmObservation.471 2009-08-20 11:45:00  
OmObservation.481 2009-08-20 12:00:00  
OmObservation.491 2009-08-20 12:15:00  
OmObservation.501 2009-08-20 12:30:00  
OmObservation.511 2009-08-20 12:45:00  
OmObservation.521 2009-08-20 13:00:00  
OmObservation.531 2009-08-20 13:15:00  
OmObservation.541 2009-08-20 13:30:00  
OmObservation.551 2009-08-20 13:45:00  
OmObservation.561 2009-08-20 14:00:00  
OmObservation.571 2009-08-20 14:15:00  
OmObservation.581 2009-08-20 14:30:00  
OmObservation.591 2009-08-20 14:45:00  
OmObservation.601 2009-08-20 15:00:00  
OmObservation.611 2009-08-20 15:15:00  
OmObservation.621 2009-08-20 15:30:00  
OmObservation.631 2009-08-20 15:45:00  
OmObservation.641 2009-08-20 16:00:00  
OmObservation.651 2009-08-20 16:15:00  
OmObservation.661 2009-08-20 16:30:00  
OmObservation.671 2009-08-20 16:45:00  
OmObservation.681 2009-08-20 17:00:00  
OmObservation.691 2009-08-20 17:15:00  
OmObservation.701 2009-08-20 17:30:00  
OmObservation.711 2009-08-20 17:45:00  
OmObservation.721 2009-08-20 18:00:00  
OmObservation.731 2009-08-20 18:15:00  
OmObservation.741 2009-08-20 18:30:00  
OmObservation.751 2009-08-20 18:45:00  
OmObservation.761 2009-08-20 19:00:00  
OmObservation.771 2009-08-20 19:15:00  
OmObservation.781 2009-08-20 19:30:00  
OmObservation.791 2009-08-20 19:45:00  
OmObservation.801 2009-08-20 20:00:00  
OmObservation.811 2009-08-20 20:15:00  
OmObservation.821 2009-08-20 20:30:00  
OmObservation.831 2009-08-20 20:45:00  
OmObservation.841 2009-08-20 21:00:00  
OmObservation.851 2009-08-20 21:15:00  
OmObservation.861 2009-08-20 21:30:00  
OmObservation.871 2009-08-20 21:45:00  
OmObservation.881 2009-08-20 22:00:00

[illegible]

[illegible]

[illegible]

[illegible]

OmObservation.1	21.0
OmObservation.2	20.7
OmObservation.3	20.5
OmObservation.4	20.1
OmObservation.5	19.9
OmObservation.6	19.7
OmObservation.7	19.5
OmObservation.8	19.4
OmObservation.9	19.3
OmObservation.10	19.1
OmObservation.11	18.8
OmObservation.12	18.4
OmObservation.13	18.3
OmObservation.14	18.0
OmObservation.15	17.8
OmObservation.16	17.7
OmObservation.17	17.6
OmObservation.18	17.6
OmObservation.19	17.4
OmObservation.20	17.2
OmObservation.21	17.0
OmObservation.22	16.9
OmObservation.23	16.8
OmObservation.24	16.8
OmObservation.25	17.0
OmObservation.26	17.0
OmObservation.27	17.4
OmObservation.28	17.9
OmObservation.29	18.3
OmObservation.30	19.3
OmObservation.31	19.5
OmObservation.32	20.4
OmObservation.33	20.4
OmObservation.34	21.0
OmObservation.35	21.4
OmObservation.36	21.5
OmObservation.37	21.8
OmObservation.38	22.0
OmObservation.39	22.6
OmObservation.40	24.0
OmObservation.41	24.7
OmObservation.42	25.4
OmObservation.43	25.9
OmObservation.44	26.9
OmObservation.45	27.5
OmObservation.46	27.4
OmObservation.47	27.8
OmObservation.48	27.5
OmObservation.49	27.8
OmObservation.50	27.8

OmObservation.51	27.6
OmObservation.52	27.8
OmObservation.53	28.1
OmObservation.54	28.1
OmObservation.55	27.9
OmObservation.56	28.1
OmObservation.57	28.4
OmObservation.58	28.4
OmObservation.59	28.2
OmObservation.60	28.1
OmObservation.61	28.2
OmObservation.62	27.8
OmObservation.63	27.9
OmObservation.64	28.0
OmObservation.65	27.8
OmObservation.66	27.9
OmObservation.67	27.8
OmObservation.68	27.8
OmObservation.69	27.8
OmObservation.70	27.7
OmObservation.71	27.6
OmObservation.72	27.6
OmObservation.73	27.5
OmObservation.74	27.3
OmObservation.75	27.1
OmObservation.76	26.7
OmObservation.77	26.4
OmObservation.78	26.1
OmObservation.79	25.7
OmObservation.80	25.4
OmObservation.81	24.8
OmObservation.82	24.4
OmObservation.83	24.0
OmObservation.84	23.5
OmObservation.85	23.3
OmObservation.86	23.0
OmObservation.87	22.8
OmObservation.88	22.4
OmObservation.89	21.9
OmObservation.90	21.6
OmObservation.91	21.4
OmObservation.92	21.0
OmObservation.93	20.8
OmObservation.94	20.6
OmObservation.95	20.3
OmObservation.96	20.0
OmObservation.110	22.5
OmObservation.210	22.2
OmObservation.310	22.0
OmObservation.410	21.9

OmObservation.510	21.5
OmObservation.610	21.0
OmObservation.710	21.0
OmObservation.810	20.5
OmObservation.97	20.5
OmObservation.101	20.4
OmObservation.111	20.1
OmObservation.121	19.8
OmObservation.131	19.5
OmObservation.141	19.3
OmObservation.151	19.0
OmObservation.161	18.8
OmObservation.171	18.6
OmObservation.181	18.4
OmObservation.191	18.5
OmObservation.201	18.4
OmObservation.211	18.2
OmObservation.221	18.0
OmObservation.231	18.0
OmObservation.241	17.9
OmObservation.251	18.1
OmObservation.261	18.0
OmObservation.271	18.2
OmObservation.281	18.6
OmObservation.291	18.8
OmObservation.301	20.6
OmObservation.311	21.6
OmObservation.321	22.5
OmObservation.331	23.4
OmObservation.341	24.5
OmObservation.351	25.2
OmObservation.361	26.2
OmObservation.371	26.8
OmObservation.381	28.0
OmObservation.391	29.0
OmObservation.401	30.0
OmObservation.411	30.6
OmObservation.421	31.7
OmObservation.431	31.3
OmObservation.441	31.6
OmObservation.451	31.9
OmObservation.461	32.8
OmObservation.471	32.6
OmObservation.481	33.9
OmObservation.491	32.4
OmObservation.501	33.3
OmObservation.511	33.2
OmObservation.521	34.2
OmObservation.531	34.0
OmObservation.541	34.6



OmObservation.551	35.2
OmObservation.561	35.7
OmObservation.571	34.1
OmObservation.581	34.6
OmObservation.591	37.0
OmObservation.601	37.7
OmObservation.611	37.8
OmObservation.621	37.8
OmObservation.631	37.6
OmObservation.641	36.9
OmObservation.651	36.0
OmObservation.661	35.8
OmObservation.671	35.3
OmObservation.681	34.9
OmObservation.691	34.9
OmObservation.701	34.4
OmObservation.711	34.0
OmObservation.721	33.6
OmObservation.731	33.5
OmObservation.741	33.2
OmObservation.751	33.2
OmObservation.761	33.2
OmObservation.771	34.0
OmObservation.781	34.0
OmObservation.791	33.2
OmObservation.801	32.2
OmObservation.811	31.6
OmObservation.821	30.9
OmObservation.831	26.1
OmObservation.841	25.3
OmObservation.851	24.6
OmObservation.861	24.3
OmObservation.871	23.8
OmObservation.881	23.1
OmObservation.891	23.2
OmObservation.901	23.0
OmObservation.911	22.8
OmObservation.921	22.6
OmObservation.931	22.6
OmObservation.941	19.7
OmObservation.951	19.4

> *obs.temp.result*

	Time
OmObservation.1	2009-08-20 00:02:00
OmObservation.2	2009-08-20 00:17:00
OmObservation.3	2009-08-20 00:32:00
OmObservation.4	2009-08-20 00:47:00
OmObservation.5	2009-08-20 01:02:00

OmObservation.6	2009-08-20	01:17:00
OmObservation.7	2009-08-20	01:32:00
OmObservation.8	2009-08-20	01:47:00
OmObservation.9	2009-08-20	02:02:00
OmObservation.10	2009-08-20	02:17:00
OmObservation.11	2009-08-20	02:32:00
OmObservation.12	2009-08-20	02:47:00
OmObservation.13	2009-08-20	03:02:00
OmObservation.14	2009-08-20	03:17:00
OmObservation.15	2009-08-20	03:32:00
OmObservation.16	2009-08-20	03:47:00
OmObservation.17	2009-08-20	04:02:00
OmObservation.18	2009-08-20	04:17:00
OmObservation.19	2009-08-20	04:32:00
OmObservation.20	2009-08-20	04:47:00
OmObservation.21	2009-08-20	05:02:00
OmObservation.22	2009-08-20	05:17:00
OmObservation.23	2009-08-20	05:32:00
OmObservation.24	2009-08-20	05:47:00
OmObservation.25	2009-08-20	06:02:00
OmObservation.26	2009-08-20	06:17:00
OmObservation.27	2009-08-20	06:32:00
OmObservation.28	2009-08-20	06:47:00
OmObservation.29	2009-08-20	07:02:00
OmObservation.30	2009-08-20	07:17:00
OmObservation.31	2009-08-20	07:32:00
OmObservation.32	2009-08-20	07:47:00
OmObservation.33	2009-08-20	08:02:00
OmObservation.34	2009-08-20	08:17:00
OmObservation.35	2009-08-20	08:32:00
OmObservation.36	2009-08-20	08:47:00
OmObservation.37	2009-08-20	09:02:00
OmObservation.38	2009-08-20	09:17:00
OmObservation.39	2009-08-20	09:32:00
OmObservation.40	2009-08-20	09:47:00
OmObservation.41	2009-08-20	10:02:00
OmObservation.42	2009-08-20	10:17:00
OmObservation.43	2009-08-20	10:32:00
OmObservation.44	2009-08-20	10:47:00
OmObservation.45	2009-08-20	11:02:00
OmObservation.46	2009-08-20	11:17:00
OmObservation.47	2009-08-20	11:32:00
OmObservation.48	2009-08-20	11:47:00
OmObservation.49	2009-08-20	12:02:00
OmObservation.50	2009-08-20	12:17:00
OmObservation.51	2009-08-20	12:32:00
OmObservation.52	2009-08-20	12:47:00
OmObservation.53	2009-08-20	13:02:00
OmObservation.54	2009-08-20	13:17:00
OmObservation.55	2009-08-20	13:32:00

OmObservation.56	2009-08-20	13:47:00
OmObservation.57	2009-08-20	14:02:00
OmObservation.58	2009-08-20	14:17:00
OmObservation.59	2009-08-20	14:32:00
OmObservation.60	2009-08-20	14:47:00
OmObservation.61	2009-08-20	15:02:00
OmObservation.62	2009-08-20	15:17:00
OmObservation.63	2009-08-20	15:32:00
OmObservation.64	2009-08-20	15:47:00
OmObservation.65	2009-08-20	16:02:00
OmObservation.66	2009-08-20	16:17:00
OmObservation.67	2009-08-20	16:32:00
OmObservation.68	2009-08-20	16:47:00
OmObservation.69	2009-08-20	17:02:00
OmObservation.70	2009-08-20	17:17:00
OmObservation.71	2009-08-20	17:32:00
OmObservation.72	2009-08-20	17:47:00
OmObservation.73	2009-08-20	18:02:00
OmObservation.74	2009-08-20	18:17:00
OmObservation.75	2009-08-20	18:32:00
OmObservation.76	2009-08-20	18:47:00
OmObservation.77	2009-08-20	19:02:00
OmObservation.78	2009-08-20	19:17:00
OmObservation.79	2009-08-20	19:32:00
OmObservation.80	2009-08-20	19:47:00
OmObservation.81	2009-08-20	20:02:00
OmObservation.82	2009-08-20	20:17:00
OmObservation.83	2009-08-20	20:32:00
OmObservation.84	2009-08-20	20:47:00
OmObservation.85	2009-08-20	21:02:00
OmObservation.86	2009-08-20	21:17:00
OmObservation.87	2009-08-20	21:32:00
OmObservation.88	2009-08-20	21:47:00
OmObservation.89	2009-08-20	22:02:00
OmObservation.90	2009-08-20	22:17:00
OmObservation.91	2009-08-20	22:32:00
OmObservation.92	2009-08-20	22:47:00
OmObservation.93	2009-08-20	23:02:00
OmObservation.94	2009-08-20	23:17:00
OmObservation.95	2009-08-20	23:32:00
OmObservation.96	2009-08-20	23:47:00
OmObservation.110	2009-08-20	00:15:00
OmObservation.210	2009-08-20	00:30:00
OmObservation.310	2009-08-20	00:45:00
OmObservation.410	2009-08-20	01:00:00
OmObservation.510	2009-08-20	01:15:00
OmObservation.610	2009-08-20	01:30:00
OmObservation.710	2009-08-20	01:45:00
OmObservation.810	2009-08-20	02:00:00
OmObservation.97	2009-08-20	02:15:00

OmObservation.101	2009-08-20	02:30:00
OmObservation.111	2009-08-20	02:45:00
OmObservation.121	2009-08-20	03:00:00
OmObservation.131	2009-08-20	03:15:00
OmObservation.141	2009-08-20	03:30:00
OmObservation.151	2009-08-20	03:45:00
OmObservation.161	2009-08-20	04:00:00
OmObservation.171	2009-08-20	04:15:00
OmObservation.181	2009-08-20	04:30:00
OmObservation.191	2009-08-20	04:45:00
OmObservation.201	2009-08-20	05:00:00
OmObservation.211	2009-08-20	05:15:00
OmObservation.221	2009-08-20	05:30:00
OmObservation.231	2009-08-20	05:45:00
OmObservation.241	2009-08-20	06:00:00
OmObservation.251	2009-08-20	06:15:00
OmObservation.261	2009-08-20	06:30:00
OmObservation.271	2009-08-20	06:45:00
OmObservation.281	2009-08-20	07:00:00
OmObservation.291	2009-08-20	07:15:00
OmObservation.301	2009-08-20	07:30:00
OmObservation.311	2009-08-20	07:45:00
OmObservation.321	2009-08-20	08:00:00
OmObservation.331	2009-08-20	08:15:00
OmObservation.341	2009-08-20	08:30:00
OmObservation.351	2009-08-20	08:44:00
OmObservation.361	2009-08-20	09:00:00
OmObservation.371	2009-08-20	09:15:00
OmObservation.381	2009-08-20	09:30:00
OmObservation.391	2009-08-20	09:45:00
OmObservation.401	2009-08-20	10:00:00
OmObservation.411	2009-08-20	10:15:00
OmObservation.421	2009-08-20	10:30:00
OmObservation.431	2009-08-20	10:45:00
OmObservation.441	2009-08-20	11:00:00
OmObservation.451	2009-08-20	11:15:00
OmObservation.461	2009-08-20	11:30:00
OmObservation.471	2009-08-20	11:45:00
OmObservation.481	2009-08-20	12:00:00
OmObservation.491	2009-08-20	12:15:00
OmObservation.501	2009-08-20	12:30:00
OmObservation.511	2009-08-20	12:45:00
OmObservation.521	2009-08-20	13:00:00
OmObservation.531	2009-08-20	13:15:00
OmObservation.541	2009-08-20	13:30:00
OmObservation.551	2009-08-20	13:45:00
OmObservation.561	2009-08-20	14:00:00
OmObservation.571	2009-08-20	14:15:00
OmObservation.581	2009-08-20	14:30:00
OmObservation.591	2009-08-20	14:45:00

OmObservation.601 2009-08-20 15:00:00  
 OmObservation.611 2009-08-20 15:15:00  
 OmObservation.621 2009-08-20 15:30:00  
 OmObservation.631 2009-08-20 15:45:00  
 OmObservation.641 2009-08-20 16:00:00  
 OmObservation.651 2009-08-20 16:15:00  
 OmObservation.661 2009-08-20 16:30:00  
 OmObservation.671 2009-08-20 16:45:00  
 OmObservation.681 2009-08-20 17:00:00  
 OmObservation.691 2009-08-20 17:15:00  
 OmObservation.701 2009-08-20 17:30:00  
 OmObservation.711 2009-08-20 17:45:00  
 OmObservation.721 2009-08-20 18:00:00  
 OmObservation.731 2009-08-20 18:15:00  
 OmObservation.741 2009-08-20 18:30:00  
 OmObservation.751 2009-08-20 18:45:00  
 OmObservation.761 2009-08-20 19:00:00  
 OmObservation.771 2009-08-20 19:15:00  
 OmObservation.781 2009-08-20 19:30:00  
 OmObservation.791 2009-08-20 19:45:00  
 OmObservation.801 2009-08-20 20:00:00  
 OmObservation.811 2009-08-20 20:15:00  
 OmObservation.821 2009-08-20 20:30:00  
 OmObservation.831 2009-08-20 20:45:00  
 OmObservation.841 2009-08-20 21:00:00  
 OmObservation.851 2009-08-20 21:15:00  
 OmObservation.861 2009-08-20 21:30:00  
 OmObservation.871 2009-08-20 21:45:00  
 OmObservation.881 2009-08-20 22:00:00  
 OmObservation.891 2009-08-20 22:15:00  
 OmObservation.901 2009-08-20 22:30:00  
 OmObservation.911 2009-08-20 22:45:00  
 OmObservation.921 2009-08-20 23:00:00  
 OmObservation.931 2009-08-20 23:15:00  
 OmObservation.941 2009-08-20 23:30:00  
 OmObservation.951 2009-08-20 23:45:00

feature

OmObservation.1 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 OmObservation.2 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 OmObservation.3 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 OmObservation.4 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 OmObservation.5 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 OmObservation.6 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 OmObservation.7 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 OmObservation.8 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 OmObservation.9 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 OmObservation.10 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 OmObservation.11 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 OmObservation.12 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 OmObservation.13 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111

[illegible]



[illegible]



OmObservation.681	urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
OmObservation.691	urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
OmObservation.701	urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
OmObservation.711	urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
OmObservation.721	urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
OmObservation.731	urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
OmObservation.741	urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
OmObservation.751	urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
OmObservation.761	urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
OmObservation.771	urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
OmObservation.781	urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
OmObservation.791	urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
OmObservation.801	urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
OmObservation.811	urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
OmObservation.821	urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
OmObservation.831	urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
OmObservation.841	urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
OmObservation.851	urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
OmObservation.861	urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
OmObservation.871	urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
OmObservation.881	urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
OmObservation.891	urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
OmObservation.901	urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
OmObservation.911	urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
OmObservation.921	urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
OmObservation.931	urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
OmObservation.941	urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
OmObservation.951	urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
	urn:ogc:def:property:OGC::Temperature
OmObservation.1	21.0
OmObservation.2	20.7
OmObservation.3	20.5
OmObservation.4	20.1
OmObservation.5	19.9
OmObservation.6	19.7
OmObservation.7	19.5
OmObservation.8	19.4
OmObservation.9	19.3
OmObservation.10	19.1
OmObservation.11	18.8
OmObservation.12	18.4
OmObservation.13	18.3
OmObservation.14	18.0
OmObservation.15	17.8
OmObservation.16	17.7
OmObservation.17	17.6
OmObservation.18	17.6
OmObservation.19	17.4
OmObservation.20	17.2
OmObservation.21	17.0

OmObservation.22	16.9
OmObservation.23	16.8
OmObservation.24	16.8
OmObservation.25	17.0
OmObservation.26	17.0
OmObservation.27	17.4
OmObservation.28	17.9
OmObservation.29	18.3
OmObservation.30	19.3
OmObservation.31	19.5
OmObservation.32	20.4
OmObservation.33	20.4
OmObservation.34	21.0
OmObservation.35	21.4
OmObservation.36	21.5
OmObservation.37	21.8
OmObservation.38	22.0
OmObservation.39	22.6
OmObservation.40	24.0
OmObservation.41	24.7
OmObservation.42	25.4
OmObservation.43	25.9
OmObservation.44	26.9
OmObservation.45	27.5
OmObservation.46	27.4
OmObservation.47	27.8
OmObservation.48	27.5
OmObservation.49	27.8
OmObservation.50	27.8
OmObservation.51	27.6
OmObservation.52	27.8
OmObservation.53	28.1
OmObservation.54	28.1
OmObservation.55	27.9
OmObservation.56	28.1
OmObservation.57	28.4
OmObservation.58	28.4
OmObservation.59	28.2
OmObservation.60	28.1
OmObservation.61	28.2
OmObservation.62	27.8
OmObservation.63	27.9
OmObservation.64	28.0
OmObservation.65	27.8
OmObservation.66	27.9
OmObservation.67	27.8
OmObservation.68	27.8
OmObservation.69	27.8
OmObservation.70	27.7
OmObservation.71	27.6

OmObservation.72	27.6
OmObservation.73	27.5
OmObservation.74	27.3
OmObservation.75	27.1
OmObservation.76	26.7
OmObservation.77	26.4
OmObservation.78	26.1
OmObservation.79	25.7
OmObservation.80	25.4
OmObservation.81	24.8
OmObservation.82	24.4
OmObservation.83	24.0
OmObservation.84	23.5
OmObservation.85	23.3
OmObservation.86	23.0
OmObservation.87	22.8
OmObservation.88	22.4
OmObservation.89	21.9
OmObservation.90	21.6
OmObservation.91	21.4
OmObservation.92	21.0
OmObservation.93	20.8
OmObservation.94	20.6
OmObservation.95	20.3
OmObservation.96	20.0
OmObservation.110	22.5
OmObservation.210	22.2
OmObservation.310	22.0
OmObservation.410	21.9
OmObservation.510	21.5
OmObservation.610	21.0
OmObservation.710	21.0
OmObservation.810	20.5
OmObservation.97	20.5
OmObservation.101	20.4
OmObservation.111	20.1
OmObservation.121	19.8
OmObservation.131	19.5
OmObservation.141	19.3
OmObservation.151	19.0
OmObservation.161	18.8
OmObservation.171	18.6
OmObservation.181	18.4
OmObservation.191	18.5
OmObservation.201	18.4
OmObservation.211	18.2
OmObservation.221	18.0
OmObservation.231	18.0
OmObservation.241	17.9
OmObservation.251	18.1

OmObservation.261	18.0
OmObservation.271	18.2
OmObservation.281	18.6
OmObservation.291	18.8
OmObservation.301	20.6
OmObservation.311	21.6
OmObservation.321	22.5
OmObservation.331	23.4
OmObservation.341	24.5
OmObservation.351	25.2
OmObservation.361	26.2
OmObservation.371	26.8
OmObservation.381	28.0
OmObservation.391	29.0
OmObservation.401	30.0
OmObservation.411	30.6
OmObservation.421	31.7
OmObservation.431	31.3
OmObservation.441	31.6
OmObservation.451	31.9
OmObservation.461	32.8
OmObservation.471	32.6
OmObservation.481	33.9
OmObservation.491	32.4
OmObservation.501	33.3
OmObservation.511	33.2
OmObservation.521	34.2
OmObservation.531	34.0
OmObservation.541	34.6
OmObservation.551	35.2
OmObservation.561	35.7
OmObservation.571	34.1
OmObservation.581	34.6
OmObservation.591	37.0
OmObservation.601	37.7
OmObservation.611	37.8
OmObservation.621	37.8
OmObservation.631	37.6
OmObservation.641	36.9
OmObservation.651	36.0
OmObservation.661	35.8
OmObservation.671	35.3
OmObservation.681	34.9
OmObservation.691	34.9
OmObservation.701	34.4
OmObservation.711	34.0
OmObservation.721	33.6
OmObservation.731	33.5
OmObservation.741	33.2
OmObservation.751	33.2

OmObservation.761	33.2
OmObservation.771	34.0
OmObservation.781	34.0
OmObservation.791	33.2
OmObservation.801	32.2
OmObservation.811	31.6
OmObservation.821	30.9
OmObservation.831	26.1
OmObservation.841	25.3
OmObservation.851	24.6
OmObservation.861	24.3
OmObservation.871	23.8
OmObservation.881	23.1
OmObservation.891	23.2
OmObservation.901	23.0
OmObservation.911	22.8
OmObservation.921	22.6
OmObservation.931	22.6
OmObservation.941	19.7
OmObservation.951	19.4

Additional metadata, like units of measurement or definitions, is accessible via `attributes(...)` for every column of the data frame.

```
> temperature.attrs <- attributes(
+   obs.temp.result[["urn:ogc:def:property:OGC::Temperature"]]
$name
[1] "urn:ogc:def:property:OGC::Temperature"

$definition
[1] "urn:ogc:def:property:OGC::Temperature"

$`unit of measurement`
[1] "Cel"
```

**Spatial Information** can be stored in an observation in several ways: (i) as a usual data attribute which is directly contained in the result `data.frame`, (ii) within a feature collection in the observation. In the latter case the utility functions `sosCoordinates(...)` and `sosFeatureIds(...)` can be used to extract the coordinates respectively the identifiers from `OmObservationCollection` or `OmObservation` classes. A variety of feature types `gml:Point` or `sa:SamplingPoint` are supported by `sosCoordinates(...)`.

```
> obs.temp.foiIDs <- sosFeatureIds(obs.temp)
> obs.temp.coords <- sosCoordinates(obs.temp)
> obs.temp.coords.1 <- sosCoordinates(obs.temp[[1]])
```

An observation collection also contains a bounding box of the contained observations, which can be extracted with the function `sosBoundedBy(...)`. The optional attribute `bbox` can be used to obtain a bounding box matrix as used by package `sp`.

```

> sosBoundedBy(obs.temp)

$srsName
[1] "urn:ogc:def:crs:EPSG:4326"

$lowerCorner
[1] "46.611644 7.6103"

$upperCorner
[1] "51.9412 13.883498"

> sosBoundedBy(obs.temp, bbox = TRUE)

           min      max
coords.lon 7.61030 13.88350
coords.lat 46.61164 51.94120

```

The combination of data values and coordinates strongly depends on the use case and existing spatial information. In the case of coordinates encoded in the features, a matching of the two data frames can easily be accomplished manually with the function `merge()`.

```

> result.names <- names(obs.temp.result)
> coords.names <- names(obs.temp.coords)
> print(toString(result.names))

[1] "Time, feature, urn:ogc:def:property:OGC::Temperature"

> print(toString(coords.names))

[1] "lat, lon, SRS, feature"

> obs.temp.data <- merge(
+   x = obs.temp.result,
+   y = obs.temp.coords,
+   by.x = result.names[[2]],
+   by.y = coords.names[[4]])

```

The default column name for the feature identifiers is `feature`. If the name of the feature identifier attribute in the data table matches (which is the case for **52°North** SOS), `merge` does not need additional information. In that case, the merging reduces to the following code:

```

> obs.temp.data <- merge(x = obs.temp.result,
+   y = obs.temp.coords)
> print(obs.temp.data)

                                     feature
1  urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
2  urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
3  urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
4  urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93

```



[illegible]



[illegible]

155 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 156 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 157 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 158 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 159 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 160 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 161 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 162 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 163 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 164 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 165 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 166 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 167 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 168 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 169 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 170 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 171 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 172 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 173 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 174 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 175 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 176 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 177 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 178 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 179 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 180 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 181 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 182 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 183 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 184 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 185 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 186 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 187 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 188 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 189 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 190 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111  
 191 urn:ogc:object:feature:OSIRIS-HWS:efeb807b-bd24-4128-a920-f6729bcdd111

	Time	urn:ogc:def:property:OGC::Temperature	lat	lon
1	2009-08-20 00:15:00	22.5	51.94120	7.61030
2	2009-08-20 00:30:00	22.2	51.94120	7.61030
3	2009-08-20 00:45:00	22.0	51.94120	7.61030
4	2009-08-20 01:00:00	21.9	51.94120	7.61030
5	2009-08-20 01:15:00	21.5	51.94120	7.61030
6	2009-08-20 01:30:00	21.0	51.94120	7.61030
7	2009-08-20 01:45:00	21.0	51.94120	7.61030
8	2009-08-20 02:00:00	20.5	51.94120	7.61030
9	2009-08-20 02:15:00	20.5	51.94120	7.61030
10	2009-08-20 02:30:00	20.4	51.94120	7.61030
11	2009-08-20 02:45:00	20.1	51.94120	7.61030
12	2009-08-20 03:00:00	19.8	51.94120	7.61030

13	2009-08-20	03:15:00	19.5	51.94120	7.61030
14	2009-08-20	03:30:00	19.3	51.94120	7.61030
15	2009-08-20	03:45:00	19.0	51.94120	7.61030
16	2009-08-20	04:00:00	18.8	51.94120	7.61030
17	2009-08-20	04:15:00	18.6	51.94120	7.61030
18	2009-08-20	04:30:00	18.4	51.94120	7.61030
19	2009-08-20	04:45:00	18.5	51.94120	7.61030
20	2009-08-20	05:00:00	18.4	51.94120	7.61030
21	2009-08-20	05:15:00	18.2	51.94120	7.61030
22	2009-08-20	05:30:00	18.0	51.94120	7.61030
23	2009-08-20	05:45:00	18.0	51.94120	7.61030
24	2009-08-20	06:00:00	17.9	51.94120	7.61030
25	2009-08-20	06:15:00	18.1	51.94120	7.61030
26	2009-08-20	06:30:00	18.0	51.94120	7.61030
27	2009-08-20	06:45:00	18.2	51.94120	7.61030
28	2009-08-20	07:00:00	18.6	51.94120	7.61030
29	2009-08-20	07:15:00	18.8	51.94120	7.61030
30	2009-08-20	07:30:00	20.6	51.94120	7.61030
31	2009-08-20	07:45:00	21.6	51.94120	7.61030
32	2009-08-20	08:00:00	22.5	51.94120	7.61030
33	2009-08-20	08:15:00	23.4	51.94120	7.61030
34	2009-08-20	08:30:00	24.5	51.94120	7.61030
35	2009-08-20	08:44:00	25.2	51.94120	7.61030
36	2009-08-20	09:00:00	26.2	51.94120	7.61030
37	2009-08-20	09:15:00	26.8	51.94120	7.61030
38	2009-08-20	09:30:00	28.0	51.94120	7.61030
39	2009-08-20	09:45:00	29.0	51.94120	7.61030
40	2009-08-20	10:00:00	30.0	51.94120	7.61030
41	2009-08-20	10:15:00	30.6	51.94120	7.61030
42	2009-08-20	10:30:00	31.7	51.94120	7.61030
43	2009-08-20	10:45:00	31.3	51.94120	7.61030
44	2009-08-20	11:00:00	31.6	51.94120	7.61030
45	2009-08-20	11:15:00	31.9	51.94120	7.61030
46	2009-08-20	11:30:00	32.8	51.94120	7.61030
47	2009-08-20	11:45:00	32.6	51.94120	7.61030
48	2009-08-20	12:00:00	33.9	51.94120	7.61030
49	2009-08-20	12:15:00	32.4	51.94120	7.61030
50	2009-08-20	12:30:00	33.3	51.94120	7.61030
51	2009-08-20	12:45:00	33.2	51.94120	7.61030
52	2009-08-20	13:00:00	34.2	51.94120	7.61030
53	2009-08-20	13:15:00	34.0	51.94120	7.61030
54	2009-08-20	13:30:00	34.6	51.94120	7.61030
55	2009-08-20	13:45:00	35.2	51.94120	7.61030
56	2009-08-20	14:00:00	35.7	51.94120	7.61030
57	2009-08-20	14:15:00	34.1	51.94120	7.61030
58	2009-08-20	14:30:00	34.6	51.94120	7.61030
59	2009-08-20	14:45:00	37.0	51.94120	7.61030
60	2009-08-20	15:00:00	37.7	51.94120	7.61030
61	2009-08-20	15:15:00	37.8	51.94120	7.61030
62	2009-08-20	15:30:00	37.8	51.94120	7.61030

63	2009-08-20	15:45:00	37.6	51.94120	7.61030
64	2009-08-20	16:00:00	36.9	51.94120	7.61030
65	2009-08-20	16:15:00	36.0	51.94120	7.61030
66	2009-08-20	16:30:00	35.8	51.94120	7.61030
67	2009-08-20	16:45:00	35.3	51.94120	7.61030
68	2009-08-20	17:00:00	34.9	51.94120	7.61030
69	2009-08-20	17:15:00	34.9	51.94120	7.61030
70	2009-08-20	17:30:00	34.4	51.94120	7.61030
71	2009-08-20	17:45:00	34.0	51.94120	7.61030
72	2009-08-20	18:00:00	33.6	51.94120	7.61030
73	2009-08-20	18:15:00	33.5	51.94120	7.61030
74	2009-08-20	18:30:00	33.2	51.94120	7.61030
75	2009-08-20	18:45:00	33.2	51.94120	7.61030
76	2009-08-20	19:00:00	33.2	51.94120	7.61030
77	2009-08-20	19:15:00	34.0	51.94120	7.61030
78	2009-08-20	19:30:00	34.0	51.94120	7.61030
79	2009-08-20	19:45:00	33.2	51.94120	7.61030
80	2009-08-20	20:00:00	32.2	51.94120	7.61030
81	2009-08-20	20:15:00	31.6	51.94120	7.61030
82	2009-08-20	20:30:00	30.9	51.94120	7.61030
83	2009-08-20	20:45:00	26.1	51.94120	7.61030
84	2009-08-20	21:00:00	25.3	51.94120	7.61030
85	2009-08-20	21:15:00	24.6	51.94120	7.61030
86	2009-08-20	21:30:00	24.3	51.94120	7.61030
87	2009-08-20	21:45:00	23.8	51.94120	7.61030
88	2009-08-20	22:00:00	23.1	51.94120	7.61030
89	2009-08-20	22:15:00	23.2	51.94120	7.61030
90	2009-08-20	22:30:00	23.0	51.94120	7.61030
91	2009-08-20	22:45:00	22.8	51.94120	7.61030
92	2009-08-20	23:00:00	22.6	51.94120	7.61030
93	2009-08-20	23:15:00	22.6	51.94120	7.61030
94	2009-08-20	23:30:00	19.7	51.94120	7.61030
95	2009-08-20	23:45:00	19.4	51.94120	7.61030
96	2009-08-20	00:02:00	21.0	46.61164	13.88350
97	2009-08-20	00:17:00	20.7	46.61164	13.88350
98	2009-08-20	00:32:00	20.5	46.61164	13.88350
99	2009-08-20	00:47:00	20.1	46.61164	13.88350
100	2009-08-20	01:02:00	19.9	46.61164	13.88350
101	2009-08-20	01:17:00	19.7	46.61164	13.88350
102	2009-08-20	01:32:00	19.5	46.61164	13.88350
103	2009-08-20	01:47:00	19.4	46.61164	13.88350
104	2009-08-20	02:02:00	19.3	46.61164	13.88350
105	2009-08-20	02:17:00	19.1	46.61164	13.88350
106	2009-08-20	02:32:00	18.8	46.61164	13.88350
107	2009-08-20	02:47:00	18.4	46.61164	13.88350
108	2009-08-20	03:02:00	18.3	46.61164	13.88350
109	2009-08-20	03:17:00	18.0	46.61164	13.88350
110	2009-08-20	03:32:00	17.8	46.61164	13.88350
111	2009-08-20	03:47:00	17.7	46.61164	13.88350
112	2009-08-20	04:02:00	17.6	46.61164	13.88350

113	2009-08-20	04:17:00	17.6	46.61164	13.88350
114	2009-08-20	04:32:00	17.4	46.61164	13.88350
115	2009-08-20	04:47:00	17.2	46.61164	13.88350
116	2009-08-20	05:02:00	17.0	46.61164	13.88350
117	2009-08-20	05:17:00	16.9	46.61164	13.88350
118	2009-08-20	05:32:00	16.8	46.61164	13.88350
119	2009-08-20	05:47:00	16.8	46.61164	13.88350
120	2009-08-20	06:02:00	17.0	46.61164	13.88350
121	2009-08-20	06:17:00	17.0	46.61164	13.88350
122	2009-08-20	06:32:00	17.4	46.61164	13.88350
123	2009-08-20	06:47:00	17.9	46.61164	13.88350
124	2009-08-20	07:02:00	18.3	46.61164	13.88350
125	2009-08-20	07:17:00	19.3	46.61164	13.88350
126	2009-08-20	07:32:00	19.5	46.61164	13.88350
127	2009-08-20	07:47:00	20.4	46.61164	13.88350
128	2009-08-20	08:02:00	20.4	46.61164	13.88350
129	2009-08-20	08:17:00	21.0	46.61164	13.88350
130	2009-08-20	08:32:00	21.4	46.61164	13.88350
131	2009-08-20	08:47:00	21.5	46.61164	13.88350
132	2009-08-20	09:02:00	21.8	46.61164	13.88350
133	2009-08-20	09:17:00	22.0	46.61164	13.88350
134	2009-08-20	09:32:00	22.6	46.61164	13.88350
135	2009-08-20	09:47:00	24.0	46.61164	13.88350
136	2009-08-20	10:02:00	24.7	46.61164	13.88350
137	2009-08-20	10:17:00	25.4	46.61164	13.88350
138	2009-08-20	10:32:00	25.9	46.61164	13.88350
139	2009-08-20	10:47:00	26.9	46.61164	13.88350
140	2009-08-20	11:02:00	27.5	46.61164	13.88350
141	2009-08-20	11:17:00	27.4	46.61164	13.88350
142	2009-08-20	11:32:00	27.8	46.61164	13.88350
143	2009-08-20	11:47:00	27.5	46.61164	13.88350
144	2009-08-20	12:02:00	27.8	46.61164	13.88350
145	2009-08-20	12:17:00	27.8	46.61164	13.88350
146	2009-08-20	12:32:00	27.6	46.61164	13.88350
147	2009-08-20	12:47:00	27.8	46.61164	13.88350
148	2009-08-20	13:02:00	28.1	46.61164	13.88350
149	2009-08-20	13:17:00	28.1	46.61164	13.88350
150	2009-08-20	13:32:00	27.9	46.61164	13.88350
151	2009-08-20	13:47:00	28.1	46.61164	13.88350
152	2009-08-20	14:02:00	28.4	46.61164	13.88350
153	2009-08-20	14:17:00	28.4	46.61164	13.88350
154	2009-08-20	14:32:00	28.2	46.61164	13.88350
155	2009-08-20	14:47:00	28.1	46.61164	13.88350
156	2009-08-20	15:02:00	28.2	46.61164	13.88350
157	2009-08-20	15:17:00	27.8	46.61164	13.88350
158	2009-08-20	15:32:00	27.9	46.61164	13.88350
159	2009-08-20	15:47:00	28.0	46.61164	13.88350
160	2009-08-20	16:02:00	27.8	46.61164	13.88350
161	2009-08-20	16:17:00	27.9	46.61164	13.88350
162	2009-08-20	16:32:00	27.8	46.61164	13.88350

163	2009-08-20 16:47:00	27.8	46.61164	13.88350
164	2009-08-20 17:02:00	27.8	46.61164	13.88350
165	2009-08-20 17:17:00	27.7	46.61164	13.88350
166	2009-08-20 17:32:00	27.6	46.61164	13.88350
167	2009-08-20 17:47:00	27.6	46.61164	13.88350
168	2009-08-20 18:02:00	27.5	46.61164	13.88350
169	2009-08-20 18:17:00	27.3	46.61164	13.88350
170	2009-08-20 18:32:00	27.1	46.61164	13.88350
171	2009-08-20 18:47:00	26.7	46.61164	13.88350
172	2009-08-20 19:02:00	26.4	46.61164	13.88350
173	2009-08-20 19:17:00	26.1	46.61164	13.88350
174	2009-08-20 19:32:00	25.7	46.61164	13.88350
175	2009-08-20 19:47:00	25.4	46.61164	13.88350
176	2009-08-20 20:02:00	24.8	46.61164	13.88350
177	2009-08-20 20:17:00	24.4	46.61164	13.88350
178	2009-08-20 20:32:00	24.0	46.61164	13.88350
179	2009-08-20 20:47:00	23.5	46.61164	13.88350
180	2009-08-20 21:02:00	23.3	46.61164	13.88350
181	2009-08-20 21:17:00	23.0	46.61164	13.88350
182	2009-08-20 21:32:00	22.8	46.61164	13.88350
183	2009-08-20 21:47:00	22.4	46.61164	13.88350
184	2009-08-20 22:02:00	21.9	46.61164	13.88350
185	2009-08-20 22:17:00	21.6	46.61164	13.88350
186	2009-08-20 22:32:00	21.4	46.61164	13.88350
187	2009-08-20 22:47:00	21.0	46.61164	13.88350
188	2009-08-20 23:02:00	20.8	46.61164	13.88350
189	2009-08-20 23:17:00	20.6	46.61164	13.88350
190	2009-08-20 23:32:00	20.3	46.61164	13.88350
191	2009-08-20 23:47:00	20.0	46.61164	13.88350

#### SRS

1	urn:ogc:def:crs:EPSG:4326
2	urn:ogc:def:crs:EPSG:4326
3	urn:ogc:def:crs:EPSG:4326
4	urn:ogc:def:crs:EPSG:4326
5	urn:ogc:def:crs:EPSG:4326
6	urn:ogc:def:crs:EPSG:4326
7	urn:ogc:def:crs:EPSG:4326
8	urn:ogc:def:crs:EPSG:4326
9	urn:ogc:def:crs:EPSG:4326
10	urn:ogc:def:crs:EPSG:4326
11	urn:ogc:def:crs:EPSG:4326
12	urn:ogc:def:crs:EPSG:4326
13	urn:ogc:def:crs:EPSG:4326
14	urn:ogc:def:crs:EPSG:4326
15	urn:ogc:def:crs:EPSG:4326
16	urn:ogc:def:crs:EPSG:4326
17	urn:ogc:def:crs:EPSG:4326
18	urn:ogc:def:crs:EPSG:4326
19	urn:ogc:def:crs:EPSG:4326
20	urn:ogc:def:crs:EPSG:4326

21 urn:ogc:def:crs:EPSG:4326  
22 urn:ogc:def:crs:EPSG:4326  
23 urn:ogc:def:crs:EPSG:4326  
24 urn:ogc:def:crs:EPSG:4326  
25 urn:ogc:def:crs:EPSG:4326  
26 urn:ogc:def:crs:EPSG:4326  
27 urn:ogc:def:crs:EPSG:4326  
28 urn:ogc:def:crs:EPSG:4326  
29 urn:ogc:def:crs:EPSG:4326  
30 urn:ogc:def:crs:EPSG:4326  
31 urn:ogc:def:crs:EPSG:4326  
32 urn:ogc:def:crs:EPSG:4326  
33 urn:ogc:def:crs:EPSG:4326  
34 urn:ogc:def:crs:EPSG:4326  
35 urn:ogc:def:crs:EPSG:4326  
36 urn:ogc:def:crs:EPSG:4326  
37 urn:ogc:def:crs:EPSG:4326  
38 urn:ogc:def:crs:EPSG:4326  
39 urn:ogc:def:crs:EPSG:4326  
40 urn:ogc:def:crs:EPSG:4326  
41 urn:ogc:def:crs:EPSG:4326  
42 urn:ogc:def:crs:EPSG:4326  
43 urn:ogc:def:crs:EPSG:4326  
44 urn:ogc:def:crs:EPSG:4326  
45 urn:ogc:def:crs:EPSG:4326  
46 urn:ogc:def:crs:EPSG:4326  
47 urn:ogc:def:crs:EPSG:4326  
48 urn:ogc:def:crs:EPSG:4326  
49 urn:ogc:def:crs:EPSG:4326  
50 urn:ogc:def:crs:EPSG:4326  
51 urn:ogc:def:crs:EPSG:4326  
52 urn:ogc:def:crs:EPSG:4326  
53 urn:ogc:def:crs:EPSG:4326  
54 urn:ogc:def:crs:EPSG:4326  
55 urn:ogc:def:crs:EPSG:4326  
56 urn:ogc:def:crs:EPSG:4326  
57 urn:ogc:def:crs:EPSG:4326  
58 urn:ogc:def:crs:EPSG:4326  
59 urn:ogc:def:crs:EPSG:4326  
60 urn:ogc:def:crs:EPSG:4326  
61 urn:ogc:def:crs:EPSG:4326  
62 urn:ogc:def:crs:EPSG:4326  
63 urn:ogc:def:crs:EPSG:4326  
64 urn:ogc:def:crs:EPSG:4326  
65 urn:ogc:def:crs:EPSG:4326  
66 urn:ogc:def:crs:EPSG:4326  
67 urn:ogc:def:crs:EPSG:4326  
68 urn:ogc:def:crs:EPSG:4326  
69 urn:ogc:def:crs:EPSG:4326  
70 urn:ogc:def:crs:EPSG:4326

71 urn:ogc:def:crs:EPSG:4326  
72 urn:ogc:def:crs:EPSG:4326  
73 urn:ogc:def:crs:EPSG:4326  
74 urn:ogc:def:crs:EPSG:4326  
75 urn:ogc:def:crs:EPSG:4326  
76 urn:ogc:def:crs:EPSG:4326  
77 urn:ogc:def:crs:EPSG:4326  
78 urn:ogc:def:crs:EPSG:4326  
79 urn:ogc:def:crs:EPSG:4326  
80 urn:ogc:def:crs:EPSG:4326  
81 urn:ogc:def:crs:EPSG:4326  
82 urn:ogc:def:crs:EPSG:4326  
83 urn:ogc:def:crs:EPSG:4326  
84 urn:ogc:def:crs:EPSG:4326  
85 urn:ogc:def:crs:EPSG:4326  
86 urn:ogc:def:crs:EPSG:4326  
87 urn:ogc:def:crs:EPSG:4326  
88 urn:ogc:def:crs:EPSG:4326  
89 urn:ogc:def:crs:EPSG:4326  
90 urn:ogc:def:crs:EPSG:4326  
91 urn:ogc:def:crs:EPSG:4326  
92 urn:ogc:def:crs:EPSG:4326  
93 urn:ogc:def:crs:EPSG:4326  
94 urn:ogc:def:crs:EPSG:4326  
95 urn:ogc:def:crs:EPSG:4326  
96 urn:ogc:def:crs:EPSG:4326  
97 urn:ogc:def:crs:EPSG:4326  
98 urn:ogc:def:crs:EPSG:4326  
99 urn:ogc:def:crs:EPSG:4326  
100 urn:ogc:def:crs:EPSG:4326  
101 urn:ogc:def:crs:EPSG:4326  
102 urn:ogc:def:crs:EPSG:4326  
103 urn:ogc:def:crs:EPSG:4326  
104 urn:ogc:def:crs:EPSG:4326  
105 urn:ogc:def:crs:EPSG:4326  
106 urn:ogc:def:crs:EPSG:4326  
107 urn:ogc:def:crs:EPSG:4326  
108 urn:ogc:def:crs:EPSG:4326  
109 urn:ogc:def:crs:EPSG:4326  
110 urn:ogc:def:crs:EPSG:4326  
111 urn:ogc:def:crs:EPSG:4326  
112 urn:ogc:def:crs:EPSG:4326  
113 urn:ogc:def:crs:EPSG:4326  
114 urn:ogc:def:crs:EPSG:4326  
115 urn:ogc:def:crs:EPSG:4326  
116 urn:ogc:def:crs:EPSG:4326  
117 urn:ogc:def:crs:EPSG:4326  
118 urn:ogc:def:crs:EPSG:4326  
119 urn:ogc:def:crs:EPSG:4326  
120 urn:ogc:def:crs:EPSG:4326



121 urn:ogc:def:crs:EPSG:4326  
122 urn:ogc:def:crs:EPSG:4326  
123 urn:ogc:def:crs:EPSG:4326  
124 urn:ogc:def:crs:EPSG:4326  
125 urn:ogc:def:crs:EPSG:4326  
126 urn:ogc:def:crs:EPSG:4326  
127 urn:ogc:def:crs:EPSG:4326  
128 urn:ogc:def:crs:EPSG:4326  
129 urn:ogc:def:crs:EPSG:4326  
130 urn:ogc:def:crs:EPSG:4326  
131 urn:ogc:def:crs:EPSG:4326  
132 urn:ogc:def:crs:EPSG:4326  
133 urn:ogc:def:crs:EPSG:4326  
134 urn:ogc:def:crs:EPSG:4326  
135 urn:ogc:def:crs:EPSG:4326  
136 urn:ogc:def:crs:EPSG:4326  
137 urn:ogc:def:crs:EPSG:4326  
138 urn:ogc:def:crs:EPSG:4326  
139 urn:ogc:def:crs:EPSG:4326  
140 urn:ogc:def:crs:EPSG:4326  
141 urn:ogc:def:crs:EPSG:4326  
142 urn:ogc:def:crs:EPSG:4326  
143 urn:ogc:def:crs:EPSG:4326  
144 urn:ogc:def:crs:EPSG:4326  
145 urn:ogc:def:crs:EPSG:4326  
146 urn:ogc:def:crs:EPSG:4326  
147 urn:ogc:def:crs:EPSG:4326  
148 urn:ogc:def:crs:EPSG:4326  
149 urn:ogc:def:crs:EPSG:4326  
150 urn:ogc:def:crs:EPSG:4326  
151 urn:ogc:def:crs:EPSG:4326  
152 urn:ogc:def:crs:EPSG:4326  
153 urn:ogc:def:crs:EPSG:4326  
154 urn:ogc:def:crs:EPSG:4326  
155 urn:ogc:def:crs:EPSG:4326  
156 urn:ogc:def:crs:EPSG:4326  
157 urn:ogc:def:crs:EPSG:4326  
158 urn:ogc:def:crs:EPSG:4326  
159 urn:ogc:def:crs:EPSG:4326  
160 urn:ogc:def:crs:EPSG:4326  
161 urn:ogc:def:crs:EPSG:4326  
162 urn:ogc:def:crs:EPSG:4326  
163 urn:ogc:def:crs:EPSG:4326  
164 urn:ogc:def:crs:EPSG:4326  
165 urn:ogc:def:crs:EPSG:4326  
166 urn:ogc:def:crs:EPSG:4326  
167 urn:ogc:def:crs:EPSG:4326  
168 urn:ogc:def:crs:EPSG:4326  
169 urn:ogc:def:crs:EPSG:4326  
170 urn:ogc:def:crs:EPSG:4326

```

171 urn:ogc:def:crs:EPSG:4326
172 urn:ogc:def:crs:EPSG:4326
173 urn:ogc:def:crs:EPSG:4326
174 urn:ogc:def:crs:EPSG:4326
175 urn:ogc:def:crs:EPSG:4326
176 urn:ogc:def:crs:EPSG:4326
177 urn:ogc:def:crs:EPSG:4326
178 urn:ogc:def:crs:EPSG:4326
179 urn:ogc:def:crs:EPSG:4326
180 urn:ogc:def:crs:EPSG:4326
181 urn:ogc:def:crs:EPSG:4326
182 urn:ogc:def:crs:EPSG:4326
183 urn:ogc:def:crs:EPSG:4326
184 urn:ogc:def:crs:EPSG:4326
185 urn:ogc:def:crs:EPSG:4326
186 urn:ogc:def:crs:EPSG:4326
187 urn:ogc:def:crs:EPSG:4326
188 urn:ogc:def:crs:EPSG:4326
189 urn:ogc:def:crs:EPSG:4326
190 urn:ogc:def:crs:EPSG:4326
191 urn:ogc:def:crs:EPSG:4326

```

And in that case, you can even save that step by specifying the attribute coordinates of the function `sosResult` which includes the merge of data values and coordinates as shown above.

```
> sosResult(obs.temp, coordinates = TRUE)
```

### 5.3.5 Temporal Filtering

The possibly most typical temporal filter is a period of time for which measurements are of interest.

```

> # temporal interval creation based on POSIXt classes
> lastWeek.period <- sosCreateTimePeriod(sos = mySOS,
+   begin = (Sys.time() - 3600 * 24 * 7), end = Sys.time())
> oneWeek.period <- sosCreateTimePeriod(sos = mySOS,
+   begin = as.POSIXct("2010/01/01"), end = as.POSIXct("2010/01/07"))
> oneWeek.eventTime <- sosCreateEventTimeList(oneWeek.period)

```

Please note that the create function `sosCreateEventTimeList()` also wraps the created objects in a list as expected by the method `getObservation(...)`.

The most comfortable creation function for event times is `sosCreateTime(...)`. It supports time intervals with starttime and endtime as character strings separated by `::` or `/` as defined by ISO 8601<sup>16</sup>. The respective time stamps have to be parsable by `as.POSIXct(...)`. If either one of the time stamps is missing, a `GmlTimePosition` wrapped in the appropriate relative temporal operator, e.g. “before”.

```
> sosCreateTime(sos = mySOS, time = "2007-07-07 07:00::2008-08-08 08:00")
```

<sup>16</sup>[http://en.wikipedia.org/wiki/ISO\\_8601#Time\\_intervals](http://en.wikipedia.org/wiki/ISO_8601#Time_intervals)

```
[[1]]
Object of class SosEventTime:
  TM_During: GmlTimePeriod: [ GmlTimePosition [ time: 2007-07-07 07:00:00 ]
--> GmlTimePosition [ time: 2008-08-08 08:00:00 ] ]

> sosCreateTime(sos = mySOS, time = "2007-07-07 07:00/2010-10-10 10:00")
```

```
[[1]]
Object of class SosEventTime:
  TM_During: GmlTimePeriod: [ GmlTimePosition [ time: 2007-07-07 07:00:00 ]
--> GmlTimePosition [ time: 2010-10-10 10:00:00 ] ]

> sosCreateTime(sos = mySOS, time = "2007-08-05")
```

```
[[1]]
Object of class SosEventTime:
  TM_Before: GmlTimePosition [ time: 2007-08-05 ]

> sosCreateTime(sos = mySOS, time = "2007-08-05/")
```

```
[[1]]
Object of class SosEventTime:
  TM_After: GmlTimePosition [ time: 2007-08-05 ]
```

**Example: What was the minimum, average and maximum temperature during one week?**

```
[sos4R] Received response (size: 65000 bytes), starting parsing ...
[sos4R] Finished getObservation to http://v-swe.uni-muenster.de:8080/WeatherSOS/sos
--> received 1 observation(s) having 575 result values [ 575 ].
[sos4R] Original document saved: obs.oneWeek.xml
```

```
> obs.oneWeek <- getObservation(sos = mySOS,
+   offering = off.temp,
+   # actually not required, as default is 'all procedures':
+   procedure = sosProcedures(off.temp),
+   eventTime = oneWeek.eventTime)
```

```
[sos4R] Received response (size: 65000 bytes), starting parsing ...
[sos4R] Finished getObservation to http://v-swe.uni-muenster.de:8080/WeatherSOS/sos
--> received 1 observation(s) having 575 result values [ 575 ].
```

```
> obs.oneWeek.result <- sosResult(obs.oneWeek)
> summary(obs.oneWeek.result)
```

```
      Time
Min.   :2010-01-01 00:15:00
1st Qu.:2010-01-02 12:08:00
Median :2010-01-04 00:01:00
Mean    :2010-01-04 00:00:12
3rd Qu.:2010-01-05 11:52:30
Max.    :2010-01-06 23:45:00
```

```
feature
urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93:575
```

```
urn:ogc:def:property:OGC::Temperature
Min.      :-8.70
1st Qu.   :-4.70
Median    :-3.40
Mean      :-3.45
3rd Qu.   :-1.90
Max.      :-0.20
```

The default temporal operator is “during”, but others are supported as well (see section 2). The next example shows how to create a temporal filter for all observations taken after a certain point in time. Here the creation function creates just one object of class `SosEventTime` which must be added to a list manually before passing it to `getObservation(...)`.

```
> lastDay.instant <- sosCreateTimeInstant(
+   time = as.POSIXct(Sys.time() - 3600 * 24), sos = mySOS)
> lastDay.eventTime <- sosCreateEventTime(time = lastDay.instant,
+   operator = SosSupportedTemporalOperators()[["TM_After"]])
> print(lastDay.eventTime)

Object of class SosEventTime:
      TM_After: GmlTimePosition [ time: 2011-03-21 03:06:39 ]
```

### 5.3.6 Spatial Filtering

The possibly most typical spatial filter is a bounding box<sup>17</sup> within which measurements of interest must have been made. Here the creation function returns an object of class `OgcBBOX`, which can be wrapped in an object of class `SosFeatureOfInterest`, which is passed into the `get-observation` call.

```
> sept09.period <- sosCreateTimePeriod(sos = mySOS,
+   begin = as.POSIXct("2009-09-01 00:00"),
+   end = as.POSIXct("2009-09-30 00:00"))
> sept09.eventTimeList <- sosCreateEventTimeList(
+   sept09.period)
> obs.sept09 <- getObservation(sos = mySOS,
+   offering = off.temp,
+   eventTime = sept09.eventTimeList)

[sos4R] Received response (size: 567248 bytes), starting parsing ...
[sos4R] Finished getObservation to http://v-swe.uni-muenster.de:8080/WeatherSOS/sos
--> received 2 observation(s) having 5291 result values [ 2647, 2644 ].
```

<sup>17</sup>[http://en.wikipedia.org/wiki/Bounding\\_box](http://en.wikipedia.org/wiki/Bounding_box)

```

> request.bbox <- sosCreateBBBOX(lowLat = 50.0, lowLon = 5.0,
+   uppLat = 55.0, uppLon = 10.0,
+   srsName = "urn:ogc:def:crs:EPSG:4326")
> request.bbox.foi <- sosCreateFeatureOfInterest(
+   spatialOps = request.bbox)
> obs.sept09.bbox <- getObservation(sos = mySOS,
+   offering = off.temp,
+   featureOfInterest = request.bbox.foi,
+   eventTime = sept09.eventTimeList)

[sos4R] Received response (size: 284184 bytes), starting parsing ...
[sos4R] Finished getObservation to http://v-swe.uni-muenster.de:8080/WeatherSOS/sos
--> received 1 observation(s) having 2644 result values [ 2644 ].

```

Unfiltered versus spatially filtered coordinates of the responses:

```

> print(sosCoordinates(obs.sept09)[,1:2])

           lat      lon
0mObservation 46.61164 13.88350
0mObservation1 51.94120  7.61030

> print(sosCoordinates(obs.sept09.bbox)[,1:2])

           lat      lon
0mObservation 51.9412 7.6103

```

More advanced spatial filtering, for example based on arbitrary shapes et cetera, is currently not implemented. This could be implemented by implementing subclasses for `GmlGeometry` (including encoders) which must be wrapped in `OgcBinarySpatialOp` which extends `OgcSpatialOps` and can therefore be added to an object of class `SosFeatureOfInterest` as the `spatial` parameter.

### 5.3.7 Feature Filtering

The feature can not only be used for spatial filtering, but also to query specific FOIs. The following example extracts the identifiers from an offering and then creates an object of class `SosFeatureOfInterest`, which is passed into the `get-observation` call. Here the encoding function is called to show how the content of the result element will look like.

```

> off.temp.fois <- sosFeaturesOfInterest(off.temp)
> request.fois <- sosCreateFeatureOfInterest(
+   objectIDs = list(off.temp.fois[[1]]))
> encodeXML(obj = request.fois, sos = mySOS)

<sos:featureOfInterest>
  <sos:ObjectID>urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93</sos:
</sos:featureOfInterest>

```

An exemplary GetObservation operation is as follows.

```
> obs.oneWeek.fois <- getObservation(sos = mySOS,
+   offering = off.temp, featureOfInterest = request.fois,
+   eventTime = oneWeek.eventTime)

[sos4R] Received response (size: 65000 bytes), starting parsing ...
[sos4R] Finished getObservation to http://v-swe.uni-muenster.de:8080/WeatherSOS/sos
--> received 1 observation(s) having 575 result values [ 575 ].

> print(sosFeaturesOfInterest(obs.oneWeek.fois))

$OmObservation
Object of class GmlFeatureCollection; id: NA;
  1 featureMember(s): <S4 object of class "GmlFeatureProperty">
```

### 5.3.8 Value Filtering

Value Filtering is realized via the slot result in a GetObservation request. The filtering in the request is based on comparison operators and operands specified by OGC Filter Encoding (Vretanos, 2005).

The classes and methods of this specification are not yet implemented, but manual definition of the XML elements is possible with the methods of the package XML.

The following code example uses a literal comparison of a property. The elements names are taken from constants within sos4R (with the naming scheme “<namespace><ElementName>Name”), but can equally as well be put in directly.

```
> # result filtering
> filter.value <- -2.3
> filter.propertyname <- xmlNode(name = ogcPropertyNameName,
+   namespace = ogcNamespacePrefix)
> xmlValue(filter.propertyname) <-
+   "urn:ogc:def:property:OGC::Temperature"
> filter.literal <- xmlNode(name = ogcLiteralName,
+   namespace = ogcNamespacePrefix)
> xmlValue(filter.literal) <- as.character(filter.value)
> filter.comparisonop <- xmlNode(
+   name = ogcComparisonOpGreaterThanName,
+   namespace = ogcNamespacePrefix,
+   .children = list(filter.propertyname,
+   filter.literal))
> filter.result <- xmlNode(name = sosResultName,
+   namespace = sosNamespacePrefix,
+   .children = list(filter.comparisonop))
```

Please consult to the extensive documentation of the XML package for details. The commands above result in the following output which is inserted into the request without further processing.

```
> filter.result
```

```

<sos:result>
  <ogc:PropertyIsGreaterThan>
    <ogc:PropertyName>urn:ogc:def:property:OGC::Temperature</ogc:PropertyName>
    <ogc:Literal>-2.3</ogc:Literal>
  </ogc:PropertyIsGreaterThan>
</sos:result>

```

Any object of class `OgcComparisonOpsOrXMLOrNULL`, which includes the class of the object returned by `xmlNode(...)`, i.e. `XMLNode`. These object can be used in the `GetObservation` request as the result parameter.

First, we request the unfiltered values for comparison, then again with the filter applied. The length of the returned results is compared in the end.

```

> # request values:
> obs.oneWeek <- getObservation(sos = mySOS,
+   eventTime = oneWeek.eventTime,
+   offering = sosOfferings(mySOS)[["ATMOSPHERIC_TEMPERATURE"]])

[sos4R] Received response (size: 65000 bytes), starting parsing ...
[sos4R] Finished getObservation to http://v-swe.uni-muenster.de:8080/WeatherSOS/sos
--> received 1 observation(s) having 575 result values [ 575 ].

> # request values for the week with a value higher than 0 degrees.
> obs.oneWeek.filter <- getObservation(sos = mySOS,
+   eventTime = oneWeek.eventTime,
+   offering = sosOfferings(mySOS)[["ATMOSPHERIC_TEMPERATURE"]],
+   result = filter.result)

[sos4R] Received response (size: 22816 bytes), starting parsing ...
[sos4R] Finished getObservation to http://v-swe.uni-muenster.de:8080/WeatherSOS/sos
--> received 1 observation(s) having 177 result values [ 177 ].

> print(paste("Filtered:", dim(sosResult(obs.oneWeek.filter))[[1]],
+   "-vs.- Unfiltered:", dim(sosResult(obs.oneWeek))[[1]]))

[1] "Filtered: 177 -vs.- Unfiltered: 575"

```

### 5.3.9 Result Exporting

A tighter integration with data structures of packages `sp` or `spacetime` (both available on CRAN) is planned for the future. Please consult the developers for the current status.

As an example the following code creates a `SpatialPointsDataFrame` (can only contain one data value per position!) based on the features of a result.

```

> library("sp")
> obs.oneWeek <- getObservation(sos = mySOS,
+   offering = off.temp,
+   procedure = sosProcedures(off.temp),
+   eventTime = oneWeek.eventTime)

```

```

[sos4R] Received response (size: 65000 bytes), starting parsing ...
[sos4R] Finished getObservation to http://v-swe.uni-muenster.de:8080/WeatherSOS/sos
--> received 1 observation(s) having 575 result values [ 575 ].

> # Create SpatialPointsDataFrame from result features
> coords <- sosCoordinates(obs.oneWeek[[1]])
> crs <- sosGetCRS(obs.oneWeek[[1]])
> spdf <- SpatialPointsDataFrame(coords = coords[,1:2],
+                               data = data.frame(coords[,4]), proj4string = crs)
> str(spdf)

Formal class 'SpatialPointsDataFrame' [package "sp"] with 5 slots
  ..@ data      : 'data.frame':      1 obs. of  1 variable:
  .. ..$ coords...4.: Factor w/ 1 level "urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4
  ..@ coords.nrs : num(0)
  ..@ coords     : num [1, 1:2] 51.94 7.61
  .. ..- attr(*, "dimnames")=List of 2
  .. .. ..$ : NULL
  .. .. ..$ : chr [1:2] "lat" "lon"
  ..@ bbox       : num [1:2, 1:2] 51.94 7.61 51.94 7.61
  .. ..- attr(*, "dimnames")=List of 2
  .. .. ..$ : chr [1:2] "lat" "lon"
  .. .. ..$ : chr [1:2] "min" "max"
  ..@ proj4string:Formal class 'CRS' [package "sp"] with 1 slots
  .. .. ..@ projargs: chr " +init=epsg:4326 +proj=longlat +ellps=WGS84 +datum=WGS84 +no_de

```

### 5.3.10 Spatial Reference Systems

For following analyses and plotting, the spatial reference system can be extracted as follows (see section 5.1.2 for a general description).

```

> sosGetCRS(obs.temp)

CRS arguments:
+init=epsg:4326 +proj=longlat +ellps=WGS84 +datum=WGS84 +no_defs
+towgs84=0,0,0

> sosGetCRS(obs.oneWeek)

CRS arguments:
+init=epsg:4326 +proj=longlat +ellps=WGS84 +datum=WGS84 +no_defs
+towgs84=0,0,0

```

## 5.4 GetObservationById

The operation `GetObservationById` is defined in clause 10.1 of the SOS specification and not part of the core profile. But it is implemented as it is quite simple. The response is the same as described in the previous section. Optional parameters, and their defaults and supported values (see sections 2 and 5.1.1), are normally the same as in `GetObservation` requests.



In this case the returned observation collection contains an om:Measurement element, which contains just one measured value and is parsed to an object of class OmMeasurement.

The result extraction works the same as with objects of class OmObservation.

```
> obsId <- getObservationById(sos = mySOS,
+                             observationId = "o_3508493")
```

```
Object of class OmMeasurement, procedure urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4
featureOfInterest: Object of class GmlFeatureProperty, href: NA, feature: Object of
srsName: NA, srsDimension: NA, srsDimension: NA, uomLabels: NA, relatedObservation: NA, re
sampledFeatures: list(sampledFeature = <pointer: 0x0000000019df4430>);
samplingTime: GmlTimePosition [ time: 2010-12-26 12:45:00 ];
result: Object of class GmlMeasure; value: 1014; uom: hPa
```

```
> sosResult(obsId, coordinates = TRUE)
```

```
urn:ogc:def:property:OGC::BarometricPressure    lat    lon
OmMeasurement                                1014 51.9412 7.6103
SRS
OmMeasurement urn:ogc:def:crs:EPSG:4326
feature
OmMeasurement urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-15447eae2b93
```

Just as for getObservation() you can save the original response document with an automatically generated name or a selected one. It is saved into the current working directory and the name starts with the observation identifier. You can also read it back using the function sosParse().

```
> # generated file name, find file in working directory:
> obsId <- getObservationById(sos = mySOS, verbose = TRUE,
+                             observationId = "o_3508493",
+                             saveOriginal = TRUE)
> .files <- list.files(getwd())
> .observationFiles <- c()
> for(.f in .files) { # %in% not working with Sweave
+   if(length(grep("^o_", .f, value=TRUE)) > 0)
+     .observationFiles <- c(.observationFiles, .f)
+ }
> obsId <- parseFile(sos = mySOS, file = .observationFiles[[1]])
>

> # manually selected file name:
> obsId <- getObservationById(sos = mySOS, verbose = TRUE,
+                             observationId = "o_3508493",
+                             saveOriginal = "myObservation")
```

```
[getObservationById] ID o_3508493
Using saveOriginal parameter for file name: myObservation
```

```

[getObservationById] REQUEST:
  Object of class SosGetObservationById: service: SOS , version: 1.0.0
Observation ID: o_3508493
ResponseFormat(s): text/xml;subtype="om/1.0.0"; , responseMode(s): NA , srsName
[.sosRequest_1.0.0] Encoding Function (beginning of function body): { standardGeneric("en
[encodeRequestXML] SosGetObservationById
[.sosRequest_1.0.0] POST!
[.sosRequest_1.0.0] REQUEST:<sos:GetObservationById xsi:schemaLocation="http://www.opengis
  <sos:ObservationId>o_3508493</sos:ObservationId>
  <sos:responseFormat>text/xml;subtype="om/1.0.0";</sos:responseFormat>
</sos:GetObservationById>
[.sosRequest_1.0.0] response:
[1] "<?xml version='1.0' encoding='UTF-8'>\r\n<om:ObservationCollection gml:id='oc_0"
attr(,"Content-Type")

"text/xml"
[getObservationById] RESPONSE:
<?xml version="1.0" encoding="UTF-8"?>
<om:ObservationCollection gml:id="oc_0" xsi:schemaLocation="http://www.opengis.net/sos/1.0
  <om:member>
    <om:Measurement gml:id="o_3508493">
      <om:samplingTime>
        <gml:TimeInstant xsi:type="gml:TimeInstantType">
          <gml:timePosition>2010-12-26T12:45:00.000+01:00</gml:timePosition>
        </gml:TimeInstant>
      </om:samplingTime>
      <om:procedure xlink:href="urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-
      <om:observedProperty xlink:href="urn:ogc:def:property:OGC::BarometricPressure"/>
      <om:featureOfInterest>
        <sa:SamplingPoint gml:id="urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d0
          <gml:name>NOT_SET</gml:name>
          <sa:sampledFeature xlink:href="urn:ogc:def:nil:OGC:unknown"/>
          <sa:position>
            <gml:Point>
              <gml:pos srsName="urn:ogc:def:crs:EPSG:4326">51.9412 7.6103</gml:pos>
            </gml:Point>
          </sa:position>
        </sa:SamplingPoint>
      </om:featureOfInterest>
      <om:result uom="hPa">1014.0</om:result>
    </om:Measurement>
  </om:member>
</om:ObservationCollection>
[getObservationById] RESPONSE DOC:
<?xml version="1.0" encoding="UTF-8"?>
<om:ObservationCollection xmlns:om="http://www.opengis.net/om/1.0" xmlns:gml="http://www.o
  <om:member>
    <om:Measurement gml:id="o_3508493">
      <om:samplingTime>
        <gml:TimeInstant xsi:type="gml:TimeInstantType">

```

```

        <gml:timePosition>2010-12-26T12:45:00.000+01:00</gml:timePosition>
      </gml:TimeInstant>
    </om:samplingTime>
    <om:procedure xlink:href="urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d07-
    <om:observedProperty xlink:href="urn:ogc:def:property:OGC::BarometricPressure"/>
    <om:featureOfInterest>
      <sa:SamplingPoint gml:id="urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4864-9d0
      <gml:name>NOT_SET</gml:name>
      <sa:sampledFeature xlink:href="urn:ogc:def:nil:OGC:unknown"/>
      <sa:position>
        <gml:Point>
          <gml:pos srsName="urn:ogc:def:crs:EPSG:4326">51.9412 7.6103</gml:pos>
        </gml:Point>
      </sa:position>
    </sa:SamplingPoint>
  </om:featureOfInterest>
  <om:result uom="hPa">1014.0</om:result>
</om:Measurement>
</om:member>
</om:ObservationCollection>

```

```

[sos4R] Original document saved: myObservation.xml
[parseOM] rootName is ObservationCollection
[parseObservationCollection] with 1 element(s).
[parseObservationCollection] Empty envelope! [parseOM] rootName is member
[parseObservationProperty] Parsing child of member: Measurement
[parseOM] rootName is Measurement
[parseMeasurement]
[parseSamplingTime]
[parseSamplingTime] time instant.
[parseFOI] starting...
[parseFOI] inline FOI: SamplingPoint
Object of class OmMeasurement, procedure urn:ogc:object:feature:OSIRIS-HWS:3d3b239f-7696-4
  featureOfInterest: Object of class GmlFeatureProperty, href: NA, feature: Object o
srsName: NA, srsDimension: NA, srsDimension: NA, uomLabels: NA, relatedObservation: NA, re
sampledFeatures: list(sampledFeature = <pointer: 0x0000000019df5fb0>);
samplingTime: GmlTimePosition [ time: 2010-12-26 12:45:00 ];
result: Object of class GmlMeasure; value: 1014; uom: hPa
[parseOM] Done! Measurement : Object of class OmMeasurement, procedure urn:ogc:object:feat
[parseOM] Done! member : Object of class OmMeasurement, procedure urn:ogc:object:feature:O
[parseObservationCollection] Done. Processed 1 elements: urn:ogc:def:property:OGC::Baromet
[parseOM] Done! ObservationCollection : Object of class OmObservationCollection with 1 mem
[getObservationById] PARSED RESPONSE:
Object of class OmObservationCollection with 1 members.

```

## 6 Changing Handling Functions

The flexibility of the specifications that model the markup requests and responses, especially the observation encoding, is too high to han-

handle all possible cases within `sos4R`. Thus an equally flexible mechanism for users to adopt the steps of encoding and decoding documents to their needs is needed.

The process of data download comprises (i) building request, (ii) encoding requests, (iii) sending and receiving data, (iv) decoding responses, and (v) applying the correct R data type to the respective data values. This can be seen as a fixed, ordered workflow a user has to follow where each step build upon the input of the previous. To ensure flexibility within these steps of the workflow but also to maximize reusability of existing functionality, a mechanism to exchange the functions that are used in these steps is provided.

Step (i), the building of requests, i.e. the assembly of the request parameters into an R object, is documented in section 5.3. Step (iii), the sending of the sending and receiving of documents to respectively from a service, does not need to be influenced directly but the user (apart from the connection method).

In the remainder of this section it is explained how this applies to the steps (ii), (iv) and (v) of the fixed workflow.

## 6.1 Include and Exclude Functions

The functions used in the exchangeable steps are organized in lists. To base your own list of functions on the existing ones, thereby not having to start from scratch, you can combine the default list of functions with your own. Use the following functions:

To add your own function, simply add it as a named argument. You can add as many as you like in the `...` parameter. If a function with that identifier already exists in the default list it will be replaced by your function. For further adjustments you can explicitly include and exclude functions by identifier. Please be aware that inclusion is applied first, then exclusion. It is also important that you also have to include that functions you just added manually!

Examples of function list generation with parsing functions:

```
> parsers <- SosParsingFunctions(
+   "ExceptionReport" = function() {
+     return("Got Exception!")
+   },
+   include = c("GetObservation", "ExceptionReport"))
> print(names(parsers))

[1] "GetObservation" "ExceptionReport"

> parsers <- SosParsingFunctions(
+   "ExceptionReport" = function() {
+     return("Got Exception!")
+   },
+   include = c("GetCapabilities"))
> print(names(parsers))

[1] "GetCapabilities"
```

```

> parsers <- SosParsingFunctions(
+   exclude = names(SosParsingFunctions())[1:15])
> print(names(parsers))

[1] "location"
[2] "Vector"
[3] "coordinate"
[4] "GeometryObservation"
[5] "CategoryObservation"
[6] "CountObservation"
[7] "TruthObservation"
[8] "TemporalObservation"
[9] "ComplexObservation"
[10] "text/csv"
[11] "text/xml;subtype="om/1.0.0";"

```

## 6.2 Encoders

The current list of a connection's encoders can be accessed with

```
> sosEncoders(mySOS)
```

A complete list of the existing encoders names:

```

> names(sosEncoders(mySOS))

[1] "GET" "POST" "SOAP"

```

Here the idea of organizing the encoding functions becomes clear: One base encoding function is given, which is a generic method that must exist for all elements that need to be encoded.

```

> myPostEncoding <- function(object, sos, verbose) {
+   return(str(object))
+ }
> # Will fail:
> mySOS2 = SOS(sosUrl(mySOS),
+   encoders = SosEncodingFunctions("POST" = myPostEncoding))

```

## 6.3 Parsers/Decoders

The terms parsing and decoding are used as synonyms for the process of processing an XML document to create an R object. XML documents are made out of hierarchical elements. That is why the parsing functions are organized in a list, whose names are the elements' names that can be parsed.

The current list of a connection's parsers can be accessed with the following function.

```
> sosParsers(mySOS)
```

A complete list of the elements with existing encoders is shown below. These are not only names of XML elements, but also MIME types<sup>18</sup>. Here the idea of organizing the encoding functions becomes clear: For every XML element or document type that must be parsed there is a function given in the list.

```
> names(sosParsers(mySOS))

[1] "GetCapabilities"
[2] "DescribeSensor"
[3] "GetObservation"
[4] "GetObservationById"
[5] "ExceptionReport"
[6] "Measurement"
[7] "member"
[8] "Observation"
[9] "ObservationCollection"
[10] "result"
[11] "DataArray"
[12] "elementType"
[13] "encoding"
[14] "values"
[15] "Position"
[16] "location"
[17] "Vector"
[18] "coordinate"
[19] "GeometryObservation"
[20] "CategoryObservation"
[21] "CountObservation"
[22] "TruthObservation"
[23] "TemporalObservation"
[24] "ComplexObservation"
[25] "text/csv"
[26] "text/xml;subtype="om/1.0.0";"
```

If you want to replace only selected parsers use the `include` parameter as described above. You can also base your own parsing functions on a variety of existing parsing functions. For example you can replace the base function for `om:ObservationCollection`, named `ObservationCollection`, but still use the parsing function for `om:Observation` within your own function if you include it in the parser list. The existing parsing functions are all named in the pattern `parse[ElementName](...)`. Please be aware that some parsers contain require a parameter of class `SOS` upon which they rely for encoding information.

```
> # Create own parsing function:
> myER <- function(xml) {
+   return("EXCEPTION!!!11")
+ }
```

<sup>18</sup>[http://en.wikipedia.org/wiki/Internet\\_media\\_type](http://en.wikipedia.org/wiki/Internet_media_type)

```

+ }
> myParsers <- SosParsingFunctions("ExceptionReport" = myER)
> mySOS2 <- SOS(sosUrl(mySOS), parsers = myParsers)

Created SOS for URL http://v-swe.uni-muenster.de:8080/WeatherSOS/sos

> # Triggers exception:
> response <- getObservation(mySOS2,
+   offering = sosOfferings(mySOS2)[[1]],
+   observedProperty = list("Bazinga"))

[sos4R] Received response (size: 1016 bytes), starting parsing ...

> print(response)

[1] "EXCEPTION!!!11"

```

To disable all parsing, you can use the function `SosDisabledParsers()`. This effectively just “passes through” all received data because the list returned by the function only contains the top-most parsing functions for SOS operations and exception reports.

```

> SosDisabledParsers()

> names(SosDisabledParsers())

[1] "GetCapabilities"      "DescribeSensor"      "GetObservation"
[4] "GetObservationById" "ExceptionReport"

```

This is also the recommended way to start if you want to set-up your own parsers (given you have responses in XML) and an alternative to debugging if you want to inspect responses directly.

The next example shows how the response (in this case the request is intentionally incorrent and triggers an exception) is passed through as an object of class `XMLInternalDocument`:

```

> mySOS2 <- SOS(sosUrl(mySOS), parsers = SosDisabledParsers())

Created SOS for URL http://v-swe.uni-muenster.de:8080/WeatherSOS/sos

> response <- getObservation(mySOS2,
+   offering = sosOfferings(mySOS2)[[1]],
+   observedProperty = list("Bazinga"))

[sos4R] Received response (size: 1016 bytes), starting parsing ...

> class(response)

[1] "XMLInternalDocument"

> print(xmlName(xmlRoot(response))) # XML functions

[1] "ExceptionReport"

```

## 6.4 Data Converters

A list of named functions to be used by the parsing methods to convert data values to the correct R type, which are mostly based on the unit of measurement<sup>19</sup> code.

The conversion functions always take two parameters: `x` is the object to be converted, `sos` is the service where the request was received from.

The available functions are basically wrappers for coercion functions, for example `as.double()`. The only method exploiting the second argument is the one for conversion of time stamps which uses the time format saved with the object of class `SOS` in a call to `strptime`.

```
> value <- 2.0
> value.string <- sosConvertString(x = value, sos = mySOS)
> print(class(value.string))

[1] "character"

> value <- "2.0"
> value.double <- sosConvertDouble(x = value, sos = mySOS)
> print(class(value.double))

[1] "numeric"

> value <- "1"
> value.logical <- sosConvertLogical(x = value, sos = mySOS)
> print(class(value.logical))

[1] "logical"

> value <- "2010-01-01T12:00:00.000"
> value.time <- sosConvertTime(x = value, sos = mySOS)
> print(class(value.time))

[1] "POSIXct" "POSIXt"
```

The full list of currently supported units can be seen below. It mostly contains common numerical units which are converted to type `double`.

```
> names(SosDataFieldConvertingFunctions())

[1] "urn:ogc:data:time:iso8601"      "urn:ogc:property:time:iso8601"
[3] "urn:ogc:phenomenon:time:iso8601" "time"
[5] "m"                               "s"
[7] "g"                               "rad"
[9] "K"                               "C"
[11] "cd"                             "%"
[13] "ppth"                           "ppm"
[15] "ppb"                           "pptr"
```

---

<sup>19</sup>[http://en.wikipedia.org/wiki/Units\\_of\\_measurement](http://en.wikipedia.org/wiki/Units_of_measurement)



[17]	"mol"	"sr"
[19]	"Hz"	"N"
[21]	"Pa"	"J"
[23]	"W"	"A"
[25]	"V"	"F"
[27]	"Ohm"	"S"
[29]	"Wb"	"Cel"
[31]	"T"	"H"
[33]	"lm"	"lx"
[35]	"Bq"	"Gy"
[37]	"Sv"	"gon"
[39]	"deg"	"'"
[41]	"'"	"l"
[43]	"L"	"ar"
[45]	"t"	"bar"
[47]	"u"	"eV"
[49]	"AU"	"pc"
[51]	"degF"	"hPa"
[53]	"mm"	"nm"
[55]	"cm"	"km"
[57]	"m/s"	"kg"
[59]	"mg"	"uom"
[61]	"urn:ogc:data:feature"	

The current list of a SOS connection's converters can be accessed with

```
> sosDataFieldConverters(mySOS)
```

The following connection shows a typical workflow of connecting to a new SOS for the first time, what the errors for missing converters look like, and how to add them to the SOS connection.

In Addition, this service shows erroneous behaviour regarding the reponse format (even if it is correctly set), so that the parameter `responseFormat` is set to `NA_character` to be excluded in the request encoding. This results in additional warnings.

```
> # GET connection
> MBARI <- SOS("http://mmisw.org/oostethys/sos",
+             method = SosSupportedConnectionMethods()[["GET"]])

Created SOS for URL http://mmisw.org/oostethys/sos

> myOff <- sosOfferings(MBARI)[[1]]
> myProc <- sosProcedures(MBARI)[[1]]
> mbariObs1 <- try(
+   getObservation(sos = MBARI, offering = myOff,
+   procedure = myProc, responseFormat = NA_character_)
+ )

[sos4R] Received response (size: 11344 bytes), starting parsing ...
[sos4R] Finished getObservation to http://mmisw.org/oostethys/sos
--> received 1 observation(s) having 100 result values [ 100 ].
```

```
> warnings()
```

Warnmeldungen:

```
1: In .boundedBy(obj, bbox) : No valid bounding box found for VISIBILITY
2: In as.SosObservationOffering.SpatialPolygons(from) :
  Cannot coerce offering VISIBILITY -- no CRS given
3: In .local(x, y, ...) : Cannot plot NULL offering!
4: In .boundedBy(obj, bbox) : No valid bounding box found for WEATHER_CODE
5: In as.SosObservationOffering.SpatialPolygons(from) :
  Cannot coerce offering WEATHER_CODE -- no CRS given
6: In .local(x, y, ...) : Cannot plot NULL offering!
7: In .boundedBy(obj, bbox) : No valid bounding box found for VISIBILITY
8: In as.SosObservationOffering.SpatialPolygons(from) :
  Cannot coerce offering VISIBILITY -- no CRS given
9: In .local(x, y, ...) : Cannot plot NULL offering!
10: In .boundedBy(obj, bbox) : No valid bounding box found for WEATHER_CODE
11: In as.SosObservationOffering.SpatialPolygons(from) :
  Cannot coerce offering WEATHER_CODE -- no CRS given
12: In .local(x, y, ...) : Cannot plot NULL offering!
13: In .boundedBy(obj, bbox) : No valid bounding box found for VISIBILITY
14: In as.SosObservationOffering.SpatialPolygons(from) :
  Cannot coerce offering VISIBILITY -- no CRS given
15: In .local(x, y, ...) : Cannot plot NULL offering!
16: In .boundedBy(obj, bbox) : No valid bounding box found for WEATHER_CODE
17: In as.SosObservationOffering.SpatialPolygons(from) :
  Cannot coerce offering WEATHER_CODE -- no CRS given
18: In .local(x, y, ...) : Cannot plot NULL offering!
19: In .boundedBy(obj, bbox) : No valid bounding box found for VISIBILITY
20: In as.SosObservationOffering.SpatialPolygons(from) :
  Cannot coerce offering VISIBILITY -- no CRS given
21: In .local(x, y, ...) : Cannot plot NULL offering!
22: In .boundedBy(obj, bbox) : No valid bounding box found for WEATHER_CODE
23: In as.SosObservationOffering.SpatialPolygons(from) :
  Cannot coerce offering WEATHER_CODE -- no CRS given
24: In .local(x, y, ...) : Cannot plot NULL offering!
25: In xmlRoot.XMLInternalDocument(obj@xml) : empty XML document
```

This shows warnings about unknown units of measurement and a `swe:Quantity` element (which describes a numeric field) without a given unit of measurement (which it should have as a numeric field). The next example creates conversion functions for these fields and repeats the operation.

```
> myConverters <- SosDataFieldConvertingFunctions(
+   "S/m" = sosConvertDouble,
+   "http://mmisw.org/ont/cf/parameter/sea_water_salinity"
+     = sosConvertDouble)
> MBARI2 <- SOS("http://mmisw.org/oostethys/sos",
+   method = SosSupportedConnectionMethods()[["GET"]],
+   dataFieldConverters = myConverters)
```

Created SOS for URL <http://mmisw.org/oostethys/sos>

```
> mbariObs2 <- getObservation(sos = MBARI2, offering = myOff,  
+                             procedure = myProc, responseFormat = NA_character_)
```

```
[sos4R] Received response (size: 11344 bytes), starting parsing ...
```

```
[sos4R] Finished getObservation to http://mmisw.org/oostethys/sos  
--> received 1 observation(s) having 100 result values [ 100 ].
```

Subsequently, the second request results in more fields in the result.

```
> toString(names(sosResult(mbariObs1)))
```

```
[1] "esecs, Latitude, Longitude, NominalDepth, Temperature"
```

```
> toString(names(sosResult(mbariObs2)))
```

```
[1] "esecs, Latitude, Longitude, NominalDepth, Temperature, Conductivity, Salinity"
```

## 7 Exception Handling

When working with sos4R, two kinds of errors must be handled: service exceptions and errors within the package. The former can occur when a request is invalid or a service encounters internal exceptions. The latter can mean a bug or illegal settings within the package.

To understand both types of errorneous states, this sections explains the contents of the exception reports returned by the service and the functionalities to investigate the inner workings of the package.

### 7.1 OWS Service Exceptions

The service exceptions returned by a SOS are described in OGC Web Services Common (Whiteside, 2007) clause 8. The classes to handle the returned exceptions in sos4R are `OwsExceptionReport`, which contains a list of exception reports, and `OwsException`, which contains slots for the parameters exception text(s), exception code, and locator. These are defined as follows and can be implementation specific.

**ExceptionText** Text describing specific exception represented by the exceptionCode.

**exceptionCode** Code representing type of this exception.

**locator** Indicator of location in the client's operation request where this exception was encountered.

The standard exception codes and meanings are accessible by calling

```
> OwsExceptionsData()
```

directly in sos4R and are shown in table 2. The original table also contains the respective HTTP error codes and messages.

```
> response <- try(getObservationById(sos = mySOS,
+   observationId = "o_not_there", inspect = TRUE))
```

```
[.sosRequest_1.0.0] POST!
[.sosRequest_1.0.0] REQUEST:<sos:GetObservationById xsi:schemaLocation="http://www.opengis
  <sos:ObservationId>o_not_there</sos:ObservationId>
  <sos:responseFormat>text/xml;subtype="om/1.0.0"</sos:responseFormat>
</sos:GetObservationById>
[getObservationById] RESPONSE:
  <?xml version="1.0" encoding="UTF-8"?>
<ows:ExceptionReport version="1.0.0" xsi:schemaLocation="http://schemas.opengis.net/ows/1.
  <ows:Exception exceptionCode="NoApplicableCode">
    <ows:ExceptionText>Error while creating observations from database query result set: E
  </ows:Exception>
</ows:ExceptionReport>
[getObservationById] RESPONSE DOC:
```

exceptionCode	meaningOfCode	locator
OperationNotSupported	Request is for an operation that is not supported by this server	Name of operation not supported
MissingParameterValue	Operation request does not include a parameter value, and this server did not declare a default parameter value for that parameter	Name of missing parameter
InvalidParameterValue	Operation request contains an invalid parameter value	Name of parameter with invalid value
VersionNegotiationFailed	List of versions in 'AcceptVersions' parameter value in GetCapabilities operation request did not include any version supported by this server	None, omit 'locator' parameter
InvalidUpdateSequence	Value of (optional) updateSequence parameter in GetCapabilities operation request is greater than current value of service metadata updateSequence number	None, omit 'locator' parameter
OptionNotSupported	Request is for an option that is not supported by this server	Identifier of option not supported
NoApplicableCode	No other exceptionCode specified by this service and server applies to this exception	None, omit 'locator' parameter

Table 2: Exception Data Table (without HTTP columns).

```
<?xml version="1.0" encoding="UTF-8"?>
<ows:ExceptionReport xmlns:ows="http://www.opengis.net/ows/1.1" xmlns:xsi="http://www.w3.o
  <ows:Exception exceptionCode="NoApplicableCode">
    <ows:ExceptionText>Error while creating observations from database query result set: E
  </ows:Exception>
</ows:ExceptionReport>
```

```
Object of class OwsExceptionReport; version: 1.0.0; lang: NA;
1 exception(s) (code @ locator : text):
NoApplicableCode @ NA :
Error while creating observations from database query result set: ERROR: invalid i
```

If an exception is received then it is also saved as a warning message.

## 7.2 Inspect Requests and Verbose Printing

The package offers two levels of inspection of the ongoing operations indicated by two boolean parameters, `inspect` and `verbose`. These are available in all service operation calls.

`inspect` prints the raw requests and responses to the console.

`verbose` prints not only the requests, but also debugging and processing statements (e.g. intermediate steps during parsing).

The option `verboseOutput` when using the method `SOS(...)` turns on the verbose setting for all subsequent requests made to the created connection unless deactivated in an operation call. By using `verboseOutput` you can also debug the automatic `GetCapabilities` operations when creating a new SOS connections.

The output with these parameters enabled is too extensive to show within this document.

```
> off.4 <- sosOfferings(mySOS)[[4]]
> getObservation(sos = mySOS, offering = off.4,
+               procedure = sosProcedures(off.4)[[1]],
+               inspect = TRUE)
> getObservation(sos = mySOS, offering = off.4,
+               procedure = sosProcedures(off.4)[[1]],
+               verbose = TRUE)
> verboseSOS <- SOS(sosUrl(mySOS), verboseOutput = TRUE)
```

## 8 Getting Started

### 8.1 Demos

The demos are a good way to get started with the package. Please be aware that you need an internet connection for these demos, the used SOSs might be temporarily unavailable, and some of the demos are under construction.

```
> demo(package = "sos4R")
> # run a demo:
> demo("southesk")
```

`ades` SOS with French groundwater level data - under construction.

`airquality` The Air Quality SOS by ifgi provides EEA AirBase<sup>20</sup> data for Germany (and other countries). It is used for this demo about spatio-temporal interpolation with inverse distance weighting of NO2 observation in Germany using the packages `gstat` and `spacetime`.

`austria` SOSs by Research Studios Austria - under construction.

`ioos` Example using SOS by the Integrated Ocean Observing System - under construction.

`marinemeta` SOS by Marine Metadata Interoperability Initiative - under construction.

---

<sup>20</sup><http://www.eea.europa.eu/themes/air/airbase>

oceanwatch SOS by NOAA/SWFSC/ERD - under construction.

pegel Water gauge data in Germany by Pegelonline, shows how to create an xyplot of a set of variables.

southesk SOSs from South Esk Testbed by CSIRO, focuses on data consolidation/fusion and plotting.

weathersos Time series analysis demo with weather data by ifgi, includes examples for DescribeSensor and data extraction from and plotting of SensorML sensor descriptions.

## 8.2 Services

There also is an incomplete list of services that have been tested or are currently evaluated on the project homepage in the “data” area<sup>21</sup>. If you find or can provide new SOS with data useful to others, please do not hesitate to leave a comment on that page so that it can be included.

Additionally, a set of SOS URLs are available via the function `SosExampleServices()`.

```
> SosExampleServices()

$`52 North SOS: Weather Data, station at IFGI, Muenster, Germany`
[1] "http://v-swe.uni-muenster.de:8080/WeatherSOS/sos"

$`52 North SOS: Water gauge data for Germany`
[1] "http://v-sos.uni-muenster.de:8080/PegelOnlineSOSv2/sos"

$`52 North SOS: Air Quality Data for Europe`
[1] "http://giv-uw.uni-muenster.de:8080/AQE/sos"

$`00Tethys SOS: Marine Metadata Interoperability Initiative (MMI)`
[1] "http://mmisw.org/oostethys/sos"

$`NOAA SOS: `
[1] "http://sdf.ndbc.noaa.gov/sos/server.php"
```

Please note that the author of this document does not control these services and does not guarantee for any factors like correctness of data or availability.

---

<sup>21</sup><http://www.nordholmen.net/sos4r/data/>

## 9 Getting Support

If you want to ask questions about using the software, please go first to the 52°North forum for the geostatistics community at <http://geostatistics.forum.52north.org/> and check if a solution is described there. If you are a frequent user please consider subscribing to the geostatistics mailing list (<http://list.52north.org/mailman/listinfo/geostatistics>) which is linked to the forum.

## 10 Developing sos4R

### Code Repository

You can download (and also browse) the source code of sos4R directly from the 52°North repository:

- SVN resource URL: <https://svn.52north.org/svn/geostatistics/main/sos4R>. Please read the documentation (especially the posting guide) of the 52°North repositories<sup>22</sup>. Anonymous access for download is possible.
- Web access: <https://svn.52north.org/cgi-bin/viewvc.cgi/main/sos4R/?root=geostatistics>

The latest changes for every version are documented in the file `CHANGES` in the package root directory, which you can directly print to the console by calling `sosChanges()`.

### Developer Documentation

See the developer documentation at the 52°North Wiki for detailed information on how to use the checked out source project: <https://wiki.52north.org/bin/view/Geostatistics/Sos4R>. You will find a detailed description of the folder and class structure, the file naming scheme, and an extensive list of tasks for future development.

Please get in touch with the community lead<sup>23</sup> of the geostatistics community if you want to become a contributor.

---

<sup>22</sup><http://52north.org/resources/source-repositories/>

<sup>23</sup><http://52north.org/communities/geostatistics/community-contact>



## 11 Acknowledgements

The project was generously supported by the 52 °North Student Innovation Prize for Geoinformatics 2010.

## 12 References

- Botts, M., 2007, OGC Implementation Specification 07-000: OpenGIS Sensor Model Language (SensorML)- Open Geospatial Consortium, Tech. Rep.
- Chambers, J.M., 2008, Software for Data Analysis, Programming with R. Springer, New York.
- Cox, S., 2007, OGC Implementation Specification 07-022r1: Observations and Measurements - Part 1 - Observation schema. Open Geospatial Consortium. Tech. Rep.
- Cox, S., 2007, OGC Implementation Specification 07-022r3: Observations and Measurements - Part 2 - Sampling Features. Open Geospatial Consortium. Tech. Rep.
- Na, A., Priest, M., Niedzwiadek, H. and Davidson, J., 2007, OGC Implementation Specification 06-009r6: Sensor Observation Service, [http://portal.opengeospatial.org/files/?artifact\\_id=26667](http://portal.opengeospatial.org/files/?artifact_id=26667), Open Geospatial Consortium, Tech. Rep.
- Portele, C., 2003, OGC Implementation Specification 07-036: OpenGIS Geography Markup Language (GML) Encoding Standard, version: 3.00. Open Geospatial Consortium, Tech. Rep.
- Vretanos, P.A., 2005, OGC Implementation Specification 04-095: OpenGIS Filter Encoding Implementation Specification. Open Geospatial Consortium, Tech. Rep.
- Whiteside, A., Greenwood, J., 2008, OGC Implementation Specification 06-121r9: OGC Web Services Common Specification. Open Geospatial Consortium, Tech. Rep.