



Service Layer API for oneM2M

Draft

85 Pages

*Text in Red is here to help you. Delete it when you have followed the instructions.
The <RFC Title> can be set from the File>Properties:User Defined menu. To update it onscreen, press F9. To update all of the fields in the document Select All (CTRL-A), then hit F9. Set the release level by selecting one from: Draft, Final Draft, Release. The date is set automatically when the document is saved.*

Abstract

10 point Arial Centered.

oneM2M is standard organization and specifies middleware for IoT, called Common Services Entities (CSE). Application can access functionality in CSE with RESTful operations, which are Create, Retrieve, Update, Delete and Notify. oneM2M allows variety of communication methods, 4 protocol bindings (HTTP, MQTT, CoAP, Websocket) and 3 serializations (XML, JSON, CBOR). This RFC describes the way to provide high level API for oneM2M RESTful operations hiding the difference of variety of communication methods.

0 Document Information

0.1 License

DISTRIBUTION AND FEEDBACK LICENSE, Version 2.0

The OSGi Alliance hereby grants you a limited copyright license to copy and display this document (the "Distribution") in any medium without fee or royalty. This Distribution license is exclusively for the purpose of reviewing and providing feedback to the OSGi Alliance. You agree not to modify the Distribution in any way and further agree to not participate in any way in the making of derivative works thereof, other than as a necessary result of reviewing and providing feedback to the Distribution. You also agree to cause this notice, along with the accompanying consent, to be included on all copies (or portions thereof) of the Distribution. The OSGi Alliance also grants you a perpetual, non-exclusive, worldwide, fully paid-up, royalty free, limited license (without the right to sublicense) under any applicable copyrights, to create and/or distribute an implementation of the Distribution that: (i) fully implements the Distribution including all its required interfaces and functionality; (ii) does not modify, subset, superset or otherwise extend the OSGi Name Space, or include any public or protected packages, classes, Java interfaces, fields or methods within the OSGi Name Space other than those required and authorized by the Distribution. An implementation that does not satisfy limitations (i)-(ii) is not considered an implementation of the Distribution, does not receive the benefits of this license, and must not be described as an implementation of the Distribution. "OSGi Name Space" shall mean the public class or interface declarations whose names begin with "org.osgi" or any recognized successors or replacements thereof. The OSGi Alliance expressly reserves all rights not granted pursuant to these limited copyright licenses including termination of the license at will at any time.

EXCEPT FOR THE LIMITED COPYRIGHT LICENSES GRANTED ABOVE, THE OSGi ALLIANCE DOES NOT GRANT, EITHER EXPRESSLY OR IMPLIEDLY, A LICENSE TO ANY INTELLECTUAL PROPERTY IT, OR ANY THIRD PARTIES, OWN OR CONTROL. Title to the copyright in the Distribution will at all times remain with the OSGi Alliance. The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted therein are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

THE DISTRIBUTION IS PROVIDED "AS IS," AND THE OSGi ALLIANCE (INCLUDING ANY THIRD PARTIES THAT HAVE CONTRIBUTED TO THE DISTRIBUTION) MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, OR TITLE; THAT THE CONTENTS OF THE DISTRIBUTION ARE SUITABLE FOR ANY PURPOSE; NOR THAT THE IMPLEMENTATION OF SUCH CONTENTS WILL NOT INFRINGE ANY THIRD PARTY PATENTS, COPYRIGHTS, TRADEMARKS OR OTHER RIGHTS.

NEITHER THE OSGi ALLIANCE NOR ANY THIRD PARTY WILL BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF OR RELATING TO ANY USE OR DISTRIBUTION OF THE DISTRIBUTION.

Implementation of certain elements of this Distribution may be subject to third party intellectual property rights, including without limitation, patent rights (such a third party may or may not be a member of the OSGi Alliance). The OSGi Alliance is not responsible and shall not be held responsible in any manner for identifying or failing to identify any or all such third party intellectual property rights.

The Distribution is a draft. As a result, the final product may change substantially by the time of final publication, and you are cautioned against relying on the content of this Distribution. You are encouraged to update any implementation of the Distribution if and when such Distribution becomes a final specification.

The OSGi Alliance is willing to receive input, suggestions and other feedback ("Feedback") on the Distribution. By providing such Feedback to the OSGi Alliance, you grant to the OSGi Alliance and all its Members a non-exclusive, non-transferable,

worldwide, perpetual, irrevocable, royalty-free copyright license to copy, publish, license, modify, sublicense or otherwise distribute and exploit your Feedback for any purpose. Likewise, if incorporation of your Feedback would cause an implementation of the Distribution, including as it may be modified, amended, or published at any point in the future ("Future Specification"), to necessarily infringe a patent or patent application that you own or control, you hereby commit to grant to all implementers of such Distribution or Future Specification an irrevocable, worldwide, sublicenseable, royalty free license under such patent or patent application to make, have made, use, sell, offer for sale, import and export products or services that implement such Distribution or Future Specification. You warrant that (a) to the best of your knowledge you have the right to provide this Feedback, and if you are providing Feedback on behalf of a company, you have the rights to provide Feedback on behalf of your company; (b) the Feedback is not confidential to you and does not violate the copyright or trade secret interests of another; and (c) to the best of your knowledge, use of the Feedback would not cause an implementation of the Distribution or a Future Specification to necessarily infringe any third-party patent or patent application known to you. You also acknowledge that the OSGi Alliance is not required to incorporate your Feedback into any version of the Distribution or a Future Specification.

I HEREBY ACKNOWLEDGE AND AGREE TO THE TERMS AND CONDITIONS DELINEATED ABOVE.

0.2 Trademarks

OSGi™ is a trademark, registered trademark, or service mark of the OSGi Alliance in the US and other countries. Java is a trademark, registered trademark, or service mark of Oracle Corporation in the US and other countries. All other trademarks, registered trademarks, or service marks used in this document are the property of their respective owners and are hereby recognized.

0.3 Feedback

This document can be downloaded from the OSGi Alliance design repository at <https://github.com/osgi/design>. The public can provide feedback about this document by opening a bug at <https://www.osgi.org/bugzilla/>.

0.4 Table of Contents

0 Document Information.....	2
0.1 License.....	2
0.2 Trademarks.....	3
0.3 Feedback.....	3
0.4 Table of Contents.....	3
0.5 Terminology and Document Conventions.....	4
0.6 Revision History.....	4
1 Introduction.....	5
2 Application Domain.....	6
2.1 IoT Application configuration using oneM2M.....	6
2.2 Communication methods used in oneM2M.....	7
2.3 Long name and short name.....	7
3 Problem Description.....	8
4 Requirements.....	8
5 Technical Solution.....	9
5.1 Overview for the solution.....	9
5.2 Service Layer Interfaces.....	11
5.3 Service Property for Interfaces.....	14
5.4 Service Binding.....	14
5.5 Example: Turning Light ON.....	14

6 Data Transfer Objects.....	15
6.1 Design Policy of DTOs.....	16
6.2 RequestPrimitiveDTO.....	17
6.3 ResponsePrimitiveDTO.....	18
6.4 ResponseTypeInfoDTO.....	19
6.5 FilterCriteriaDTO.....	19
6.6 ResourceDTO.....	21
6.7 NotificationDTO.....	22
6.8 Other DTOs.....	22
6.9 Mapping Rules for Generic DTO.....	22
7 Javadoc.....	23
8 Considered Alternatives.....	83
8.1 Representation of DTO.....	83
8.1.1 JAXB generated Class.....	83
8.1.2 Generic DTO.....	83
8.1.3 Specific DTO.....	83
8.2 Resource Types Expression.....	83
8.3 Use of Annotation defined by JAXB in DTO.....	84
9 Security Considerations.....	84
9.1 ProtocolBinding Service with secure protocol configuration.....	84
9.2 Binding of AE Core and Protocol Binding.....	84
10 Document Support.....	84
10.1 References.....	84
10.2 Author's Address.....	85
10.3 Acronyms and Abbreviations.....	85
10.4 End of Document.....	85

0.5 Terminology and Document Conventions

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY" and "OPTIONAL" in this document are to be interpreted as described in 10.1.

Source code is shown in this typeface.

0.6 Revision History

The last named individual in this history is currently responsible for this document.

Revision	Date	Comments
Initial	SEP 15 2017	Initial Contribution. Hiroyuki Maeomichi, NTT, maeomichi.hiroyuki@lab.ntt.co.jp
0.0.1	SEP 21 2017	Updated alternatives, some figures, added description on validator. Hiroyuki Maeomichi, NTT, maeomichi.hiroyuki@lab.ntt.co.jp

Revision	Date	Comments
0.0.2	April 17 2018	Update based on discussion in Washington meeting. Hiroyuki Maeomichi, NTT, maeomichi.hiroyuki@lab.ntt.co.jp
0.0.3	June 22 2018	Add new fields and class reflecting R3 draft of oneM2M: Added fields in RequestPrimitiveDTO, ResponsePrimitiveDTO, and FilterCriteriaDTO, and ReleaseVersion enum. Organize DTOs: Added AttributeDTO, LocalIdTokenIdAssignmentDTO, and DasInfoDTO and remove DynAuthLocalIdAssignmentsDTO and DynAuthReqInfoDTO Introduce OperationIF interface as a super interface of ProtocolBinding interface and CSE interface for enabling concise application code. This replaces former simple.Client. Organize Introspection interfaces with less methods. They are moved to dedicated package.
0.0.4	June 25 2018	Add section 'Mapping Rules for Generic DTO' Update Javadoc with more explanations. (moved old classes to org.osgi.service.onem2m.old package for preparing deletion.) Add description to Security Consideration section. Add oneM2M R3 specs and XSD to references.
0.0.5	Jun 27 2018	Modified after discussion in Washington DC F2F. Restructure service interfaces; now 2 interface is remaining. For receiving notification, dedicated interface is prepared. Remove Introspection interfaces. Reduce service properties by removing ones for informative purpose. Add example flow to control devices. Modify security consideration in section 9.2.

1 Introduction

Introduce the RFC. Discuss the origins and status of the RFC and list any open items to do.

oneM2M is standard organization and specifies middleware for Internet of Things (IoT), called Common Services Entities (CSE). Applications can access CSE's functionality with RESTful operations, which are Create, Retrieve, Update, Delete and Notify. TS-0001 [2] defines more than 40 resource types to expose CSE's functionalities. oneM2M allows variety of communication methods, combination of 4 protocol bindings (HTTP, MQTT, CoAP, Websocket) and 3 serializations (XML, JSON, CBOR).


This RFP discuss the way to provide high level API (namely service layer API) for oneM2M RESTful operations hiding the difference of variety of communication methods.

2 Application Domain

This section should be copied from the appropriate RFP(s). It is repeated here so it can be extended while the RFC authors learn more subtle details.

2.1 IoT Application configuration using oneM2M

oneM2M's middleware, called CSE can be deployed in different locations and they are connected each other forming tree topology. Depending on deployed location, CSEs are categorized to 3 types, IN-CSE, MN-CSE and ASN-CSE. IN-CSE is located top of tree, ASN-CSE is located at leaf and MN-CSE is located and MN-CSE is located on middle.

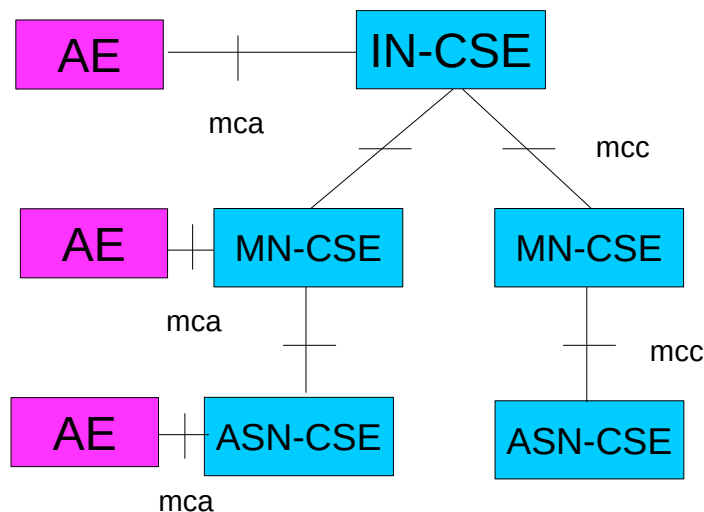


oneM2M's application, called Application Entity (AE) connects to one of CSEs. After AE connecting to the CSE, AE can access to all of CSEs, by retargeting function (similar to routing) of CSEs.

AE accesses to CSE's functionality through RESTful API, which consists of Create, Retrieve, Update, Delete and Notify in targeting more than 40 types of resources. For examples, typical resources are `<contentInstance>` that expresses IoT data and `<container>` that holds set of `<contentInstance>`s. AE can create or retrieve the `<contentInstance>` on any CSE by the retargeting functionality, as far as permission is allowed. Interface between CSEs is called *mcc* and interface between CSE and AE is called *mca*, both interfaces have almost same interface.

It is possible to develop variety types of distributed applications using the architecture. For example for IoT data aggregation applications, it is possible to develop gradual aggregation type or direct aggregation type. In gradual aggregation type, AE connected to ASN-CSE creates `<contentInstance>`s in ASN-CSE, and intermediate applications calculate statistics and put the result on IN-CSE as a `<contentInstance>`, while, in direct aggregation type, AE connected to ASN-CSE creates `<contentInstance>`s in IN-CSE directly.

Under CSE layer, oneM2M specifies NSE(Network Services Entity), but this RFC doesn't cover the NSE layer.

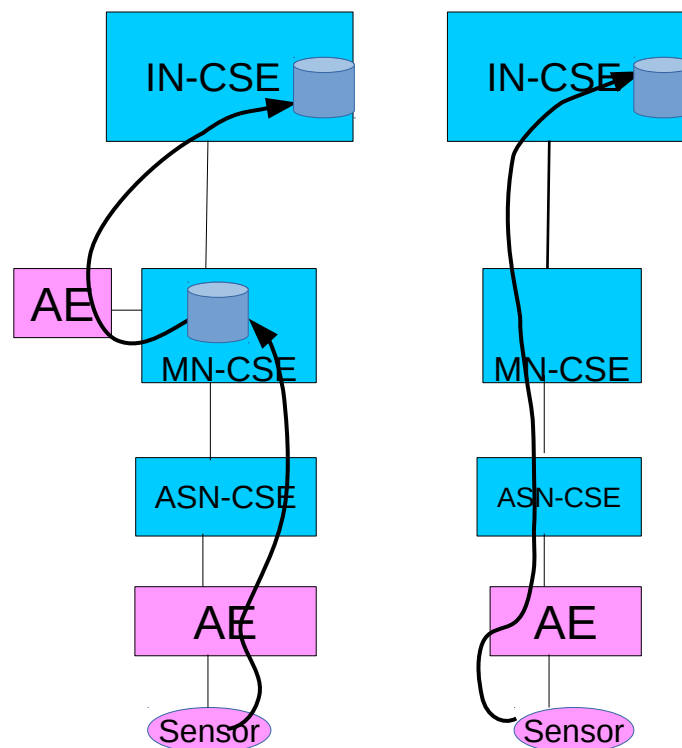

2.2 Communication methods used in oneM2M

oneM2M allows variety of communication methods, combination of 4 protocol bindings (HTTP, MQTT, CoAP, Websocket) and 3 serializations (XML, JSON, CBOR). It might be added in future. oneM2M specifies specification in different level.

Firstly TS-0001[2] specifies high level resource definitions, it defines more than 40 resource types, such as `<contentInstance>` for storing IoT data, `<timeSeriesInstance>` for periodic sensor measurement with leap detection mechanism.

Secondly TS-0004[3] specifies procedures and serializations in independent manner from protocol bindings.

Resource type and protocol data unit are defined using XSD for XML serialization. Mapping between XML and other serializations are also specified.

Thirdly TS-0008, TS-0009, TS-0010, TS-0020 specify protocol specific details for CoAP, HTTP, MQTT and Web Socket respectively.

2.3 Long name and short name

oneM2M introduced two types of notation, called long name and short name for resource types, attribute and so on. Long name is human friendly string and specifications mainly use this notation, while short name is short string consist of typically 2 or 3 characters (but not limited and sometimes longer) and communication protocol use this notation. In most cases, the initial characters of long name are assigned as short name, for examples, ct for CreationTime and at for AnnounceTo.

3 Problem Description

This section should be copied from the appropriate RFP(s). It is repeated here so it can be extended while the RFC authors learn more subtle details.

oneM2M specifies protocol based interface, but doesn't specify programming level API. As previously mentioned oneM2M allows variety of communication methods which are the combinations of 4 protocol bindings (HTTP, MQTT, CoAP, Websocket) and 3 serializations (XML, JSON, CBOR).

First problem is application portability. Without standardized API, application program tends to depend on the communication method initially intend to use and it will became hard to run another environment in which uses another communication method. (For example, an application designed for XML/HTTP, tend to run on environment use JSON/Websocket)

Second problem is the latency of the communication between CSE and application. Even if CSE and application is located in the same box, current oneM2M specifications define methods through protocols which requires serialization/deserialization of data, context-switch of applications, validation of incoming data and resulted in large latency compared to the situation both CSE and Application resides in the same Java VM and communicate with Java interfaces. Large latency reduces applicable area of oneM2M based solution.

Third problem is the complexity of handling of long name and short name. Even if short name is defined by trying to use initial characters, it is not straight forward to translate them in head.

4 Requirements

This section should be copied from the appropriate RFP(s)

- R0010 – The solution MUST provide means to access outer CSE from application.
- R0011 – The solution MUST provide means to access outer CSE from client CSE.
- R0012 – The solution MUST provide means to select a communication method for application.
- R0013 – The solution MUST provide means to select a communication method for client CSE.
- R0020 – The solution MUST provide means for CSE to accept requests form outer CSE.
- R0020 – The solution MUST provide means for CSE to accept requests form outer application.
- R0030 – The solution MUST provide means to communicate through Java interface between CSE and application that are located in the same OSGi framework.
- R0040 – The solution SHOULD hide differences of communication methods, which are combinations of 4 protocol bindings and 3 serializations (XML, JSON, CBOR).
- R0050 – The solution SHOULD provide developer friendly way for handling short names.
- R0060 – The solution MUST provide asynchronous interface using 'call by value', such as DTO.

5 Technical Solution

First give an architectural overview of the solution so the reader is gently introduced in the solution (Javadoc is not considered gently). What are the different modules? How do the modules relate? How do they interact? Where do they come from? This section should contain a class diagram. Then describe the different modules in detail. This should contain descriptions, Java code, UML class diagrams, state diagrams and interaction diagrams. This section should be sufficient to implement the solution assuming a skilled person.


Strictly use the terminology a defined in the Problem Context.

On each level, list the limitations of the solutions and any rationales for design decisions. Almost every decision is a trade off so explain what those trade offs are and why a specific trade off is made.

Address what security mechanisms are implemented and how they should be used.


5.1 Overview for the solution

Protocol binding service is introduced to handle different protocols and serializations. oneM2M application uses the protocol binding service through Service Layer Interface to communicate CSE. The interface is protocol and serialization agnostic interface; it has no protocol and serialization specific methods, parameters, so that application can communicate to CSE without knowing which protocol is actually used.

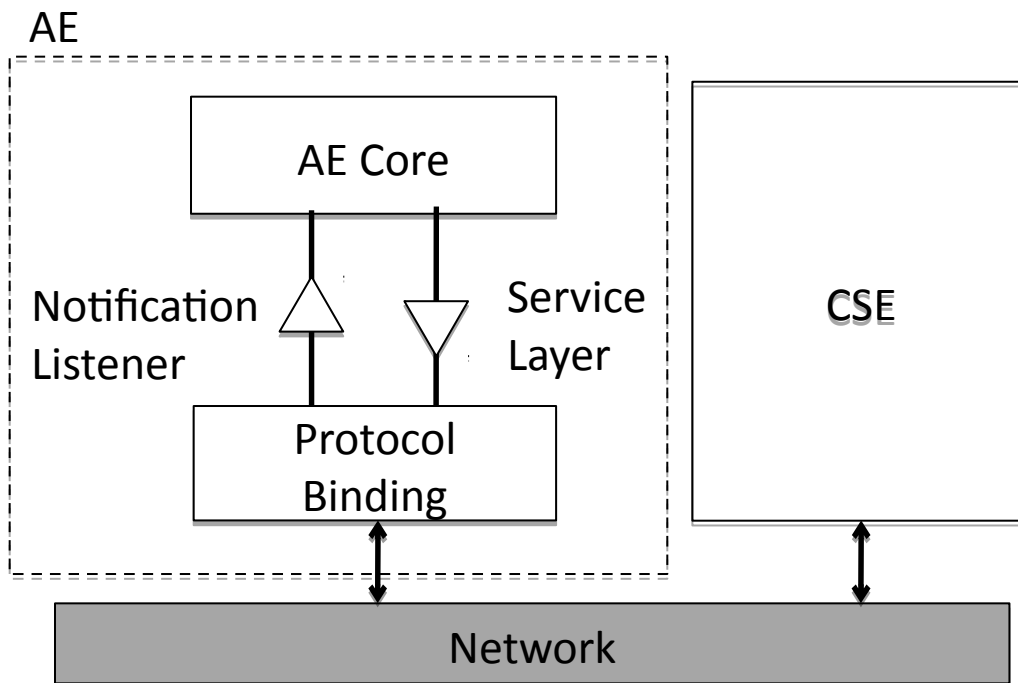


In figure, the term of Core is introduced for AE Core and CSE Core. This is for specifying parts which does not contain ProtocolBinding of AE and CSE.

Another use case is that the AE Core and the CSE core are located on the same OSGi Framework. In this use case, the AE Core and the CSE core communicate directly with ServiceLayer API, without inter-mediating ProtocolBinding Services. Following figure depicts overall configuration. Though this type of communication is not clearly defined in oneM2M specification, communicating directly without serializing data between AE and CSE allows shorter latency and less computational resources.

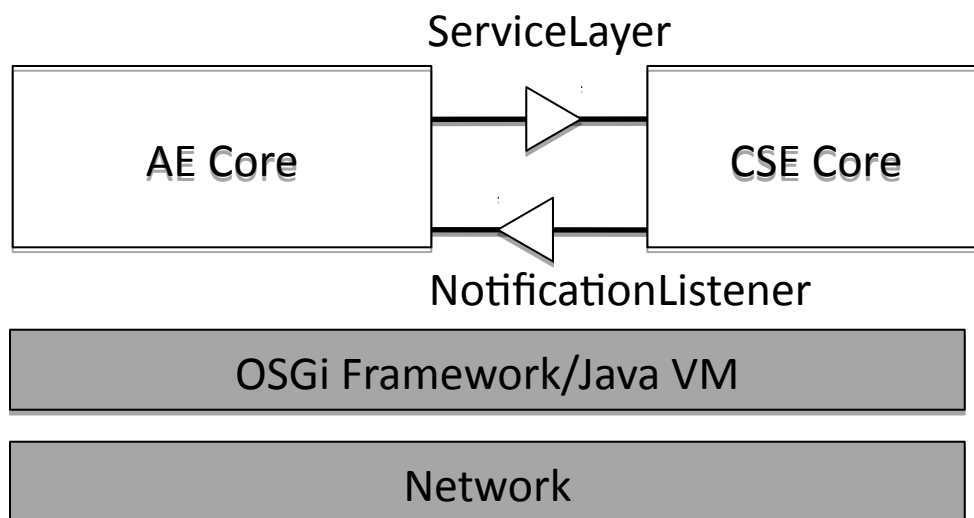

Following figure (right hand side) shows potential implementation of CSE, which are consisted of CSE core and Protocol Binding Service, as symmetric to AE side. APIs defined in this RFC is consistent with the usage, but this RFC does not mandate that usage and it is left to implementor's choice.

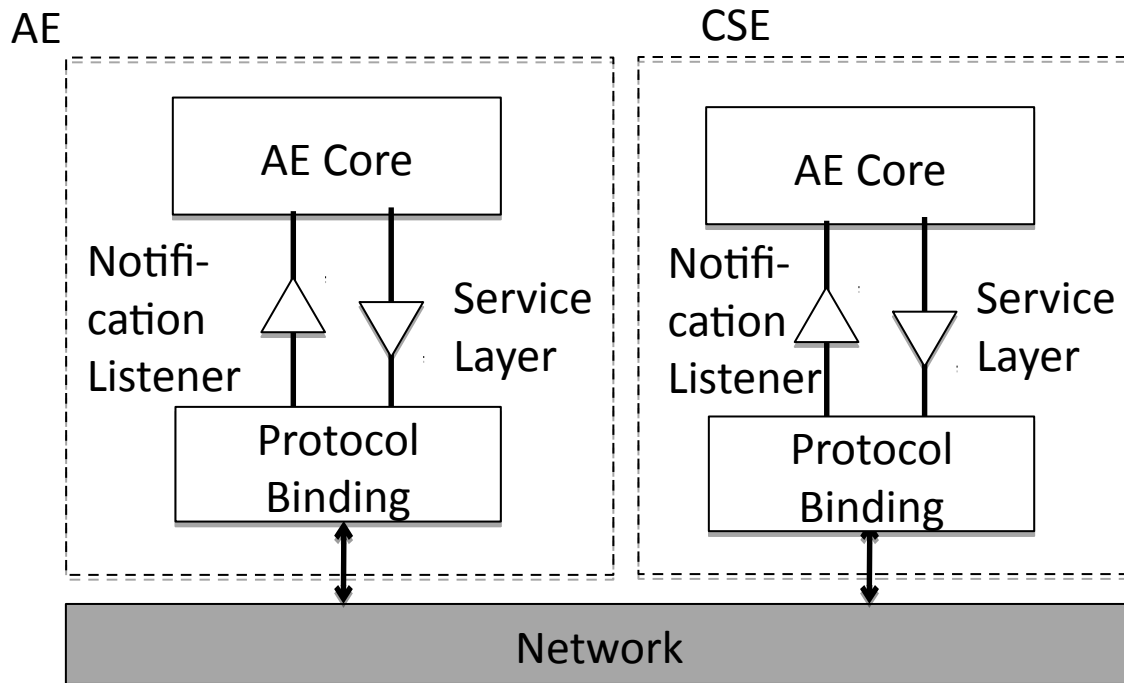

5.2 Service Layer Interfaces

Service Layer Interface is for allowing AE to send request and get response.

request() method allows very raw data type access and it enables all possible message exchanges among oneM2M entities,

```
Promise<ResponseDTO> request(RequestDTO request);
```

Meanwhile, it can be redundant to application developers, because they need to write composition of requestPrimitive and decomposition of responsePrimitive. This interface is provided for application developer allowing less application codes. It provides methods with higher level of abstraction; operation level of resource such as create, retrieve, update, delete and so on. They do not cover all of possible message exchange but do typical ones.

Note: If this RFC doesn't provide these methods, developers likely to create similar ones in their own (various) way.

```
package org.osgi.service.onem2m.servicelayer;
```

```
import org.osgi.onem2m.dto.RequestDTO;
import org.osgi.onem2m.dto.ResponseDTO;
import org.osgi.util.promise.Promise;

/**
 * Service Layer Interface, which locates between AE and Protocol Binding Service.
 */
public interface ServiceLayer {
    /**
     * send a request.
     *
     * @param request request
     * @return promise for ResponseDTO.
     */
    Promise<ResponseDTO> request(RequestDTO request);

    /**
     * create resource
     *
     * @param uri URI for parent resource
     * @param resource resource data
     * @return Promise of created resource
     */
    public Promise<ResourceDTO> create(String uri, ResourceDTO resource);

    /**
     * retrieve resource
     *
     * @param uri URI for retrieving resource
     * @return retrieved resource data
     */
    public Promise<ResourceDTO> retrieve(String uri, ResourceDTO resource);

    /**
     * retrieve subset of attributes.
     *
     * @param uri URI for retrieving resource
     * @param targetNames attribute names for retrival
     * @return retrieved resource data
     */
    public Promise<ResourceDTO> retrieve(String uri, List<String>
targetAttributes);

    /**
     * update resource
     *
     * @param uri URI for updating resource
     * @param resource data resource
     */
}
```

```

    * @return updated resource
    */
    public Promise<ResourceDTO> update(String uri, ResourceDTO resource);

    /**
     * delete resource
     *
     * @param uri target URI for deleting resource
     */
    public Promise<Boolean> delete(String uri);

    /**
     * find resources
     *
     * @param uri URI for top of search
     * @param fc filter criteria
     * @return list of URIs matching the condition specified in fc
     */
    public Promise<List<String>> discovery(String uri, FilterCriteriaDTO fc);

    /**
     * send notification
     *
     * @param notification
     */
    public Promise<Boolean> notify(String uri, NotificationDTO notification );
}

```

5.3 Service Property for Interfaces

Services implementing Service Layer Interface shall be registered with following properties.

Interface	property Name	type	explanation
ServiceLayer	POAforAE	String[]	URIs for point of access. POA is basically set of listening protocol, host, port and subaddress or oneM2M address. In case that implementing entity is Protocol Binding, this property is provided, meanwhile, in case of CSE Core, the property is not provided. [MAY BE TRICKY]
NotificationListener	AE-ID	String	ID of Application Entity
	POA	String[]	Point of Access

Here, AE-ID of NotificationListener is assigned by CSE thorough registration process, which is done by creating AE resource. After receiving assigned value, AE Core should updated the property with the value.

POA is the URIs for receiving Notification. AE Core retrieves the value from property of using ServiceLayer. [**MAY BE TRICKY: having getPOA() method in ServiceLayer is also alternative approach.**]

NOTE: It may be informative to put information on service properties, such as protocol, serialization, usage of secure protocol, oneM2M release version, or CSEtype, but there is no clear use case to use them, This RFC does not specify their usage.


5.4 Service Binding

Proper Protocol Binding Service must be bound to proper AE Core. Implementation of ServiceLayer may be registered as ServiceFactory on the service registry and implementation should create a proper service instance depending on calling AE Core.

How to create and configure is out of scope of this RFC.

5.5 Example: Turning Light ON

Following figure shows the example showing how application turn on the light device on the remote.

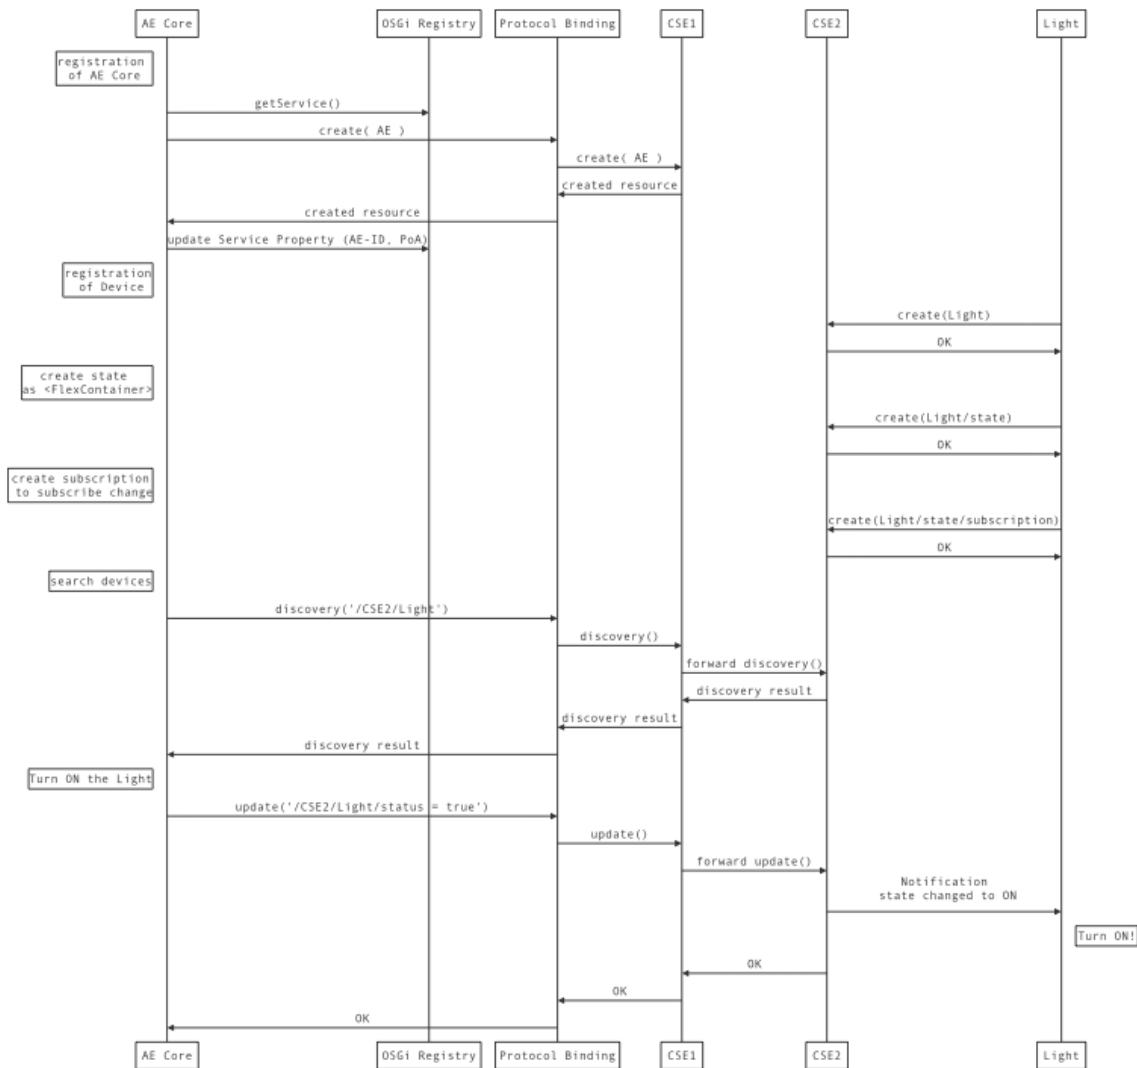

[This MAY BE SMALL TO READ: please refer sequence.png or sequence.md]

6 Data Transfer Objects

RFC 185 defines Data Transfer Objects as a generic means for management solutions to interact with runtime entities in an OSGi Framework. DTOs provides a common, easily serializable representation of the technology.

For all new functionality added to the OSGi Framework the question should be asked: would this feature benefit from a DTO? The expectation is that in most cases it would.


The DTOs for the design in this RFC should be described here and if there are no DTOs being defined an explanation should be given explaining why this is not applicable in this case.

This section is optional and could also be provided in a separate RFC.

6.1 Design Policy of DTOs

Data transfer Object was chosen as data object passing by the interfaces, following OSGi's design convention. Though data structure near root structures are designed specific DTO, deeper data types are to be stored as generic types, such as Map, List and Wrapper classes of Java Primitives. Following figure depict reference relationship among object. (See also the considered Alternatives)

In the class definition, some data types are shown as Object, but the assigned value shall be a type that is allowed for OSGi DTO.

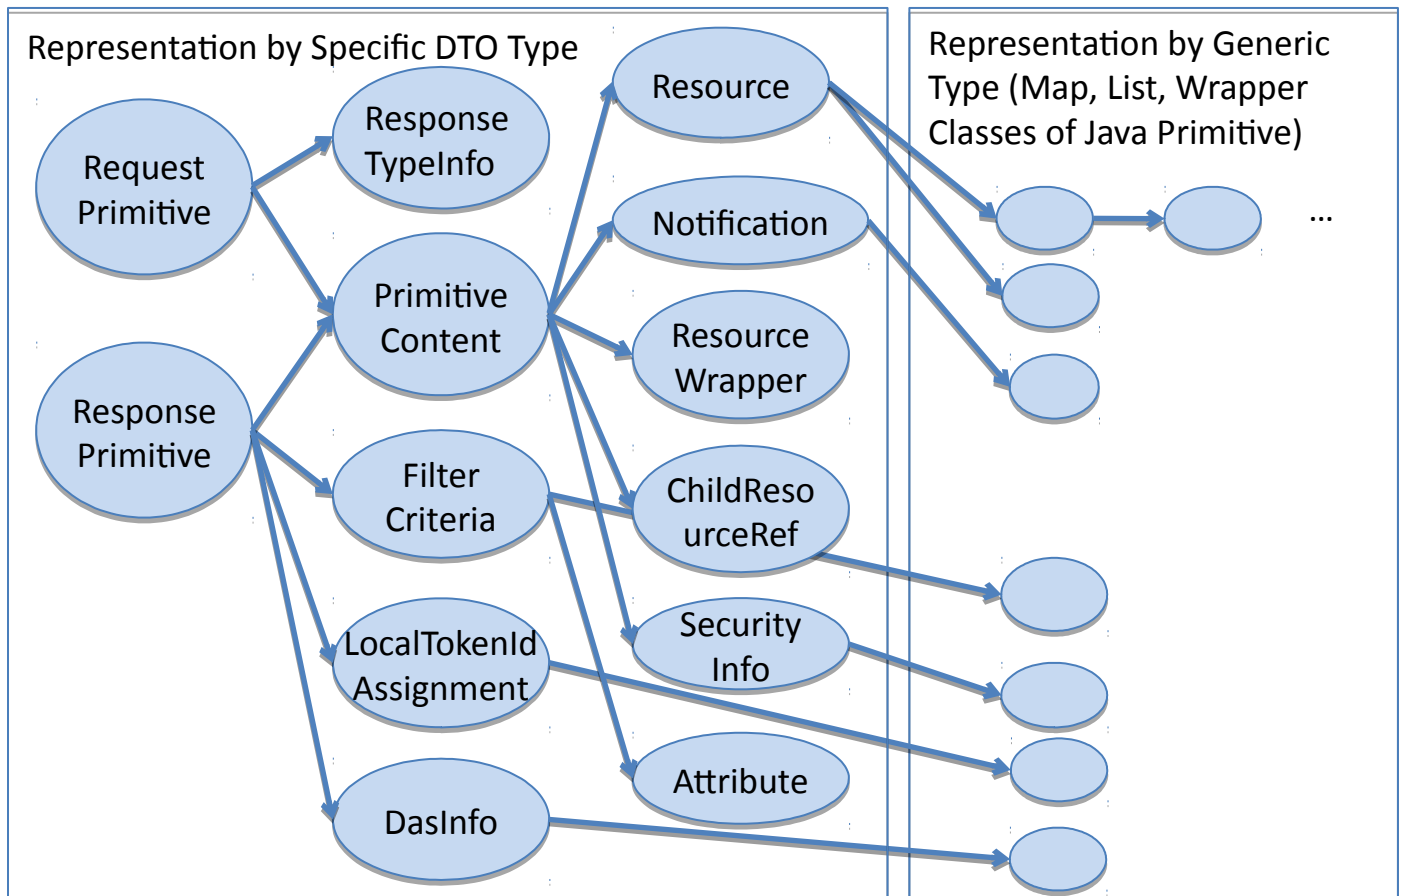

In figure, followed 'DTO' is omitted.

6.2 RequestPrimitiveDTO

RequestPrimitiveDTO holds a Request Information used for oneM2M communication.

```
package org.osgi.service.onem2m.dto;

import java.util.*;

public class RequestPrimitiveDTO extends org.osgi.dto.DTO {
    @javax.xml.bind.annotation.XmlElement(required = true)
    public Operation operation;
    @javax.xml.bind.annotation.XmlElement(required = true)
    public String to;
    public String from;
    @javax.xml.bind.annotation.XmlElement(required = true)
    public String requestIdentifier;
    @javax.xml.bind.annotation.XmlElement(required = false)
    public Integer resourceType;
    public PrimitiveContentDTO content;
    public List<String> roleIDs;

    public String originatingTimestamp;
    public String requestExpirationTimestamp;
    public String resultExpirationTimestamp;
    public String operationExecutionTime;

    public ResponseTypeInfoDTO responseType;
    public String resultPersistence;
    @javax.xml.bind.annotation.XmlElement(required = false)
    public ResultContent resultContent;
    public String eventCategory;
    @javax.xml.bind.annotation.XmlElement(required = false)
    public Boolean deliveryAggregation;
    public String groupRequestIdentifier;
    public FilterCriteriaDTO filterCriteria;
    @javax.xml.bind.annotation.XmlElement(required = false)
    public DiscoveryResultType discoveryResultType;
    public String tokens;
    public List<String> tokenIDs;
    public List<String> localTokenIDs;
    @javax.xml.bind.annotation.XmlElement(required = false)
    public Boolean tokenReqIndicator;

    // Added at R3.0
    public List<String> groupRequestTargetMembers;
    public Boolean authSignatureIndicator;
```

```

public List<String> authSignature;
public Boolean authRelationshipIndicator;
public Boolean semanticQueryIndicator;
public ReleaseVersion releaseVersion;
public String verndorInformation;

public static enum DiscoveryResultType {
    structured(1), unstructured(2);
    // omitted
}

public static enum ResultContent {
    nothing(1), attributes(2), hierarchicalAddress(3),
    hierarchicalAddressAndAttributes(4),
attributesAndChildResources(5),
attributesAndChildResourceReferences(6),
childResourceReferences(7), originalResource(8), childResources(9);

    // omitted
}

public static enum Operation {
    Create(1), Retrieve(2), Update(3), Delete(4), Notify(5);
    // omitted
}
}

```

6.3 ResponsePrimitiveDTO

ResponsePrimitiveDTO holds a Response Information used for oneM2M communication.

```

package org.osgi.service.onem2m.dto;
import java.util.*;

public class ResponsePrimitiveDTO extends org.osgi.dto.DTO{
    @javax.xml.bind.annotation.XmlElement( required = true)
    public Integer responseStatusCode;
    @javax.xml.bind.annotation.XmlElement( required = true)
    public String requestIdentifier;
    public PrimitiveContentDTO content;
    public String to;
    public String from;
    public String originatingTimestamp;
}

```

```

    public String resultExpirationTimestamp;
    public String eventCategory;
    @javax.xml.bind.annotation.XmlElement( required = false)
    public ContentStatus contentStatus;
    @javax.xml.bind.annotation.XmlElement( required = false)
    public Integer contentOffset;
    public List<LocalTokenIdAssignmentDTO>
assignedTokenIdentifiers;//Map<String,Object>
    public List<DasInfoDTO> tokenReqInfo;//DynAuthTokenReqInfoDTO

    // Added R3.0
    public Boolean AuthSignatureReqInfo;
    public ReleaseVersion releaseVersionIndicator;
    public String vendorInformation;

    public static enum ContentStatus{
        PARTIAL_CONTENT, // 1
        FULL_CONTENT; //2
    }
}

```

6.4 ResponseTypeInfoDTO

```

package org.osgi.service.onem2m.dto;

import java.util.*;

public class ResponseTypeInfoDTO extends org.osgi.dto.DTO {
    @javax.xml.bind.annotation.XmlElement(required = true)
    public java.lang.Integer responseTypeValue;
    @javax.xml.bind.annotation.XmlElement(required = true)
    public List<java.lang.String> notificationURI;

    public static enum ResponseType {
        nonBlockingRequestSynch(1), nonBlockingRequestAsynch(2),
        blockingRequest(3), flexBlocking(4);
        // omitted.
    }
}

```

6.5 FilterCriteriaDTO

```
package org.osgi.service.onem2m.dto;
import java.util.*;

public class FilterCriteriaDTO extends org.osgi.dto.DTO{
    public String createdBefore;
    public String createdAfter;
    public String modifiedSince;
    public String unmodifiedSince;
    @javax.xml.bind.annotation.XmlElement( required = false)
    public Integer stateTagSmaller;
    @javax.xml.bind.annotation.XmlElement( required = false)
    public Integer stateTagBigger;
    public String expireBefore;
    public String expireAfter;
    public List<String> labels;
    public List<Integer> resourceType;
    @javax.xml.bind.annotation.XmlElement( required = false)
    public Integer sizeAbove;
    @javax.xml.bind.annotation.XmlElement( required = false)
    public Integer sizeBelow;
    public List<String> contentType;
    public AttributeDTO attribute;
    @javax.xml.bind.annotation.XmlElement( required = false)
    public FilterUsage filterUsage;
    @javax.xml.bind.annotation.XmlElement( required = false)
    public Integer limit;
    public String semanticsFilter;
    @javax.xml.bind.annotation.XmlElement( required = false)
    public FilterOperation filterOperation;
    @javax.xml.bind.annotation.XmlElement( required = false)
    public Integer contentFilterSyntax;
    public String contentFilterQuery;
    @javax.xml.bind.annotation.XmlElement( required = false)
    public Integer level;
    @javax.xml.bind.annotation.XmlElement( required = false)
    public Integer offset;

    // added in R3
    public List<String> childLabels;
    public List<String> parentLabels;
    public String labelsQuery;
    public Integer childResourceType;
    public Integer parentResourceType;
    public AttributeDTO childAttribute;
    public AttributeDTO parentAttribute;
    public String applyRelativePath;
```

```
    public static enum FilterOperation {
        AND(1), OR(2);
        // omitted...
    }

    public static enum FilterUsage {
        DiscoveryCriteria(1), ConditionalRetrival(2), IPEOnDemandDiscovery(3);
        // omitted...
    }
}
```

6.6 ResourceDTO

```
package org.osgi.service.onem2m.dto;
import java.util.*;

public class ResourceDTO extends org.osgi.dto.DTO{

    // Universal Attribute, which can be held by all resources.
    @javax.xml.bind.annotation.XmlElement( required = true)
    public Integer resourceType;
    @javax.xml.bind.annotation.XmlElement( required = true)
    public String resourceID;
    @javax.xml.bind.annotation.XmlElement( required = true)
    public String parentID;
    @javax.xml.bind.annotation.XmlElement( required = true)
    public String creationTime;
    @javax.xml.bind.annotation.XmlElement( required = true)
    public String lastModifiedTime;

    public String resourceName;

    // optional, Universal Attributes
    public List<String> labels;

    /**
     * Non Universal Attribute.
     * Value Part must be the types that are allowed for OSGi DTO.
     */
    public Map<String, Object> attribute;
}
```

6.7 NotificationDTO

NotificationDTO has information of notification.

```
package org.osgi.service.onem2m.dto;
import java.util.*;

public class NotificationDTO extends org.osgi.dto.DTO{
    public Map<String,Object> notificationEvent;//NotificationEventDTO
    @javax.xml.bind.annotation.XmlElement( required = false)
    public Boolean verificationRequest;
    @javax.xml.bind.annotation.XmlElement( required = false)
    public Boolean subscriptionDeletion;
    public String subscriptionReference;
    public String creator;
    public String notificationForwardingURI;
    @javax.xml.bind.annotation.XmlElement( required = false)
    public Map<String,Object> ipeDiscoveryRequest;//IPEDiscoveryRequestDTO
}
```

6.8 Other DTOs

There are some other DTOs, please refer Javadoc section for them.

6.9 Mapping Rules for Generic DTO

Following table summarizes mapping rule between oneM2M data types and Generic types used in DTOs. There are two types of XSD are defined in oneM2M, which are longname version and shortname version. The longname version should be referred.

oneM2M Types (XML Schema)	Type of OSGi DTO	
Basic Types of XML Schema	Wrapper Object of Java primitive	For example: xs:integer, xs:float
xs:anyURI, m2m:ID,	String	
m2m:timestamp	String	YYYYMMDDThhmmss,sssss
m2m:absRelTimestamp	String	Union of m2m:timestamp and xs:long. This is exception of union rule above. Distinction is done by existence of 'T'
xs:sequence (as complexType)	Map	Name of element is used for key of map.
xs:list, xs:sequence (as list)	List	
xs:union	Map	Base attribute of restriction tag is used for key of map. Only one key is allowed.

		See Example of missingDataList:
--	--	---------------------------------

Following XML is an example of missingData.

```
<xs:simpleType name="missingDataList">  
  <xs:union>  
    <simpleType>  
      <restriction base='m2m:listOfTimeStamp' />  
    </simpleType>  
    <simpleType>  
      <restriction base='m2m:listOfRelTimeStamp' />  
    </simpleType>  
  </xs:union>  
</xs:simpleType>
```

7 Javadoc

Please include Javadoc of any new APIs here, once the design has matured. Instructions on how to export Javadoc for inclusion in the RFC can be found here: <https://www.osgi.org/members/RFC/Javadoc>

Demo Documentation

18/06/27 11:51

Package Summary		Page
org.osgi.service.onem2m	This package includes essential interfaces for oneM2M service layer API.	24
org.osgi.service.onem2m.dto	This package contains OSGi DTOs used in oneM2M Service Layer API.	30
org.osgi.service.onem2m.introspection	This package include interfaces for providing information of data structures and checking validity.	76

Package org.osgi.service.onem2m

This package includes essential interfaces for oneM2M service layer API.

See:

[Description](#)

Interface Summary		Page
NotificationList ener	Primary Interface for an oneM2M entity to send request and get response to/from other oneM2M entity.	26
ServiceLayer	Primary Interface for an oneM2M entity to send request and get response to/from other oneM2M entity.	27

Package org.osgi.service.onem2m Description

This package includes essential interfaces for oneM2M service layer API.

Interface NotificationListener

org.osgi.service.onem2m

```
public interface NotificationListener
```

Primary Interface for an oneM2M entity to send request and get response to/from other oneM2M entity.

Method Summary		Page
void	notified (RequestPrimitiveDTO request) receive notification.	26

Method Detail

notified

```
void notified(RequestPrimitiveDTO request)
```

receive notification.

Parameters:

request - request primitive

Interface ServiceLayer

[org.osgi.service.onem2m](#)

public interface **ServiceLayer**

Primary Interface for an oneM2M entity to send request and get response to/from other oneM2M entity.

Method Summary		Page
org.osgi.util.promise.Promise< ResourceDTO >	create (String uri, ResourceDTO resource) create resource	28
org.osgi.util.promise.Promise<Boolean>	delete (String uri) delete resource	29
org.osgi.util.promise.Promise<List<String>>	discovery (String uri, FilterCriteriaDTO fc) find resources	29
org.osgi.util.promise.Promise<Boolean>	notify (String uri, NotificationDTO notification) send notification	29
org.osgi.util.promise.Promise< ResponsePrimitiveDTO >	request (RequestPrimitiveDTO request) send a request.	27
org.osgi.util.promise.Promise< ResourceDTO >	retrieve (String uri, List<String> targetAttributes) retrieve subset of attributes.	28
org.osgi.util.promise.Promise< ResourceDTO >	retrieve (String uri, ResourceDTO resource) retrieve resource	28
org.osgi.util.promise.Promise< ResourceDTO >	update (String uri, ResourceDTO resource) update resource	28

Method Detail

request

org.osgi.util.promise.Promise<[ResponsePrimitiveDTO](#)> **request**([RequestPrimitiveDTO](#) request)

send a request.

Parameters:

request - request primitive

Returns:

promise of ResponseDTO.

create

```
org.osgi.util.promise.Promise<ResourceDTO> create(String uri,  
                                             ResourceDTO resource)
```

create resource

Parameters:

uri - URI for parent resource
resource - resource data

Returns:

Promise of created resource

retrieve

```
org.osgi.util.promise.Promise<ResourceDTO> retrieve(String uri,  
                                                  ResourceDTO resource)
```

retrieve resource

Parameters:

uri - URI for retrieving resource

Returns:

retrieved resource data

retrieve

```
org.osgi.util.promise.Promise<ResourceDTO> retrieve(String uri,  
                                                  List<String> targetAttributes)
```

retrieve subset of attributes.

Parameters:

uri - URI for retrieving resource
targetAttributes - names of the target attribute

Returns:

retrieved resource data

update

```
org.osgi.util.promise.Promise<ResourceDTO> update(String uri,  
                                                  ResourceDTO resource)
```

update resource

Parameters:

uri - URI for updating resource
resource - data resource

Returns:

updated resource

delete

```
org.osgi.util.promise.Promise<Boolean> delete(String uri)
```

delete resource

Parameters:

uri - target URI for deleting resource

discovery

```
org.osgi.util.promise.Promise<List<String>> discovery(String uri,  
                                                       FilterCriteriaDTO fc)
```

find resources

Parameters:

uri - URI for top of search

fc - filter criteria

Returns:

list of URIs matching the condition specified in fc

notify

```
org.osgi.util.promise.Promise<Boolean> notify(String uri,  
                                                NotificationDTO notification)
```

send notification

Package org.osgi.service.onem2m.dto

This package contains OSGi DTOs used in oneM2M Service Layer API.

See:

[Description](#)

Class Summary		Page
AttributeDTO	DTO expresses Attribute.	32
ChildResourceRefDTO	DTO expressing ChildResourceRef.	33
DasInfoDTO	DTO expressing DasInfo.	35
FilterCriteriaDTO	DTO expressing FilterCriteria.	36
LocalTokenIdAssignmentDTO	DTO expressing LocalTokenIdAssignment.	45
NotificationDTO	DTO expressing Notification.	46
PrimitiveContentDTO	DTO expressing Primitive Content.	49
RequestPrimitiveDTO	DTO expresses Request Primitive.	52
ResourceDTO	DTO expressing Resource.	63
ResourceWrapperDTO	DTO expressing ResourceWrapper.	65
ResponsePrimitiveDTO	DTO expressing Response Primitive.	66
ResponseTypeInfoDTO	Expressing ResponseTypeInfo	71
SecurityInfoDTO	DTO expressing Security Info.	74

Enum Summary		Page
FilterCriteriaDTO.FilterOperation		41
FilterCriteriaDTO.FilterUsage		43
ReleaseVersion	Enum expressing oneM2M specification version.	50
RequestPrimitiveDTO.DiscoveryResultType		57
RequestPrimitiveDTO.Operation		59

RequestPrimitiveDTO.ResultContent		61
ResponsePrimitiveDTO.ContentStatus		69
ResponseTypeInfoDTO.ResponseType		72

Exception Summary		Page
OneM2MException	General Exception for oneM2M.	48

Package org.osgi.service.onem2m.dto Description

This package contains OSGi DTOs used in oneM2M Service Layer API.

Class AttributeDTO

[org.osgi.service.onem2m.dto](#)

```
java.lang.Object
└─ org.osgi.dto.DTO
    └─ org.osgi.service.onem2m.dto.AttributeDTO
```

```
public class AttributeDTO
extends org.osgi.dto.DTO
```

DTO expresses Attribute. This is typically used in FilterCriteriaDTO

Field Summary		Page
String	name	32
Object	value	32

Constructor Summary	Page
AttributeDTO()	32

Methods inherited from class org.osgi.dto.DTO
toString

Field Detail

name

```
public String name
```

value

```
public Object value
```

Constructor Detail

AttributeDTO

```
public AttributeDTO()
```


Class ChildResourceRefDTO

[org.osgi.service.onem2m.dto](#)

```
java.lang.Object
├─ org.osgi.dto.DTO
│   └─ org.osgi.service.onem2m.dto.ChildResourceRefDTO
```

```
public class ChildResourceRefDTO
extends org.osgi.dto.DTO
```

DTO expressing ChildResourceRef.

Field Summary		Page
String	name	33
String	specializationID	33
Integer	type	33
String	uri	33

Constructor Summary	Page
ChildResourceRefDTO()	34

Methods inherited from class org.osgi.dto.DTO
toString

Field Detail

uri

```
public String uri
```

name

```
public String name
```

type

```
public Integer type
```

specializationID

```
public String specializationID
```

Constructor Detail

ChildResourceRefDTO

`public ChildResourceRefDTO()`

Class DasInfoDTO

[org.osgi.service.onem2m.dto](#)

```
java.lang.Object
└─ org.osgi.dto.DTO
    └─ org.osgi.service.onem2m.dto.DasInfoDTO
```

```
public class DasInfoDTO
extends org.osgi.dto.DTO
```

DTO expressing DasInfo. DAS is short for Dynamic Authorization Server.

Field Summary			Page
Map<String, Object>	dasRequest		35
String	securedDasRequest		35
String	uri		35

Constructor Summary		Page
DasInfoDTO()		35

Methods inherited from class org.osgi.dto.DTO	
toString	

Field Detail

uri

```
public String uri
```

dasRequest

```
public Map<String, Object> dasRequest
```

securedDasRequest

```
public String securedDasRequest
```

Constructor Detail

DasInfoDTO

```
public DasInfoDTO()
```

Class FilterCriteriaDTO

[org.osgi.service.onem2m.dto](#)

```
java.lang.Object
└─ org.osgi.dto.DTO
    └─ org.osgi.service.onem2m.dto.FilterCriteriaDTO
```

```
public class FilterCriteriaDTO
extends org.osgi.dto.DTO
```

DTO expressing FilterCriteria. This data structure is used for searching resources.

Nested Class Summary		Page
static enum	FilterCriteriaDTO.FilterOperation	41
static enum	FilterCriteriaDTO.FilterUsage	43

Field Summary		Page
String	applyRelativePath	40
AttributeDTO	attribute	38
AttributeDTO	childAttribute	40
List<String>	childLabels	39
Integer	childResourceType	39
String	contentFilterQuery	39
Integer	contentFilterSyntax	39
List<String>	contentType	38
String	createdAfter	37
String	createdBefore	37
String	expireAfter	38
String	expireBefore	38
FilterCriteriaDTO.FilterOperation	filterOperation	39
FilterCriteriaDTO.FilterUsage	filterUsage	38
List<String>	labels	38
String	labelsQuery	39
Integer	level	39
Integer	limit	38
String	modifiedSince	37
Integer	offset	39
AttributeDTO	parentAttribute	40
List<String>	parentLabels	39

Integer	parentResourceType	40
List<Integer>	resourceType	38
String	semanticsFilter	39
Integer	sizeAbove	38
Integer	sizeBelow	38
Integer	stateTagBigger	37
Integer	stateTagSmaller	37
String	unmodifiedSince	37

Constructor Summary	Page
FilterCriteriaDTO ()	40

Methods inherited from class org.osgi.dto.DTO
toString

Field Detail

createdBefore

public String createdBefore

createdAfter

public String createdAfter

modifiedSince

public String modifiedSince

unmodifiedSince

public String unmodifiedSince

stateTagSmaller

public Integer stateTagSmaller

stateTagBigger

public Integer stateTagBigger

expireBefore

```
public String expireBefore
```

expireAfter

```
public String expireAfter
```

labels

```
public List<String> labels
```

resourceType

```
public List<Integer> resourceType
```

sizeAbove

```
public Integer sizeAbove
```

sizeBelow

```
public Integer sizeBelow
```

contentType

```
public List<String> contentType
```

attribute

```
public AttributeDTO attribute
```

filterUsage

```
public FilterCriteriaDTO.FilterUsage filterUsage
```

limit

```
public Integer limit
```

semanticsFilter

```
public String semanticsFilter
```

filterOperation

```
public FilterCriteriaDTO.FilterOperation filterOperation
```

contentFilterSyntax

```
public Integer contentFilterSyntax
```

contentFilterQuery

```
public String contentFilterQuery
```

level

```
public Integer level
```

offset

```
public Integer offset
```

childLabels

```
public List<String> childLabels
```

parentLabels

```
public List<String> parentLabels
```

labelsQuery

```
public String labelsQuery
```

childResourceType

```
public Integer childResourceType
```

parentResourceType

```
public Integer parentResourceType
```

childAttribute

```
public AttributeDTO childAttribute
```

parentAttribute

```
public AttributeDTO parentAttribute
```

applyRelativePath

```
public String applyRelativePath
```

Constructor Detail

FilterCriteriaDTO

```
public FilterCriteriaDTO()
```


Enum FilterCriteriaDTO.FilterOperation

[org.osgi.service.onem2m.dto](#)

```
java.lang.Object
└─ java.lang.Enum<FilterCriteriaDTO.FilterOperation>
    └─ org.osgi.service.onem2m.dto.FilterCriteriaDTO.FilterOperation
```

All Implemented Interfaces:
Comparable<[FilterCriteriaDTO.FilterOperation](#)>, Serializable

Enclosing class:
[FilterCriteriaDTO](#)

```
public static enum FilterCriteriaDTO.FilterOperation
extends Enum<FilterCriteriaDTO.FilterOperation>
```

Enum Constant Summary		Pag e
AND		41
OR		41

Method Summary		Pag e
int	getValue ()	42
static FilterCriteriaDTO.FilterOperation	valueOf (String name)	42
static FilterCriteriaDTO.FilterOperation []	values ()	41

Enum Constant Detail

AND

```
public static final FilterCriteriaDTO.FilterOperation AND
```

OR

```
public static final FilterCriteriaDTO.FilterOperation OR
```

Method Detail

values

```
public static FilterCriteriaDTO.FilterOperation[] values ()
```

valueOf

```
public static FilterCriteriaDTO.FilterOperation valueOf(String name)
```

getValue

```
public int getValue()
```

Enum FilterCriteriaDTO.FilterUsage

[org.osgi.service.onem2m.dto](#)

```
java.lang.Object
└─ java.lang.Enum<FilterCriteriaDTO.FilterUsage>
    └─ org.osgi.service.onem2m.dto.FilterCriteriaDTO.FilterUsage
```

All Implemented Interfaces:
Comparable<[FilterCriteriaDTO.FilterUsage](#)>, Serializable

Enclosing class:
[FilterCriteriaDTO](#)

```
public static enum FilterCriteriaDTO.FilterUsage
extends Enum<FilterCriteriaDTO.FilterUsage>
```

Enum Constant Summary		Pag e
ConditionalRetrival		43
DiscoveryCriteria		43
IPEOndemandDiscovery		43

Method Summary		Pag e
int	getValue ()	44
static FilterCrit eriaDTO.Fi lterUsage	valueOf (String name)	44
static FilterCrit eriaDTO.Fi lterUsage[]	values ()	44

Enum Constant Detail

DiscoveryCriteria
public static final [FilterCriteriaDTO.FilterUsage](#) **DiscoveryCriteria**

ConditionalRetrival
public static final [FilterCriteriaDTO.FilterUsage](#) **ConditionalRetrival**

IPEOndemandDiscovery
public static final [FilterCriteriaDTO.FilterUsage](#) **IPEOndemandDiscovery**

Method Detail

values

```
public static FilterCriteriaDTO.FilterUsage[] values()
```

valueOf

```
public static FilterCriteriaDTO.FilterUsage valueOf(String name)
```

getValue

```
public int getValue()
```

Class LocalTokenIdAssignmentDTO

[org.osgi.service.onem2m.dto](#)

```
java.lang.Object
└─ org.osgi.dto.DTO
    └─ org.osgi.service.onem2m.dto.LocalTokenIdAssignmentDTO
```

```
public class LocalTokenIdAssignmentDTO
extends org.osgi.dto.DTO
```

DTO expressing LocalTokenIdAssignment.

Field Summary		Page
String	localTokenID	45
String	tokenID	45

Constructor Summary	Page
LocalTokenIdAssignmentDTO()	45

Methods inherited from class org.osgi.dto.DTO
toString

Field Detail

localTokenID

```
public String localTokenID
```

tokenID

```
public String tokenID
```

Constructor Detail

LocalTokenIdAssignmentDTO

```
public LocalTokenIdAssignmentDTO()
```

Class NotificationDTO

[org.osgi.service.onem2m.dto](#)

```
java.lang.Object
└─ org.osgi.dto.DTO
    └─ org.osgi.service.onem2m.dto.NotificationDTO
```

```
public class NotificationDTO
extends org.osgi.dto.DTO
```

DTO expressing Notification.

Field Summary		Page
String	creator	47
Map<String, Object>	ipeDiscoveryRequest	47
Map<String, Object>	notificationEvent	46
String	notificationForwardingURI	47
Boolean	subscriptionDeletion	46
String	subscriptionReference	47
Boolean	verificationRequest	46

Constructor Summary	Page
NotificationDTO ()	47

Methods inherited from class org.osgi.dto.DTO
toString

Field Detail

notificationEvent

```
public Map<String, Object> notificationEvent
```

verificationRequest

```
public Boolean verificationRequest
```

subscriptionDeletion

```
public Boolean subscriptionDeletion
```

subscriptionReference

```
public String subscriptionReference
```

creator

```
public String creator
```

notificationForwardingURI

```
public String notificationForwardingURI
```

ipeDiscoveryRequest

```
public Map<String,Object> ipeDiscoveryRequest
```

Constructor Detail

NotificationDTO

```
public NotificationDTO()
```

Class OneM2MException

[org.osgi.service.onem2m.dto](#)

```
java.lang.Object
└─ java.lang.Throwable
    └─ java.lang.Exception
        └─ java.io.IOException
            └─ org.osgi.service.onem2m.dto.OneM2MException
```

All Implemented Interfaces:
Serializable

```
public class OneM2MException
extends IOException
```

General Exception for oneM2M.

Field Summary		Page
String	cause	48
int	errorCode	48

Constructor Summary	Page
OneM2MException()	48

Field Detail

errorCode
public int **errorCode**

cause

```
public String cause
```

Constructor Detail

OneM2MException
public **OneM2MException()**

Class PrimitiveContentDTO

[org.osgi.service.onem2m.dto](#)

```
java.lang.Object
└─ org.osgi.dto.DTO
    └─ org.osgi.service.onem2m.dto.PrimitiveContentDTO
```

```
public class PrimitiveContentDTO
extends org.osgi.dto.DTO
```

DTO expressing Primitive Content. This Data structure is like union. Only one field MUST have a value, other field MUST be null.

Constructor Summary	Page
PrimitiveContentDTO()	49

Methods inherited from class org.osgi.dto.DTO
toString

Constructor Detail

PrimitiveContentDTO

```
public PrimitiveContentDTO()
```

Enum ReleaseVersion

[org.osgi.service.onem2m.dto](#)

```
java.lang.Object
└─ java.lang.Enum<ReleaseVersion>
    └─ org.osgi.service.onem2m.dto.ReleaseVersion
```

All Implemented Interfaces:
Comparable<[ReleaseVersion](#)>, Serializable

```
public enum ReleaseVersion
extends Enum<ReleaseVersion>
```

Enum expressing oneM2M specification version. This information is introduced after Release 2.0 and oneM2M uses only R2A,R3_0 (as 2a and 3).

Enum Constant Summary		Page
R1_0		50
R1_1		50
R2_0		50
R2A		51
R3_0		51

Method Summary		Page
static ReleaseVersion valueOf (String name)		51
static ReleaseVersion [] values ()		51

Enum Constant Detail

R1_0

```
public static final ReleaseVersion R1_0
```

R1_1

```
public static final ReleaseVersion R1_1
```

R2_0

```
public static final ReleaseVersion R2_0
```

R2A

```
public static final ReleaseVersion R2A
```

R3_0

```
public static final ReleaseVersion R3_0
```

Method Detail

values

```
public static ReleaseVersion[] values()
```

valueOf

```
public static ReleaseVersion valueOf(String name)
```

Class RequestPrimitiveDTO

[org.osgi.service.onem2m.dto](#)

```
java.lang.Object
├─ org.osgi.dto.DTO
│   └─ org.osgi.service.onem2m.dto.RequestPrimitiveDTO
```

```
public class RequestPrimitiveDTO
extends org.osgi.dto.DTO
```

DTO expresses Request Primitive.

Nested Class Summary		Page
static enum	RequestPrimitiveDTO.DiscoveryResultType	57
static enum	RequestPrimitiveDTO.Operation	59
static enum	RequestPrimitiveDTO.ResultContent	61

Field Summary		Page
Boolean	authRelationshipIndicator	56
List<String>	authSignature	56
Boolean	authSignatureIndicator	55
PrimitiveContentDTO	content	54
Boolean	deliveryAggregation	55
RequestPrimitiveDTO.DiscoveryResultType	discoveryResultType	55
String	eventCategory	54
FilterCriteriaDTO	filterCriteria	55
String	from	53
String	groupRequestIdentifier	55
List<String>	groupRequestTargetMembers	55
List<String>	localTokenIDs	55
RequestPrimitiveDTO.Operation	operation	53
String	operationExecutionTime	54
String	originatingTimestamp	54
ReleaseVersion	releaseVersion	56
String	requestExpirationTimestamp	54
String	requestIdentifier	53
Integer	resourceType	53
ResponseTypeInfoDTO	responseType	54

RequestPrimitiveDTO.ResultContent	resultContent	54
String	resultExpirationTimestamp	54
String	resultPersistence	54
List<String>	roleIDs	54
Boolean	semanticQueryIndicator	56
String	to	53
List<String>	tokenIDs	55
Boolean	tokenReqIndicator	55
String	tokens	55
String	verndorInformation	56

Constructor Summary	Page
RequestPrimitiveDTO ()	56

Methods inherited from class org.osgi.dto.DTO
toString

Field Detail

operation
public [RequestPrimitiveDTO.Operation](#) **operation**

to
public String **to**

from
public String **from**

requestIdentifier
public String **requestIdentifier**

resourceType
public Integer **resourceType**

content

```
public PrimitiveContentDTO content
```

roleIDs

```
public List<String> roleIDs
```

originatingTimestamp

```
public String originatingTimestamp
```

requestExpirationTimestamp

```
public String requestExpirationTimestamp
```

resultExpirationTimestamp

```
public String resultExpirationTimestamp
```

operationExecutionTime

```
public String operationExecutionTime
```

responseType

```
public ResponseTypeInfoDTO responseType
```

resultPersistence

```
public String resultPersistence
```

resultContent

```
public RequestPrimitiveDTO.ResultContent resultContent
```

eventCategory

```
public String eventCategory
```

deliveryAggregation

```
public Boolean deliveryAggregation
```

groupRequestIdentifier

```
public String groupRequestIdentifier
```

filterCriteria

```
public FilterCriteriaDTO filterCriteria
```

discoveryResultType

```
public RequestPrimitiveDTO.DiscoveryResultType discoveryResultType
```

tokens

```
public String tokens
```

tokenIDs

```
public List<String> tokenIDs
```

localTokenIDs

```
public List<String> localTokenIDs
```

tokenReqIndicator

```
public Boolean tokenReqIndicator
```

groupRequestTargetMembers

```
public List<String> groupRequestTargetMembers
```

authSignatureIndicator

```
public Boolean authSignatureIndicator
```

authSignature

```
public List<String> authSignature
```

authRelationshipIndicator

```
public Boolean authRelationshipIndicator
```

semanticQueryIndicator

```
public Boolean semanticQueryIndicator
```

releaseVersion

```
public ReleaseVersion releaseVersion
```

verndorInformation

```
public String verndorInformation
```

Constructor Detail

RequestPrimitiveDTO

```
public RequestPrimitiveDTO()
```


Enum RequestPrimitiveDTO.DiscoveryResultType

[org.osgi.service.onem2m.dto](#)

```
java.lang.Object
└─ java.lang.Enum<RequestPrimitiveDTO.DiscoveryResultType>
    └─ org.osgi.service.onem2m.dto.RequestPrimitiveDTO.DiscoveryResultType
```

All Implemented Interfaces:
Comparable<[RequestPrimitiveDTO.DiscoveryResultType](#)>, Serializable

Enclosing class:
[RequestPrimitiveDTO](#)

```
public static enum RequestPrimitiveDTO.DiscoveryResultType
extends Enum<RequestPrimitiveDTO.DiscoveryResultType>
```

Enum Constant Summary		Page
structured		57
unstructured		57

Method Summary		Page
int	getValue ()	58
static RequestPrimitiveDTO.DiscoveryResultType	valueOf (String name)	58
static RequestPrimitiveDTO.DiscoveryResultType []	values ()	57

Enum Constant Detail

structured
public static final [RequestPrimitiveDTO.DiscoveryResultType](#) **structured**

unstructured
public static final [RequestPrimitiveDTO.DiscoveryResultType](#) **unstructured**

Method Detail

values
public static [RequestPrimitiveDTO.DiscoveryResultType](#)[] **values** ()

valueOf

```
public static RequestPrimitiveDTO.DiscoveryResultType valueOf(String name)
```

getValue

```
public int getValue()
```

Enum RequestPrimitiveDTO.Operation

[org.osgi.service.onem2m.dto](#)

```
java.lang.Object
└─ java.lang.Enum<RequestPrimitiveDTO.Operation>
    └─ org.osgi.service.onem2m.dto.RequestPrimitiveDTO.Operation
```

All Implemented Interfaces:

Comparable<[RequestPrimitiveDTO.Operation](#)>, Serializable

Enclosing class:

[RequestPrimitiveDTO](#)

```
public static enum RequestPrimitiveDTO.Operation
extends Enum<RequestPrimitiveDTO.Operation>
```

Enum Constant Summary		Page
Create		59
Delete		60
Notify		60
Retrieve		59
Update		59

Method Summary		Page
int	getValue ()	60
static RequestPrimitiveDTO.Operation	valueOf (String name)	60
static RequestPrimitiveDTO.Operation []	values ()	60

Enum Constant Detail

Create

```
public static final RequestPrimitiveDTO.Operation Create
```

Retrieve

```
public static final RequestPrimitiveDTO.Operation Retrieve
```

Update

```
public static final RequestPrimitiveDTO.Operation Update
```

Delete

```
public static final RequestPrimitiveDTO.Operation Delete
```

Notify

```
public static final RequestPrimitiveDTO.Operation Notify
```

Method Detail

values

```
public static RequestPrimitiveDTO.Operation[] values()
```

valueOf

```
public static RequestPrimitiveDTO.Operation valueOf(String name)
```

getValue

```
public int getValue()
```

Enum RequestPrimitiveDTO.ResultContent

[org.osgi.service.onem2m.dto](#)

```
java.lang.Object
└─ java.lang.Enum<RequestPrimitiveDTO.ResultContent>
    └─ org.osgi.service.onem2m.dto.RequestPrimitiveDTO.ResultContent
```

All Implemented Interfaces:

Comparable<[RequestPrimitiveDTO.ResultContent](#)>, Serializable

Enclosing class:

[RequestPrimitiveDTO](#)

```
public static enum RequestPrimitiveDTO.ResultContent
extends Enum<RequestPrimitiveDTO.ResultContent>
```

Enum Constant Summary	Page
attributes	61
attributesAndChildResourceReferences	62
attributesAndChildResources	62
childResourceReferences	62
childResources	62
hierarchicalAddress	62
hierarchicalAddressAndAttributes	62
nothing	61
originalResource	62

Method Summary	Page
int getValue ()	62
static RequestPrimitiveDTO.ResultContent valueOf (String name)	62
static RequestPrimitiveDTO.ResultContent [] values ()	62

Enum Constant Detail

nothing

```
public static final RequestPrimitiveDTO.ResultContent nothing
```

attributes

```
public static final RequestPrimitiveDTO.ResultContent attributes
```

hierarchicalAddress

```
public static final RequestPrimitiveDTO.ResultContent hierarchicalAddress
```

hierarchicalAddressAndAttributes

```
public static final RequestPrimitiveDTO.ResultContent hierarchicalAddressAndAttributes
```

attributesAndChildResources

```
public static final RequestPrimitiveDTO.ResultContent attributesAndChildResources
```

attributesAndChildResourceReferences

```
public static final RequestPrimitiveDTO.ResultContent attributesAndChildResourceReferences
```

childResourceReferences

```
public static final RequestPrimitiveDTO.ResultContent childResourceReferences
```

originalResource

```
public static final RequestPrimitiveDTO.ResultContent originalResource
```

childResources

```
public static final RequestPrimitiveDTO.ResultContent childResources
```

Method Detail

values

```
public static RequestPrimitiveDTO.ResultContent[] values()
```

valueOf

```
public static RequestPrimitiveDTO.ResultContent valueOf(String name)
```

getValue

```
public int getValue()
```

Class ResourceDTO

[org.osgi.service.onem2m.dto](#)

```
java.lang.Object
└─ org.osgi.dto.DTO
    └─ org.osgi.service.onem2m.dto.ResourceDTO
```

```
public class ResourceDTO
extends org.osgi.dto.DTO
```

DTO expressing Resource.

Field Summary		Page
Map<String, Object>	attribute Non Universal Attribute.	64
String	creationTime	64
List<String>	labels	64
String	lastModifiedTime	64
String	parentID	63
String	resourceID	63
String	resourceName	64
Integer	resourceType	63

Constructor Summary	Page
ResourceDTO()	64

Methods inherited from class org.osgi.dto.DTO
toString

Field Detail

resourceType

public Integer resourceType

resourceID

public String resourceID

parentID

public String parentID

creationTime

```
public String creationTime
```

lastModifiedTime

```
public String lastModifiedTime
```

resourceName

```
public String resourceName
```

labels

```
public List<String> labels
```

attribute

```
public Map<String,Object> attribute
```

Non Universal Attribute. Value Part must be the types that are allowed for OSGi DTO.

Constructor Detail

ResourceDTO

```
public ResourceDTO()
```


Class ResourceWrapperDTO

[org.osgi.service.onem2m.dto](#)

```
java.lang.Object
└─ org.osgi.dto.DTO
    └─ org.osgi.service.onem2m.dto.ResourceWrapperDTO
```

```
public class ResourceWrapperDTO
extends org.osgi.dto.DTO
```

DTO expressing ResourceWrapper.

Field Summary		Page
String	uri	65

Constructor Summary		Page
ResourceWrapperDTO	()	65

Methods inherited from class org.osgi.dto.DTO	
toString	

Field Detail

uri
public String **uri**

Constructor Detail

ResourceWrapperDTO
public **ResourceWrapperDTO**()

Class ResponsePrimitiveDTO

[org.osgi.service.onem2m.dto](#)

```
java.lang.Object
├─ org.osgi.dto.DTO
│   └─ org.osgi.service.onem2m.dto.ResponsePrimitiveDTO
```

```
public class ResponsePrimitiveDTO
    extends org.osgi.dto.DTO
```

DTO expressing Response Primitive.

Nested Class Summary		Page
static enum	ResponsePrimitiveDTO.ContentStatus	69

Field Summary		Page
List< LocalTokenIdAssignmentDTO >	assignedTokenIdentifiers	68
Boolean	AuthSignatureReqInfo	68
PrimitiveContentDTO	content	67
Integer	contentOffset	67
ResponsePrimitiveDTO.ContentStatus	contentStatus	67
String	eventCategory	67
String	from	67
String	originatingTimestamp	67
ReleaseVersion	releaseVersionIndicator	68
String	requestIdentifier	67
Integer	responseStatusCode	67
String	resultExpirationTimestamp	67
String	to	67
List< DasInfoDTO >	tokenReqInfo	68
String	vendorInformation	68

Constructor Summary		Page
	ResponsePrimitiveDTO()	68

Methods inherited from class org.osgi.dto.DTO	
toString	

Field Detail

responseStatusCode

public Integer **responseStatusCode**

requestIdentifier

public String **requestIdentifier**

content

public [PrimitiveContentDTO](#) **content**

to

public String **to**

from

public String **from**

originatingTimestamp

public String **originatingTimestamp**

resultExpirationTimestamp

public String **resultExpirationTimestamp**

eventCategory

public String **eventCategory**

contentStatus

public [ResponsePrimitiveDTO.ContentStatus](#) **contentStatus**

contentOffset

public Integer **contentOffset**

assignedTokenIdentifiers

```
public List<LocalTokenIdAssignmentDTO> assignedTokenIdentifiers
```

tokenReqInfo

```
public List<DasInfoDTO> tokenReqInfo
```

AuthSignatureReqInfo

```
public Boolean AuthSignatureReqInfo
```

releaseVersionIndicator

```
public ReleaseVersion releaseVersionIndicator
```

vendorInformation

```
public String vendorInformation
```

Constructor Detail

ResponsePrimitiveDTO

```
public ResponsePrimitiveDTO()
```

Enum ResponsePrimitiveDTO.ContentStatus

[org.osgi.service.onem2m.dto](#)

```
java.lang.Object
└─ java.lang.Enum<ResponsePrimitiveDTO.ContentStatus>
    └─ org.osgi.service.onem2m.dto.ResponsePrimitiveDTO.ContentStatus
```

All Implemented Interfaces:

Comparable<[ResponsePrimitiveDTO.ContentStatus](#)>, Serializable

Enclosing class:

[ResponsePrimitiveDTO](#)

```
public static enum ResponsePrimitiveDTO.ContentStatus
extends Enum<ResponsePrimitiveDTO.ContentStatus>
```

Enum Constant Summary	Page
FULL_CONTENT	69
PARTIAL_CONTENT	69

Method Summary	Page
static ResponsePrimitiveDTO.ContentStatus valueOf (String name)	70
static ResponsePrimitiveDTO.ContentStatus [] values ()	69

Enum Constant Detail

PARTIAL_CONTENT

```
public static final ResponsePrimitiveDTO.ContentStatus PARTIAL_CONTENT
```

FULL_CONTENT

```
public static final ResponsePrimitiveDTO.ContentStatus FULL_CONTENT
```

Method Detail

values

```
public static ResponsePrimitiveDTO.ContentStatus[] values()
```

valueOf

```
public static ResponsePrimitiveDTO.ContentStatus valueOf(String name)
```

Class ResponseTypeInfoDTO

[org.osgi.service.onem2m.dto](#)

```
java.lang.Object
└─ org.osgi.dto.DTO
    └─ org.osgi.service.onem2m.dto.ResponseTypeInfoDTO
```

```
public class ResponseTypeInfoDTO
extends org.osgi.dto.DTO
```

Expressing ResponseTypeInfo

Nested Class Summary		Page
static enum	ResponseTypeInfoDTO.ResponseType	72

Field Summary		Page
List<String>	notificationURI	71
ResponseTypeInfoDTO.ResponseType	responseTypeValue	71

Constructor Summary		Page
ResponseTypeInfoDTO()		71

Methods inherited from class org.osgi.dto.DTO	
toString	

Field Detail

responseTypeValue

```
public ResponseTypeInfoDTO.ResponseType responseTypeValue
```

notificationURI

```
public List<String> notificationURI
```

Constructor Detail

ResponseTypeInfoDTO

```
public ResponseTypeInfoDTO()
```

Enum ResponseTypeInfoDTO.ResponseType

[org.osgi.service.onem2m.dto](#)

```
java.lang.Object
└─ java.lang.Enum<ResponseTypeInfoDTO.ResponseType>
    └─ org.osgi.service.onem2m.dto.ResponseTypeInfoDTO.ResponseType
```

All Implemented Interfaces:
Comparable<[ResponseTypeInfoDTO.ResponseType](#)>, Serializable

Enclosing class:
[ResponseTypeInfoDTO](#)

```
public static enum ResponseTypeInfoDTO.ResponseType
extends Enum<ResponseTypeInfoDTO.ResponseType>
```

Enum Constant Summary		Page
blockingRequest		72
flexBlocking		73
nonBlockingRequestAsynch		72
nonBlockingRequestSynch		72

Method Summary		Page
int	getValue ()	73
static ResponseTypeInfoDTO.ResponseType	valueOf (String name)	73
static ResponseTypeInfoDTO.ResponseType []	values ()	73

Enum Constant Detail

nonBlockingRequestSynch

public static final [ResponseTypeInfoDTO.ResponseType](#) nonBlockingRequestSynch

nonBlockingRequestAsynch

public static final [ResponseTypeInfoDTO.ResponseType](#) nonBlockingRequestAsynch

blockingRequest

public static final [ResponseTypeInfoDTO.ResponseType](#) blockingRequest

flexBlocking

```
public static final ResponseTypeInfoDTO.ResponseType flexBlocking
```

Method Detail

values

```
public static ResponseTypeInfoDTO.ResponseType[] values()
```

valueOf

```
public static ResponseTypeInfoDTO.ResponseType valueOf(String name)
```

getValue

```
public int getValue()
```

Class SecurityInfoDTO

[org.osgi.service.onem2m.dto](#)

```
java.lang.Object
└─ org.osgi.dto.DTO
    └─ org.osgi.service.onem2m.dto.SecurityInfoDTO
```

```
public class SecurityInfoDTO
extends org.osgi.dto.DTO
```

DTO expressing Security Info.

Field Summary		Page
Map<String, Object>	dasRequest	74
Map<String, Object>	dasResponse	74
byte[]	escertkeMessage	75
String	esprimObject	75
Map<String, Object>	esprimRandObject	75
Integer	securityInfoType	74

Constructor Summary	Page
SecurityInfoDTO()	75

Methods inherited from class org.osgi.dto.DTO
toString

Field Detail

securityInfoType

```
public Integer securityInfoType
```

dasRequest

```
public Map<String, Object> dasRequest
```

dasResponse

```
public Map<String, Object> dasResponse
```

esprimRandObject

```
public Map<String,Object> esprimRandObject
```

esprimObject

```
public String esprimObject
```

escertkeMessage

```
public byte[] escertkeMessage
```

Constructor Detail

SecurityInfoDTO

```
public SecurityInfoDTO()
```

Package org.osgi.service.onem2m.introspection

This package include interfaces for providing information of data structures and checking validity.

See:

[Description](#)

Interface Summary		Page
FlexContainerInspector	FlexContainerInspector provides information of sub data structures and validity of data structure for FlexContainer Resource.	77
Inspector	Inspector provides information of sub data structures and validity of data structure of oneM2M, except FlexContainer.	79

Enum Summary		Page
Optionality	Enum expressing optionality of fields.	82

Package org.osgi.service.onem2m.introspection Description

This package include interfaces for providing information of data structures and checking validity.

Interface FlexContainerIntrospector

org.osgi.service.onem2m.introspection

public interface **FlexContainerIntrospector**

FlexContainerInspector provides information of sub data structures and validity of data structure for FlexContainer Resource.

Method Summary		Page
String[]	findValidationProblems (ResourceDTO resource) Execute Validation of Data Structure	77
String[]	getCustomeAttributeNames (String containerDefinition) get Possible Attributes for the given resourceType.	77
Optionalit y	getOptionalit y (String containerDefinition, String attributeName) get optionality of specified attribute	77
Object	getTemplateObject (String containerDefinition, String customAttributeName) return Typical Data Structure for Type for given attribute of resource type	78
Class	getType (String containerDefinition, String attributeName) return Java Type for given attribute of resource type	78

Method Detail

findValidationProblems

String[] **findValidationProblems** ([ResourceDTO](#) resource)

Execute Validation of Data Structure

Returns:
array of problems

getCustomeAttributeNames

String[] **getCustomeAttributeNames** (String containerDefinition)

get Possible Attributes for the given resourceType.

Returns:
array of Possible Attributes

getOptionality

[Optionality](#) **getOptionality** (String containerDefinition,
String attributeName)

get optionality of specified attribute

Parameters:

containerDefinition - container definition
attributeName - attribute name

Returns:

optionality of the attribute

getType

Class **getType**(String containerDefinition,
String attributeName)

return Java Type for given attribute of resource type

Parameters:

containerDefinition - container definition of flexContainer
attributeName - attribute name

Returns:

expected class for the specified attribute

getTemplateObject

Object **getTemplateObject**(String containerDefinition,
String customAttributeName)

return Typical Data Structure for Type for given attribute of resource type

Parameters:

containerDefinition - container definition of flexContainer

Returns:

Template Object

Interface Introspector

org.osgi.service.onem2m.introspection

```
public interface Introspector
```

Inspector provides information of sub data structures and validity of data structure of oneM2M, except FlexContainer.

Method Summary		Page
String[]	findValidationProblems (RequestPrimitiveDTO req) execute Validation of Data Structure	79
String[]	findValidationProblems (ResponsePrimitiveDTO resp) execute Validation of Data Structure	79
String[]	findValidationProblemsForCreate (ResourceDTO resource) execute Validation of Data Structure	80
String[]	findValidationProblemsForUpdate (ResourceDTO resource) execute Validation of Data Structure	80
String[]	getAttributeNames (int resourceType) get Possible Attributes for specified resourceType.	80
Optional V	getOptionalitvForCreate (int resourceType, String attributeName) get Optionality of specified attribute in create operation.	80
Optional V	getOptionalitvForUpdate (int resourceType, String attributeName) get Optionality of specified attribute in update operation.	80
Object	getTemplateObject (int resourceType, String Attribute) return Typical Data Structure for Type of specified attribute of resource type	81
Class	getType (int resourceType, String attributeName) return Java Type for given attribute of resource type	81

Method Detail

findValidationProblems

```
String[] findValidationProblems (ResponsePrimitiveDTO resp)
```

execute Validation of Data Structure

Returns:

array of problems

findValidationProblems

```
String[] findValidationProblems (RequestPrimitiveDTO req)
```

execute Validation of Data Structure

Returns:

array of problems

findValidationProblemsForCreate

`String[] findValidationProblemsForCreate (ResourceDTO resource)`

execute Validation of Data Structure

Returns:

array of problems

findValidationProblemsForUpdate

`String[] findValidationProblemsForUpdate (ResourceDTO resource)`

execute Validation of Data Structure

Returns:

array of problems

getAttributeNames

`String[] getAttributeNames (int resourceType)`

get Possible Attributes for specified resourceType.

Returns:

array of Possible Attribute Names

getOptionalityForCreate

`Optionality getOptionalityForCreate (int resourceType,
String attributeName)`

get Optionality of specified attribute in create operation.

Parameters:

resourceType - resource type
attributeName - attribute Name

Returns:

Optionality

getOptionalityForUpdate

`Optionality getOptionalityForUpdate (int resourceType,
String attributeName)`

get Optionality of specified attribute in update operation.

Parameters:

resourceType - resource type

attributeName - attribute Name

Returns:

Optionality

getType

Class **getType**(int resourceType,
String attributeName)

return Java Type for given attribute of resource type

Parameters:

resourceType - resource type
attributeName - attribute Name

Returns:

expected class for the specified attribute

getTemplateObject

Object **getTemplateObject**(int resourceType,
String Attribute)

return Typical Data Structure for Type of specified attribute of resource type

Returns:

Template Object

Enum Optionality

[org.osgi.service.onem2m.introspection](#)

```
java.lang.Object
└─ java.lang.Enum<Optionality>
    └─ org.osgi.service.onem2m.introspection.Optionality
```

All Implemented Interfaces:

Comparable<[Optionality](#)>, Serializable

```
public enum Optionality
extends Enum<Optionality>
```

Enum expressing optionality of fields.

Enum Constant Summary	Page
Mandatory	82
NotPresent	82
Optional	82

Method Summary	Page
static Optionality valueOf (String name)	83
static Optionality values ()	82

Enum Constant Detail

Mandatory

```
public static final Optionality Mandatory
```

Optional

```
public static final Optionality Optional
```

NotPresent

```
public static final Optionality NotPresent
```

Method Detail

values

```
public static Optionality[] values()
```

valueOf

```
public static Optionality valueOf(String name)
```

Java API documentation generated with [DocFlex/Doclet](#) v1.6.1

DocFlex/Doclet is both a multi-format Javadoc doclet and a free edition of [DocFlex/Javadoc](#). If you need to customize your Javadoc without writing a full-blown doclet from scratch, DocFlex/Javadoc may be the only tool able to help you! Find out more at www.docflex.com

8 Considered Alternatives

For posterity, record the design alternatives that were considered but rejected along with the reason for rejection. This is especially important for external/earlier solutions that were deemed not applicable.

8.1 Representation of DTO

8.1.1 JAXB generated Class

As alternative solution, utilization of generated Java classes by JAXB has been considered, since oneM2M provides well defined XSD for defining data format. With the following aspects, this approach is not applied.

Many classes: Currently 65 XSD files are defined in oneM2M specification and JAXB tool (xjc) generates more than 140 Java classes. Using many classes as interface could make specification more complicated than its nature.

No Uniqueness: Generated classes by xjc are not unique, because it is possible to customize generation processes.

Changeability: Depending on the version of oneM2M, XSD files differ. It is preferable to choose version independent API, as much as possible. oneM2M ensures any data can be converted to JSON and CBOR, so proposed approach can be used with out modification, even if XSD file would be changed.

8.1.2 Generic DTO

Generic DTO, which has Map<String, Obj> in the top, has been discussed in Gent meeting. But it seems bad usage of defining DTO.

8.1.3 Specific DTO

SpecificDTO definitions have been generated from XSD generated classes. The number of DTO exceeds 170 and Java doc pages are getting 300 pages. It is apparently too much to express data formats. So middle approach of generic DTO and specific DTO has been chosen.

8.2 Resource Types Expression

In DTO, enum was eagerly used for clear candidates of possible values. But resource types seems more fragile because new resource types could be easily added. So Integer was chosen for resource types.

8.3 Use of Annotation defined by JAXB in DTO

Currently annotations defined by JAXB was used in DTO. It was pointed out as confusing because it might give impression that it only support XML serialization. But it was kept in the definitions by following reasons.

1. Removing the annotations are easier than inserting.
2. It is informative to specify optionality.

New OSGI annotation specifying optionality could be possible, but it might take time because it should be published as Core specification and R7 just has released.

9 Security Considerations

Description of all known vulnerabilities this may either introduce or address as well as scenarios of how the weaknesses could be circumvented.

9.1 ProtocolBinding Service with secure protocol configuration

In case that ProtocolBinding Service uses secure protocols, it is expected to handle pre-shared key or certificate and other parameters. Those configuration could be very diverse. This is out of scope of this RFC and it is responsibility of bundle developer that provides ProtocolBindingService.

9.2 Binding of AE Core and Protocol Binding

Protocol Binding has identity information, such as a key or certificate, which represents AE, so that AE core MUST be bound to the right protocol service binding. It is implementation's responsibility of protocol binding, it SHOULD utilize Service Factory to determine calling entity.

10 Document Support

10.1 References

- [1]. Bradner, S., Key words for use in RFCs to Indicate Requirement Levels, RFC2119, March 1997.
- [2]. oneM2M TS-0001 Functional Architecture, http://onem2m.org/images/files/deliverables/Release2/TS-0001-%20Functional_Architecture-V2_10_0.pdf
- [3]. oneM2M TS-0004 Service Layer Core Protocol, http://onem2m.org/images/files/deliverables/Release2/TS-0004_Service_Layer_Core_Protocol_V2_7_1.zip

- [4]. oneM2M TS-0001 Functional Architecture Draft v3.11.0, <http://www.onem2m.org/technical/published-drafts>
- [5]. oneM2M TS-0004 Service Layer Core Protocol Draft v3.7.0, <http://www.onem2m.org/technical/published-drafts>
- [6]. XSD files for oneM2M, <https://git.onem2m.org/PRO/XSD.git>
- [7]. Software Requirements & Specifications. Michael Jackson. ISBN 0-201-87712-0
(NOTE:Is this needed?)

*Add references simply by adding new items. You can then cross-refer to them by chosing <Insert><Cross Reference><Numbered Item> and then selecting the paragraph. **STATIC REFERENCES (I.E. BODGED) ARE NOT ACCEPTABLE, SOMEONE WILL HAVE TO UPDATE THEM LATER, SO DO IT PROPERLY NOW.***

10.2 Author's Address

Name	Hiroyuki Maeomichi
Company	NTT
Address	Midorimachi 3-9-11, Musashino, Tokyo, Japan
Voice	+81 422 59 4072
e-mail	maeomichi.hiroyuki@lab.ntt.co.jp

10.3 Acronyms and Abbreviations

CSE: Common Services Entity

AE: Application Entity

CBOR: Concise Binary Object Representation

10.4 End of Document