



# OSGi<sup>TM</sup> Alliance

## **RFC 219 LogService Update**

Draft

54 Pages

### **Abstract**

Logging is a crucial component to discover software bugs in a software system. The OSGi Log Service was the first compendium service and the Java eco-system gained over time many different log solutions: Log4j 2, Logback, Java Util Logging, etc. Since the OSGi Log Service was not further developed, the API does not take advantages of any of the new features in Java and looks very simplistic in comparison to mainstream Java. This document seeks to improve the Log Service API and add additional roles to upgrade it to Java 8.

---

# 0 Document Information

---

## 0.1 License

### **DISTRIBUTION AND FEEDBACK LICENSE, Version 2.0**

The OSGi Alliance hereby grants you a limited copyright license to copy and display this document (the "Distribution") in any medium without fee or royalty. This Distribution license is exclusively for the purpose of reviewing and providing feedback to the OSGi Alliance. You agree not to modify the Distribution in any way and further agree to not participate in any way in the making of derivative works thereof, other than as a necessary result of reviewing and providing feedback to the Distribution. You also agree to cause this notice, along with the accompanying consent, to be included on all copies (or portions thereof) of the Distribution. The OSGi Alliance also grants you a perpetual, non-exclusive, worldwide, fully paid-up, royalty free, limited license (without the right to sublicense) under any applicable copyrights, to create and/or distribute an implementation of the Distribution that: (i) fully implements the Distribution including all its required interfaces and functionality; (ii) does not modify, subset, superset or otherwise extend the OSGi Name Space, or include any public or protected packages, classes, Java interfaces, fields or methods within the OSGi Name Space other than those required and authorized by the Distribution. An implementation that does not satisfy limitations (i)-(ii) is not considered an implementation of the Distribution, does not receive the benefits of this license, and must not be described as an implementation of the Distribution. "OSGi Name Space" shall mean the public class or interface declarations whose names begin with "org.osgi" or any recognized successors or replacements thereof. The OSGi Alliance expressly reserves all rights not granted pursuant to these limited copyright licenses including termination of the license at will at any time.

EXCEPT FOR THE LIMITED COPYRIGHT LICENSES GRANTED ABOVE, THE OSGi ALLIANCE DOES NOT GRANT, EITHER EXPRESSLY OR IMPLIEDLY, A LICENSE TO ANY INTELLECTUAL PROPERTY IT, OR ANY THIRD PARTIES, OWN OR CONTROL. Title to the copyright in the Distribution will at all times remain with the OSGi Alliance. The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted therein are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

THE DISTRIBUTION IS PROVIDED "AS IS," AND THE OSGi ALLIANCE (INCLUDING ANY THIRD PARTIES THAT HAVE CONTRIBUTED TO THE DISTRIBUTION) MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, OR TITLE; THAT THE CONTENTS OF THE DISTRIBUTION ARE SUITABLE FOR ANY PURPOSE; NOR THAT THE IMPLEMENTATION OF SUCH CONTENTS WILL NOT INFRINGE ANY THIRD PARTY PATENTS, COPYRIGHTS, TRADEMARKS OR OTHER RIGHTS.

NEITHER THE OSGi ALLIANCE NOR ANY THIRD PARTY WILL BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF OR RELATING TO ANY USE OR DISTRIBUTION OF THE DISTRIBUTION.

Implementation of certain elements of this Distribution may be subject to third party intellectual property rights, including without limitation, patent rights (such a third party may or may not be a member of the OSGi Alliance). The OSGi Alliance is not responsible and shall not be held responsible in any manner for identifying or failing to identify any or all such third party intellectual property rights.

The Distribution is a draft. As a result, the final product may change substantially by the time of final publication, and you are cautioned against relying on the content of this Distribution. You are encouraged to update any implementation of the Distribution if and when such Distribution becomes a final specification.

The OSGi Alliance is willing to receive input, suggestions and other feedback ("Feedback") on the Distribution. By providing such Feedback to the OSGi Alliance, you grant to the OSGi Alliance and all its Members a non-exclusive, non-transferable,

worldwide, perpetual, irrevocable, royalty-free copyright license to copy, publish, license, modify, sublicense or otherwise distribute and exploit your Feedback for any purpose. Likewise, if incorporation of your Feedback would cause an implementation of the Distribution, including as it may be modified, amended, or published at any point in the future ("Future Specification"), to necessarily infringe a patent or patent application that you own or control, you hereby commit to grant to all implementers of such Distribution or Future Specification an irrevocable, worldwide, sublicenseable, royalty free license under such patent or patent application to make, have made, use, sell, offer for sale, import and export products or services that implement such Distribution or Future Specification. You warrant that (a) to the best of your knowledge you have the right to provide this Feedback, and if you are providing Feedback on behalf of a company, you have the rights to provide Feedback on behalf of your company; (b) the Feedback is not confidential to you and does not violate the copyright or trade secret interests of another; and (c) to the best of your knowledge, use of the Feedback would not cause an implementation of the Distribution or a Future Specification to necessarily infringe any third-party patent or patent application known to you. You also acknowledge that the OSGi Alliance is not required to incorporate your Feedback into any version of the Distribution or a Future Specification.

I HEREBY ACKNOWLEDGE AND AGREE TO THE TERMS AND CONDITIONS DELINEATED ABOVE.

---

## 0.2 Trademarks

OSGi™ is a trademark, registered trademark, or service mark of the OSGi Alliance in the US and other countries. Java is a trademark, registered trademark, or service mark of Oracle Corporation in the US and other countries. All other trademarks, registered trademarks, or service marks used in this document are the property of their respective owners and are hereby recognized.

---

## 0.3 Feedback

This document can be downloaded from the OSGi Alliance design repository at <https://github.com/osgi/design> The public can provide feedback about this document by opening a bug at <https://www.osgi.org/bugzilla/>.

---

## 0.4 Table of Contents

<b>0 Document Information.....</b>	<b>2</b>
0.1 License.....	2
0.2 Trademarks.....	3
0.3 Feedback.....	3
0.4 Table of Contents.....	3
0.5 Terminology and Document Conventions.....	4
0.6 Revision History.....	4
<b>1 Introduction.....</b>	<b>6</b>
<b>2 Application Domain.....</b>	<b>6</b>
2.1 OSGi Log Service.....	6
2.2 Open Source.....	6
2.3 OSGi enRoute.....	8
2.4 Apache Sling Log Service.....	9
2.5 Terminology + Abbreviations.....	9
<b>3 Problem Description.....</b>	<b>9</b>
<b>4 Requirements.....</b>	<b>10</b>
4.1 SLF4J Loggers.....	10
4.2 Log Service.....	10
4.3 Log Admin.....	10
4.4 Log Reader.....	11
4.5 Log Entry.....	11

<b>5 Technical Solution.....</b>	<b>11</b>
5.1 Logger.....	11
5.1.1 Logger names.....	12
5.1.2 DS Support for Logger.....	12
5.2 Obtaining LogEntries.....	12
5.3 LogEntry.....	13
5.4 Logger Admin.....	14
5.4.1 Logger Context.....	14
5.4.2 Logger Configuration.....	14
5.4.3 Configuration Admin Integration.....	14
5.4.4 Effective Log Level.....	15
5.5 LogService Legacy.....	15
5.6 Mapping of Events.....	16
5.7 SLF4J Support.....	16
5.8 Capabilities.....	16
5.8.1 osgi.service Capabilities.....	16
<b>6 Javadoc.....</b>	<b>17</b>
<b>7 Considered Alternatives.....</b>	<b>53</b>
7.1 osgi.implementation Capability.....	53
7.2 LogStream.....	53
<b>8 Security Considerations.....</b>	<b>53</b>
<b>9 Document Support.....</b>	<b>54</b>
9.1 References.....	54
9.2 Author's Address.....	54
9.3 Acronyms and Abbreviations.....	54
9.4 End of Document.....	54

---

## 0.5 Terminology and Document Conventions

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY" and "OPTIONAL" in this document are to be interpreted as described in 9.1.

Source code is shown in this typeface.

---

## 0.6 Revision History

The last named individual in this history is currently responsible for this document.

Revision	Date	Comments
Initial	2016-01-05	Initial draft. BJ Hargrave

Revision	Date	Comments
2 <sup>nd</sup> draft	2016-01-14	<p>Updates from CPEG meeting in Madrid.</p> <p>Add FormatterLogger, LogService extends LoggerFactory, DS support for Logger injection.</p> <p>BJ Hargrave</p>
3 <sup>rd</sup> draft	2016-01-21	<p>Updates from CPEG call. Moved LogStream into a separate package.</p> <p>BJ Hargrave</p>
4 <sup>th</sup> draft	2016-02-16	<p>Updated additional arguments description for {} place holders to match SLF4J behavior.</p> <p>BJ Hargrave</p>
5 <sup>th</sup> draft	2016-02-26	<p>Added org.osgi.service.log.admin package design to support inspecting and configuring log levels for named Loggers by bundle.</p> <p>BJ Hargrave</p>
6 <sup>th</sup> draft	2016-03-01	<p>Updated handling of legacy log methods given changes draft 5. Also clarified some aspects of Configuration Admin integration.</p> <p>BJ Hargrave</p>
7 <sup>th</sup> draft	2016-03-02	<p>Added information on updating 101.6 Mapping of Events.</p> <p>BJ Hargrave</p>
8 <sup>th</sup> draft	2016-03-03	<p>Updates from CPEG call. Configuration changes via LoggerContext are not persisted. To persistently configure log levels, you must do so via the Configuration Admin integration.</p> <p>BJ Hargrave</p>
9 <sup>th</sup> draft	2016-03-14	<p>Updated with changes for slf4j support.</p> <p>BJ Hargrave</p>
10 <sup>th</sup> draft	2016-04-29	<p>Added withHistory() method to LogStream. Added capabilities section per bug 2874.</p> <p>BJ Hargrave</p>
11 <sup>th</sup> draft	2016-05-05	<p>Deleted osgi.implementation capability per bug 2907.</p> <p>BJ Hargrave</p>
<a href="#">12<sup>th</sup> draft</a>	<a href="#">2016-07-06</a>	<p><a href="#">Changed how PushStream&lt;LogEntry&gt; is obtained based upon comments from EG meetings in Darmstadt.</a></p> <p><a href="#">BJ Hargrave</a></p>

# 1 Introduction

---

This RFC originates from a general desire in the OSGi community to upgrade the OSGi Log service and provide a more mainstream solution to make OSGi logging look more modern. The RFC is influenced by the OSGi enRoute project.

---

## 2 Application Domain

---

### 2.1 OSGi Log Service

The Log Service API has 4 methods. Each method takes a log level and a *message* string. In the OSGi Log Service this is an int. The ERROR level is 1, the TRACE level is 4, additional levels are accepted and stored. The 4 variations are used to pass a Service Reference and a Throwable.

Since the Log Service is aware of the bundle logging it can automatically provide this bundle in the entries. The OSGi Log Service is a dispatcher, it brokers between a *log client* and zero or more *log appenders*. The clients get the OSGi Log Service and the appenders get the OSGi Log Reader Service and register a listener with the Log Reader Service. The listener is then updated of any logging entries submitted by any client. The OSGi Log Reader has an optional history of recent events. The purpose of the history is to capture the log *entries* before the appender had been able to register itself.

A log entry consists of the bundle, a message, and an optional Service Reference and/or Throwable.

Since the OSGi Log Service uses services there can be multiple implementations and there is no guarantee that there is a log service is present. However, in general, there is only one Log Service and Log Reader service registered. In Declarative Services (DS) terms, the Log service should in general be a static dependency of a log client, which implies that the highest ranking log service is used. Though theoretically possible, few clients log to all registered service. Multiple Log Services is deemed an anomaly because it is a broker model and multiple brokers forfeit the purpose a bit.

Since the Log Service is a service it is possible that there is a need to log before the Log Service is available. Best practices in this case is to record the events until the Log Service becomes available, print to standard out, or ignore events. In Declarative Services, the bind methods that are called before the component is activated (and thus can be called before the Log Service is bound) can throw exceptions that are then logged by the Service Component Runtime.

---

### 2.2 Open Source

In the Open Source world a frenzy took place in developing log APIs. The current situation is quite complex because there are so many choices which created their own problems requiring facades that could log to many

different logging subsystems. About ten years ago Java introduced `java.util.logging` but received a lot of flack from the industry because they had not followed best practices. Logging seems to be a quite sensitive product in our industry.

Today it seems that the Simple Logging Facade for Java (SLF4J) is the most mainstream API for clients. The reason of its success is partly its design. It provides an API that is identical to some of the other APIs and it can easily forward the logged entries to other log subsystems. This makes SLF4J attractive from the point of view of the log client.

SLF4J has the concept of a named *logger*. A logger is generally created in a static variable and is obtained from the `LoggerFactory` class. The name is generally the class name (there is an overloaded method on the `LoggerFactory` to give a class object). When the first logger is created, the SLF4J code does some very heavy handed dynamic class loading magic to find a *provider*. The factory classes of the provider are generally implemented in a standard package in the SLF4J namespace. The provider then creates an implementation of the `Logger` class that is returned to the client. Since this is all static, it happens lazily on the first creation. However, it does require all classes to be visible from the API classes. In OSGi it is therefore necessary to provide the implementation in the same bundle as the API bundle, or use a fragment on the API bundle.

The name of the logger is then used to establish on what level should actually be logged. Since Java class names are hierarchical, wildcards can be used to set the levels for related loggers. In SLF4J, the configuration is set with a properties file/resource that is searched for on well known places. In OSGi, fragments on the API bundle are often used to provide these properties. If a different configuration is needed then the application must be restarted. A logger is set to be *active* for a given level when log messages are passed to the appender.

The SLF4J API is a hodgepodge of log methods that come from different other log APIs and improvements over time. In general, the level is encoded in the method name. i.e. there are error, warn, trace, debug and info.

An important aspect of logging is the performance. Enterprise code is heavily instrumented and logging can take a significant portion of the code and CPU time. It is crucial to minimize the overhead of logging. This is the reason why often the actual log method is not called when the level is not active:

```
if (logger.isDebugEnabled())  
    logger.debug("Hello " + name );
```

The reason of this pattern that this way the concatenation of the strings only takes place when the level is active. With the advent of Java 5 we got varargs. Varargs made it easy to defer the cost of computations of the parameters to when it is actually necessary. This made printf like loggers popular:

```
logger.debug("Hello {}", name );
```

This reduced the clutter of log messages significantly. The SLF4J Logger provides printf like methods for all supported levels but does not use the familiar % syntax of the Java String Formatters. It uses the message based format with curly braces.

SLF4J also provides capture of the current threads and *markers*. Markers allow the introduction of variables in the log that can bind different parts in an execution.

List of currently used logging frameworks:

- Log4j and the next version Log4j 2
- SLF4J and the update Logback
- Java 2 Logging API


## 2.3 OSGi enRoute

In the OSGi enRoute [7] project it was clear from the beginning that SLF4J was so popular in open source that it needed to be supported. However, though SLF4J and its appenders are delivered as bundles, it was not seen as a good idea to bypass the OSGi service model since the factory model is heavily based on dynamic class loading, causing all kinds of visibility problems. Therefore the approach was taken to provide a special enRoute appender that captured the log entries and forwarded them to the Log Service. Since this appender can be created before any OSGi framework is available it cannot rely on any of the OSGi mechanisms. It therefore buffers the log entry in memory as well as any loggers that access it.

Once the enRoute logger bundle becomes available it then accesses the static history and registers itself as the master. This logger bundle is configured with rules for the active levels for each logger. Based on these rules it forwards the entries to the OSGi Log Service. It is assumed that any appenders to other log systems would then use a Log Reader service. Mapping SLF4J entries to OSGi entries was a tad painful since the OSGi entries missed concepts like threads, sequence numbers, and markers.

Since dynamics are so important in OSGi, it also defined a Log Service Admin that could be used to manage the active levels of the loggers as well as provide the names of loggers that have logged. With this service (and corresponding Gogo commands) it is possible to dynamically change the active level of loggers.

The service diagram of the enRoute solution looked as depicted here:

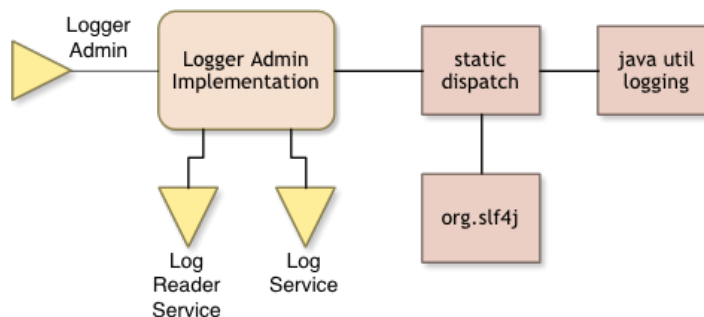

OSGi enRoute registers an SLF4J Logger service and uses a Service Factory to capture the bundle. The name of this logger is then the symbolic name and version of the captured bundle. Though a logging service has the slight disadvantage that it is not available during initialization, it has the huge benefit of the service model. Since Declarative Services takes care of logging for errors in binding methods, the practical disadvantage is actually quite small.

Additionally, the OSGi enRoute also provided a utility to log based on a mechanism pioneered in bnd. The utility took an interface and a Logger and returned a proxy. Each method on the interface was a log message. The proxy handler would take the method name and turn it into a message, interleaving it with the arguments of the method. The level was defined by the return type.

Annotations were added to override the automatic message generation and to allow reorder and format arguments with the Java String Formatter API. By using Java types, the IDE helps finding log messages and refactoring log messages. The overhead is quite minimal since dynamic proxies have become quite fast today.

Last, and maybe least, OSGi enRoute added an additional level: AUDIT. This is a non-maskable level. Many financial institutions use log messages to audit, using a special level can provide more guarantees.



---

## 2.4 Apache Sling Log Service

The Apache Sling Log Service follows similar patterns but uses a slightly different route. In addition to consider SLF4J the most used log library, it also acknowledges that logback (<http://logback.qos.ch/>) is the most common backend for processing log entries.

Instead of funneling all log entries through the OSGi LogService, everything is passed on to SLF4J and from there to logback. Therefore the OSGi LogService logs to SLF4J and all the bridges are in place to pass log entries done through JUL or LOG4J to SLF4J.

Loggers and log levels can be configured through OSGi configurations. Config changes are of course processed dynamically and directly applied. On the other hand instead of using the OSGi LogService as an extension model, logback concepts are used through the whiteboard pattern. Logback TurboFilters, Filters, Appenders etc. can be registered dynamically as well as some other extensions.

This approach uses the most common parts today used for logging: SLF4J for clients and logback for processing.

[1] <http://sling.apache.org/documentation/development/logging.html>

---

## 2.5 Terminology + Abbreviations

- SLF4J - Simple Logging Facade for Java

---

# 3 Problem Description

---

The current OSGi Log Service suffers from the following problems:

- There is no way to set log levels so that not all messages are logged or a certain client.
- The OSGi Log Service API with its separate level is awkward to use in the code, the current practice is to use methods with the level name.
- The log client must construct the full message before the call is executed. This costs time and screen space.
- The current API does not capture threads, nor provides markers, or maintains sequence numbers
- The Log Service is not always available when a entry must be logged, especially during initialization. Then bundles need to buffer the log entries or print them on the console.
- The Log Service specification was developed before the whiteboard model was popular. This means that Log Listeners must first get the Log Reader Service and then register themselves. This is awkward, the whiteboard is much more convenient.

- Static loggers like SLF4J do not capture the bundle information
- Static loggers like SLF4J require class loading hacks to link them to an appender that are very non-OSGi like.

---

## 4 Requirements

---

### 4.1 SLF4J Loggers

- S0010 – It must be possible to use SLF4J API to log
- S0020 – It must be possible to create a static SLF4J logger (the normal way)
- S0030 – It must be possible to use a SFL4J Logger service that is automatically named according to the bundle's symbolic name and version.
- S0040 – Describe how static loggers are cleaned up when a bundle is uninstalled
- S0050 – Define how the the SLF4J go to the OSGi Log Service, taking into account that the bundle implementing the Log Service might be active when the SLF4J log entry is made and no entries may be lost.
- S0060 - Provide SLF4J support as an open source impl (via github for example) rather than bake SLF4J into a specification.

---

### 4.2 Log Service

- L0010 – The Log Service must provide a new level for AUDIT that cannot be ignored
- L0020 – The Log Service must provide a new level for TRACE to match SLF4J.
- L0030 – The Log Service API should be extended with the methods from the SLF4J Logger API. A varargs method should be added as will as the common 1, 2, ... n arg versions for performance (avoid compiler always creating array to hold varargs).
- L0050 – Generally ensure that all SLF4J concepts map to a Log Service concept.
- L0060 – Provide visibility to the current log level so it can be interrogated.

---

### 4.3 Log Admin

- A0010 – The active levels of the loggers must be dynamically changeable

- A0020 – It must be possible to get a list of active loggers with their active level.
- A0030 – It must be possible to set the active level of a bundle for all logger from that bundle, assuming that static loggers come from the bundle they were loaded from.
- A0040 – It must be possible to get some Key Performance Indicators (KPIs) of the Logging subsystem like log entries per second, total entries, black listed readers, etc.
- A0050 – Provide a means to take action if a KPI reaches a threshold.

---

## 4.4 Log Reader

- R0010 – The Log Reader Listener must become whiteboard

---

## 4.5 Log Entry

- E0010 – It must be possible to capture thread information (thread id/thread name) in a Log Entry
- E0030 – The solution must provide the log entry with a sequence number.
- E0040 – The solution must provide the log entry with a logger name.
- E0050 – The solution should provide an option to include location info like the class and the method and line number if available.

---

# 5 Technical Solution

---

---

## 5.1 Logger

A new type is added to hold the various logging methods: `Logger`. The old log methods on `LogService` are now deprecated and a super interface, `LoggerFactory`, is added having methods to obtain a named `Logger` object. In SLF4J parlance, the `LoggerFactory` serves the function of an `ILoggerFactory`.

Like SLF4J, logging method names are based upon the log levels and will only log if the level is in effect. Methods are present to test if a log level is in effect to enable work avoidance.

Like SLF4J, the `Logger` log methods support formatted messages with “{}” place holders to avoid object-to-string conversion and string concatenation if the log level is not in effect.

As an option, the `LoggerFactory` also supports obtaining `FormatterLogger` objects which use printf-style formatting.

The implementation of the LogService specification must register the logging service under both the LogService name and the LoggerFactory name since they represent the same log and since LogService extends LoggerFactory.

### 5.1.1 Logger names

Logger names should be in the form of a fully qualified Java class names with segments separated by full stop ('.' \u002E). For example:

```
com.foo.Bar
```

Logger names form a hierarchy. A logger name is said to be an ancestor of another logger name if the logger name followed by a full stop ('.' \u002E) is a prefix of the descendant logger name. The root logger name ("ROOT") is the top ancestor of the logger name hierarchy. For example:

```
com.foo.Bar
```

```
com.foo
```

```
com
```

```
ROOT
```

### 5.1.2 DS Support for Logger

Since logging is both important and needed early in code execution, RFC 222 will add special support for injecting Logger and FormatterLogger objects even though they themselves are not services. When a component references the Logger or FormatterLogger types, SCR must first get the LoggerFactory service matching the reference and then call the `getLogger(String, Class)` method passing the component implementation class name as the first argument and the Logger type as the second argument. The returned Logger object is then injected for the reference, rather than the LoggerFactory service used to create the Logger.

A DS example using Logger:

```
@Component
public class MyComponent {
    @Reference
    private Logger logger;
    @Activate
    void activate(ComponentContext context) {
        logger.trace("activating component id {}",
            context.getProperties().get("component.id"));
    }
}
```

---

## 5.2 Obtaining LogEntries

A new [LogStreamProvider](#) service is defined to replace the `LogReaderService`. The [LogStreamProvider](#) service is ~~a prototype scope service which must be obtained as a prototype scope service using `ServiceObjects` or `@Reference(scope = ReferenceScope.PROTOTYPE_REQUIRED)` in a Declarative Service component used to create `PushStream<LogEntry>` streams.~~

Since the log is basically an ongoing stream of LogEntries having asynchronous arrival, a `LogStream` object is a `PushStream<LogEntry>` and object can be used to receive the LogEntries. The following code snippet shows how one could get the log entries and print them.

```
@Reference(scope = ReferenceScope.PROTOTYPE_REQUIRED)
public void handleLog(LogStreamProvider logs) {
    logs.createStream()
        .forEach(l -> System.out.println(l))
        .onResolve(() -> System.out.println("LogStream closed"));
}
```

An existing LogListener implementation can also be used with LogStreamProvider.

```
private LogListener ll;
@Reference(scope = ReferenceScope.PROTOTYPE_REQUIRED)
public void handleLog(LogStreamProvider logs) {
    logs.createStream()
        .forEach(ll::logged)
        .onResolve(() -> System.out.println("LogStream closed"));
}
```

The LogStreamProvider typeservice includes a `withHistory()` HISTORY method option which will prime the `PushLogStream<LogEntry>` with the past log history, if any. The following code will process the past log entries followed by any new log entries.

```
@Reference(scope = ReferenceScope.PROTOTYPE_REQUIRED)
public void handleLog(LogStreamProvider logs) {
    logs.withHistory().createStream(LogStreamProvider.Options.HISTORY)
        .forEach(l -> System.out.println(l))
        .onResolve(() -> System.out.println("LogStream closed"));
}
```

This change depends upon RFC 216 Push Streams.

The LogStreamProvider interface is in a separate package, `org.osgi.service.log.stream`, so that the existing `org.osgi.service.log` package does not use the `org.osgi.util.pushstream` package. The `org.osgi.util.pushstream` package requires `org.osgi.util.promise` and Java 8. Having LogStreamProvider in a separate package allows the `org.osgi.service.log` package to be implemented in a framework without dragging in the dependencies on `org.osgi.util.pushstream`, `org.osgi.util.promise` and Java 8. In this case, LogStreamProvider can be implemented by an external bundle which sources LogEntries from the LogReaderService.

## 5.3 LogEntry

LogEntry is extended to include:

- Thread information on the log entry creator.
- A sequence number which increases for each created log entry.
- The name of the Logger used to create the log entry.
- A StackTraceElement element of the caller that created the log entry.

## 5.4 Logger Admin

A Logger Admin service is defined which allows for the configuration of Loggers. The Logger Admin service can be used to obtain the Logger Context for a bundle. LoggerContexts are named similar to targeted PIDs in Configuration Admin. Each bundle may have its own named Logger Context based upon its bundle symbolic name, bundle version, and bundle location. There is also a root Logger Context from which each named Logger Context inherits. The root Logger Context has no name.

The Logger Admin service is associated with the Logger Factory service it administrates via the `osgi.log.service.id` service property whose value is a Long containing the service.id of the Logger Factory service.

### 5.4.1 Logger Context

The logger implementation must locate the Logger Context for the bundle to determine the effective log level of the logger when a bundle logs. The *best matching name* for the Logger Context is the longest name, which has a non-empty Logger Context, according to this syntax:

```
name ::= symbolic-name ( '|' version ( '|' location )? )?
```

The version must be formatted canonically, that is, according to the `toString()` method of the `Version` class. So the Logger Context for a bundle is searched for using the following names in the given order:

```
<symbolic-name>|<version>|<location>
```

```
<symbolic-name>|<version>
```

```
<symbolic-name>
```

If a non-empty Logger Context is not found, the Logger Context with the name `<symbolic-name>` is used for the bundle.

This allows a bundle to have no Logger Context configured. In this case it will use the root Logger Context's configuration. It also allows a bundle to be configured based upon bundle symbolic name, bundle symbolic name and version or even bundle symbolic name, version, and location. The latter forms may be of interest if there are multiple versions of a bundle installed.

### 5.4.2 Logger Configuration

Logger Contexts can be configured using the `getLogLevels` and `setLogLevels` methods of the Logger Context. Logger names, including the root logger name ("ROOT"), can be configured to a specific log level. The configured log level can also be `null` which means inherit the log level of the ancestor logger name.

Any change to the configuration of a Logger Context must be effective immediately for all loggers that would rely upon the configuration of the Logger Context. Changes to the configuration of a Logger Context via the `setLogLevels` method are not persisted.

### 5.4.3 Configuration Admin Integration

If Configuration Admin is present, configuration information in Configuration Admin must be set into the mapped Logger Context. This allows external Logger Context configuration such as via RFC 218 Configurer. The name of the Logger Context is mapped from a Configuration Admin targeted PID as follows:

- The PID `"org.osgi.service.log.admin"` is mapped to the root Logger Context, which has no name.

- PIDs starting with `"org.osgi.service.log.admin|"` are mapped to named Logger Contexts by removing the above prefix. For example, the PID `"org.osgi.service.log.admin|com.foo.bar"` is mapped to the Logger Context named `"com.foo.bar"`.

In a Configuration Admin Configuration mapped to a Logger Context, the dictionary keys are logger names (key type is String) and the values are the names of the LogLevel enums (value types is String) with the addition of the special value `"NULL"` which signifies a `null` log level value for the logger name. If the Configuration contains any key/value pairs whose value is not the name of a LogLevel enum or `"NULL"`, that key/value pair must be ignored when setting the configuration into the Logger Context.

Any change to the Configuration mapped to a Logger Context must be set into the Logger Context as soon as possible. Since notification of Configuration changes happen asynchronously, it may take a brief period of time before Configuration changes can be made effective.

This section is not meant to require that a logging implementation must require Configuration Admin. But if Configuration Admin is present, the Configuration Admin Configurations must be used to set the log levels in the mapped Logger Contexts.

#### 5.4.4 Effective Log Level

Once the Logger Context for the logging bundle is determined, the effective log level for the logger's name is found by the following steps:

1. If the logger name is configured with a non-null log level in the bundle's Logger Context, use the configured log level.
2. For each ancestor logger name of the logger name, if the ancestor logger name is configured with a non-null log level in the bundle's Logger Context, use the configured log level.
3. If the logger name is configured with a non-null log level in the root Logger Context, use the configured log level.
4. For each ancestor logger name of the logger name, if the ancestor logger name is configured with a non-null log level in the root Logger Context, use the configured log level.
5. Use `LogLevel.WARN` because no non-null log level has been found for the logger name or any of its ancestor logger names.

---

### 5.5 LogService Legacy

The LogService interface has its original members deprecated. But the log methods can still be used by bundles. These log methods are now specified to log to the logger name `"LogService"` which allows legacy logging to be configured as specified above. Furthermore, the integer log level values used with the log methods are mapped to the new LogLevel values as follows:

- `LOG_ERROR` - `LogLevel.ERROR`
- `LOG_WARNING` - `LogLevel.WARN`
- `LOG_INFO` - `LogLevel.INFO`
- `LOG_DEBUG` - `LogLevel.DEBUG`
- Any other value - `LogLevel.TRACE`

The integer log level value is stored in the generated LogEntry to be returned by `getLevel()`.

---

## 5.6 Mapping of Events

The log implementation must map framework events, ServiceEvent, BundleEvent, and FrameworkEvent, into log entries. This section of the spec must be updated to state the logger names used. This will allow the effective log level for this mapping to be configured. FrameworkEvents are logged under the logger name "Events.Framework", ServiceEvents under the logger name "Events.Service", and BundleEvents under the logger name "Events.Bundle". These logger names all share the ancestor logger name "Events" to allow for shared configuration.

When mapping log entries to Event Admin, the list of logging levels must be expanded to include the new LogLevel names. The properties of the event are expanded to add:

- `log.loggername` – (String) The name of the Logger.
- `log.threadinfo` – (String) The thread information for the thread creating the log entry.

---

## 5.7 SLF4J Support

The `slf4j-osgi` open source implementation [10] is now available which provides an implementation of the `org.slf4j.impl` package that directs SLF4J logging into the OSGi Log Service. This uses the new LoggerFactory and Logger APIs.

Implementation of this project required the addition of a new method to LoggerFactory to obtain the Logger for a specified Bundle rather than the Bundle which obtained the LoggerFactory service. Since the SLF4J logging method to obtain a Logger is a static method, the implementation can be called before a bundle is started and has a BundleContext to obtain a LoggerFactory service. So the `slf4j-osgi` implementation uses the system bundle context to obtain the LoggerFactory service and thus then needs a `getLogger` method which takes a bundle argument.

---

## 5.8 Capabilities

### 5.8.1 osgi.service Capabilities

The bundle providing the Logger Factory and Log Service services must provide a capability in the `osgi.service` namespace representing this service. This capability must also declare a uses constraint for the `org.osgi.service.log` package:

```
Provide-Capability: osgi.service;
  objectClass:List<String>=
    "org.osgi.service.log.LoggerFactory,org.osgi.service.log.LogService";
  uses:="org.osgi.service.log"
```

The bundle providing the Log Reader Service service must provide a capability in the `osgi.service` namespace representing this service. This capability must also declare a uses constraint for the `org.osgi.service.log` package:

```
Provide-Capability: osgi.service;
  objectClass:List<String>="org.osgi.service.log.LogReaderService";
  uses:="org.osgi.service.log"
```



The bundle providing the Logger Admin service must provide a capability in the `osgi.service` namespace representing this service. This capability must also declare a uses constraint for the `org.osgi.service.log.admin` package:

```
Provide-Capability: osgi.service;  
    objectClass:List<String>="org.osgi.service.log.admin.LoggerAdmin";  
    uses:="org.osgi.service.log.admin"
```

The bundle providing the Log Stream [Provider](#) service must provide a capability in the `osgi.service` namespace representing this service. This capability must also declare a uses constraint for the `org.osgi.service.log.stream` package:

```
Provide-Capability: osgi.service;  
    objectClass:List<String>="org.osgi.service.log.stream.LogStreamProvider";  
    uses:="org.osgi.service.log.stream"
```

These capabilities must follow the rules defined for the `osgi.service` Namespace.

---

## 6 Javadoc

---

## OSGi Javadoc

7/6/16 3:14 PM

Package Summary		Page
<a href="#">org.osgi.service.log</a>	Log Service Package Version 1.4.	19
<a href="#">org.osgi.service.log.admin</a>	Log Admin Package Version 1.0.	45
<a href="#">org.osgi.service.log.stream</a>	Log Stream Package Version 1.0.	50

## Package org.osgi.service.log

@org.osgi.annotation.versioning.Version(value="1.4")

Log Service Package Version 1.4.

See:

[Description](#)

Interface Summary		Page
<a href="#">FormatterLogger</a>	Provides methods for bundles to write messages to the log using printf-style format strings.	20
<a href="#">LogEntry</a>	Provides methods to access the information contained in an individual Log Service log entry.	21
<a href="#">Logger</a>	Provides methods for bundles to write messages to the log using SLF4J-style format strings.	25
<a href="#">LoggerFactory</a>	Logger Factory service for logging information.	33
<a href="#">LogListener</a>	Subscribes to <code>LogEntry</code> objects from the <code>LogReaderService</code> .	38
<a href="#">LogReaderService</a>	LogReaderService for obtaining logging information.	39
<a href="#">LogService</a>	LogService for logging information.	41

Enum Summary		Page
<a href="#">LogLevel</a>	Log Levels.	36

## Package org.osgi.service.log Description

Log Service Package Version 1.4.

Bundles wishing to use this package must list the package in the Import-Package header of the bundle's manifest. This package has two types of users: the consumers that use the API in this package and the providers that implement the API in this package.

Example import for consumers using the API in this package:

```
Import-Package: org.osgi.service.log; version="[1.4,2.0)"
```

Example import for providers implementing the API in this package:

```
Import-Package: org.osgi.service.log; version="[1.4,1.5)"
```

# Interface `FormatterLogger`

[org.osgi.service.log](#)

All Superinterfaces:  
[Logger](#)

```
@org.osgi.annotation.versioning.ProviderType
public interface FormatterLogger
extends Logger
```

Provides methods for bundles to write messages to the log using printf-style format strings.

Messages can be formatted by the `Logger` once the `Logger` determines the log level is enabled. Uses printf-style format strings as described in `Formatter`.

You can also add a `Throwable` and/or `ServiceReference` to the generated [LogEntry](#) by passing them to the logging methods as additional arguments. If the last argument is a `Throwable` or `ServiceReference`, it is added to the generated [LogEntry](#) and then if the next to last argument is a `ServiceReference` or `Throwable` and not the same type as the last argument, it is added to the generated [LogEntry](#). For example:

```
logger.info("Found service %s.", serviceReference, serviceReference);
logger.warn("Something named %s happened.", name, serviceReference,
    throwable);
logger.error("Failed.", exception);
```

If an exception occurs formatting the message, the logged message will indicate the formatting failure including the format string and the arguments.

Since:  
1.4  
**ThreadSafe**

## Fields inherited from interface `org.osgi.service.log.Logger`

[ROOT\\_LOGGER\\_NAME](#)

## Methods inherited from interface `org.osgi.service.log.Logger`

[audit](#), [audit](#), [audit](#), [audit](#), [debug](#), [debug](#), [debug](#), [debug](#), [error](#), [error](#), [error](#), [error](#), [getName](#), [info](#), [info](#), [info](#), [info](#), [isDebugEnabled](#), [isErrorEnabled](#), [isInfoEnabled](#), [isTraceEnabled](#), [isWarnEnabled](#), [trace](#), [trace](#), [trace](#), [trace](#), [warn](#), [warn](#), [warn](#), [warn](#)

# Interface LogEntry

[org.osgi.service.log](http://org.osgi.service.log)

```
@org.osgi.annotation.versioning.ProviderType
public interface LogEntry
```

Provides methods to access the information contained in an individual Log Service log entry.

A `LogEntry` object may be acquired from the `LogReaderService.getLog` method or by registering a `LogListener` object.

**ThreadSafe**

Method Summary		Page
org.osgi.framework.Bundle	<a href="#">getBundle()</a> Returns the bundle that created this <code>LogEntry</code> object.	21
Throwable	<a href="#">getException()</a> Returns the exception object associated with this <code>LogEntry</code> object.	22
int	<a href="#">getLevel()</a> <b>Deprecated.</b> Since 1.4.	22
Stack Trace Element	<a href="#">getLocation()</a> Returns the location information of the creation of this <code>LogEntry</code> object.	24
String	<a href="#">getLoggerName()</a> Returns the name of the <a href="#">Logger</a> object used to create this <code>LogEntry</code> object.	23
<a href="#">LogLevel</a>	<a href="#">getLogLevel()</a> Returns the level of this <code>LogEntry</code> object.	23
String	<a href="#">getMessage()</a> Returns the human readable message associated with this <code>LogEntry</code> object.	22
long	<a href="#">getSequence()</a> Returns the sequence number for this <code>LogEntry</code> object.	23
org.osgi.framework.ServiceReference<?>	<a href="#">getServiceReference()</a> Returns the <code>ServiceReference</code> object for the service associated with this <code>LogEntry</code> object.	22
String	<a href="#">getThreadInfo()</a> Returns a string representing the thread which created this <code>LogEntry</code> object.	23
long	<a href="#">getTime()</a> Returns the value of <code>currentTimeMillis()</code> at the time this <code>LogEntry</code> object was created.	22

## Method Detail

### getBundle

```
org.osgi.framework.Bundle getBundle()
```

Returns the bundle that created this `LogEntry` object.

**Returns:**

The bundle that created this `LogEntry` object; `null` if no bundle is associated with this `LogEntry` object.

---

## getServiceReference

org.osgi.framework.ServiceReference<?> **getServiceReference()**

Returns the `ServiceReference` object for the service associated with this `LogEntry` object.

**Returns:**

`ServiceReference` object for the service associated with this `LogEntry` object; null if no `ServiceReference` object was provided.

---

## getLevel

@Deprecated  
int **getLevel()**

**Deprecated.** Since 1.4. Replaced by [getLogLevel\(\)](#).

Returns the integer level of this `LogEntry` object.

If one of the `log` methods of [LogService](#) was used, this is the specified integer level. Otherwise, this is the ordinal value of the [log\\_level](#).

**Returns:**

Integer level of this `LogEntry` object.

---

## getMessage

String **getMessage()**

Returns the human readable message associated with this `LogEntry` object.

**Returns:**

String containing the message associated with this `LogEntry` object.

---

## getException

Throwable **getException()**

Returns the exception object associated with this `LogEntry` object.

In some implementations, the returned exception may not be the original exception. To avoid references to a bundle defined exception class, thus preventing an uninstalled bundle from being garbage collected, the Log Service may return an exception object of an implementation defined `Throwable` subclass. The returned object will attempt to provide as much information as possible from the original exception object such as the message and stack trace.

**Returns:**

`Throwable` object of the exception associated with this `LogEntry`; null if no exception is associated with this `LogEntry` object.

---

## getTime

long **getTime()**

Returns the value of `currentTimeMillis()` at the time this `LogEntry` object was created.

**Returns:**

The system time in milliseconds when this `LogEntry` object was created.

**See Also:**

"`System.currentTimeMillis()`"

---

## **getLogLevel**

[LogLevel](#) `getLogLevel()`

Returns the level of this `LogEntry` object.

**Returns:**

The level of this `LogEntry` object.

**Since:**

1.4

---

## **getLoggerName**

`String getLoggerName()`

Returns the name of the [Logger](#) object used to create this `LogEntry` object.

**Returns:**

The name of the [Logger](#) object used to create this `LogEntry` object.

**Since:**

1.4

---

## **getSequence**

`long getSequence()`

Returns the sequence number for this `LogEntry` object.

A unique, non-negative value that is larger than all previously assigned values since the log implementation was started. These values are transient and are reused upon restart of the log implementation.

**Returns:**

The sequence number for this `LogEntry` object.

**Since:**

1.4

---

## **getThreadInfo**

`String getThreadInfo()`

Returns a string representing the thread which created this `LogEntry` object.

This string must contain the name of the thread and may contain other information about the thread.

**Returns:**

A string representing the thread which created this `LogEntry` object.

**Since:**

1.4

---

## **getLocation**

---

StackTraceElement **getLocation**()

Returns the location information of the creation of this `LogEntry` object.

**Returns:**

The location information of the creation of this `LogEntry` object.

**Since:**

1.4



## Interface Logger

[org.osgi.service.log](http://org.osgi.service.log)

### All Known Subinterfaces:

[FormatterLogger](#)

```
@org.osgi.annotation.versioning.ProviderType
public interface Logger
```

Provides methods for bundles to write messages to the log using SLF4J-style format strings.

Messages can be formatted by the Logger once the Logger determines the log level is enabled. Use "{}" as a place holder for an argument. If you need to use the literal "{}" in the formatted message, precede the place holder with a backslash: "\\{}". If you need to place a backslash before the place holder, precede the backslash with a backslash: "\\\\{}".

You can also add a [Throwable](#) and/or [ServiceReference](#) to the generated [LogEntry](#) by passing them to the logging methods as additional arguments. If the last argument is a [Throwable](#) or [ServiceReference](#), it is added to the generated [LogEntry](#) and then if the next to last argument is a [ServiceReference](#) or [Throwable](#) and not the same type as the last argument, it is added to the generated [LogEntry](#). These arguments will not be used for place holders. For example:

```
logger.info("Found service {}.", serviceReference, serviceReference);
logger.warn("Something named {} happened.", name, serviceReference,
    throwable);
logger.error("Failed.", exception);
```

### Since:

1.4

### ThreadSafe

Field Summary		Page
String	<a href="#">ROOT_LOGGER_NAME</a> Root Logger Name.	27

Method Summary		Page
void	<a href="#">audit</a> (String message) Log a message at the <a href="#">LogLevel.AUDIT</a> level.	32
void	<a href="#">audit</a> (String format, Object arg) Log a formatted message at the <a href="#">LogLevel.AUDIT</a> level.	32
void	<a href="#">audit</a> (String format, Object arg1, Object arg2) Log a formatted message at the <a href="#">LogLevel.AUDIT</a> level.	32
void	<a href="#">audit</a> (String format, Object... arguments) Log a formatted message at the <a href="#">LogLevel.AUDIT</a> level.	32
void	<a href="#">debug</a> (String message) Log a message at the <a href="#">LogLevel.DEBUG</a> level.	28
void	<a href="#">debug</a> (String format, Object arg) Log a formatted message at the <a href="#">LogLevel.DEBUG</a> level.	28
void	<a href="#">debug</a> (String format, Object arg1, Object arg2) Log a formatted message at the <a href="#">LogLevel.DEBUG</a> level.	28

void	<a href="#"><code>debug</code></a> (String format, Object... arguments) Log a formatted message at the <a href="#"><code>LogLevel.DEBUG</code></a> level.	29
void	<a href="#"><code>error</code></a> (String message) Log a message at the <a href="#"><code>LogLevel.ERROR</code></a> level.	31
void	<a href="#"><code>error</code></a> (String format, Object arg) Log a formatted message at the <a href="#"><code>LogLevel.ERROR</code></a> level.	31
void	<a href="#"><code>error</code></a> (String format, Object arg1, Object arg2) Log a formatted message at the <a href="#"><code>LogLevel.ERROR</code></a> level.	31
void	<a href="#"><code>error</code></a> (String format, Object... arguments) Log a formatted message at the <a href="#"><code>LogLevel.ERROR</code></a> level.	32
String	<a href="#"><code>getName</code></a> () Return the name of this Logger.	27
void	<a href="#"><code>info</code></a> (String message) Log a message at the <a href="#"><code>LogLevel.INFO</code></a> level.	29
void	<a href="#"><code>info</code></a> (String format, Object arg) Log a formatted message at the <a href="#"><code>LogLevel.INFO</code></a> level.	29
void	<a href="#"><code>info</code></a> (String format, Object arg1, Object arg2) Log a formatted message at the <a href="#"><code>LogLevel.INFO</code></a> level.	29
void	<a href="#"><code>info</code></a> (String format, Object... arguments) Log a formatted message at the <a href="#"><code>LogLevel.INFO</code></a> level.	30
boolean	<a href="#"><code>isDebugEnabled</code></a> () Is logging enabled for the <a href="#"><code>LogLevel.DEBUG</code></a> level?	28
boolean	<a href="#"><code>isErrorEnabled</code></a> () Is logging enabled for the <a href="#"><code>LogLevel.ERROR</code></a> level?	31
boolean	<a href="#"><code>isInfoEnabled</code></a> () Is logging enabled for the <a href="#"><code>LogLevel.INFO</code></a> level?	29
boolean	<a href="#"><code>isTraceEnabled</code></a> () Is logging enabled for the <a href="#"><code>LogLevel.TRACE</code></a> level?	27
boolean	<a href="#"><code>isWarnEnabled</code></a> () Is logging enabled for the <a href="#"><code>LogLevel.WARN</code></a> level?	30
void	<a href="#"><code>trace</code></a> (String message) Log a message at the <a href="#"><code>LogLevel.TRACE</code></a> level.	27
void	<a href="#"><code>trace</code></a> (String format, Object arg) Log a formatted message at the <a href="#"><code>LogLevel.TRACE</code></a> level.	27
void	<a href="#"><code>trace</code></a> (String format, Object arg1, Object arg2) Log a formatted message at the <a href="#"><code>LogLevel.TRACE</code></a> level.	27
void	<a href="#"><code>trace</code></a> (String format, Object... arguments) Log a formatted message at the <a href="#"><code>LogLevel.TRACE</code></a> level.	28
void	<a href="#"><code>warn</code></a> (String message) Log a message at the <a href="#"><code>LogLevel.WARN</code></a> level.	30
void	<a href="#"><code>warn</code></a> (String format, Object arg) Log a formatted message at the <a href="#"><code>LogLevel.WARN</code></a> level.	30
void	<a href="#"><code>warn</code></a> (String format, Object arg1, Object arg2) Log a formatted message at the <a href="#"><code>LogLevel.WARN</code></a> level.	30
void	<a href="#"><code>warn</code></a> (String format, Object... arguments) Log a formatted message at the <a href="#"><code>LogLevel.WARN</code></a> level.	31

## Field Detail

### ROOT\_LOGGER\_NAME

```
public static final String ROOT_LOGGER_NAME = "ROOT"
```

Root Logger Name.

## Method Detail

### getName

```
String getName()
```

Return the name of this Logger.

**Returns:**

The name of this Logger.

---

## isTraceEnabled

```
boolean isTraceEnabled()
```

Is logging enabled for the [LogLevel.TRACE](#) level?

**Returns:**

true if logging is enabled for the [LogLevel.TRACE](#) level.

---

## trace

```
void trace(String message)
```

Log a message at the [LogLevel.TRACE](#) level.

**Parameters:**

message - The message to log.

---

## trace

```
void trace(String format,  
           Object arg)
```

Log a formatted message at the [LogLevel.TRACE](#) level.

**Parameters:**

format - The format of the message to log.

arg - The argument to format into the message.

---

## trace

```
void trace(String format,  
           Object arg1,  
           Object arg2)
```

Log a formatted message at the [LogLevel.TRACE](#) level.

### Parameters:

`format` - The format of the message to log.  
`arg1` - The first argument to format into the message.  
`arg2` - The second argument to format into the message.

---

## trace

```
void trace(String format,  
           Object... arguments)
```

Log a formatted message at the [LogLevel.TRACE](#) level.

### Parameters:

`format` - The format of the message to log.  
`arguments` - The arguments to format into the message.

---

## isDebugEnabled

```
boolean isDebugEnabled()
```

Is logging enabled for the [LogLevel.DEBUG](#) level?

### Returns:

`true` if logging is enabled for the [trace](#) level.

---

## debug

```
void debug(String message)
```

Log a message at the [LogLevel.DEBUG](#) level.

### Parameters:

`message` - The message to log.

---

## debug

```
void debug(String format,  
           Object arg)
```

Log a formatted message at the [LogLevel.DEBUG](#) level.

### Parameters:

`format` - The format of the message to log.  
`arg` - The argument to format into the message.

---

## debug

```
void debug(String format,  
           Object arg1,  
           Object arg2)
```

Log a formatted message at the [LogLevel.DEBUG](#) level.

### Parameters:

`format` - The format of the message to log.

arg1 - The first argument to format into the message.  
arg2 - The second argument to format into the message.

---

### debug

```
void debug(String format,  
           Object... arguments)
```

Log a formatted message at the [LogLevel.DEBUG](#) level.

#### Parameters:

format - The format of the message to log.  
arguments - The arguments to format into the message.

---

### isInfoEnabled

```
boolean isInfoEnabled()
```

Is logging enabled for the [LogLevel.INFO](#) level?

#### Returns:

true if logging is enabled for the [trace](#) level.

---

### info

```
void info(String message)
```

Log a message at the [LogLevel.INFO](#) level.

#### Parameters:

message - The message to log.

---

### info

```
void info(String format,  
          Object arg)
```

Log a formatted message at the [LogLevel.INFO](#) level.

#### Parameters:

format - The format of the message to log.  
arg - The argument to format into the message.

---

### info

```
void info(String format,  
          Object arg1,  
          Object arg2)
```

Log a formatted message at the [LogLevel.INFO](#) level.

#### Parameters:

format - The format of the message to log.  
arg1 - The first argument to format into the message.  
arg2 - The second argument to format into the message.

### info

```
void info(String format,  
          Object... arguments)
```

Log a formatted message at the [LogLevel.INFO](#) level.

**Parameters:**

`format` - The format of the message to log.  
`arguments` - The arguments to format into the message.

---

### isWarnEnabled

```
boolean isWarnEnabled()
```

Is logging enabled for the [LogLevel.WARN](#) level?

**Returns:**

`true` if logging is enabled for the [trace](#) level.

---

### warn

```
void warn(String message)
```

Log a message at the [LogLevel.WARN](#) level.

**Parameters:**

`message` - The message to log.

---

### warn

```
void warn(String format,  
          Object arg)
```

Log a formatted message at the [LogLevel.WARN](#) level.

**Parameters:**

`format` - The format of the message to log.  
`arg` - The argument to format into the message.

---

### warn

```
void warn(String format,  
          Object arg1,  
          Object arg2)
```

Log a formatted message at the [LogLevel.WARN](#) level.

**Parameters:**

`format` - The format of the message to log.  
`arg1` - The first argument to format into the message.  
`arg2` - The second argument to format into the message.

---

### warn

---

```
void warn(String format,  
          Object... arguments)
```

Log a formatted message at the [LogLevel.WARN](#) level.

**Parameters:**

`format` - The format of the message to log.  
`arguments` - The arguments to format into the message.

---

### isErrorEnabled

```
boolean isErrorEnabled()
```

Is logging enabled for the [LogLevel.ERROR](#) level?

**Returns:**

`true` if logging is enabled for the [trace](#) level.

---

### error

```
void error(String message)
```

Log a message at the [LogLevel.ERROR](#) level.

**Parameters:**

`message` - The message to log.

---

### error

```
void error(String format,  
          Object arg)
```

Log a formatted message at the [LogLevel.ERROR](#) level.

**Parameters:**

`format` - The format of the message to log.  
`arg` - The argument to format into the message.

---

### error

```
void error(String format,  
          Object arg1,  
          Object arg2)
```

Log a formatted message at the [LogLevel.ERROR](#) level.

**Parameters:**

`format` - The format of the message to log.  
`arg1` - The first argument to format into the message.  
`arg2` - The second argument to format into the message.

---

### error

---

```
void error(String format,  
           Object... arguments)
```

Log a formatted message at the [LogLevel.ERROR](#) level.

**Parameters:**

`format` - The format of the message to log.

`arguments` - The arguments to format into the message.

---

### audit

```
void audit(String message)
```

Log a message at the [LogLevel.AUDIT](#) level.

**Parameters:**

`message` - The message to log.

---

### audit

```
void audit(String format,  
           Object arg)
```

Log a formatted message at the [LogLevel.AUDIT](#) level.

**Parameters:**

`format` - The format of the message to log.

`arg` - The argument to format into the message.

---

### audit

```
void audit(String format,  
           Object arg1,  
           Object arg2)
```

Log a formatted message at the [LogLevel.AUDIT](#) level.

**Parameters:**

`format` - The format of the message to log.

`arg1` - The first argument to format into the message.

`arg2` - The second argument to format into the message.

---

### audit

```
void audit(String format,  
           Object... arguments)
```

Log a formatted message at the [LogLevel.AUDIT](#) level.

**Parameters:**

`format` - The format of the message to log.

`arguments` - The arguments to format into the message.



# Interface LoggerFactory

[org.osgi.service.log](http://org.osgi.service.log)

All Known Subinterfaces:  
[LogService](#)

```
@org.osgi.annotation.versioning.ProviderType
public interface LoggerFactory
```

Logger Factory service for logging information.

Provides methods for bundles to obtain named [Loggers](#) that can be used to write messages to the log.

Logger names should be in the form of a fully qualified Java class names with segments separated by full stop ('.' \u002E). For example:

```
com.foo.Bar
```

Logger names exist in a hierarchy. A logger name is said to be an ancestor of another logger name if the logger name followed by a full stop ('.' \u002E) is a prefix of the descendant logger name. The [root logger name](#) is the top ancestor of the logger name hierarchy. For example:

```
com.foo.Bar
com.foo
com
ROOT
```

Since:  
1.4  
ThreadSafe

Method Summary		Page
<a href="#">Logger</a>	<a href="#">getLogger</a> (Class<?> clazz) Return the <a href="#">Logger</a> named with the specified class.	34
L	<a href="#">getLogger</a> (Class<?> clazz, Class<L> loggerType) Return the <a href="#">Logger</a> of the specified type named with the specified class.	34
<a href="#">Logger</a>	<a href="#">getLogger</a> (String name) Return the <a href="#">Logger</a> named with the specified name.	33
L	<a href="#">getLogger</a> (String name, Class<L> loggerType) Return the <a href="#">Logger</a> of the specified type named with the specified name.	34
L	<a href="#">getLogger</a> (org.osgi.framework.Bundle bundle, String name, Class<L> loggerType) Return the <a href="#">Logger</a> of the specified type named with the specified name for the specified bundle.	34

## Method Detail

### getLogger

```
Logger getLogger(String name)
```

Return the [Logger](#) named with the specified name.

**Parameters:**

name - The name to use for the logger name.

**Returns:**

The [Logger](#) named with the specified name. If the name parameter is equal to [Logger.ROOT\\_LOGGER\\_NAME](#), then the root logger is returned.

---

## getLogger

[Logger](#) getLogger(Class<?> clazz)

Return the [Logger](#) named with the specified class.

**Parameters:**

clazz - The class to use for the logger name.

**Returns:**

The [Logger](#) named with the name of the specified class.

---

## getLogger

L getLogger(String name,  
Class<L> loggerType)

Return the [Logger](#) of the specified type named with the specified name.

**Type Parameters:**

L - The Logger type.

**Parameters:**

name - The name to use for the logger name.

loggerType - The type of Logger. Can be [Logger](#) or [FormatterLogger](#).

**Returns:**

The [Logger](#) or [FormatterLogger](#) named with the specified name. If the name parameter is equal to [Logger.ROOT\\_LOGGER\\_NAME](#), then the root logger is returned.

**Throws:**

IllegalArgumentException - If the specified type is not a supported Logger type.

---

## getLogger

L getLogger(Class<?> clazz,  
Class<L> loggerType)

Return the [Logger](#) of the specified type named with the specified class.

**Type Parameters:**

L - A Logger type.

**Parameters:**

clazz - The class to use for the logger name.

loggerType - The type of Logger. Can be [Logger](#) or [FormatterLogger](#).

**Returns:**

The [Logger](#) or [FormatterLogger](#) named with the name of the specified class.

**Throws:**

IllegalArgumentException - If the specified type is not a supported Logger type.

---

## getLogger

L getLogger(org.osgi.framework.Bundle bundle,  
String name,  
Class<L> loggerType)

Return the [Logger](#) of the specified type named with the specified name for the specified bundle.

This method is not normally used. The other `getLogger` methods return a [Logger](#) associated with the bundle used to obtain this Logger Factory service. This method is used to obtain a [Logger](#) for the specified bundle which may be useful to code which is logging on behalf of another bundle.

**Type Parameters:**

`L` - The Logger type.

**Parameters:**

`bundle` - The bundle associated with the Logger.

`name` - The name to use for the logger name.

`loggerType` - The type of Logger. Can be [Logger](#) or [FormatterLogger](#).

**Returns:**

The [Logger](#) or [FormatterLogger](#) named with the specified name for the specified bundle. If the name parameter is equal to [Logger.ROOT\\_LOGGER\\_NAME](#), then the root logger is returned.

**Throws:**

`IllegalArgumentException` - If the specified type is not a supported Logger type or the specified Bundle is not a resolved bundle.

## Enum LogLevel

[org.osgi.service.log](http://org.osgi.service.log)

```
java.lang.Object
└─ java.lang.Enum<LogLevel>
    └─ org.osgi.service.log.LogLevel
```

### All Implemented Interfaces:

Comparable<[LogLevel](#)>, Serializable

---

```
public enum LogLevel
extends Enum<LogLevel>
```

Log Levels.

### Since:

1.4

---

Enum Constant Summary		Page
<a href="#">AUDIT</a>	Audit – Information that must always be logged.	36
<a href="#">DEBUG</a>	Debug – Detailed output for debugging operations.	37
<a href="#">ERROR</a>	Error – Information about an error situation.	37
<a href="#">INFO</a>	Info – Information about normal operation.	37
<a href="#">TRACE</a>	Trace level – Large volume of output for tracing operations.	37
<a href="#">WARN</a>	Warning – Information about a failure or unwanted situation that is not blocking.	37

Method Summary		Page
boolean	<a href="#">implies</a> ( <a href="#">LogLevel</a> other) Returns whether this log level implies the specified log level.	37
static <a href="#">LogLevel</a>	<a href="#">valueOf</a> (String name)	37
static <a href="#">LogLevel</a> []	<a href="#">values</a> ()	37

## Enum Constant Detail

### AUDIT

```
public static final LogLevel AUDIT
```

Audit – Information that must always be logged.

---

## **ERROR**

---

```
public static final LogLevel ERROR
```

Error – Information about an error situation.

## **WARN**

---

```
public static final LogLevel WARN
```

Warning – Information about a failure or unwanted situation that is not blocking.

## **INFO**

---

```
public static final LogLevel INFO
```

Info – Information about normal operation.

## **DEBUG**

---

```
public static final LogLevel DEBUG
```

Debug – Detailed output for debugging operations.

## **TRACE**

---

```
public static final LogLevel TRACE
```

Trace level – Large volume of output for tracing operations.

## **Method Detail**

### **values**

```
public static LogLevel[] values()
```

### **valueOf**

---

```
public static LogLevel valueOf(String name)
```

### **implies**

---

```
public boolean implies(LogLevel other)
```

Returns whether this log level implies the specified log level.

#### **Parameters:**

`other` - The other log level.

#### **Returns:**

`true` If this log level implies the specified log level; `false` otherwise.

## Interface LogListener

[org.osgi.service.log](http://org.osgi.service.log)

**All Superinterfaces:**  
EventListener

---

```
@org.osgi.annotation.versioning.ConsumerType
@FunctionalInterface
public interface LogListener
extends EventListener
```

Subscribes to `LogEntry` objects from the `LogReaderService`.

A `LogListener` object may be registered with the Log Reader Service using the `LogReaderService.addListener` method. After the listener is registered, the `logged` method will be called for each `LogEntry` object created. The `LogListener` object may be unregistered by calling the `LogReaderService.removeListener` method.

Since 1.4, [LogStreamProvider](#) is the preferred way to obtain [LogEntry](#) objects.

**ThreadSafe**

---

Method Summary		Page
void	<a href="#">logged</a> ( <a href="#">LogEntry</a> entry) Listener method called for each LogEntry object created.	38

### Method Detail

#### **logged**

void **logged**([LogEntry](#) entry)

Listener method called for each LogEntry object created.

**Parameters:**

entry - A [LogEntry](#) object containing log information.

## Interface LogReaderService

[org.osgi.service.log](http://org.osgi.service.log)

---

```
@org.osgi.annotation.versioning.ProviderType
public interface LogReaderService
```

LogReaderService for obtaining logging information.

There are two ways to obtain [LogEntry](#) objects:

- The primary way to obtain [LogEntry](#) objects is to get a [LogStreamProvider](#) object from the service registry. This replaces adding a [LogListener](#) object.
- To obtain past [LogEntry](#) objects, the [getLog\(\)](#) method can be called which will return an Enumeration of the [LogEntry](#) objects in the log.

ThreadSafe

---

Method Summary		Page
void	<a href="#">addLogListener</a> ( <a href="#">LogListener</a> listener) Subscribes to <a href="#">LogEntry</a> objects.	39
Enumeration< <a href="#">LogEntry</a> >	<a href="#">getLog</a> () Returns an Enumeration of the <a href="#">LogEntry</a> objects in the log.	40
void	<a href="#">removeLogListener</a> ( <a href="#">LogListener</a> listener) Unsubscribes to <a href="#">LogEntry</a> objects.	39

## Method Detail

### addLogListener

```
void addLogListener(LogListener listener)
```

Subscribes to [LogEntry](#) objects.

This method registers a [LogListener](#) object with the Log Reader Service. The [LogListener.logged\(LogEntry\)](#) method will be called for each [LogEntry](#) object placed into the log.

When a bundle which registers a [LogListener](#) object is stopped or otherwise releases the Log Reader Service, the Log Reader Service must remove all of the bundle's listeners.

If this Log Reader Service's list of listeners already contains a listener `l` such that `(l==listener)`, this method does nothing.

Since 1.4, [LogStreamProvider](#) is the preferred way to obtain [LogEntry](#) objects.

#### Parameters:

`listener` - A [LogListener](#) object to register; the [LogListener](#) object is used to receive [LogEntry](#) objects.

---

### removeLogListener

```
void removeLogListener(LogListener listener)
```

Unsubscribes to [LogEntry](#) objects.

This method unregisters a [LogListener](#) object from the Log Reader Service.

If `listener` is not contained in this Log Reader Service's list of listeners, this method does nothing.

Since 1.4, [LogStreamProvider](#) is the preferred way to obtain [LogEntry](#) objects.

**Parameters:**

`listener` - A [LogListener](#) object to unregister.

---

## getLog

`Enumeration<LogEntry> getLog()`

Returns an `Enumeration` of the [LogEntry](#) objects in the log.

Each element of the enumeration is a [LogEntry](#) object, ordered with the most recent entry first. Whether the enumeration is of all [LogEntry](#) objects since the Log Service was started or some recent past is implementation-specific. Also implementation-specific is which level [LogEntry](#) objects are included in the enumeration.

**Returns:**

An `Enumeration` of the [LogEntry](#) objects in the log.



## Interface LogService

[org.osgi.service.log](http://org.osgi.service.log)

All Superinterfaces:

[LoggerFactory](#)

---

```
@org.osgi.annotation.versioning.ProviderType
public interface LogService
extends LoggerFactory
```

LogService for logging information.

Replaced by [LoggerFactory](#).

ThreadSafe

---

Field Summary		Page
int	<a href="#">LOG_DEBUG</a> Deprecated. Since 1.4.	42
int	<a href="#">LOG_ERROR</a> Deprecated. Since 1.4.	41
int	<a href="#">LOG_INFO</a> Deprecated. Since 1.4.	42
int	<a href="#">LOG_WARNING</a> Deprecated. Since 1.4.	42

Method Summary		Page
void	<a href="#">log</a> (int level, String message) Deprecated. Since 1.4.	42
void	<a href="#">log</a> (int level, String message, Throwable exception) Deprecated. Since 1.4.	43
void	<a href="#">log</a> (org.osgi.framework.ServiceReference<?> sr, int level, String message) Deprecated. Since 1.4.	43
void	<a href="#">log</a> (org.osgi.framework.ServiceReference<?> sr, int level, String message, Throwable exception) Deprecated. Since 1.4.	44

Methods inherited from interface org.osgi.service.log.[LoggerFactory](#)

[getLogger](#), [getLogger](#), [getLogger](#), [getLogger](#), [getLogger](#)

## Field Detail

### LOG\_ERROR

```
@Deprecated
public static final int LOG_ERROR = 1
```

Deprecated.

An error message (Value 1).

This log entry indicates the bundle or service may not be functional.

---

### LOG\_WARNING

```
@Deprecated
public static final int LOG_WARNING = 2
```

**Deprecated.**

A warning message (Value 2).

This log entry indicates a bundle or service is still functioning but may experience problems in the future because of the warning condition.

---

### LOG\_INFO

```
@Deprecated
public static final int LOG_INFO = 3
```

**Deprecated.**

An informational message (Value 3).

This log entry may be the result of any change in the bundle or service and does not indicate a problem.

---

### LOG\_DEBUG

```
@Deprecated
public static final int LOG_DEBUG = 4
```

**Deprecated.**

A debugging message (Value 4).

This log entry is used for problem determination and may be irrelevant to anyone but the bundle developer.

## Method Detail

### log

```
@Deprecated
void log(int level,
        String message)
```

**Deprecated.** Since 1.4. Replaced by [Logger](#). See [LoggerFactory](#).

Logs a message.

The `ServiceReference` field and the `Throwable` field of the `LogEntry` object will be set to `null`.

This method will log to the [Logger](#) named "LogService" for the bundle. The specified level is mapped to a [LogLevel](#) as follows:

- [LOG\\_ERROR](#) - [LogLevel.ERROR](#)
- [LOG\\_WARNING](#) - [LogLevel.WARN](#)
- [LOG\\_INFO](#) - [LogLevel.INFO](#)
- [LOG\\_DEBUG](#) - [LogLevel.DEBUG](#)
- Any other value - [LogLevel.TRACE](#)

In the generated log entry, [LogEntry.getLevel\(\)](#) must return the specified level.

**Parameters:**

`level` - The severity of the message. This should be one of the defined log levels but may be any integer that is interpreted in a user defined way.  
`message` - Human readable string describing the condition or `null`.

---

## log

```
@Deprecated
void log(int level,
        String message,
        Throwable exception)
```

**Deprecated.** Since 1.4. Replaced by [Logger](#). See [LoggerFactory](#).

Logs a message with an exception.

The `ServiceReference` field of the `LogEntry` object will be set to `null`.

This method will log to the [Logger](#) named "LogService" for the bundle. The specified level is mapped to a [LogLevel](#) as follows:

- [LOG\\_ERROR](#) - [LogLevel.ERROR](#)
- [LOG\\_WARNING](#) - [LogLevel.WARN](#)
- [LOG\\_INFO](#) - [LogLevel.INFO](#)
- [LOG\\_DEBUG](#) - [LogLevel.DEBUG](#)
- Any other value - [LogLevel.TRACE](#)

In the generated log entry, [LogEntry.getLevel\(\)](#) must return the specified level.

**Parameters:**

`level` - The severity of the message. This should be one of the defined log levels but may be any integer that is interpreted in a user defined way.  
`message` - The human readable string describing the condition or `null`.  
`exception` - The exception that reflects the condition or `null`.

---

## log

```
@Deprecated
void log(org.osgi.framework.ServiceReference<?> sr,
        int level,
        String message)
```

**Deprecated.** Since 1.4. Replaced by [Logger](#). See [LoggerFactory](#).

Logs a message associated with a specific `ServiceReference` object.

The `Throwable` field of the `LogEntry` will be set to `null`.

This method will log to the [Logger](#) named "LogService" for the bundle. The specified level is mapped to a [LogLevel](#) as follows:

- [LOG\\_ERROR](#) - [LogLevel.ERROR](#)
- [LOG\\_WARNING](#) - [LogLevel.WARN](#)
- [LOG\\_INFO](#) - [LogLevel.INFO](#)
- [LOG\\_DEBUG](#) - [LogLevel.DEBUG](#)
- Any other value - [LogLevel.TRACE](#)

In the generated log entry, [LogEntry.getLevel\(\)](#) must return the specified level.

**Parameters:**

`sr` - The `ServiceReference` object of the service that this message is associated with or `null`.  
`level` - The severity of the message. This should be one of the defined log levels but may be any integer that is interpreted in a user defined way.  
`message` - Human readable string describing the condition or `null`.

---

## log

@Deprecated

```
void log(org.osgi.framework.ServiceReference<?> sr,  
        int level,  
        String message,  
        Throwable exception)
```

**Deprecated.** Since 1.4. Replaced by [Logger](#). See [LoggerFactory](#).

Logs a message with an exception associated and a `ServiceReference` object.

This method will log to the [Logger](#) named "LogService" for the bundle. The specified level is mapped to a [LogLevel](#) as follows:

- [LOG\\_ERROR](#) - [LogLevel.ERROR](#)
- [LOG\\_WARNING](#) - [LogLevel.WARN](#)
- [LOG\\_INFO](#) - [LogLevel.INFO](#)
- [LOG\\_DEBUG](#) - [LogLevel.DEBUG](#)
- Any other value - [LogLevel.TRACE](#)

In the generated log entry, [LogEntry.getLevel\(\)](#) must return the specified level.

**Parameters:**

`sr` - The `ServiceReference` object of the service that this message is associated with.  
`level` - The severity of the message. This should be one of the defined log levels but may be any integer that is interpreted in a user defined way.  
`message` - Human readable string describing the condition or `null`.  
`exception` - The exception that reflects the condition or `null`.

## Package org.osgi.service.log.admin

@org.osgi.annotation.versioning.Version(value="1.0")

Log Admin Package Version 1.0.

See:

[Description](#)

Interface Summary		Page
<a href="#">LoggerAdmin</a>	LoggerAdmin service for configuring loggers.	46
<a href="#">LoggerContext</a>	Logger Context for a bundle.	48

## Package org.osgi.service.log.admin Description

Log Admin Package Version 1.0.

Bundles wishing to use this package must list the package in the Import-Package header of the bundle's manifest. This package has two types of users: the consumers that use the API in this package and the providers that implement the API in this package.

Example import for consumers using the API in this package:

```
Import-Package: org.osgi.service.log.admin; version="[1.0,2.0)"
```

Example import for providers implementing the API in this package:

```
Import-Package: org.osgi.service.log.admin; version="[1.0,1.1)"
```

# Interface `LoggerAdmin`

[org.osgi.service.log.admin](#)

```
@org.osgi.annotation.versioning.ProviderType
public interface LoggerAdmin
```

`LoggerAdmin` service for configuring loggers.

Each bundle may have its own named [LoggerContext](#) based upon its bundle symbolic name, bundle version, and bundle location. There is also a root Logger Context from which each named Logger Context inherits. The root Logger Context has no name.

When a bundle logs, the logger implementation must locate the Logger Context for the bundle to determine the [effective log level](#) of the logger name. The *best matching name* for the Logger Context is the longest name, which has a non-empty Logger Context, according to this syntax:

```
name ::= symbolic-name ( '|' version ( '|' location )? )?
```

The version must be formatted canonically, that is, according to the `toString()` method of the `Version` class. So the Logger Context for a bundle is searched for using the following names in the given order:

```
<symbolic-name>|<version>|<location>
<symbolic-name>|<version>
<symbolic-name>
```

If a non-empty Logger Context is not found, the Logger Context with the name `<symbolic-name>` is used for the bundle.

**ThreadSafe**

Field Summary		Page
String	<a href="#">LOG_SERVICE_ID</a> Logger Admin service property to associate the Logger Admin service with a <a href="#">LoggerFactory</a> service.	46

Method Summary		Page
<a href="#">LoggerContext</a>	<a href="#">getLoggerContext</a> (String name) Get the Logger Context for the specified name.	47

## Field Detail

### LOG\_SERVICE\_ID

```
public static final String LOG_SERVICE_ID = "osgi.log.service.id"
```

Logger Admin service property to associate the Logger Admin service with a [LoggerFactory](#) service.

This service property is set to the `service.id` for the [LoggerFactory](#) service administered by this Logger Admin.

The value of this service property must be of type `Long`.

## Method Detail

### getLoggerContext

[LoggerContext](#) **getLoggerContext**(String name)

Get the Logger Context for the specified name.

**Parameters:**

name - The name of the Logger Context. Can be `null` to specify the root Logger Context.

**Returns:**

The Logger Context for the specified name.

## Interface **LoggerContext**

[org.osgi.service.log.admin](http://org.osgi.service.log.admin)

---

```
@org.osgi.annotation.versioning.ProviderType
public interface LoggerContext
```

Logger Context for a bundle.

Any change to the configuration of this Logger Context must be effective immediately for all loggers that would rely upon the configuration of this Logger Context.

**ThreadSafe**

---

Method Summary		Page
void	<a href="#">clear</a> () Clear the configuration of this Logger Context.	49
<a href="#">LogLevel</a>	<a href="#">getEffectiveLogLevel</a> (String name) Returns the effective log level of the logger name in this Logger Context.	48
Map<String, <a href="#">LogLevel</a> >	<a href="#">getLogLevels</a> () Returns the configured log levels for this Logger Context.	49
String	<a href="#">getName</a> () Returns the name for this Logger Context.	48
boolean	<a href="#">isEmpty</a> () Returns whether the configuration of this Logger Context is empty.	49
void	<a href="#">setLogLevels</a> (Map<String, <a href="#">LogLevel</a> > logLevels) Configure the log levels for this Logger Context.	49

## Method Detail

### **getName**

String **getName**()

Returns the name for this Logger Context.

**Returns:**

The name for this Logger Context. The root Logger Context has no name and returns `null`.

---

### **getEffectiveLogLevel**

[LogLevel](#) **getEffectiveLogLevel**(String name)

Returns the effective log level of the logger name in this Logger Context.

The effective log level for a logger name is found by the following steps:

1. If the specified logger name is configured with a non-null log level in this Logger Context, return the configured log level.
2. For each ancestor logger name of the specified logger name, if the ancestor logger name is configured with a non-null log level in this Logger Context, return the configured log level.



3. If the specified logger name is configured with a non-null log level in the root Logger Context, return the configured log level.
4. For each ancestor logger name of the specified logger name, if the ancestor logger name is configured with a non-null log level in the root Logger Context, return the configured log level.
5. Return [LogLevel.WARN](#) because no non-null log level has been found for the specified logger name or any of its ancestor logger names.

**Parameters:**

`name` - The logger name.

**Returns:**

The effective log level of the logger name in this Logger Context.

---

## getLogLevels

Map<String, [LogLevel](#)> **getLogLevels**()

Returns the configured log levels for this Logger Context.

**Returns:**

The configured log levels for this Logger Context. The keys are the logger names and the values are the log levels. The returned map may be empty if no logger names are configured for this Logger Context. The log level value can be `null`. The returned map is the property of the caller who can modify the map and use it as input to [setLogLevels\(Map\)](#). The returned map must support all optional Map operations.

---

## setLogLevels

void **setLogLevels**(Map<String, [LogLevel](#)> logLevels)

Configure the log levels for this Logger Context.

All previous log levels configured for this Logger Context are cleared and then the log levels in the specified map are configured.

**Parameters:**

`logLevels` - The log levels to configure for this Logger Context. The keys are the logger names and the values are the log levels. The log level value can be `null`. The specified map is the property of the caller and this method must not modify or retain the specified map.

---

## clear

void **clear**()

Clear the configuration of this Logger Context.

The configured log levels will be cleared.

---

## isEmpty

boolean **isEmpty**()

Returns whether the configuration of this Logger Context is empty.

**Returns:**

`true` if this Logger Context has no configuration. That is, the configured log levels are empty. Otherwise `false` is returned.

## Package org.osgi.service.log.stream

@org.osgi.annotation.versioning.Version(value="1.0")

Log Stream Package Version 1.0.

See:

[Description](#)

Interface Summary		Page
<a href="#">LogStreamProvider</a>	LogStreamProvider service for creating a PushStream of <a href="#">LogEntry</a> objects.	51

Enum Summary		Page
<a href="#">LogStreamProvider.Options</a>	Creation options for the PushStream of <a href="#">LogEntry</a> objects.	52

## Package org.osgi.service.log.stream Description

Log Stream Package Version 1.0.

Bundles wishing to use this package must list the package in the Import-Package header of the bundle's manifest. This package has two types of users: the consumers that use the API in this package and the providers that implement the API in this package.

Example import for consumers using the API in this package:

```
Import-Package: org.osgi.service.log.stream; version="[1.0,2.0) "
```

Example import for providers implementing the API in this package:

```
Import-Package: org.osgi.service.log.stream; version="[1.0,1.1) "
```

# Interface LogStreamProvider

[org.osgi.service.log.stream](http://org.osgi.service.log.stream)

```
@org.osgi.annotation.versioning.ProviderType
public interface LogStreamProvider
```

LogStreamProvider service for creating a PushStream of [LogEntry](#) objects.

ThreadSafe

Nested Class Summary		Page
static enum	<a href="#">LogStreamProvider.Options</a> Creation options for the PushStream of <a href="#">LogEntry</a> objects.	52

Method Summary		Page
org.osgi.util.pushstream.PushStream< <a href="#">LogEntry</a> >	<a href="#">createStream</a> ( <a href="#">LogStreamProvider.Options</a> ... options) Create a PushStream of <a href="#">LogEntry</a> objects.	51

## Method Detail

### createStream

```
org.osgi.util.pushstream.PushStream<LogEntry> createStream(LogStreamProvider.Options... options)
```

Create a PushStream of [LogEntry](#) objects.

The returned PushStream is an unbuffered stream with a parallelism of one.

When this LogStreamProvider service is released by the obtaining bundle, this LogStreamProvider service must call `close()` on the returned PushStream object if it has not already been closed.

**Parameters:**  
    options - The options to use when creating the PushStream.

**Returns:**  
    A PushStream of [LogEntry](#) objects.

## Enum LogStreamProvider.Options

[org.osgi.service.log.stream](#)

```
java.lang.Object
├ java.lang.Enum<LogStreamProvider.Options>
│   └ org.osgi.service.log.stream.LogStreamProvider.Options
```

### All Implemented Interfaces:

Comparable<[LogStreamProvider.Options](#)>, Serializable

### Enclosing class:

[LogStreamProvider](#)

---

```
public static enum LogStreamProvider.Options
extends Enum<LogStreamProvider.Options>
```

Creation options for the PushStream of [LogEntry](#) objects.

---

Enum Constant Summary		Page
<b><a href="#">HISTORY</a></b>		52
Include history.		

Method Summary		Page
static <a href="#">LogStreamProvider.Options</a> <b><a href="#">valueOf</a></b> (String name)		53
static <a href="#">LogStreamProvider.Options</a> [] <b><a href="#">values</a></b> ()		52

## Enum Constant Detail

### HISTORY

```
public static final LogStreamProvider.Options HISTORY
```

Include history.

Prime the created PushStream with the past [LogEntry](#) objects. The number of past [LogEntry](#) objects is implementation specific.

The created PushStream will supply the past [LogEntry](#) objects followed by newly created [LogEntry](#) objects.

## Method Detail

### values

```
public static LogStreamProvider.Options[] values()
```

---

## **valueOf**

---

```
public static LogServiceProvider.Options valueOf(String name)
```

---

Java API documentation generated with [DocFlex/Doclet](#) v1.5.6

DocFlex/Doclet is both a multi-format Javadoc doclet and a free edition of [DocFlex/Javadoc](#). If you need to customize your Javadoc without writing a full-blown doclet from scratch, DocFlex/Javadoc may be the only tool able to help you! Find out more at [www.docflex.com](http://www.docflex.com)

---

# 7 Considered Alternatives

---

## 7.1 osgi.implementation Capability

The osgi.implementation capability was removed from the RFC since multiple bundles could provide the parts of the spec and it is unclear which bundle would be the provider of the capability. Also since the spec is all services and no whiteboard, there is no clear reason to need to require the capability.

The Log Service implementation bundle must provide the `osgi.implementation` capability with name `osgi.log`. This capability can be used by provisioning tools and during resolution to ensure that a Log Service implementation is present. The capability must also declare a uses constraint for the `org.osgi.service.log` packages and provide the version of this specification:

```
Provide-Capability: osgi.implementation;  
    osgi.implementation="osgi.log";  
    uses:="org.osgi.service.log";  
    version:Version="1.4"
```

This capability must follow the rules defined for the `osgi.implementation` Namespace.

---

## 7.2 LogStream

The LogStream type is replaced by LogServiceProvider. LogStream was defined to extend PushStream<LogEntry> and since PushStream is a @ProviderType, this make the log.stream package dependent on the provider version range of the pushstream package.

---

# 8 Security Considerations

---

To configure log levels via the LoggerAdmin service, bundles will need ServicePermission to get the LoggerAdmin service. To create configurations in Config Admin that configure log levels, bundles will need ConfigurationPermission to configure the desired PID names.

The Log Service, Logger Factory, Log Reader Service, Logger Admin and Log Stream services should only be implemented by trusted bundles. These bundle requires ServicePermission[LogService|LogReaderService|LoggerFactory|LoggerAdmin|LogStream, REGISTER]. The implementation of Logger Admin will need ConfigurationPermission to read the configurations.

Virtually all bundles should get ServicePermission[LogService|LoggerFactory, GET]. The ServicePermission[LogReaderService|LoggerAdmin|LogStream, GET] should only be assigned to trusted bundles.

---

## 9 Document Support

---

---

### 9.1 References

- [1] Bradner, S., Key words for use in RFCs to Indicate Requirement Levels, RFC2119, March 1997.
- [2] Software Requirements & Specifications. Michael Jackson. ISBN 0-201-87712-0
- [3] <https://issues.apache.org/jira/browse/FELIX-536>
- [4] SLF4J, <http://www.slf4j.org>
- [5] Apache Log4j 2, <http://logging.apache.org/log4j/2.x/>
- [6] Equinox Log Service (org.eclipse.equinox.log)
- [7] <http://enroute.osgi.org/services/osgi.enroute.logger.api.html>
- [8] Logback Architecture. <http://logback.qos.ch/manual/architecture.html>
- [9] Logback Configuration. <http://logback.qos.ch/manual/configuration.html>
- [10] slf4j-osgi. <https://github.com/osgi/slf4j-osgi>

---

### 9.2 Author's Address

Name	BJ Hargrave
Company	IBM

---

### 9.3 Acronyms and Abbreviations

---

### 9.4 End of Document