



RFC 216: Push Streams

Draft

69 Pages

Abstract

10 point Arial Centered.

The OSGi specifications have described how to distribute OSGi services across VM boundaries now for a number of years. However many OSGi services are synchronous in their nature. Many of today's business applications require asynchronous distributed communication mechanisms. While the OSGi Event Admin specification describes an asynchronous eventing model inside the Java VM this does not address event distribution to other Vms. In addition, while the OSGi Asynchronous Services specification defines mechanisms for asynchronously invoking services, it does not address some concerns specific to eventing. This RFP aims to address the issue of Distributed Events in an OSGi context.

0 Document Information

0.1 License

DISTRIBUTION AND FEEDBACK LICENSE, Version 2.0

The OSGi Alliance hereby grants you a limited copyright license to copy and display this document (the “Distribution”) in any medium without fee or royalty. This Distribution license is exclusively for the purpose of reviewing and providing feedback to the OSGi Alliance. You agree not to modify the Distribution in any way and further agree to not participate in any way in the making of derivative works thereof, other than as a necessary result of reviewing and providing feedback to the Distribution. You also agree to cause this notice, along with the accompanying consent, to be included on all copies (or portions thereof) of the Distribution. The OSGi Alliance also grants you a perpetual, non-exclusive, worldwide, fully paid-up, royalty free, limited license (without the right to sublicense) under any applicable copyrights, to create and/or distribute an implementation of the Distribution that: (i) fully implements the Distribution including all its required interfaces and functionality; (ii) does not modify, subset, superset or otherwise extend the OSGi Name Space, or include any public or protected packages, classes, Java interfaces, fields or methods within the OSGi Name Space other than those required and authorized by the Distribution. An implementation that does not satisfy limitations (i)-(ii) is not considered an implementation of the Distribution, does not receive the benefits of this license, and must not be described as an implementation of the Distribution. “OSGi Name Space” shall mean the public class or interface declarations whose names begin with “org.osgi” or any recognized successors or replacements thereof. The OSGi Alliance expressly reserves all rights not granted pursuant to these limited copyright licenses including termination of the license at will at any time.

EXCEPT FOR THE LIMITED COPYRIGHT LICENSES GRANTED ABOVE, THE OSGi ALLIANCE DOES NOT GRANT, EITHER EXPRESSLY OR IMPLIEDLY, A LICENSE TO ANY INTELLECTUAL PROPERTY IT, OR ANY THIRD PARTIES, OWN OR CONTROL. Title to the copyright in the Distribution will at all times remain with the OSGi Alliance. The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted therein are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

THE DISTRIBUTION IS PROVIDED “AS IS,” AND THE OSGi ALLIANCE (INCLUDING ANY THIRD PARTIES THAT HAVE CONTRIBUTED TO THE DISTRIBUTION) MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, OR TITLE; THAT THE CONTENTS OF THE DISTRIBUTION ARE SUITABLE FOR ANY PURPOSE; NOR THAT THE IMPLEMENTATION OF SUCH CONTENTS WILL NOT INFRINGE ANY THIRD PARTY PATENTS, COPYRIGHTS, TRADEMARKS OR OTHER RIGHTS.

NEITHER THE OSGi ALLIANCE NOR ANY THIRD PARTY WILL BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF OR RELATING TO ANY USE OR DISTRIBUTION OF THE DISTRIBUTION.

Implementation of certain elements of this Distribution may be subject to third party intellectual property rights, including without limitation, patent rights (such a third party may or may not be a member of the OSGi Alliance). The OSGi Alliance is not responsible and shall not be held responsible in any manner for identifying or failing to identify any or all such third party intellectual property rights.

The Distribution is a draft. As a result, the final product may change substantially by the time of final publication, and you are cautioned against relying on the content of this Distribution. You are encouraged to update any implementation of the Distribution if and when such Distribution becomes a final specification.

The OSGi Alliance is willing to receive input, suggestions and other feedback (“Feedback”) on the Distribution. By providing such Feedback to the OSGi Alliance, you grant to the OSGi Alliance and all its Members a non-exclusive, non-transferable,

worldwide, perpetual, irrevocable, royalty-free copyright license to copy, publish, license, modify, sublicense or otherwise distribute and exploit your Feedback for any purpose. Likewise, if incorporation of your Feedback would cause an implementation of the Distribution, including as it may be modified, amended, or published at any point in the future ("Future Specification"), to necessarily infringe a patent or patent application that you own or control, you hereby commit to grant to all implementers of such Distribution or Future Specification an irrevocable, worldwide, sublicenseable, royalty free license under such patent or patent application to make, have made, use, sell, offer for sale, import and export products or services that implement such Distribution or Future Specification. You warrant that (a) to the best of your knowledge you have the right to provide this Feedback, and if you are providing Feedback on behalf of a company, you have the rights to provide Feedback on behalf of your company; (b) the Feedback is not confidential to you and does not violate the copyright or trade secret interests of another; and (c) to the best of your knowledge, use of the Feedback would not cause an implementation of the Distribution or a Future Specification to necessarily infringe any third-party patent or patent application known to you. You also acknowledge that the OSGi Alliance is not required to incorporate your Feedback into any version of the Distribution or a Future Specification.

I HEREBY ACKNOWLEDGE AND AGREE TO THE TERMS AND CONDITIONS DELINEATED ABOVE.

0.2 Trademarks

OSGi™ is a trademark, registered trademark, or service mark of the OSGi Alliance in the US and other countries. Java is a trademark, registered trademark, or service mark of Oracle Corporation in the US and other countries. All other trademarks, registered trademarks, or service marks used in this document are the property of their respective owners and are hereby recognized.

0.3 Feedback

This document can be downloaded from the OSGi Alliance design repository at <https://github.com/osgi/design> The public can provide feedback about this document by opening a bug at <https://www.osgi.org/bugzilla/>.

0.4 Table of Contents

0 Document Information.....	2
0.1 License.....	2
0.2 Trademarks.....	3
0.3 Feedback.....	3
0.4 Table of Contents.....	3
0.5 Terminology and Document Conventions.....	4
0.6 Revision History.....	4
1 Introduction.....	5
2 Application Domain.....	5
2.1 Point-to-point/Queue semantics with current Event Admin Service.....	8
2.2 Existing approaches to distribute the Event Admin Service.....	8
2.3 Terminology + Abbreviations.....	8
3 Problem Description.....	9
3.1 Issues with current Event Admin.....	9
3.2 Event Pipelines.....	10
3.2.1 Buffering and Circuit breakers.....	10
4 Requirements.....	10
5 Technical Solution.....	11
5.1 Asynchronous Event Processing.....	11
5.1.1 The Event.....	11

5.1.2 Consuming Asynchronous Events.....	12
5.1.3 Producing Asynchronous Events.....	13
5.2 Asynchronous Event Pipelines.....	13
5.2.1 Simple Stream operations.....	13
5.2.2 The PushStream lifecycle.....	14
5.2.3 PushStream lifecycle callbacks.....	15
5.2.4 Buffering.....	15
5.2.5 Coalescing and windowing.....	16
5.2.6 Forking.....	17
5.2.7 Splitting.....	17
5.3 The PushStreamProvider.....	18
5.3.1 Buffered Streams, Unbuffered Streams and Buffered Consumers.....	18
5.3.2 QueuePolicy.....	19
5.3.3 PushbackPolicy.....	20
5.3.4 Streams as Event Sources.....	20
5.4 Simplifying PushEventSource creation.....	20
5.4.1 Optimising Event Creation.....	21
6 Data Transfer Objects.....	23
7 Javadoc.....	23
7.1 The PushStream API.....	23
8 Considered Alternatives.....	62
9 Security Considerations.....	62
10 Document Support.....	62
10.1 References.....	62
10.2 Author's Address.....	63
10.3 Acronyms and Abbreviations.....	64
10.4 End of Document.....	64

0.5 Terminology and Document Conventions

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY" and "OPTIONAL" in this document are to be interpreted as described in 10.1.

Source code is shown in this typeface.

0.6 Revision History

The last named individual in this history is currently responsible for this document.

Revision	Date	Comments
Initial	Nov 12 2015	Initial version of the document Split from RFC 214 Tim Ward (Paremus)
0.1	Dec 16 2015	Minor Updates to the PushStream API after the Chicago F2F, more examples

Revision	Date	Comments
0.2	Jan 18 2016	Minor Updates to the PushStreamProvider API to add a builder, some package name changes, and more examples for the SimplePushEventSource
0.3	Feb 4 2016	Recombine the builder package into the main pushstream package
0.4	Sep 6 2016	Add a streamOf method to the PushStreamProvider
0.5	Sep 8 2016	Add support for timeout and time limited streams

1 Introduction

This RFC began as an RFP nearly two years ago, in an effort to provide a better asynchronous messaging and eventing solution between OSGi framework. The RFP experienced some delays because parts of the problem space related to other OSGi RFCs. The primary blocks were the lack of an “updatatable” remote service, and the lack of native support for asynchronous primitives. The Enterprise R6 release will include both RSA 1.1, the Async Service, and OSGi Promises, meaning that further progress is now possible for Distributed Eventing.

As part of distributed eventing it became necessary to think further about event streams and event processing. Modern event processing frameworks such as Akka and Reactive Streams offer a number of useful features for asynchronous systems. Similarly Java 8's introduction of functional programming techniques via lambda expressions opens up a wide variety of solution spaces not previously available.

2 Application Domain

Distributed systems may be built using a number of different *interaction patterns*. Despite vocal proponents for each approach - it is increasingly clear that no one architectural solution is optimal in every context. Rather there is a continuous spectrum of interaction behaviors. If at all possible – these should ideally be supported in a consistent / coherent manner.

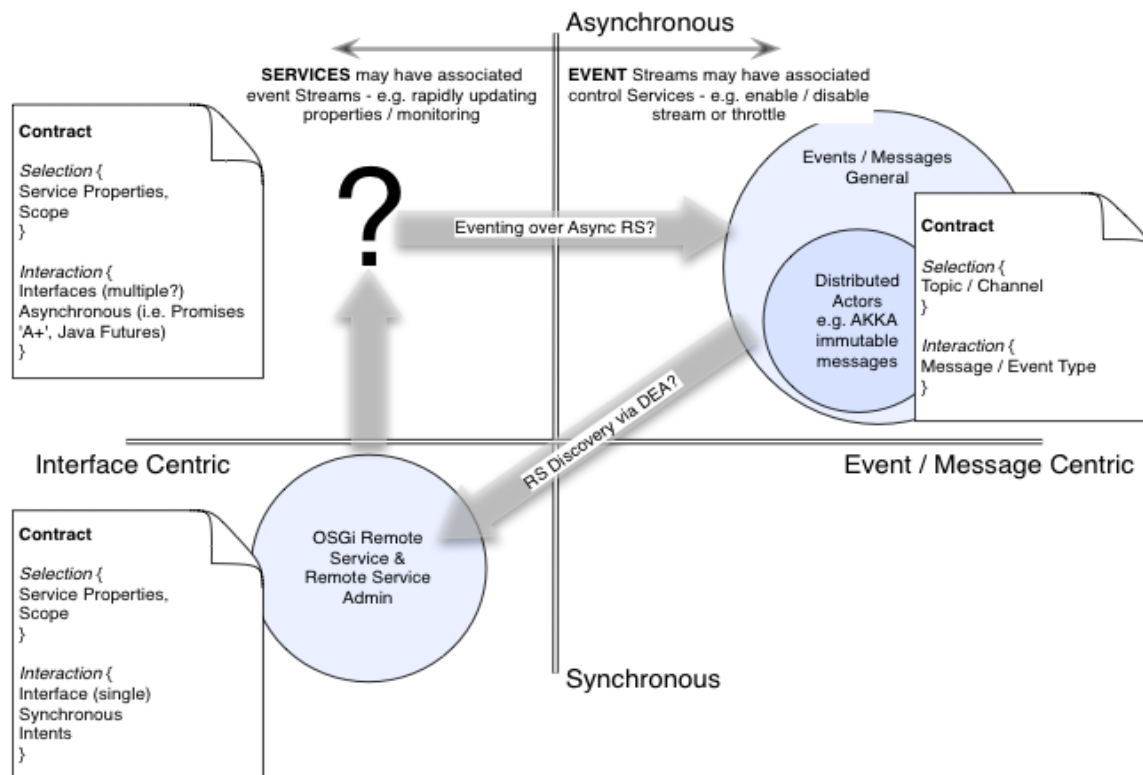


Figure 1: Types of distributed interaction

Synchronous RPC Services: The OSGi Alliance addressed the requirement for Remote Services via the *remote service* and *remote service admin specifications*: these specifications for synchronous RPC Services. In a dynamic environment (1..n) Services may be dynamically discovered, a sub-set of which (1..m where $m < n$) may be selected for use based on advertised Service properties. Service properties might be *Immutable* e.g. *Version*, *Location* or *Ownership* information – or *Mutable*: *reliability metrics*, *rating* or *cost metrics* – which may changing frequently in time.

It should be noted that:

- The RSA architecture is modular – allowing different Data Distribution and Discovery Providers to be used. This approach is extremely flexible. Some RSA implementations may choose to use a distributed P2P event substrate to provide Service discovery while other implementations use some form of static look-up service. Which ever is used - a coherent OSGi architecture is maintained. The use of an distributed Event Substrate for Service Discovery is one example of how RS/RSA and Distributed Eventing might interact.
- The current RSA specification does not address Service property updates: properties may change – and one does not necessarily wish to remove and re-add a Service because of this change. In more extreme cases, for volatile Service properties, one may wish to monitor these. Here a reference to the appropriate event streams might be advertised as Service properties. This scenario highlights a second potential relationship between RS/RSA and Distributed Eventing. (Note that it is planned to update the Remote Service Admin specification for Enterprise R6 to support Service property updates, see RFC 203.)

Note the suggested RS/RSA enhancements are out of scope of this RFP – they are mentioned to illustrate the potential relationships between RS/RSA and a Distributed Eventing specification.

Asynchronous Services: Synchronous Services will block until a response is received from the local or remote service. However, on occasions it is preferable for the client to return from the call immediately and continue – some form of notification received at a future point in time – i.e. a 'promise' or a 'future'.

While a number of remote service data distribution providers (RSA) can – in principle support - asynchronous operation, there are currently no OSGi specifications to address support for asynchronous Services (local or remote). Such a specification is desirable as asynchronous Services are increasing popular in Cloud and Distributed environments – and increasingly the JavaScript development community (e.g. node.js). Work in the planned JavaScript RFC will look at implementations of asynchronous Service Registries.

As indicated in Figure 1 – in static environments - Asynchronous Services might be used as a mechanism to implement distributed events. This makes less sense in dynamic environments as some form of discovery mechanism is required – which is usually event based for scaling. So Distributed Eventing would more likely underpin RS/RSA.

This is an important area that requires OSGi Alliance specification work, work that clear relates to both Distributed Eventing & RS / RSA, but Asynchronous Services are out of scope of this current RFP; they are the topic of RFP 132.

Distributed Events / Messages:

Asynchronous Message / Event based approaches are increasingly the underpinnings of large scale distributed environments including 'Cloud'. In these distributed systems *Publishers* endpoints are decoupled from *Subscribers* endpoints; association is achieved via the *Topic* the *Publishers* and *Subscribers* choose to subscribe to a named Topic - and /or – a specific Message type.

Implementations vary considerably – and range from 'classic' enterprise message solutions - (e.g. JMS/AMQP) with centralized message brokers – to peer-to-peer de-centralized P2P solutions – e.g. 0MQ and the Object Management Group's (OMG) Data Distribution Service - see http://www.omg.org/technology/documents/dds_spec_catalog.html

In principle asynchronous message based system provide the potential for greater scalability. However one cannot naively claim that asynchronous messaging will always scale more effectively than synchronous services: the performance characteristics are implementation dependent. An asynchronous messaging Service implemented via a central broker may introduce significant latency, throughput bottlenecks and points of architectural fragility. Whereas a dynamic Services approach with effective Service endpoint load balancing capabilities – would avoid these issues. However, correctly implemented P2P asynchronous message based systems will out perform both - with lower latency, higher throughput and increased resilience.

Due to the increased level of end-point de-coupling and potentially the use of parallel asynchronous pipelines, interaction contracts within message / event based systems are more challenging. Unlike a Service centric approach - failure of Subscribers is not obvious to Publishers (or visa-versa).

Dependent upon the Capabilities of the Distributed Eventing provider – events may / may not be durable – and in-order delivery of message / events may / may not be possible.

- Broker based messaging solutions (i.e. JMS Brokers) typically rely on ACID transactions between publishers and the message broker, then the message broker and subscribers. Such solutions are typically used for chaining interactions between coarse grained services running on large compute servers – i.e. Mainframes / large Unix Systems in traditional Enterprise environments. However centralized brokers / ACID transactions represent bottlenecks and points of fragility: failing to efficiently scale in large distributed highly parallel asynchronous environments.
- Increasingly highly distributed / parallelized environments typical of 'Cloud' are using P2P messaging solutions with compensational / recovery / eventual consistency / based approaches to recovery. In such environments the components with a distributed system need to be idempotent as messages / events / may be re-injected in response to some form of timeout or failure notifications. In such environments aggregation points are still required to coordination at input (fan-out) and output (fan-in) boundaries of the parallel flows.

From a developer perspective 'Actors' are an increasingly popular asynchronous programming style. While popularised by the the Scala / Akka community – Java Actor frameworks also exist – i.e. the kilim actor framework (<http://www.mahar.net/sriram/kilim/>) and the Netflix RXJava project <https://github.com/Netflix/RxJava/wiki>. In these environments local asynchronous events (locally using a message / mailbox pattern) may be distributed between remote 'Actors' via a plug-able messaging layer; e.g. for Akka 0MQ or via Camel / Camel plug-ins. An OSGi Distributed Eventing specification would provide a natural remoting substrate for 'Actor' / OSGi based applications.

2.1 Point-to-point/Queue semantics with current Event Admin Service

Some projects use the OSGi Service Registry Hooks to add point-to-point and/or queue messaging semantics to existing Event Admin Service implementations. This approach is working well for these projects and does not actually require a change to the Event Admin Service specification as it uses the hooks to only show the listeners that should receive the message to the Event Admin Service. While not distributed across remote frameworks such a design could also be relevant in a distributed context.

2.2 Existing approaches to distribute the Event Admin Service

A number of projects have successfully implemented a distribution-enabled Event Admin Service employing the existing OSGi API of the Event Admin Service to send events to remote clients. A master thesis was also written on the topic in 2009 by Marc Schaaf [4].

While this approach is very useful in certain situations, it has limitations which make the current Event Admin Service not generally applicable as a service for distributing events.

2.3 Terminology + Abbreviations

Event: a notification that a circumstance or situation has occurred or an incident happened. Events are represented as data that can be stored and forwarded using any mechanism and/or technology and often include information about the time of occurrence, what caused the event and what entity created the event.

Message: a piece of data conveyed via an asynchronous remote communication mechanism such as a message queue product or other middleware. A message can contain an event, but can also have other information or instructions as its payload.

Common definitions for messaging systems include:

Queue: A messaging channel which delivers each message only to one receiver even if multiple receivers are registered, the message will only be delivered to one of them. If a receiver disconnects than all following messages are distributed between the remaining recipients. (It should be configurable that if no recipient is registered when a message is about to be delivered if the message is kept until a receiver is registered or if the message will be lost)

Topic: A publish and subscribe channel that delivers a message to all currently subscribed receivers. Therefore one message is broadcasted to multiple recipients. If no subscription of a receiver is available when a message is about to be delivered, the message is discarded. If a messaging client is disconnected for a period of time, it will miss all messages transferred during this period.

3 Problem Description

The OSGi Alliance has an elegant approach to event management via the Event Admin service. This model, however has a number of drawbacks

3.1 Issues with current Event Admin

It should be noted that the following issues exist with the current Event Admin specification. There is no concept of 'contract' and the messages are untyped, so each participant has to continually work out what kind of message it has received, validate it, handle errors and missing info, work out what it should send in response.

- Current Event Admin only specifies how to send and receive events
- What to do after receiving an Event is unspecified...
- Current Event Admin events are maps, where the values can be anything - Java's instanceof operator to find out the type. Does this / should this / be modernized to be DTO centric?

This is fine if we don't want to go to the trouble of defining a contract for a particular interaction, but the risk is that modules become *more* tightly coupled because of hidden assumptions about the form of events they exchange. Also Event Admin is missing features such as the ability to send a point-to-point reply to a specific message, perhaps to a specific endpoint or subset of endpoints (perhaps via correlation IDs).

For these reasons it may not be possible to repurpose the existing Event Admin since it is already designed for a certain set of local use-cases, and there may be backwards compatibility concerns. Hence a completely new distributed eventing design may be required that might optionally replace or complement the local Event Admin service.

3.2 Event Pipelines

The ReactiveX effort provides an API for event stream processing, where “Observers” have events pushed to them, and may publish the event on, or publish another related event as a result. In general this programming model leads to the creation of event “pipelines” through which events flow and are transformed.

This model is effectively a “push based” version of the Java 8 Streams API, which provides a functional pipeline for operating on Collections. The Streams API is inherently “pull based” as it relies on iterators/spliterators to “pull” the next entry from the stream. This is the primary difference between synchronous and asynchronous models. In an asynchronous world entries are pushed into the pipeline.

The other key difference between a pull-based and push based architecture is that pull-based models inherently throttle themselves. A slow part of the pipeline consumes the thread of execution, preventing more events from being created and overloading the system. In a push-based model the non-blocking nature forces “extra” events to be queued. Fast producers can easily overwhelm slow consumers. To combat this asynchronous systems introduce “back-pressure”. Back-pressure is used to indicate that an event source should slow down its event production to avoid overwhelming the consumer.

3.2.1 Buffering and Circuit breakers

An important part of stream processing is the use of buffering. Importantly, buffers provide an opportunity for thread switching in the asynchronous pipeline. This allows event producing threads to be returned to the event source without forcing them to execute the entire pipeline.

Buffers also provide an opportunity to create “circuit breakers”. Event storms occur when a large number of events occur in a short time, and can overwhelm the system. Buffering policies can move the system into a “blocking” state, or can simply disconnect the listener by “breaking” the pipeline. This is known as circuit breaker behaviour.

4 Requirements

DE010 – The solution **MUST** allow the sending of asynchronous messages to remote recipients.

DE012 – The solution **MUST** support a one-to-many, pub-sub/topic messaging semantic.

DE015 – The solution **MUST** support a one-to-one, queue messaging semantic.

DE020 – The solution **MUST** be independent of messaging technology used. This may be message broker based, peer-to-peer using a centralized approach or otherwise.

DE030 – The solution **MUST** allow implementations to advertise their supported Qualities of Service.

DE040 – The solution **MUST** provide a mechanism to select an Event Service provider based on its provided QoS.

DE042 – The solution **SHOULD** define a list of well-known QoS. Implementations **MUST NOT** be required to support all of these well known QoS.

DE045 – An implementation **MUST** be allowed to provide additional proprietary Qualities of Service.

DE047 – The solution **MUST** enable the message sender to specify the actual QoS used for sending a certain message.

DE048 – The solution **MUST** provide a facility for failure detection and/or reporting in cases where the requested Quality of Service cannot be satisfied.

DE050 – Events / Messages **MUST** be language agnostic – enabling a remote non-Java party to participate; e.g. C/C++ OSGi based agents.

DE055 – The solution **MAY** define a standard message encoding, for example using XML, JSON and/or other technology if appropriate.

DE060 – The solution **MUST** provide the means for point-to-point based communications for example to allow replies to specific messages – an event targeted to a specific node.

DE080 – The solution **MUST** provide the means to obtain information on the sender of an event e.g. bundleID, Framework UUID, SubSystem name. This information **MAY** be incomplete if the message didn't originate in an OSGi framework.

DE085 – The solution **SHOULD** provide the means to discover available Topics and Queues..

DE087 – The solution **MUST** allow certain Topics and Queues to not be advertised in the discovery mechanism.

DE088 – The solution **SHOULD** allow certain messages to be hidden from potential receivers.

DE090 – The solution **SHOULD NOT** prevent an implementation from providing a basic distribution solution for the existing Event Admin. While this will not provide all features of a Distributed Eventing solution, it is shown to be useful in certain contexts.

5 Technical Solution

A key part of the event processing model is defining how the events are processed. As OSGi R7 is moving to Java 8 the API design should enable idiomatic use of lambda expressions and functional programming techniques.

5.1 Asynchronous Event Processing

The three primitives of event processing are the event producer, the event consumer, and the event type itself.

5.1.1 The Event

Asynchronous Event processing is simplest when the Java Type model can be leveraged. The `org.osgi.service.event.Event` class provides a flexible model of an event, however it also requires the use of

“magic string” keys and that values be cast to implementation types. The event type used in distributed eventing should therefore be parameterizable with the type of the payload that it contains.

Whilst some events are “one off” occurrences, the majority of events form part of an event stream. The time between events may be large, or unpredictable, however event topics exist because it is very unusual for streams to consist of a single event. In general event streams consist of a series of data events, followed by zero or one terminal event. The terminal event may be a clean “close” or it may indicate a failure of some kind. In the case of an infinite event stream there may never be a terminal event (for example a series of temperature readings from a sensor has no logical “end”).

To encapsulate the above this RFC proposes a `PushEvent` API type, with an `EventType` enum to indicate the type of the event. The event has a `getType()` method to access the type information, `getData()` and `getFailure()` methods to access the data or failure that triggered the event, and an `isTerminal()` method to indicate that the method represents the end of the stream. There are also static methods for creating data, error or close events.

In order to facilitate the easy remoting of events the `PushEvent` type is `final` and contains only easy to serialize data. Assuming that the event payload is also serializable the complete state of the event can be reconstituted from its accessor methods.

Whilst it is not enforced, it is strongly recommended that event data be immutable. Mutable state in an event may not be visible between threads, and may cause corruption when processing.

5.1.2 Consuming Asynchronous Events

Consuming an event should be a simple process for simple use cases, but needs to be sufficiently flexible to allow more complex systems to be built. A functional interface allows for simple inline implementations to be created. Therefore the event consumer should be a SAM type.

Providing back-pressure to the event producer also requires that the event consumer return a value from the event consuming method. As event processing systems may have significant performance and latency challenges it would be ideal if the type were a primitive or an enum instance as these types avoid performance and garbage collection overheads. This RFC proposes that the return value from the consumer method should therefore be a `long` which indicates either that:

- The stream should be closed (a value < 0)
- Event delivery should continue (a value $== 0$)
- That delivery of the next event should be delayed by x nanoseconds (a value of x where $x > 0$)

The proposed API is therefore:

@ConsumerType

@FunctionalInterface

public interface `PushEventConsumer<T>` {

long `accept(PushEvent<? extends T> event)` **throws** `Exception`;

}

This API is simple to provide using a lambda function. Typical `PushEventConsumer` implementations will receive a number of Data events, followed by a terminal event to represent the end of the stream. In a multithreaded environment it is possible that some data events may arrive concurrently or out of order. After a terminal event, however, no more events will be delivered.

Note that the back-pressure returned to the source has only a best-effort guarantee. The source is permitted to call the consumer again without waiting for all, or even any, of the requested time to pass.

5.1.3 Producing Asynchronous Events

Producing a stream of asynchronous events is reasonably easy. The producer starts a listener, or a background thread, and generates an event as a reaction to some external change (which may simply be a progression in time). The event producer then delivers the event to one or more consumers. As with the `PushEventConsumer` it is preferable to make this a SAM type.

In addition to registering consumers it must also be possible to close the stream of events before it finishes on its own (for example a temperature monitor may be disabled while the stream of temperature events never terminates). Therefore the registration method should return a `Closeable`.

The proposed API is therefore:

```
@ConsumerType
@FunctionalInterface
public interface PushEventSource<T> {

    Closeable open(PushEventConsumer<? super T> event) throws
    Exception;

}
```

This API is simple to provide using a lambda function. Typical `PushEventSource` implementations will produce a number of Data events, followed by a terminal event to represent the end of the stream. The event source should also keep track of any back-pressure requested by the sources, and delay event delivery as requested. This may involve buffering the responses, or simply skipping one or more events. In the case where it is not possible to locally buffer or skip events then the source may continue to deliver the events by ignoring the back-pressure. The source is also required to send a terminal event when a consumer requests it with a negative back-pressure. No further events may be sent after a terminal event.

5.2 Asynchronous Event Pipelines

Directly connecting a `PushEventConsumer` and a `PushEventSource` is a simple way to consume events, however it leaves all of the processing up to the event consumer. Much of this processing is complex, and could be dramatically simplified by including some basic functional concepts from the Java 8 Streams API.

A `PushStream` is effectively a push-based version of the Java 8 Stream, except where the Stream returns a value, the `PushStream` returns a promise to the value.

5.2.1 Simple Stream operations

Operations on a `PushStream`, much like operations on a Java 8 Stream, are either “intermediate” or “terminal”. Intermediate operations are ones that act upon events in the stream, but return a stream for continued processing. Intermediate operations are also lazy, in particular they do not cause the `PushStream` to become connected to the `PushEventSource`. Terminal operations, however, are ones that return a result (wrapped in a Promise) or void.

Intermediate operations may be either Stateless or Stateful. Stateful operations may require a degree of buffering within the stream, and can cause either significant latency or require large amounts of memory. Stateful operations may also be impossible on streams which do not terminate.

Terminal operations trigger the connection of the PushStream to the PushEventSource, causing event delivery to begin. Some terminal operations are short circuiting. Short circuiting operations are ones that do not need to process the entire stream to reach a result, for example findAny(). Other operations, such as min and max, must process every entry to reach a result, and so will not complete until they receive a close event from the event source (this may occur as a result of the stream being closed).

Stateless operations	Intermediate Operations	Stateful Intermediate Operations	Terminal Operations	Short circuit terminal operations
filter()		distinct()	forEach()	anyMatch()
map()		sorted()	forEachEvent()	allMatch()
flatMap()		limit(long)	toArray()	noneMatch()
split()		skip(long)	reduce()	findFirst()
sequential()		buffer()	collect()	findAny()
fork();		coalesce()	min()	
merge()		window()	max()	
timeout()			count()	

Simple Stream examples 1 – How many odd numbers are there in the next 20 events?:

```
PushStream<Integer> ps = getStream();
Promise<Long> = ps.limit(20)
    .filter(x -> (x & 1) == 0)
    .count();
```

Simple Stream examples 2 – What is the biggest integer less than 100 in the next 1000 events from two different streams?:

```
PushStream<Integer> ps = getStream();
PushStream<Long> ps2 = getOtherStream();

Promise<Optional<Integer>> = ps.merge(
    ps2.filter(l -> l < Integer.MAX_VALUE)
        .map(Long::intValue))
    .limit(1000)
    .filter(x -> x < 1000)
    .max();
```

5.2.2 The PushStream lifecycle

PushStream instances are created in a disconnected state, and only connect to the underlying event source when a terminal operation is invoked.

PushStream objects implement Closeable, and can therefore be closed at any point. When a stream is closed a close event will be sent to the downstream consumer (if it exists), and any events subsequently received by the stream will return negative back-pressure, so as to close the stream back to its source.

If at any point the stream encounters an error then an error event will be sent to the downstream consumer, and any events subsequently received by the stream will return negative back-pressure, so as to close the stream back to its source.

Finally, if a `PushEventConsumer` consuming from an `PushStream` returns negative back-pressure then the stream pipeline will be closed and the negative value returned to the parent. Any events subsequently received by the stream will not be forwarded to the consumer and the stream will return negative back-pressure, so as to close the stream back to its source.

5.2.2.1 Terminal Event Operations

When a terminal event is encountered the Push Stream must complete processing any previous events before delivering the terminal event. Any subsequent events received before the terminal event is processed can be silently dropped.

5.2.3 PushStream lifecycle callbacks

Clients may register a `Runnable` callback with the `PushStream` using the `onClose(Runnable)` method. This callback will run when the stream is closed, regardless of how it is closed (e.g. a call to the `close` method, or a negative return from a downstream handler). If the `PushStream` is already closed when the handler is registered then the callback will run immediately. The thread used to run the callback is undefined. Only one close callback may be registered with a particular stage of the pipeline.

Clients may also register a `Callback` to be notified if the stream completes with an error using the `onError(Consumer<? super Throwable>)`. The `PushStream` does not hold on to events once it is closed, so this callback will only be called if it is registered before an error occurs. Only one error callback may be registered with a particular stage of the pipeline.

5.2.4 Buffering


Buffering is an important part of asynchronous stream processing. Introducing buffers allows processing to be moved onto a different thread, and for the number of processing threads to be changed. Buffering can therefore protect an `PushEventSource` from having its event generation thread “stolen” by a consumer which executes a long running operation. As a result the `PushEventSource` can be written more simply.

Buffering also provides a “fire break” for back-pressure. Back-pressure return values propagate back along a `PushStream` until they reach a part of the stream that is able to respond. For some `PushEventSource` implementations it is not possible to slow or delay event generation, however a buffer can always respond to back pressure by not releasing events from the buffer. Buffers can therefore be used to “smooth out” sources that produce bursts of events more quickly than they can be immediately processed. This simplifies the creation of `PushEventConsumer` instances, which can rely on their back-pressure requests being honoured.

Simple buffering is provided by the `PushStream` using default configuration values (provided by its creator) however a builder can also be used to give more fine-grained control of the buffering. This can supply the details of the buffer, including:

- The level of parallelism that the downstream side of the buffer should use for event delivery
- The `Executor` that the buffer should use to deliver downstream events
- The `BlockingQueue` implementation that should be used to queue the events

- A QueuePolicy, which is responsible for adding events into the queue
- A PushbackPolicy, which determines how much back-pressure should be applied by the buffer

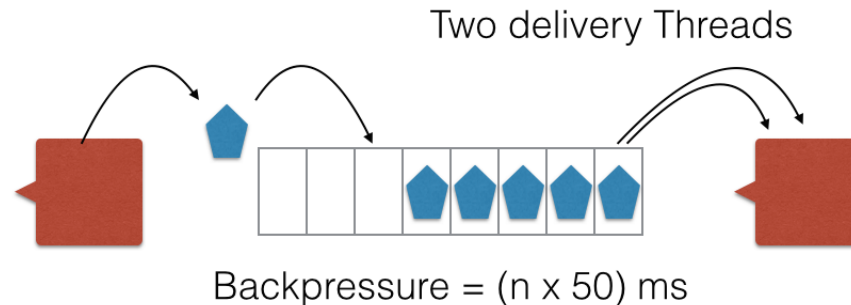

5.2.5 Coalescing and windowing

Coalescing and windowing are types of operation that do not exist on pull-based streams. In effect both coalescing and windowing are partial reduction operations. They both consume a number of events and reduce them into a single event which is then forwarded on. In this way they also behave like a buffer, storing up events and only passing them on when the necessary criteria are met.

The primary difference between coalescing and windowing is the way in which the next stage of processing is triggered. A coalescing stage collects events until it has the correct number and then passes them to the handler function, regardless of how long this takes. A windowing stage collects events for a given amount of time, and then passes the collected events to the handler function, regardless of how many events are collected.

To avoid the need for a potentially infinite buffer a windowing stage may also place a limit on the number of events to be buffered. If this limit is reached then the window finishes early and the buffer is passed to the client, just like a coalescing stage. In this mode of operation the handler function is also passed the length of time for which the window lasted.

When coalescing events there is no opportunity for feedback from the event handler while the events are being buffered. As a result back pressure from the handler is zero except when the event triggers a call to the next stage. When the next stage is triggered the back-pressure from that stage is returned.

As windowing requires the collected events to be delivered asynchronously there is no opportunity for back-pressure from the previous stage to be applied upstream. Windowing therefore returns zero back-pressure in all cases except when a buffer size limit has been declared and is reached. If a window size limit is reached then the windowing stage returns the remaining window time as back pressure. Applying back pressure in this way means that the event source will tend not to repeatedly oversaturate the window.

When a coalescing or windowing stream is closed, or receives a close event, then any events in the buffer are immediately passed to the downstream handler, followed by a close event.

Coalescing Example:

In the following example the event stream is a sequence of integers running from zero to 49 inclusive. The stream collapses each set of three values into their sum, and then forwards on the result

```
PushStream<Integer> ps = getStream();
List<Integer> list = ps
    .coalesce(3, (e) -> e.stream().reduce(0, (a,b) -> a + b))
    .collect(toList())
    .getValue();

// The resulting list is:
// [3,12,21,30,39,48,57,66,75,84,93,102,111,120,129,138,97]
```

Windowing Example:

In the following example the event stream is a sequence of 50 events emitted on average once every 20 milliseconds. The stream windows for 200 milliseconds, counts the events received and then forwards this on as the result

```
PushStream<Integer> ps = getStream();
List<Integer> list = ps.window(Duration.of(200, MILLISECONDS),
                               Collection::size)
    .collect(toList())
    .getValue();

// The resulting list is:
// [9,12,9,10,9,1]
```

5.2.6 Forking

Sometimes the processing that needs to be performed on an event is long-running. An important part of the asynchronous eventing model is that callbacks are short and non-blocking, which means that these callbacks should not run using the primary event thread. One solution to this is to buffer the stream, allowing a thread handoff at the buffer and limiting the impact of the long-running task. Buffering, however, has other consequences, and so it may be the case that a simple thread hand-off is preferable.

Forking allows users to specify a maximum number of concurrent downstream operations. Incoming events will block if this limit has been reached. If there are blocked threads then the returned back pressure for an event will be equal to the number of queued threads multiplied by the supplied timeout value. If there are no blocked threads then the back pressure will be zero.

5.2.7 Splitting

Sometimes it is desirable to split a stream into multiple parallel pipelines. These pipelines are independent from the point at which they are split, but share the same source and upstream pipeline.

Splitting a stream is possible using the `split(Predicate<? super T>... predicates)` method. For each predicate an `PushStream` will be returned that receives the events accepted by the predicate.

Note that the lifecycle of a split stream differs from that of a normal stream in two key ways,

1. The stream will begin event delivery when **any** of the downstream handlers encounters a terminal operation
2. The stream will only close when **all** of the downstream handlers are closed.

5.2.8 Time Limited Streams

An important difference between Push Streams and Java 8 Streams is that events occur over time, there are therefore some operations that do not apply to Java 8 Streams which are relevant to Push Streams.

The `limit()` operation on a Stream can be used to limit the number of elements that are processed, however on a Push Stream that number of events may never be reached, even though the stream has not closed. Push Streams therefore have a `limit` method which takes a duration. This duration limits the time for which the stream is open, closing it after the duration has elapsed.

The `timeout` operation of a Push Stream can be used to close a stream if no events are received for the given amount of time. If an event is received then this resets the timeout counter. The timeout operation is therefore a useful mechanism for identifying pipelines which have stalled in their processing.

5.3 The PushStreamProvider

The `PushStreamProvider` can be used to assist with a variety of asynchronous event handling use cases. An `PushStreamProvider` can create `PushStream` instances from an event source, it can buffer an `PushEventConsumer`, or it can turn a `PushStream` into a reusable `PushEventSource`.

5.3.1 Buffered Streams, Unbuffered Streams and Buffered Consumers

The primary use for the `PushStreamProvider` is to create `BufferedPushStream` instances. The `createStream()` method can be used to create a `PushStream` with the default buffering configuration. The default buffering configuration is as follows:

- A parallelism of one
- A `FAIL` `QueuePolicy`
- A `LINEAR` `PushbackPolicy` with a maximum pushback of one second
- A Buffer with a capacity of 32 elements

These values can be overridden by using a `PushStreamBuilder` to explicitly provide the buffering parameters. If no `Executor` is provided then the `PushStream` will create its own internal `Executor` with the same number of threads as the defined parallelism. An internally created `Executor` will be shut down when the `PushStream` is closed.

The `PushStreamBuilder` interface provides a `Builder` that can be used to configure the high-level behaviour of the `PushStream`. For example the `PushStreamBuilder` can be used to customize the buffer at the start of the `PushStream`, or it can be used to create an unbuffered `PushStream`. An unbuffered `PushStream` uses the incoming event delivery thread to process the events, and therefore users must be careful not to block the thread, or perform long-running tasks.

5.3.1.1 Examples

In the following examples the `get16bitADCStream` method returns an event source of 16 bit analog-to-digital samples, represented as an integer between 0 and 65535 inclusive.

Creating a PushStream with default buffering:

```
PushEventSource<Integer> source = get16BitADCStream();  
PushStreamProvider psp = getPushStreamProviderService();  
PushStream<Integer> ps = psp.createStream(source);
```

```
Promise<Boolean> clipped = ps  
    .filter(i -> i == 65535)  
    .anyMatch();
```

Creating a PushStream with configured buffering:

```
PushEventSource<Integer> source = get16BitADCStream();  
PushStreamProvider psp = getPushStreamProviderService();  
  
PushStream<Integer> ps = psp.buildStream(source)  
    .buffer(new ArrayBlockingQueue<>(64))  
    ,withQueuePolicy(QueuePolicyOption.FAIL)  
    .withPushbackPolicy(PushBackPolicyOption.LINEAR, SECONDS.toNanos(2))  
    .withExecutor(Executors.newFixedThreadPool(8))  
    .withParallelism(4)  
    .create();
```

```
Promise<Boolean> clipped = ps  
    .filter(i -> i == 65535)  
    .anyMatch();
```

Creating an unbuffered PushStream:

```
PushEventSource<Integer> source = get16BitADCStream();  
PushStreamProvider psp = getPushStreamProviderService();
```

```
PushStream<Integer> ps = psp.buildStream(source)
    .unbuffered()
    .create();

Promise<Boolean> clipped = ps
    .filter(i -> i == 65535)
    .anyMatch();
```

Both buffered and unbuffered streams are created in a disconnected state, and that the `PushEventSource` will not be opened until a terminal operation is encountered.

In addition to buffering streams the `PushStreamProvider` is also able to buffer `PushEventConsumers` directly. This wraps the the consumer with a buffer so that it can be implemented simply, but still gain the advantage of additional parallelism and back-pressure. Buffered `PushEventConsumers` use the same builder pattern as `PushStreams`.

5.3.2 QueuePolicy

A queue policy is used to determine what should happen when an event is added to the queue. The queue implementation must be a `BlockingQueue`, however subtypes may be used (such as a `BlockingDeque`) to enable more advanced custom Queueing policies.

There are three basic `QueuePolicyOption` values that can be used by clients.

- `DISCARD_OLDEST` – Attempts to add the event to the queue, and discards the event at the head of the queue if the event cannot immediately be added. This process is repeated until the event is queued
- `BLOCK` – Attempts to add the event to the queue, blocking until the event can be added
- `FAIL` – Attempts to add the event to the queue, throwing an `Exception` if the event cannot be immediately added.

5.3.3 PushbackPolicy

A `PushbackPolicy` is used to determine the amount of back-pressure that should be provided by the buffer. As with a `QueuePolicy` custom `PushbackPolicy` implementations that depend on specific queue implementations may be used. A number of simple `PushbackPolicyOption` types exist, and can be used to create a `PushbackPolicy` based on a base time in milliseconds:

- `FIXED` – Returns a fixed value for every event
- `ON_FULL_FIXED` – Returns zero until the buffer is full, at which point a fixed value is returned
- `ON_FULL_EXPONENTIAL` – Returns zero until the buffer is full, at which point an exponentially increasing value is returned. Once the buffer is no longer full the back-pressure value is reset
- `ON_FULL_CLOSE` – Returns zero until the buffer is full, at which point a negative value is used to close the stream

- **LINEAR** – Returns a value that linearly increases from zero to a fixed value depending on the remaining capacity of the buffer

5.3.4 Streams as Event Sources

The final feature of the `PushStreamProvider` is that it enables `PushStream` implementations to be used as `PushEventSources`. It is simple to connect a single `PushEventConsumer` to an `PushStream`, however connecting multiple consumers over time is more difficult.

Converting a stream to an `EventSource` buffers the events before distributing them to any connected consumers. It is not possible to create an unbuffered `EventSource` from a `PushStream`. Specific configuration for the buffer can be provided using the same `Builder` pattern as for buffered event consumers and `PushStreams`.

5.3.5 Mapping between Java 8 Streams and Push Streams

There are a number of scenarios where an application developer may wish to convert between a Java 8 Stream and a `PushStream`. In particular, the `flatMap` operation of a `PushStream` takes a single event and converts it into many events in a `PushStream`. Common operations, such as splitting the event into child events will result in a Java collection, or a Java 8 Stream. These need to be converted into a `PushStream` before they can be returned from the `flatMap` operation.

To assist this model the `PushStreamProvider` provides two `streamOf` methods. These convert a Java 8 Stream into a `PushStream`, changing the pull-based model of Java 8 streams into the asynchronous model of the `PushStream`.

The first `streamOf` method takes a Java 8 Stream. The `PushStream` created by this method is not fully asynchronous, it uses the connecting thread to consume the Java 8 Stream. As a result the streams created using this method will block terminal operations. This method should therefore not normally be used for infinite event streams, but instead for short, finite streams of data that can be processed rapidly, for example as the result of a flatmapping. In this scenario reusing the incoming thread improves performance.

For larger Streams of data, or when truly asynchronous operation is required, there is a second `streamOf` method which also takes an `Executor`. This executor is used to asynchronously consume elements from the Java 8 Stream using a single task. This mode of operation is suitable for use with infinite data streams, or for streams which require a truly asynchronous mode of operation, and does not require the stream to be parallel.

5.4 Simplifying `PushEventSource` creation

The `PushEventSource` and `PushEventConsumer` are both functional interfaces, however it is noticeably harder to implement a `PushEventSource` than a `PushEventConsumer`. A `PushEventSource` must be able to support multiple independently closeable consumer registrations, all of which are providing potentially different amounts of back pressure.

To simplify the case where a user wishes to write a basic event source the `PushStreamProvider` is able to create a `SimplePushEventSource`. The `SimplePushEventSource` handles the details of implementing `PushEventSource`, providing a simplified API for the event producing code to use.

Events can be sent via the `SimplePushEventSource` `publish(T t)` method at any time until it is closed. These events may be silently ignored if no consumer is connected, but if one or more consumers are connected then the event will be asynchronously delivered to them. When the event has been delivered to all of the connected consumers then the returned promise will resolve.

Close or error events can be sent equally easily using the `endOfStream()` and `error(Exception e)` methods. These will send disconnection events to all of the currently connected consumers and remove them from the `SimplePushEventSource`. Note that sending these events does not close the `SimplePushEventSource`, subsequent connection attempts will succeed, and events can still be published.

5.4.1 Optimising Event Creation

In addition to the publication methods the `SimplePushEventSource` provides `isConnected()` and `connectPromise()` methods. The `isConnected()` method gives a point-in-time snapshot of whether there are any connections to the `SimplePushEventSource`. If this method returns false then the event producer may wish to avoid creating the event, particularly if it is computationally expensive to do so. The `connectPromise()` method returns a `Promise` representing the current connection state. This `Promise` resolves when there is a client connected (which means it may be resolved immediately as it is created). If the `SimplePushEventSource` is closed before the `Promise` resolves then the `Promise` is failed with an `IllegalStateException`. The `connect` `Promise` can be used to trigger the initialisation of an event thread, allowing even lazier startup examples

In the following examples the `getADCReading` method returns a 16 bit analog-to-digital sample, represented as an integer between 0 and 65535 inclusive.

Simple Example allowing the EventSource to ignore back-pressure and connection management

```
SimplePushEventSource<Integer> spes = getSimplePushEventSource();

ScheduledExecutorService worker = getExecutor();

Runnable work = () -> {
    Integer value = getADCReading();
    spes.publish(value);
};

worker.scheduleAtFixedRate(work, 0, 20, MICROSECONDS);
```

Simple Example allowing the worker to avoid generating an event when noone is connected

```
SimplePushEventSource<Integer> spes = getSimplePushEventSource();

ScheduledExecutorService worker = getExecutor();

Runnable work = () -> {
    if (spes.isConnected()) {
        Integer value = getADCReading();
        spes.publish(value);
    }
};

worker.scheduleAtFixedRate(work, 0, 20, MICROSECONDS);
```

Simple Example allowing the event producer thread to be started/stopped as needed


```
/**
 * Once called this method sends events until the SimplePushEventSource is closed
 * It delays starting the worker until needed, and shuts it down when not needed.
 */
void setupADCEventStream() {

    SimplePushEventSource<Integer> spes = getSimplePushEventSource();

    Success<Void,Void> success = p -> {
        ScheduledExecutorService worker = getExecutor();

        Deferred<Void> noMoreListeners = new Deferred<>();

        Runnable work = () -> {
            try {
                if (spes.isConnected()) {
                    Integer value = getADCReading();
                    spes.publish(value);
                } else {
                    noMoreListeners.resolve(null);
                    worker.shutdown();
                }
            } catch (RuntimeException e) {
                noMoreListeners.fail(e);
                worker.shutdown();
            }
        };

        worker.scheduleAtFixedRate(work, 0, 20, MICROSECONDS);

        return noMoreListeners.getPromise();
    };

    spes.connectPromise()
        .then(success)
        .onResolve(this::setupADCEventStream);
}
```

6 Data Transfer Objects

RFC 185 defines Data Transfer Objects as a generic means for management solutions to interact with runtime entities in an OSGi Framework. DTOs provides a common, easily serializable representation of the technology.

For all new functionality added to the OSGi Framework the question should be asked: would this feature benefit from a DTO? The expectation is that in most cases it would.

The DTOs for the design in this RFC should be described here and if there are no DTOs being defined an explanation should be given explaining why this is not applicable in this case.

This section is optional and could also be provided in a separate RFC.

7 Javadoc

7.1 The PushStream API

OSGi Javadoc

9/8/16 1:01 PM

Package Summary		Page
org.osgi.util.pushstream	Push Stream Package Version 1.0.	26

Package org.osgi.util.pushstream

@org.osgi.annotation.versioning.Version(value="1.0")

Push Stream Package Version 1.0.

See:

[Description](#)

Interface Summary		Page
BufferBuilder	Create a buffered section of a Push-based stream	28
PushbackPolicy	A PushbackPolicy is used to calculate how much back pressure to apply based on the current buffer.	31
PushEventConsumer	An Async Event Consumer asynchronously receives Data events until it receives either a Close or Error event.	39
PushEventSource	An event source.	41
PushStream	A Push Stream fulfills the same role as the Java 8 stream but it reverses the control direction.	42
PushStreamBuilder	A Builder for a PushStream.	55
QueuePolicy	A QueuePolicy is used to control how events should be queued in the current buffer.	62
SimplePushEventSource	A SimplePushEventSource is a helper that makes it simpler to write a PushEventSource .	65

Class Summary		Page
PushEvent	A PushEvent is an immutable object that is transferred through a communication channel to push information to a downstream consumer.	34
PushStreamProvider	A factory for PushStream instances, and utility methods for handling PushEventSources and PushEventConsumers	58

Enum Summary		Page
PushbackPolicyOption	PushbackPolicyOption provides a standard set of simple PushbackPolicy implementations.	32
PushEvent.EventType	The type of a PushEvent .	37
QueuePolicyOption	QueuePolicyOption provides a standard set of simple QueuePolicy implementations.	63

Package org.osgi.util.pushstream Description

Push Stream Package Version 1.0.

Bundles wishing to use this package must list the package in the Import-Package header of the bundle's manifest.

Example import for consumers using the API in this package:

```
Import-Package: org.osgi.util.pushstream; version="[1.0,2.0)"
```

Example import for providers implementing the API in this package:

Package org.osgi.util.pushstream

Import-Package: org.osgi.util.pushstream; version="[1.0,1.1)"

Interface *BufferBuilder*

org.osgi.util.pushstream

Type Parameters:

- R - The type of object being built
- T - The type of objects in the [PushEvent](#)
- U - The type of the Queue used in the user specified buffer

All Known Subinterfaces:

[PushStreamBuilder](#)

```
public interface BufferBuilder
```

Create a buffered section of a Push-based stream

Method Summary		Page
R create ()		29
BufferBuilder<R,T,U> withBuffer (U queue)	The BlockingQueue implementation to use as a buffer	28
BufferBuilder<R,T,U> withExecutor (Executor executor)	Set the Executor that should be used to deliver events from this buffer	29
BufferBuilder<R,T,U> withParallelism (int parallelism)	Set the maximum permitted number of concurrent event deliveries allowed from this buffer	29
BufferBuilder<R,T,U> withPushbackPolicy (PushbackPolicy < T , U > pushbackPolicy)	Set the PushbackPolicy of this builder	29
BufferBuilder<R,T,U> withPushbackPolicy (PushbackPolicyOption pushbackPolicyOption, long time)	Set the PushbackPolicy of this builder	29
BufferBuilder<R,T,U> withQueuePolicy (QueuePolicy < T , U > queuePolicy)	Set the QueuePolicy of this Builder	28
BufferBuilder<R,T,U> withQueuePolicy (QueuePolicyOption queuePolicyOption)	Set the QueuePolicy of this Builder	29

Method Detail

withBuffer

[BufferBuilder<R,T,U>](#) **withBuffer** ([U](#) queue)

The [BlockingQueue](#) implementation to use as a buffer

Returns:

this builder

withQueuePolicy

[BufferBuilder<R,T,U>](#) **withQueuePolicy** ([QueuePolicy](#)<[T](#),[U](#)> queuePolicy)

Set the [QueuePolicy](#) of this Builder

Returns:
this builder

withQueuePolicy

[BufferBuilder](#)<[R](#),[T](#),[U](#)> **withQueuePolicy**([QueuePolicyOption](#) queuePolicyOption)

Set the [QueuePolicy](#) of this Builder

Returns:
this builder

withPushbackPolicy

[BufferBuilder](#)<[R](#),[T](#),[U](#)> **withPushbackPolicy**([PushbackPolicy](#)<[T](#),[U](#)> pushbackPolicy)

Set the [PushbackPolicy](#) of this builder

Returns:
this builder

withPushbackPolicy

[BufferBuilder](#)<[R](#),[T](#),[U](#)> **withPushbackPolicy**([PushbackPolicyOption](#) pushbackPolicyOption,
long time)

Set the [PushbackPolicy](#) of this builder

Returns:
this builder

withParallelism

[BufferBuilder](#)<[R](#),[T](#),[U](#)> **withParallelism**(int parallelism)

Set the maximum permitted number of concurrent event deliveries allowed from this buffer

Returns:
this builder

withExecutor

[BufferBuilder](#)<[R](#),[T](#),[U](#)> **withExecutor**([Executor](#) executor)

Set the [Executor](#) that should be used to deliver events from this buffer

Returns:
this builder

create

[R](#) **create**()

Returns:

the object being built

Interface PushbackPolicy

[org.osgi.util.pushstream](#)

Type Parameters:

- T - The type of the data
- U - The type of the queue

```
@org.osgi.annotation.versioning.ConsumerType
@FunctionalInterface
public interface PushbackPolicy
```

A [PushbackPolicy](#) is used to calculate how much back pressure to apply based on the current buffer. The [PushbackPolicy](#) will be called after an event has been queued, and the returned value will be used as back pressure.

See Also:

[PushbackPolicyOption](#)

Method Summary		Page
long	pushback (U queue) Given the current state of the queue, determine the level of back pressure that should be applied	31

Method Detail

pushback

```
long pushback (U queue)
    throws Exception
```

Given the current state of the queue, determine the level of back pressure that should be applied

Returns:

a back pressure value in nanoseconds

Throws:

Exception

Enum PushbackPolicyOption

[org.osgi.util.pushstream](#)

```
java.lang.Object
├─ java.lang.Enum<PushbackPolicyOption>
│   └─ org.osgi.util.pushstream.PushbackPolicyOption
```

All Implemented Interfaces:

Comparable<[PushbackPolicyOption](#)>, Serializable

```
public enum PushbackPolicyOption
extends Enum<PushbackPolicyOption>
```

[PushbackPolicyOption](#) provides a standard set of simple [PushbackPolicy](#) implementations.

See Also:

[PushbackPolicy](#)

Enum Constant Summary		Page
FIXED	Returns a fixed amount of back pressure, independent of how full the buffer is	32
LINEAR	Returns zero back pressure when the buffer is empty, then it returns a linearly increasing amount of back pressure based on how full the buffer is.	33
ON_FULL_EXPONENTIAL	Returns zero back pressure until the buffer is full, then it returns an exponentially increasing amount, starting with the supplied value and doubling it each time.	33
ON_FULL_FIXED	Returns zero back pressure until the buffer is full, then it returns a fixed value	33

Method Summary		Page
abstract PushbackPolicyOption <T,U>	getPolicy (long value) Create a PushbackPolicy instance configured with a base back pressure time in nanoseconds The actual backpressure returned will vary based on the selected implementation, the base value, and the state of the buffer.	33
static PushbackPolicyOption	valueOf (String name)	33
static PushbackPolicyOption []	values ()	33

Enum Constant Detail

FIXED

```
public static final PushbackPolicyOption FIXED
```

Returns a fixed amount of back pressure, independent of how full the buffer is

ON_FULL_FIXED

public static final [PushbackPolicyOption](#) ON_FULL_FIXED

Returns zero back pressure until the buffer is full, then it returns a fixed value

ON_FULL_EXPONENTIAL

public static final [PushbackPolicyOption](#) ON_FULL_EXPONENTIAL

Returns zero back pressure until the buffer is full, then it returns an exponentially increasing amount, starting with the supplied value and doubling it each time. Once the buffer is no longer full the back pressure returns to zero.

LINEAR

public static final [PushbackPolicyOption](#) LINEAR

Returns zero back pressure when the buffer is empty, then it returns a linearly increasing amount of back pressure based on how full the buffer is. The maximum value will be returned when the buffer is full.

Method Detail

values

public static [PushbackPolicyOption](#)[] values()

valueOf

public static [PushbackPolicyOption](#) valueOf(String name)

getPolicy

public abstract [PushbackPolicy](#)<T,U> getPolicy(long value)

Create a [PushbackPolicy](#) instance configured with a base back pressure time in nanoseconds The actual backpressure returned will vary based on the selected implementation, the base value, and the state of the buffer.

Returns:

A [PushbackPolicy](#) to use

Class *PushEvent*

[org.osgi.util.pushstream](https://osgi.org/spec/osgi/4.2.0/org.osgi.util.pushstream)

```
java.lang.Object
└─ org.osgi.util.pushstream.PushEvent
```

Type Parameters:

T - The payload type of the event.

```
abstract public class PushEvent
extends Object
```

A *PushEvent* is an immutable object that is transferred through a communication channel to push information to a downstream consumer. The event has three different types:

- [PushEvent.EventType.DATA](#) – Provides access to a typed data element in the stream.
- [PushEvent.EventType.CLOSE](#) – The stream is closed. After receiving this event, no more events will follow.
- [PushEvent.EventType.ERROR](#) – The stream ran into an unrecoverable problem and is sending the reason downstream. The stream is closed and no more events will follow after this event.

Immutable

Nested Class Summary		Page
static enum	PushEvent.EventType The type of a PushEvent .	37

Method Summary		Page
static PushEvent < T>	close () Create a new close event.	36
static PushEvent < T>	data (T payload) Create a new data event.	35
static PushEvent < T>	error (Exception e) Create a new error event.	36
T	getData () Return the data for this event.	35
Exception	getFailure () Return the error that terminated the stream.	35
abstract PushEvent . EventType	getType () Get the type of this event.	35
boolean	isTerminal () Answer if no more events will follow after this event.	35
PushEvent < X>	nodata () Convenience to cast a close/error event to another payload type.	36

Method Detail

getType

```
public abstract PushEvent.EventType getType()
```

Get the type of this event.

Returns:

The type of this event.

getData

```
public T getData()  
    throws IllegalStateException
```

Return the data for this event.

Returns:

The data payload.

Throws:

[IllegalStateException](#) - if this event is not a [PushEvent.EventType.DATA](#) event.

getFailure

```
public Exception getFailure()  
    throws IllegalStateException
```

Return the error that terminated the stream.

Returns:

The error that terminated the stream.

Throws:

[IllegalStateException](#) - if this event is not an [PushEvent.EventType.ERROR](#) event.

isTerminal

```
public boolean isTerminal()
```

Answer if no more events will follow after this event.

Returns:

false if this is a data event, otherwise true.

data

```
public static PushEvent<T> data(T payload)
```

Create a new data event.

Type Parameters:

[T](#) - The payload type.

Parameters:

payload - The payload.

Returns:

A new data event wrapping the specified payload.

error

```
public static PushEvent<T> error(Exception e)
```

Create a new error event.

Type Parameters:

T - The payload type.

Parameters:

e - The error.

Returns:

A new error event with the specified error.

close

```
public static PushEvent<T> close()
```

Create a new close event.

Type Parameters:

T - The payload type.

Returns:

A new close event.

nodata

```
public PushEvent<X> nodata()  
    throws IllegalStateException
```

Convenience to cast a close/error event to another payload type. Since the payload type is not needed for these events this is harmless. This therefore allows you to forward the close/error event downstream without creating anew event.

Type Parameters:

X - The new payload type.

Returns:

The current error or close event mapped to a new payload type.

Throws:

IllegalStateException - if the event is a [PushEvent.EventType.DATA](#) event.

Enum `PushEvent.EventType`

[org.osgi.util.pushstream](#)

```
java.lang.Object
└─ java.lang.Enum<PushEvent.EventType>
    └─ org.osgi.util.pushstream.PushEvent.EventType
```

All Implemented Interfaces:

`Comparable`<[PushEvent.EventType](#)>, `Serializable`

Enclosing class:

[PushEvent](#)

```
public static enum PushEvent.EventType
extends Enum<PushEvent.EventType>
```

The type of a [PushEvent](#).

Enum Constant Summary		Page
CLOSE	An event that indicates that the stream has terminated normally	37
DATA	A data event forming part of the stream	37
ERROR	An error event that indicates streaming has failed and that no more events will arrive	37

Method Summary		Page
static PushEvent.EventType valueOf (String name)		38
static PushEvent.EventType [] values ()		38

Enum Constant Detail

DATA

```
public static final PushEvent.EventType DATA
```

A data event forming part of the stream

ERROR

```
public static final PushEvent.EventType ERROR
```

An error event that indicates streaming has failed and that no more events will arrive

CLOSE

```
public static final PushEvent.EventType CLOSE
```

An event that indicates that the stream has terminated normally

Method Detail

values

```
public static PushEvent.EventType[] values()
```

valueOf

```
public static PushEvent.EventType valueOf(String name)
```

Interface PushEventConsumer

org.osgi.util.pushstream

Type Parameters:

T - The type for the event payload

```
@org.osgi.annotation.versioning.ConsumerType
@FunctionalInterface
public interface PushEventConsumer
```

An Async Event Consumer asynchronously receives Data events until it receives either a Close or Error event.

Field Summary		Pag e
long	ABORT If ABORT is used as return value, the sender should close the channel all the way to the upstream source.	39
long	CONTINUE A 0 indicates that the consumer is willing to receive subsequent events at full speeds.	39

Method Summary		Pag e
long	accept (PushEvent <? extends T > event) Accept an event from a source.	39

Field Detail

ABORT

```
public static final long ABORT = -1L
```

If ABORT is used as return value, the sender should close the channel all the way to the upstream source. The ABORT will not guarantee that no more events are delivered since this is impossible in a concurrent environment. The consumer should accept subsequent events and close/clean up when the Close or Error event is received. Though ABORT has the value -1, any value less than 0 will act as an abort.

CONTINUE

```
public static final long CONTINUE = 0L
```

A 0 indicates that the consumer is willing to receive subsequent events at full speeds. Any value more than 0 will indicate that the consumer is becoming overloaded and wants a delay of the given milliseconds before the next event is sent. This allows the consumer to pushback the event delivery speed.

Method Detail

accept

```
long accept(PushEvent<? extends T> event)
    throws Exception
```

Accept an event from a source. Events can be delivered on multiple threads simultaneously. However, Close and Error events are the last events received, no more events must be sent after them.

Parameters:

`event` - The event

Returns:

less than 0 means abort, 0 means continue, more than 0 means delay ms

Throws:

`Exception` - to indicate that an error has occurred and that no further events should be delivered to this [PushEventConsumer](#)

Interface PushEventSource

org.osgi.util.pushstream

Type Parameters:

T - The payload type

All Known Subinterfaces:

[SimplePushEventSource](#)

```
@org.osgi.annotation.versioning.ConsumerType
@FunctionalInterface
public interface PushEventSource
```

An event source. An event source can open a channel between a source and a consumer. Once the channel is opened (even before it returns) the source can send events to the consumer. A source should stop sending and automatically close the channel when sending an event returns a negative value, see [PushEventConsumer.ABORT](#). Values that are larger than 0 should be treated as a request to delay the next events with those number of milliseconds.

Method Summary		Page
AutoCloseable	open (PushEventConsumer <? super T > aec) Open the asynchronous channel between the source and the consumer.	41

Method Detail

open

```
AutoCloseable open (PushEventConsumer<? super T> aec)
    throws Exception
```

Open the asynchronous channel between the source and the consumer. The call returns an `AutoCloseable`. This can be closed, and should close the channel, including sending a Close event if the channel was not already closed. The returned object must be able to be closed multiple times without sending more than one Close events.

Parameters:

aec - the consumer (not null)

Returns:

a `AutoCloseable` that can be used to close the stream

Throws:

`Exception`

Interface PushStream

org.osgi.util.pushstream

Type Parameters:

T - The Payload type

All Superinterfaces:

AutoCloseable

```
@org.osgi.annotation.versioning.ProviderType
public interface PushStream
extends AutoCloseable
```

A Push Stream fulfills the same role as the Java 8 stream but it reverses the control direction. The Java 8 stream is pull based and this is push based. A Push Stream makes it possible to build a pipeline of transformations using a builder kind of model. Just like streams, it provides a number of terminating methods that will actually open the channel and perform the processing until the channel is closed (The source sends a Close event). The results of the processing will be send to a Promise, just like any error events. A stream can be used multiple times. The Push Stream represents a pipeline. Upstream is in the direction of the source, downstream is in the direction of the terminating method. Events are sent downstream asynchronously with no guarantee for ordering or concurrency. Methods are available to provide serialization of the events and splitting in background threads.

Method Summary		Pag e
org.osgi.util.promise.Promise<Boolean>	allMatch (Predicate<? super T > predicate) Closes the channel and resolve the promise with false when the predicate does not matches a pay load.If the channel is closed before, the promise is resolved with true.	53
org.osgi.util.promise.Promise<Boolean>	anyMatch (Predicate<? super T > predicate) Close the channel and resolve the promise with true when the predicate matches a payload.	53
PushStream < T >	buffer () Buffer the events in a queue using default values for the queue size and other behaviours.	47
PushStreamBuilder < T , U >	buildBuffer () Build a buffer to enqueue events in a queue using custom values for the queue size and other behaviours.	47
PushStream < R >	coalesce (int count, Function<Collection< T >, R > f) Coalesces a number of events into a new type of event.	49
PushStream < R >	coalesce (Function<? super T , Optional< R >> f) Coalesces a number of events into a new type of event.	49
PushStream < R >	coalesce (IntSupplier count, Function<Collection< T >, R > f) Coalesces a number of events into a new type of event.	49
org.osgi.util.promise.Promise< R >	collect (Collector<? super T , A , R > collector) See Stream.	52
org.osgi.util.promise.Promise<Long>	count () See Stream.	53
PushStream < T >	distinct () Remove any duplicates.	45
PushStream < T >	filter (Predicate<? super T > predicate) Only pass events downstream when the predicate tests true.	45

org.osgi.util.promise.Promise<Optional< T >>	findAny () Close the channel and resolve the promise with the first element.	54
org.osgi.util.promise.Promise<Optional< T >>	findFirst () Close the channel and resolve the promise with the first element.	54
PushStream < R >	flatMap (Function<? super T ,? extends PushStream <? extends R >> mapper) Flat map the payload value (turn one event into 0..n events of potentially another type).	45
org.osgi.util.promise.Promise<Void>	forEach (Consumer<? super T > action) Execute the action for each event received until the channel is closed.	51
org.osgi.util.promise.Promise<Long>	forEachEvent (PushEventConsumer <? super T > action) Pass on each event to another consumer until the stream is closed.	54
PushStream < T >	fork (int n, int delay, Executor e) Execute the downstream events in up to n background threads.	47
PushStream < T >	limit (Duration maxTime) Automatically close the channel after the given amount of time has elapsed.	46
PushStream < T >	limit (long maxSize) Automatically close the channel after the maxSize number of elements is received.	46
PushStream < R >	map (Function<? super T ,? extends R > mapper) Map a payload value.	45
org.osgi.util.promise.Promise<Optional< T >>	max (Comparator<? super T > comparator) See Stream.	53
PushStream < T >	merge (PushEventSource <? extends T > source) Merge in the events from another source.	48
PushStream < T >	merge (PushStream <? extends T > source) Merge in the events from another PushStream.	48
org.osgi.util.promise.Promise<Optional< T >>	min (Comparator<? super T > comparator) See Stream.	52
org.osgi.util.promise.Promise<Boolean>	noneMatch (Predicate<? super T > predicate) Closes the channel and resolve the promise with false when the predicate matches any pay load.	54
PushStream < T >	onClose (Runnable closeHandler) Must be run after the channel is closed.	44
PushStream < T >	onError (Consumer<? super Throwable> closeHandler) Must be run after the channel is closed.	44
org.osgi.util.promise.Promise<Optional< T >>	reduce (BinaryOperator< T > accumulator) Standard reduce without identity, so the return is an Optional.	52
org.osgi.util.promise.Promise< T >	reduce (T identity, BinaryOperator< T > accumulator) Standard reduce, see Stream.	51
org.osgi.util.promise.Promise< U >	reduce (U identity, BiFunction< U ,? super T , U > accumulator, BinaryOperator< U > combiner) Standard reduce with identity, accumulator and combiner.	52
PushStream < T >	sequential () Ensure that any events are delivered sequentially.	48

PushStream <T>	skip (long n) Skip a number of events in the channel.	46
PushStream <T>	sorted () Sorted the elements, assuming that T extends Comparable.	45
PushStream <T>	sorted (Comparator<? super T > comparator) Sorted the elements with the given comparator.	46
PushStream <T>[]	split (Predicate<? super T >... predicates) Split the events to different streams based on a predicate.	48
PushStream <T>	timeout (Duration idleTime) Automatically close the channel if no events are received for the indicated length of time	46
org.osgi.util.promise.Promise<Object>	toArray () Collect the payloads in an Object array after the channel is closed.	51
org.osgi.util.promise.Promise<A>	toArray (IntFunction<A> generator) Collect the payloads in an Object array after the channel is closed.	51
PushStream <R>	window (Duration d, Executor executor, Function<Collection< T >,R> f) Buffers a number of events over a fixed time interval and then forwards the events to an accumulator function.	50
PushStream <R>	window (Duration d, Function<Collection< T >,R> f) Buffers a number of events over a fixed time interval and then forwards the events to an accumulator function.	49
PushStream <R>	window (Supplier<Duration> timeSupplier, IntSupplier maxEvents, Executor executor, BiFunction<Long,Collection< T >,R> f) Buffers a number of events over a variable time interval and then forwards the events to an accumulator function.	50
PushStream <R>	window (Supplier<Duration> timeSupplier, IntSupplier maxEvents, BiFunction<Long,Collection< T >,R> f) Buffers a number of events over a variable time interval and then forwards the events to an accumulator function.	50

Method Detail

onClose

[PushStream](#)<T> **onClose**(Runnable closeHandler)

Must be run after the channel is closed. This handler will run after the downstream methods have processed the close event and before the upstream methods have closed.

Parameters:

closeHandler - Will be called on close

Returns:

This stream

onError

[PushStream](#)<T> **onError**(Consumer<? super Throwable> closeHandler)

Must be run after the channel is closed. This handler will run after the downstream methods have processed the close event and before the upstream methods have closed.

Parameters:

`closeHandler` - Will be called on close

Returns:

This stream

filter

[PushStream](#)<T> **filter**(Predicate<? super T> predicate)

Only pass events downstream when the predicate tests true.

Parameters:

`predicate` - The predicate that is tested (not null)

Returns:

Builder style (can be a new or the same object)

map

[PushStream](#)<R> **map**(Function<? super T, ? extends R> mapper)

Map a payload value.

Parameters:

`mapper` - The map function

Returns:

Builder style (can be a new or the same object)

flatMap

[PushStream](#)<R> **flatMap**(Function<? super T, ? extends [PushStream](#)<? extends R>> mapper)

Flat map the payload value (turn one event into 0..n events of potentially another type).

Parameters:

`mapper` - The flat map function

Returns:

Builder style (can be a new or the same object)

distinct

[PushStream](#)<T> **distinct**()

Remove any duplicates. Notice that this can be expensive in a large stream since it must track previous payloads.

Returns:

Builder style (can be a new or the same object)

sorted

[PushStream](#)<T> **sorted**()

Sorted the elements, assuming that T extends Comparable. This is of course expensive for large or infinite streams since it requires buffering the stream until close.

Returns:

Builder style (can be a new or the same object)

sorted

[PushStream](#)<T> **sorted**(Comparator<? super T> comparator)

Sorted the elements with the given comparator. This is of course expensive for large or infinite streams since it requires buffering the stream until close.

Returns:

Builder style (can be a new or the same object)

limit

[PushStream](#)<T> **limit**(long maxSize)

Automatically close the channel after the maxSize number of elements is received.

Parameters:

maxSize - Maximum number of elements has been received

Returns:

Builder style (can be a new or the same object)

limit

[PushStream](#)<T> **limit**(Duration maxTime)

Automatically close the channel after the given amount of time has elapsed.

Parameters:

maxTime - The maximum time that the stream should remain open

Returns:

Builder style (can be a new or the same object)

timeout

[PushStream](#)<T> **timeout**(Duration idleTime)

Automatically close the channel if no events are received for the indicated length of time

Parameters:

idleTime - The length of time that the stream should remain open when no events are being received.

Returns:

Builder style (can be a new or the same object)

skip

[PushStream](#)<T> **skip**(long n)

Skip a number of events in the channel.

Parameters:

n - number of elements to skip

Returns:

Builder style (can be a new or the same object)

fork

```
PushStream<T> fork(int n,  
                    int delay,  
                    Executor e)  
    throws IllegalArgumentException,  
           NullPointerException
```

Execute the downstream events in up to n background threads. If more requests are outstanding apply delay * nr of delayed threads back pressure. A downstream channel that is closed or throws an exception will cause all execution to cease and the stream to close

Parameters:

n - number of simultaneous background threads to use
delay - Nr of ms/thread that is queued back pressure
e - an executor to use for the background threads.

Returns:

Builder style (can be a new or the same object)

Throws:

[IllegalArgumentException](#) - if the number of threads is 1 or the delay is 0
[NullPointerException](#) - if the [Executor](#) is null

buffer

```
PushStream<T> buffer()
```

Buffer the events in a queue using default values for the queue size and other behaviours. Buffered work will be processed asynchronously in the rest of the chain. Buffering also blocks the transmission of back pressure to previous elements in the chain, although back pressure is honoured by the buffer.

Buffers are useful for "bursty" event sources which produce a number of events close together, then none for some time. These bursts can sometimes overwhelm downstream event consumers. Buffering will not, however, protect downstream components from a source which produces events faster than they can be consumed. For fast sources [filter\(Predicate\)](#) and [coalesce\(int, Function\)](#) [fork\(int, int, Executor\)](#) are better choices.

Returns:

Builder style (can be a new or the same object)

buildBuffer

```
PushStreamBuilder<T, U> buildBuffer()
```

Build a buffer to enqueue events in a queue using custom values for the queue size and other behaviours. Buffered work will be processed asynchronously in the rest of the chain. Buffering also blocks the transmission of back pressure to previous elements in the chain, although back pressure is honoured by the buffer.

Buffers are useful for "bursty" event sources which produce a number of events close together, then none for some time. These bursts can sometimes overwhelm downstream event consumers. Buffering will not, however, protect downstream components from a source which produces events faster than they can be consumed. For fast sources [filter\(Predicate\)](#) and [coalesce\(int, Function\)](#) [fork\(int, int, Executor\)](#) are better choices.

Buffers are also useful as "circuit breakers" in the pipeline. If a [QueuePolicyOption.FAIL](#) is used then a full buffer will trigger the stream to close, preventing an event storm from reaching the client.

Returns:

Builder style (can be a new or the same object)

merge

[PushStream](#)<T> **merge** ([PushEventSource](#)<? extends T> source)

Merge in the events from another source. The resulting channel is not closed until this channel and the channel from the source are closed.

Parameters:

source - The source to merge in.

Returns:

Builder style (can be a new or the same object)

merge

[PushStream](#)<T> **merge** ([PushStream](#)<? extends T> source)

Merge in the events from another PushStream. The resulting channel is not closed until this channel and the channel from the source are closed.

Parameters:

source - The source to merge in.

Returns:

Builder style (can be a new or the same object)

split

[PushStream](#)<T>[] **split**(Predicate<? super T>... predicates)

Split the events to different streams based on a predicate. If the predicate is true, the event is dispatched to that channel on the same position. All predicates are tested for every event.

This method differs from other methods of AsyncStream in three significant ways:

- The return value contains multiple streams.
- This stream will only close when all of these child streams have closed.
- Event delivery is made to all open children that accept the event.

Parameters:

predicates - the predicates to test

Returns:

streams that map to the predicates

sequential

[PushStream](#)<T> **sequential**()

Ensure that any events are delivered sequentially. That is, no overlapping calls downstream. This can be used to turn a forked stream (where for example a heavy conversion is done in multiple threads) back into a sequential stream so a reduce is simple to do.

Returns:

Builder style (can be a new or the same object)

coalesce

```
PushStream<R> coalesce(Function<? super T,Optional<R>>> f)
```

Coalesces a number of events into a new type of event. The input events are forwarded to a accumulator function. This function returns an Optional. If the optional is present, it's value is send downstream, otherwise it is ignored.

Returns:

Builder style (can be a new or the same object)

coalesce

```
PushStream<R> coalesce(int count,  
                        Function<Collection<T>,R> f)
```

Coalesces a number of events into a new type of event. A fixed number of input events are forwarded to a accumulator function. This function returns new event data to be forwarded on.

Returns:

Builder style (can be a new or the same object)

coalesce

```
PushStream<R> coalesce(IntSupplier count,  
                        Function<Collection<T>,R> f)
```

Coalesces a number of events into a new type of event. A variable number of input events are forwarded to a accumulator function. The number of events to be forwarded is determined by calling the count function. The accumulator function then returns new event data to be forwarded on.

Returns:

Builder style (can be a new or the same object)

window

```
PushStream<R> window(Duration d,  
                     Function<Collection<T>,R> f)
```

Buffers a number of events over a fixed time interval and then forwards the events to an accumulator function. This function returns new event data to be forwarded on. Note that:

- The collection forwarded to the accumulator function will be empty if no events arrived during the time interval.
- The accumulator function will be run and the forwarded event delivered as a different task, (and therefore potentially on a different thread) from the one that delivered the event to this [PushStream](#).
- Due to the buffering and asynchronous delivery required, this method prevents the propagation of back-pressure to earlier stages

Returns:

Builder style (can be a new or the same object)

window

```
PushStream<R> window(Duration d,  
    Executor executor,  
    Function<Collection<T>,R> f)
```

Buffers a number of events over a fixed time interval and then forwards the events to an accumulator function. This function returns new event data to be forwarded on. Note that:

- The collection forwarded to the accumulator function will be empty if no events arrived during the time interval.
- The accumulator function will be run and the forwarded event delivered by a task given to the supplied executor.
- Due to the buffering and asynchronous delivery required, this method prevents the propagation of back-pressure to earlier stages

Returns:

Builder style (can be a new or the same object)

window

```
PushStream<R> window(Supplier<Duration> timeSupplier,  
    IntSupplier maxEvents,  
    BiFunction<Long,Collection<T>,R> f)
```

Buffers a number of events over a variable time interval and then forwards the events to an accumulator function. The length of time over which events are buffered is determined by the time function. A maximum number of events can also be requested, if this number of events is reached then the accumulator will be called early. The accumulator function returns new event data to be forwarded on. It is also given the length of time for which the buffer accumulated data. This may be less than the requested interval if the buffer reached the maximum number of requested events early. Note that:

- The collection forwarded to the accumulator function will be empty if no events arrived during the time interval.
- The accumulator function will be run and the forwarded event delivered as a different task, (and therefore potentially on a different thread) from the one that delivered the event to this [PushStream](#).
- Due to the buffering and asynchronous delivery required, this method prevents the propagation of back-pressure to earlier stages
- If the window finishes by hitting the maximum number of events then the remaining time in the window will be applied as back-pressure to the previous stage, attempting to slow the producer to the expected windowing threshold.

Returns:

Builder style (can be a new or the same object)

window

```
PushStream<R> window(Supplier<Duration> timeSupplier,  
    IntSupplier maxEvents,  
    Executor executor,  
    BiFunction<Long,Collection<T>,R> f)
```

Buffers a number of events over a variable time interval and then forwards the events to an accumulator function. The length of time over which events are buffered is determined by the time function. A maximum number of events can also be requested, if this number of events is reached then the accumulator will be called early. The accumulator function returns new event data to be forwarded on. It is also given the length of time for which the buffer accumulated data. This may be less than the requested interval if the buffer reached the maximum number of requested events early. Note that:

- The collection forwarded to the accumulator function will be empty if no events arrived during the time interval.
- The accumulator function will be run and the forwarded event delivered as a different task, (and therefore potentially on a different thread) from the one that delivered the event to this [PushStream](#).
- If the window finishes by hitting the maximum number of events then the remaining time in the window will be applied as back-pressure to the previous stage, attempting to slow the producer to the expected windowing threshold.

Returns:

Builder style (can be a new or the same object)

forEach

```
org.osgi.util.promise.Promise<Void> forEach(Consumer<? super T> action)
```

Execute the action for each event received until the channel is closed. This is a terminating method, the returned promise is resolved when the channel closes.

This is a **terminal operation**

Parameters:

`action` - The action to perform

Returns:

A promise that is resolved when the channel closes.

toArray

```
org.osgi.util.promise.Promise<Object> toArray()
```

Collect the payloads in an Object array after the channel is closed. This is a terminating method, the returned promise is resolved when the channel is closed.

This is a **terminal operation**

Returns:

A promise that is resolved with all the payloads received over the channel

toArray

```
org.osgi.util.promise.Promise<A> toArray(IntFunction<A> generator)
```

Collect the payloads in an Object array after the channel is closed. This is a terminating method, the returned promise is resolved when the channel is closed. The type of the array is handled by the caller using a generator function that gets the length of the desired array.

This is a **terminal operation**

Returns:

A promise that is resolved with all the payloads received over the channel

reduce

```
org.osgi.util.promise.Promise<T> reduce(T identity,  
                                     BinaryOperator<T> accumulator)
```

Standard reduce, see Stream. The returned promise will be resolved when the channel closes.

This is a **terminal operation**

Parameters:

`identity` - The identity/begin value

`accumulator` - The accumulator

Returns:

A

reduce

```
org.osgi.util.promise.Promise<Optional<T>> reduce(BinaryOperator<T> accumulator)
```

Standard reduce without identity, so the return is an Optional. The returned promise will be resolved when the channel closes.

This is a **terminal operation**

Parameters:

`accumulator` - The accumulator

Returns:

an Optional

reduce

```
org.osgi.util.promise.Promise<U> reduce(U identity,  
                                         BiFunction<U,? super T,U> accumulator,  
                                         BinaryOperator<U> combiner)
```

Standard reduce with identity, accumulator and combiner. The returned promise will be resolved when the channel closes.

This is a **terminal operation**

Parameters:

`combiner` - combines to U's into one U (e.g. how combine two lists)

Returns:

The promise

collect

```
org.osgi.util.promise.Promise<R> collect(Collector<? super T,A,R> collector)
```

See Stream. Will resolve once the channel closes.

This is a **terminal operation**

Returns:

A Promise representing the collected results

min

```
org.osgi.util.promise.Promise<Optional<T>> min(Comparator<? super T> comparator)
```

See Stream. Will resolve once the channel closes.

This is a **terminal operation**

Returns:

A Promise representing the minimum value, or null if no values are seen before the end of the stream

max

```
org.osgi.util.promise.Promise<Optional<T>> max(Comparator<? super T> comparator)
```

See Stream. Will resolve once the channel closes.

This is a **terminal operation**

Returns:

A Promise representing the maximum value, or null if no values are seen before the end of the stream

count

```
org.osgi.util.promise.Promise<Long> count()
```

See Stream. Will resolve once the channel closes.

This is a **terminal operation**

Returns:

A Promise representing the number of values in the stream

anyMatch

```
org.osgi.util.promise.Promise<Boolean> anyMatch(Predicate<? super T> predicate)
```

Close the channel and resolve the promise with true when the predicate matches a payload. If the channel is closed before the predicate matches, the promise is resolved with false.

This is a **short circuiting terminal operation**

Returns:

A Promise that will resolve when an event matches the predicate, or the end of the stream is reached

allMatch

```
org.osgi.util.promise.Promise<Boolean> allMatch(Predicate<? super T> predicate)
```

Closes the channel and resolve the promise with false when the predicate does not matches a pay load.If the channel is closed before, the promise is resolved with true.

This is a **short circuiting terminal operation**

Returns:

A Promise that will resolve when an event fails to match the predicate, or the end of the stream is reached

noneMatch

`org.osgi.util.promise.Promise<Boolean> noneMatch(Predicate<? super T> predicate)`

Closes the channel and resolve the promise with false when the predicate matches any pay load. If the channel is closed before, the promise is resolved with true.

This is a **short circuiting terminal operation**

Returns:

A Promise that will resolve when an event matches the predicate, or the end of the stream is reached

findFirst

`org.osgi.util.promise.Promise<Optional<T>> findFirst()`

Close the channel and resolve the promise with the first element. If the channel is closed before, the Optional will have no value.

Returns:

a promise

findAny

`org.osgi.util.promise.Promise<Optional<T>> findAny()`

Close the channel and resolve the promise with the first element. If the channel is closed before, the Optional will have no value.

This is a **terminal operation**

Returns:

a promise

forEachEvent

`org.osgi.util.promise.Promise<Long> forEachEvent(PushEventConsumer<? super T> action)`

Pass on each event to another consumer until the stream is closed.

This is a **terminal operation**

Returns:

a promise

Interface PushStreamBuilder

org.osgi.util.pushstream

Type Parameters:

- T - The type of objects in the [PushEvent](#)
- U - The type of the Queue used in the user specified buffer

All Superinterfaces:

[BufferBuilder](#)<[PushStream](#)<T>,T,U>

```
public interface PushStreamBuilder
extends BufferBuilder<PushStream<T>,T,U>
```

A Builder for a PushStream. This Builder extends the support of a standard BufferBuilder by allowing the PushStream to be unbuffered.

Method Summary		Page
PushStreamBuilder <T, U >	unbuffered () Tells this PushStreamBuilder to create an unbuffered stream which delivers events directly to its consumer using the incoming delivery thread.	55
PushStreamBuilder <T, U >	withBuffer (U queue) The BlockingQueue implementation to use as a buffer	56
PushStreamBuilder <T, U >	withExecutor (Executor executor) Set the Executor that should be used to deliver events from this buffer	57
PushStreamBuilder <T, U >	withParallelism (int parallelism) Set the maximum permitted number of concurrent event deliveries allowed from this buffer	57
PushStreamBuilder <T, U >	withPushbackPolicy (PushbackPolicy <T, U > pushbackPolicy) Set the PushbackPolicy of this builder	56
PushStreamBuilder <T, U >	withPushbackPolicy (PushbackPolicyOption pushbackPolicyOption, long time) Set the PushbackPolicy of this builder	56
PushStreamBuilder <T, U >	withQueuePolicy (QueuePolicy <T, U > queuePolicy) Set the QueuePolicy of this Builder	56
PushStreamBuilder <T, U >	withQueuePolicy (QueuePolicyOption queuePolicyOption) Set the QueuePolicy of this Builder	56

Methods inherited from interface org.osgi.util.pushstream.[BufferBuilder](#)

[create](#)

Method Detail

unbuffered

[PushStreamBuilder](#)<T,[U](#)> [unbuffered](#)()

Tells this [PushStreamBuilder](#) to create an unbuffered stream which delivers events directly to its consumer using the incoming delivery thread.

Returns:

the builder

withBuffer

[PushStreamBuilder](#)<T,U> **withBuffer**(U queue)

Description copied from interface: [BufferBuilder](#)
The BlockingQueue implementation to use as a buffer

Specified by:

[withBuffer](#) in interface [BufferBuilder](#)

Returns:

this builder

withQueuePolicy

[PushStreamBuilder](#)<T,U> **withQueuePolicy**([QueuePolicy](#)<T,U> queuePolicy)

Description copied from interface: [BufferBuilder](#)
Set the [QueuePolicy](#) of this Builder

Specified by:

[withQueuePolicy](#) in interface [BufferBuilder](#)

Returns:

this builder

withQueuePolicy

[PushStreamBuilder](#)<T,U> **withQueuePolicy**([QueuePolicyOption](#) queuePolicyOption)

Description copied from interface: [BufferBuilder](#)
Set the [QueuePolicy](#) of this Builder

Specified by:

[withQueuePolicy](#) in interface [BufferBuilder](#)

Returns:

this builder

withPushbackPolicy

[PushStreamBuilder](#)<T,U> **withPushbackPolicy**([PushbackPolicy](#)<T,U> pushbackPolicy)

Description copied from interface: [BufferBuilder](#)
Set the [PushbackPolicy](#) of this builder

Specified by:

[withPushbackPolicy](#) in interface [BufferBuilder](#)

Returns:

this builder

withPushbackPolicy

[PushStreamBuilder](#)<T,U> **withPushbackPolicy**([PushbackPolicyOption](#) pushbackPolicyOption,
long time)

Description copied from interface: [BufferBuilder](#)
Set the [PushbackPolicy](#) of this builder

Specified by:

[withPushbackPolicy](#) in interface [BufferBuilder](#)

Returns:

this builder

withParallelism

[PushStreamBuilder](#)<[T](#), [U](#)> **withParallelism**(int parallelism)

Description copied from interface: [BufferBuilder](#)

Set the maximum permitted number of concurrent event deliveries allowed from this buffer

Specified by:

[withParallelism](#) in interface [BufferBuilder](#)

Returns:

this builder

withExecutor

[PushStreamBuilder](#)<[T](#), [U](#)> **withExecutor**(Executor executor)

Description copied from interface: [BufferBuilder](#)

Set the `Executor` that should be used to deliver events from this buffer

Specified by:

[withExecutor](#) in interface [BufferBuilder](#)

Returns:

this builder

Class *PushStreamProvider*

[org.osgi.util.pushstream](#)

java.lang.Object

└─ **org.osgi.util.pushstream.PushStreamProvider**

```
final public class PushStreamProvider
extends Object
```

A factory for [PushStream](#) instances, and utility methods for handling [PushEventSource](#)s and [PushEventConsumer](#)s

Constructor Summary	Page
PushStreamProvider ()	59

Method Summary	Page
BufferBuilder<PushEventConsumer<T>, T, U> buildBufferedConsumer (PushEventConsumer <T> delegate)	60
Build a buffered PushEventConsumer with custom configuration.	
BufferBuilder<PushEventSource<T>, T, U> buildEventSourceFromStream (PushStream <T> stream)	60
Convert an PushStream into an PushEventSource .	
BufferBuilder<SimplePushEventSource<T>, T, U> buildSimpleEventSource (Class<T> type)	60
Build a SimplePushEventSource with the supplied type and custom buffering behaviours.	
PushStreamBuilder<T, U> buildStream (PushEventSource <T> eventSource)	59
Builds a push stream with custom configuration.	
PushEventConsumer<T> createBufferedConsumer (PushEventConsumer <T> delegate)	60
Create a buffered PushEventConsumer with the default configured buffer, executor size, queue, queue policy and pushback policy.	
PushEventSource<T> createEventSourceFromStream (PushStream <T> stream)	59
Convert an PushStream into an PushEventSource .	
SimplePushEventSource<T> createSimpleEventSource (Class<T> type)	60
Create a SimplePushEventSource with the supplied type and default buffering behaviours.	
PushStream<T> createStream (PushEventSource <T> eventSource)	59
Create a stream with the default configured buffer, executor size, queue, queue policy and pushback policy.	
PushStream<T> streamOf (Executor executor, Stream<T> items)	61
Create an Unbuffered PushStream from a Java Stream The data from the stream will be pushed into the PushStream asynchronously using the supplied Executor.	
PushStream<T> streamOf (Stream<T> items)	61
Create an Unbuffered PushStream from a Java Stream The data from the stream will be pushed into the PushStream synchronously as it is opened.	

Constructor Detail

PushStreamProvider

```
public PushStreamProvider()
```

Method Detail

createStream

```
public PushStream<T> createStream(PushEventSource<T> eventSource)
```

Create a stream with the default configured buffer, executor size, queue, queue policy and pushback policy. This is equivalent to calling `buildStream(source).create()`;

This stream will be buffered from the event producer, and will honour back pressure even if the source does not.

Buffered streams are useful for "bursty" event sources which produce a number of events close together, then none for some time. These bursts can sometimes overwhelm downstream processors. Buffering will not, however, protect downstream components from a source which produces events faster (on average) than they can be consumed.

Event delivery will not begin until a terminal operation is reached on the chain of AsyncStreams. Once a terminal operation is reached the stream will be connected to the event source.

Returns:

A [PushStream](#) with a default initial buffer

buildStream

```
public PushStreamBuilder<T,U> buildStream(PushEventSource<T> eventSource)
```

Builds a push stream with custom configuration.

The resulting [PushStream](#) may be buffered or unbuffered depending on how it is configured.

Parameters:

`eventSource` - The source of the events

Returns:

A [PushStreamBuilder](#) for the stream

createEventSourceFromStream

```
public PushEventSource<T> createEventSourceFromStream(PushStream<T> stream)
```

Convert an [PushStream](#) into an [PushEventSource](#). The first call to [PushEventSource.open\(PushEventConsumer\)](#) will begin event processing. The [PushEventSource](#) will remain active until the backing stream is closed, and permits multiple consumers to [PushEventSource.open\(PushEventConsumer\)](#) it. This is equivalent to:
`buildEventSourceFromStream(stream).create()`;

Returns:

a [PushEventSource](#) backed by the [PushStream](#)

buildEventSourceFromStream

```
public BufferBuilder<PushEventSource<T>,T,U> buildEventSourceFromStream(PushStream<T> stream)
```

Convert an [PushStream](#) into an [PushEventSource](#). The first call to [PushEventSource.open\(PushEventConsumer\)](#) will begin event processing. The [PushEventSource](#) will remain active until the backing stream is closed, and permits multiple consumers to [PushEventSource.open\(PushEventConsumer\)](#) it.

Returns:

a [PushEventSource](#) backed by the [PushStream](#)

createSimpleEventSource

```
public SimplePushEventSource<T> createSimpleEventSource(Class<T> type)
```

Create a [SimplePushEventSource](#) with the supplied type and default buffering behaviours. The [SimplePushEventSource](#) will respond to back pressure requests from the consumers connected to it. This is equivalent to: `buildSimpleEventSource(type).create();`

Returns:

a [SimplePushEventSource](#)

buildSimpleEventSource

```
public BufferBuilder<SimplePushEventSource<T>,T,U> buildSimpleEventSource(Class<T> type)
```

Build a [SimplePushEventSource](#) with the supplied type and custom buffering behaviours. The [SimplePushEventSource](#) will respond to back pressure requests from the consumers connected to it.

Returns:

a [SimplePushEventSource](#)

createBufferedConsumer

```
public PushEventConsumer<T> createBufferedConsumer(PushEventConsumer<T> delegate)
```

Create a buffered [PushEventConsumer](#) with the default configured buffer, executor size, queue, queue policy and pushback policy. This is equivalent to calling `buildBufferedConsumer(delegate).create();`

The returned consumer will be buffered from the event source, and will honour back pressure requests from its delegate even if the event source does not.

Buffered consumers are useful for "bursty" event sources which produce a number of events close together, then none for some time. These bursts can sometimes overwhelm the consumer. Buffering will not, however, protect downstream components from a source which produces events faster than they can be consumed.

Returns:

a [PushEventConsumer](#) with a buffer directly before it

buildBufferedConsumer

```
public BufferBuilder<PushEventConsumer<T>,T,U> buildBufferedConsumer(PushEventConsumer<T> delegate)
```

Build a buffered [PushEventConsumer](#) with custom configuration.

The returned consumer will be buffered from the event source, and will honour back pressure requests from its delegate even if the event source does not.

Buffered consumers are useful for "bursty" event sources which produce a number of events close together, then none for some time. These bursts can sometimes overwhelm the consumer. Buffering will not, however, protect downstream components from a source which produces events faster than they can be consumed.

Buffers are also useful as "circuit breakers". If a [QueuePolicyOption.FAIL](#) is used then a full buffer will request that the stream close, preventing an event storm from reaching the client.

Note that this buffered consumer will close when it receives a terminal event, or if the delegate returns negative backpressure. No further events will be propagated after this time.

Returns:

a [PushEventConsumer](#) with a buffer directly before it

streamOf

```
public PushStream<T> streamOf(Stream<T> items)
```

Create an Unbuffered [PushStream](#) from a Java `Stream`. The data from the stream will be pushed into the `PushStream` synchronously as it is opened. This may make terminal operations blocking unless a buffer has been added to the [PushStream](#). Care should be taken with infinite `Streams` to avoid blocking indefinitely.

Parameters:

`items` - The items to push into the `PushStream`

Returns:

A `PushStream` containing the items from the Java `Stream`

streamOf

```
public PushStream<T> streamOf(Executor executor,  
                               Stream<T> items)
```

Create an Unbuffered [PushStream](#) from a Java `Stream`. The data from the stream will be pushed into the `PushStream` asynchronously using the supplied `Executor`.

Parameters:

`executor` - The worker to use to push items from the `Stream` into the `PushStream`

`items` - The items to push into the `PushStream`

Returns:

A `PushStream` containing the items from the Java `Stream`

Interface QueuePolicy

org.osgi.util.pushstream

Type Parameters:

- T - The type of the data
- U - The type of the queue

```
@org.osgi.annotation.versioning.ConsumerType
@FunctionalInterface
public interface QueuePolicy
```

A [QueuePolicy](#) is used to control how events should be queued in the current buffer. The [QueuePolicy](#) will be called when an event has arrived.

See Also:

[QueuePolicyOption](#)

Method Summary		Page
void	doOffer (U queue, PushEvent <? extends T> event) Enqueue the event and return the remaining capacity available for events	62

Method Detail

doOffer

```
void doOffer(U queue,
             PushEvent<? extends T> event)
    throws Exception
```

Enqueue the event and return the remaining capacity available for events

Throws:

Exception - If an error occurred adding the event to the queue. This exception will cause the connection between the [PushEventSource](#) and the [PushEventConsumer](#) to be closed with an [PushEvent.EventType.ERROR](#)

Enum QueuePolicyOption

[org.osgi.util.pushstream](#)

```
java.lang.Object
└─ java.lang.Enum<QueuePolicyOption>
    └─ org.osgi.util.pushstream.QueuePolicyOption
```

All Implemented Interfaces:
Comparable<[QueuePolicyOption](#)>, Serializable

```
public enum QueuePolicyOption
extends Enum<QueuePolicyOption>
```

[QueuePolicyOption](#) provides a standard set of simple [QueuePolicy](#) implementations.

See Also:
[QueuePolicy](#)

Enum Constant Summary		Page
BLOCK	Attempt to add the supplied event to the queue, blocking until the enqueue is successful.	63
DISCARD_OLDEST	Attempt to add the supplied event to the queue.	63
FAIL	Attempt to add the supplied event to the queue, throwing an exception if the queue is full.	64

Method Summary		Page
abstract QueuePolicy y <T,U>	getPolicy ()	64
static QueuePolicy yOption	valueOf (String name)	64
static QueuePolicy yOption []	values ()	64

Enum Constant Detail

DISCARD_OLDEST

```
public static final QueuePolicyOption DISCARD_OLDEST
```

Attempt to add the supplied event to the queue. If the queue is unable to immediately accept the value then discard the value at the head of the queue and try again. Repeat this process until the event is enqueued.

BLOCK

```
public static final QueuePolicyOption BLOCK
```

Attempt to add the supplied event to the queue, blocking until the enqueue is successful.

FAIL

public static final [QueuePolicyOption](#) **FAIL**

Attempt to add the supplied event to the queue, throwing an exception if the queue is full.

Method Detail

values

public static [QueuePolicyOption](#)[] **values**()

valueOf

public static [QueuePolicyOption](#) **valueOf**(String name)

getPolicy

public abstract [QueuePolicy](#)<T,U> **getPolicy**()

Returns:

a [QueuePolicy](#) implementation

Interface SimplePushEventSource

org.osgi.util.pushstream

Type Parameters:

T - The type of the events produced by this source

All Superinterfaces:

AutoCloseable, [PushEventSource](#)<T>

```
@org.osgi.annotation.versioning.ProviderType
public interface SimplePushEventSource
extends PushEventSource<T>, AutoCloseable
```

A [SimplePushEventSource](#) is a helper that makes it simpler to write a [PushEventSource](#). Users do not need to manage multiple registrations to the stream, nor do they have to be concerned with back pressure.

Method Summary		Page
void	close () Close this source.	65
org.osgi.util.promise.Promise<Void>	connectPromise () This method can be used to delay event generation until an event source has connected.	66
void	endOfStream () Close this source for now, but potentially reopen it later.	66
void	error (Exception e) Close this source for now, but potentially reopen it later.	66
boolean	isConnected () Determine whether there are any PushEventConsumer s for this PushEventSource .	66
void	publish (T t) Asynchronously publish an event to this stream and all connected PushEventConsumer instances.	66

Methods inherited from interface org.osgi.util.pushstream.[PushEventSource](#)

[open](#)

Method Detail

close

```
void close()
```

Close this source. Calling this method indicates that there will never be any more events published by it. Calling this method sends a close event to all connected consumers. After calling this method any [PushEventConsumer](#) that tries to [PushEventSource.open\(PushEventConsumer\)](#) this source will immediately receive a close event.

Specified by:

close in interface AutoCloseable

publish

```
void publish(T t)
```

Asynchronously publish an event to this stream and all connected [PushEventConsumer](#) instances. When this method returns there is no guarantee that all consumers have been notified. Events published by a single thread will maintain their relative ordering, however they may be interleaved with events from other threads.

Throws:

`IllegalStateException` - if the source is closed

endOfStream

```
void endOfStream()
```

Close this source for now, but potentially reopen it later. Calling this method asynchronously sends a close event to all connected consumers. After calling this method any [PushEventConsumer](#) that wishes may [PushEventSource.open\(PushEventConsumer\)](#) this source, and will receive subsequent events.

error

```
void error(Exception e)
```

Close this source for now, but potentially reopen it later. Calling this method asynchronously sends an error event to all connected consumers. After calling this method any [PushEventConsumer](#) that wishes may [PushEventSource.open\(PushEventConsumer\)](#) this source, and will receive subsequent events.

Parameters:

e - the error

isConnected

```
boolean isConnected()
```

Determine whether there are any [PushEventConsumer](#)s for this [PushEventSource](#). This can be used to skip expensive event creation logic when there are no listeners.

Returns:

true if any consumers are currently connected

connectPromise

```
org.osgi.util.promise.Promise<Void> connectPromise()
```

This method can be used to delay event generation until an event source has connected. The returned promise will resolve as soon as one or more [PushEventConsumer](#) instances have opened the [SimplePushEventSource](#).

The returned promise may already be resolved if this [SimplePushEventSource](#) already has connected consumers. If the [SimplePushEventSource](#) is closed before the returned Promise resolves then it will be failed with an `IllegalStateException`.

Note that the connected consumers are able to asynchronously close their connections to this [SimplePushEventSource](#), and therefore it is possible that once the promise resolves this [SimplePushEventSource](#) may no longer be connected to any consumers.

Returns:

A promise representing the connection state of this EventSource

Java API documentation generated with [DocFlex/Doclet](#) v1.5.6

DocFlex/Doclet is both a multi-format Javadoc doclet and a free edition of [DocFlex/Javadoc](#). If you need to customize your Javadoc without writing a full-blown doclet from scratch, DocFlex/Javadoc may be the only tool able to help you! Find out more at www.docflex.com

8 Considered Alternatives

9 Security Considerations

Description of all known vulnerabilities this may either introduce or address as well as scenarios of how the weaknesses could be circumvented.

10 Document Support

10.1 References

- [1]. Bradner, S., Key words for use in RFCs to Indicate Requirement Levels, RFC2119, March 1997.
- [2]. Software Requirements & Specifications. Michael Jackson. ISBN 0-201-87712-0

- [3]. The Power of Events'. D. C. Luckham. Boston, MA, USA: Addison-Wesley Longman Publishing Co., Inc., 2001.
- [4]. Extending OSGi by Means of Asynchronous Messaging - Master Thesis, Marc Schaaf, September 2009, University of Applied Sciences and Arts Hannover. http://schaaf.es/docs/master_thesis_marc_schaaf_Extending_OSGi_by_Means_of_Asynchronous_Messaging.pdf

10.2 Author's Address

Name	Tim Ward
Company	Paremus
Address	
Voice	
e-mail	tim.ward@paremus.com

Name	Peter Kriens
Company	Paremus
Address	
Voice	
e-mail	peter.kriens@aqute.biz

Name	Richard Nicholson
Company	Paremus Ltd
Address	107-111 Fleet Street London
Voice	
e-mail	richard.nicholson@paremus.com

Name	Marc Schaaf
Company	
Address	
Voice	
e-mail	marc@marc-schaaf.de

Name	David Bosschaert
Company	Adobe
Address	
Voice	
e-mail	bosschae@adobe.com

Name	Carsten Ziegeler
Company	Adobe
Address	
Voice	
e-mail	cziegele@adobe.com

Name	Graham Charters
Company	IBM
Address	
Voice	
e-mail	charters@uk.ibm.com

10.3 Acronyms and Abbreviations

10.4 End of Document