

0.1 R1CS in Matrix Form

While the Rank-1 Constraint System provides a powerful way to represent computations, it is not succinct at all, since the number of constraints depends linearly on the complexity of the problem being solved. In practical scenarios, this can require tens or even hundreds of thousands of constraints, sometimes even millions. The Quadratic Arithmetic Program (QAP) can address this issue.

Remark. Understanding polynomials and their properties is crucial for this section. If you are not confident in this area, it is better to revisit the corresponding chapter and refresh your knowledge. See ??.

To define a constraint in the R1CS we need four vectors: three coefficient vectors (ℓ , r , and o) and the witness one — z . And that's just for one constraint. As you can imagine, many of the values in these vectors are zeros. In circuits with thousands of inputs, outputs, and auxiliary variables, where there are also thousands of constraints, you could end up with a millions of zeroes.

Remark. A matrix in which most of the elements are zero in numerical analysis is usually called **sparse matrix**.

So, we need to change the way how we manage coefficients and make the representation of such matrices and vectors succinct (as required by the definition of SNARK).

Theorem 0.1 (R1CS in the Matrix Form). Consider a Rank-1 Constraint System (R1CS) defined by m constraints. Each constraint is associated with coefficient vectors ℓ_i , r_i , and o_i , where $i \in [m]$. Suppose a witness vector z consists of n elements. Then, this system can also be represented using the corresponding $m \times n$ matrices L, R, O such that all constraints can be reduced to the single equation:

$$Lz \odot Rz = Oz$$

In this representation:

- Each i -th row of the matrices corresponds to the coefficients of a specific constraint.
- Each column of these matrices corresponds to the coefficients associated with a particular element of the witness vector z .

Proof. Matrices defined this way can be expressed as

$$L = \begin{bmatrix} \ell_1^\top \\ \ell_2^\top \\ \vdots \\ \ell_m^\top \end{bmatrix}, \quad R = \begin{bmatrix} r_1^\top \\ r_2^\top \\ \vdots \\ r_m^\top \end{bmatrix}, \quad O = \begin{bmatrix} o_1^\top \\ o_2^\top \\ \vdots \\ o_m^\top \end{bmatrix}$$

1

Consider an expression $L\mathbf{z}$:

$$L\mathbf{z} = \begin{bmatrix} \ell_1^\top \\ \ell_2^\top \\ \vdots \\ \ell_m^\top \end{bmatrix} \begin{bmatrix} z_1 \\ z_2 \\ \vdots \\ z_n \end{bmatrix} = \begin{bmatrix} \ell_1^\top \mathbf{z} \\ \ell_2^\top \mathbf{z} \\ \vdots \\ \ell_m^\top \mathbf{z} \end{bmatrix}$$

The last equality is a bit tricky to observe, so let us explain how we ended up with such expression. Notice that since $L \in \mathbb{F}^{m \times n}$ and $\mathbf{z} \in \mathbb{F}^n$, the product $L\mathbf{z}$ is a vector from $\mathbb{F}^m$. Now, for j^{th} element of such vector, based on the matrix product definition, we have $(L\mathbf{z})_j = \sum_{\ell=1}^n a_{j,\ell} z_\ell$ which is exactly an inner product between ℓ_j and $\mathbf{z}$! Therefore, we have:

$$L\mathbf{z} = \begin{bmatrix} \langle \ell_1, \mathbf{z} \rangle \\ \langle \ell_2, \mathbf{z} \rangle \\ \vdots \\ \langle \ell_m, \mathbf{z} \rangle \end{bmatrix}, \quad R\mathbf{z} = \begin{bmatrix} \langle \mathbf{r}_1, \mathbf{z} \rangle \\ \langle \mathbf{r}_2, \mathbf{z} \rangle \\ \vdots \\ \langle \mathbf{r}_m, \mathbf{z} \rangle \end{bmatrix}, \quad O\mathbf{z} = \begin{bmatrix} \langle \mathbf{o}_1, \mathbf{z} \rangle \\ \langle \mathbf{o}_2, \mathbf{z} \rangle \\ \vdots \\ \langle \mathbf{o}_m, \mathbf{z} \rangle \end{bmatrix}$$

Therefore, $L\mathbf{z} \odot R\mathbf{z} = O\mathbf{z}$ is equivalent to the system of m constraints:

$$\langle \ell_j, \mathbf{z} \rangle \times \langle \mathbf{r}_j, \mathbf{z} \rangle = \langle \mathbf{o}_j, \mathbf{z} \rangle, \quad j \in [m].$$

Example 0.1. The vectors ℓ_i from the previous examples have the form:

$$\begin{aligned} \ell_1 &= (0, 0, 1, 0, 0, 0, 0) \\ \ell_2 &= (0, 0, 0, 1, 0, 0, 0) \\ \ell_3 &= (0, 0, 1, 0, 0, 0, 0) \\ \ell_4 &= (1, 0, -1, 0, 0, 0, 0) \end{aligned}$$

This corresponds to $n = 7, m = 4$

$$L = \begin{bmatrix} L_{1,1} & L_{1,2} & L_{1,3} & L_{1,4} & L_{1,5} & L_{1,6} & L_{1,7} \\ L_{2,1} & L_{2,2} & L_{2,3} & L_{2,4} & L_{2,5} & L_{2,6} & L_{2,7} \\ L_{3,1} & L_{3,2} & L_{3,3} & L_{3,4} & L_{3,5} & L_{3,6} & L_{3,7} \\ L_{4,1} & L_{4,2} & L_{4,3} & L_{4,4} & L_{4,5} & L_{4,6} & L_{4,7} \end{bmatrix} = \begin{bmatrix} 0 & 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & 0 \\ 1 & 0 & -1 & 0 & 0 & 0 & 0 \end{bmatrix}$$

0.2 Polynomial Interpolation

Now is the time to define how we are going to build polynomials! Notice that the columns of these matrices (say, column $(\ell_{1,i}, \ell_{2,i}, \ell_{3,i}, \ell_{4,i})$ in matrix L from example above) represent the mappings from constraint number i to the corresponding coefficient of the j element in the witness vector!

Example 0.2. Consider the witness from the previous examples:

$$\mathbf{z} = (1, r, x_1, x_2, x_3, \text{mult}, \text{selectMult})$$

For element x_1 we are interested in the third columns of the L , R and O matrices, as it's placed on the third position in the witness vector, so $j = 3$. For matrix L :

$$\begin{bmatrix} 0 & 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & 0 \\ 1 & 0 & -1 & 0 & 0 & 0 & 0 \end{bmatrix}$$

Thus, for constraint number 4 ($i = 4$) the coefficient of x_1 is -1 :

$$\begin{bmatrix} 0 & 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & 0 \\ 1 & 0 & -1 & 0 & 0 & 0 & 0 \end{bmatrix}$$

Good, so now we know that for the j th element in the witness vector there are m (the number of constraints) corresponding values in matrices L , R , and O . Now, we want to encode this statement in a form of a polynomial. As we know from the previous chapters, such a mapping in math can be built using the Lagrange polynomial interpolation.

Remark. As a remainder, the Lagrange interpolation polynomial $f(X) \in \mathbb{F}^{\leq n}[X]$ for a given set of points $\{(x_0, y_0), (x_1, y_1), \dots, (x_n, y_n)\} \subseteq \mathbb{F} \times \mathbb{F}$ such that $f(x_i) = y_i$ can be built with the following formula:

$$f(X) = \sum_{i=0}^n y_i e_i(X), \quad e_i(X) = \prod_{j=0, j \neq i}^n \frac{X - x_j}{x_i - x_j}.$$

For a given column $j \in [n]$ in a matrix L the set of points that define the variable polynomial $\ell_j(X)$ can be defined as $\{(i, L_{i,j})\}_{i \in [m]}$. In other words, we want to interpolate n polynomials $\ell_j(X) \in \mathbb{F}[X]$ such that:

$$\ell_j(i) = L_{i,j}, \quad i \in [m], \quad j \in [n].$$

The same is true for matrices R and O , resulting in $3n$ polynomials, n for each of the coefficients matrices:

$$\ell_1(X), \ell_2(X), \dots, \ell_n(X), r_1(X), r_2(X), \dots, r_n(X), o_1(X), o_2(X), \dots, o_n(X)$$

Example 0.3. Considering the witness vector $\mathbf{z}$ and matrix L from the previous example, for the variable x_1 , the next set of points can be derived:

$$\{(1, 1), (2, 0), (3, 1), (4, -1)\}$$

We can see that it is used in the 1st, 3rd, and 4th constraints as the values of the coefficients are not zero.

The Lagrange interpolation polynomial for this set of points can be built as follows (for the demonstration purposes, assume we are working over $\mathbb{R}$):

$$\begin{aligned} e_1(X) &= \frac{(X-2)(X-3)(X-4)}{(1-2)(1-3)(1-4)} = -\frac{(X-2)(X-3)(X-4)}{6}, \\ e_2(X) &= \frac{(X-1)(X-3)(X-4)}{(2-1)(2-3)(2-4)} = \frac{(X-1)(X-3)(X-4)}{2}, \\ e_3(X) &= \frac{(X-1)(X-2)(X-4)}{(3-1)(3-2)(3-4)} = -\frac{(X-1)(X-2)(X-4)}{2}, \\ e_4(X) &= \frac{(X-1)(X-2)(X-3)}{(4-1)(4-2)(4-3)} = \frac{(X-1)(X-2)(X-3)}{6}. \end{aligned}$$

Thus, the polynomial is given by:

$$\begin{aligned} \ell_1(X) &= 1 \cdot e_1(X) + 0 \cdot e_2(X) + 1 \cdot e_3(X) + (-1) \cdot e_4(X) \\ &= -\frac{(X-2)(X-3)(X-4)}{6} - \frac{(X-1)(X-2)(X-4)}{2} \\ &\quad - \frac{(X-1)(X-2)(X-3)}{6} = -\frac{5}{6}X^3 + 6X^2 - \frac{79}{6}X + 9. \end{aligned}$$

Therefore, the final Lagrange interpolation polynomial is:

$$\ell_1(X) = -\frac{5}{6}X^3 + 6X^2 - \frac{79}{6}X + 9$$

As shown in Illustration below, the curve intersects all the given points. In this figure, the x -axis represents the constraint number, and the y -axis represents the coefficients of the x_1 witness element.

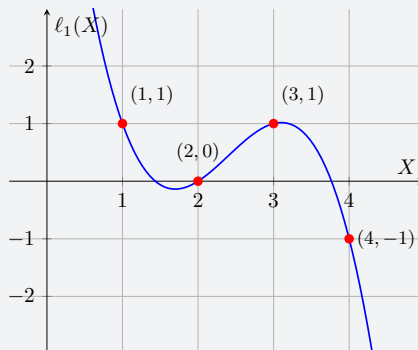


Illustration: The Lagrange interpolation polynomial for points $\{(1, 1), (2, 0), (3, 1), (4, -1)\}$ visualized over $\mathbb{R}$.

Remark. One might a reasonable question: why do we choose x -coordinates to be the indices of the corresponding constraints? Actually, just for convenience purposes. We could have assigned any *unique* index from $\mathbb{F}$ to each constraint (say, t_i for each $i \in [m]$) and interpolate through these points:

$$\ell_j(t_i) = L_{i,j}, \quad i \in [m], \quad j \in [n]$$

As we will see in the subsequent lectures, we can define the x -coordinates in much more clever way to reduce the workload needed for interpolation. But for now, we will stick to this simple version.

0.3 Putting All Together!

Now, using coefficients encoded with polynomials, a constraint number $h \in [m]$, from a constraint system with a witness vector $\mathbf{z}$ can be built in the next way:

$$\begin{aligned} (z_1 \ell_1(h) + z_2 \ell_2(h) + \cdots + z_n \ell_n(h)) \times (z_1 r_1(h) + z_2 r_2(h) + \cdots + z_n r_n(h)) = \\ = (z_1 o_1(h) + z_2 o_2(h) + \cdots + z_n o_n(h)) \end{aligned}$$

Or, written more concisely:

$$\sum_{i \in [n]} z_i \ell_i(h) \cdot \sum_{i \in [n]} z_i r_i(h) = \sum_{i \in [n]} z_i o_i(h).$$

Remark. Hold on, but why does it hold? Let us substitute any $X = j$ into this equation:

$$\sum_{i \in [n]} z_i \ell_i(j) \cdot \sum_{i \in [n]} z_i r_i(j) = \sum_{i \in [n]} z_i o_i(j) \quad \forall j \in [m]$$

Recall that we interpolated polynomials to have $\ell_i(j) = L_{j,i}$. Therefore, the equation above can be reduced to:

$$\sum_{i \in [n]} z_i L_{j,i} \cdot \sum_{i \in [n]} z_i R_{j,i} = \sum_{i \in [n]} z_i O_{j,i} \quad \forall j \in [m]$$

But hold on again! Notice that $\sum_{i \in [n]} z_i L_{j,i} = \langle \mathbf{z}, \ell_j \rangle$ and therefore we have:

$$\langle \mathbf{z}, \ell_j \rangle \times \langle \mathbf{z}, \mathbf{r}_j \rangle = \langle \mathbf{z}, \mathbf{o}_j \rangle \quad \forall j \in [m],$$

so we ended up with the initial m constraint equations!

Now let us define polynomials $\ell(X)$, $r(X)$, $o(X)$ for easier notation:

$$\ell(X) = \sum_{i \in [n]} z_i \ell_i(X), \quad r(X) = \sum_{i \in [n]} z_i r_i(X), \quad o(X) = \sum_{i \in [n]} z_i o_i(X)$$

Therefore, our set of constraints can be rewritten simply as the single check $\ell(h) \cdot r(h) = o(h)$ for each $h \in [m]$ – much less scary-looking than what we have written before. OK, but what does it give us?

Notice that if $\ell(X) \cdot r(X) = o(X)$ for all $h \in [m]$ then polynomial, defined as $m(X) := \ell(X) \cdot r(X) - o(X)$, has zeros at all elements from the set $\Omega = [m]$. Define the so-called **vanishing polynomial** on Ω as:

$$z_\Omega(X) := \prod_{h \in \Omega} (X - h) = \prod_{i \in [m]} (X - i)$$

Now, if $m(X)$ vanishes on all points from Ω , it means that z_Ω must divide m , so $z_\Omega \mid m$. But that means that m can be divided by z_Ω without remainder! In other words, there exists some polynomial h such that $m = z_\Omega h$. We further drop index Ω for simplicity.

All in all, let us give the definition of a **Quadratic Arithmetic Program** [?].

Definition 0.2 (Quadratic Arithmetic Program). Suppose that m R1CS constraints with a witness of size n are written in a form

$$Lz \odot Rz = Oz, \quad L, R, O \in \mathbb{F}^{m \times n}$$

Then, the **Quadratic Arithmetic Program** consists of $3n$ polynomials $\ell_1, \dots, \ell_n, r_1, \dots, r_n, o_1, \dots, o_n$ such that:

$$\ell_j(i) = a_{i,j}, \quad r_j(i) = b_{i,j}, \quad o_j(i) = c_{i,j}, \quad \forall i \in [m] \quad \forall j \in [n]$$

Then, $\mathbf{z} \in \mathbb{F}^n$ is a valid assignment for the given QAP and **target polynomial** $z(X) = \prod_{i \in [m]} (X - i)$ if and only if there exists such a polynomial $h(X)$ such that

$$\sum_{i \in [n]} z_i \ell_i(X) \cdot \sum_{i \in [n]} z_i r_i(X) - \sum_{i \in [n]} z_i o_i(X) = z(X) h(X)$$

This was our final step in representing a high-level programming language to some math primitive. We have managed to encode our computation to a single polynomial!

0.4 Probabilistically Checkable Proofs

Before going further we should get acquainted with one more concept from the computational complexity theory, that have an important application in zk-SNARK and provides the theoretical backbone.

L Probabilistically Checkable Proof (PCP) is a type of proof system where the verifier can efficiently check the correctness of a proof by examining only a small, random portion of it, rather than verifying it entirely.

Definition 0.3. A language $\mathcal{L} \subseteq \Sigma^*$ (for some given alphabet Σ) is in the class $\text{PCP}(r, q)$ (**probabilistically checkable proofs**), where r is the *randomness complexity* and q is the *query complexity*, if for a given pair of algorithms $(\mathcal{P}, \mathcal{V})$:

- **Syntax:** $\mathcal{P}$ calculates a proof (bit string) $\pi \in \Sigma^*$ in polynomial time $\text{poly}(|\mathbb{x}|)$ of the common input $\mathbb{x}$. The prover $\mathcal{P}$ and verifier $\mathcal{V}$ interact, where the verifier has an oracle access to π (meaning, he queries it at any position).
- **Complexity:** $\mathcal{V}$ uses at most r random bits to decide which part of the proof to query and the verifier queries at most q bits of the proof.

Such pair of algorithms $(\mathcal{P}, \mathcal{V})$ should satisfy the following properties (with a security parameter $\lambda \in \mathbb{N}$):

- **Completeness:** If $\mathbb{x} \in \mathcal{L}$, then $\Pr[\mathcal{V}^\pi(\mathbb{x}) = 1] = 1$.
- **Soundness:** If $\mathbb{x} \notin \mathcal{L}$, then for any possible (malicious) proof π^* ,

$$\Pr[\mathcal{V}^{\pi^*}(\mathbb{x}) = 1] = \text{negl}(\lambda).$$

This allows a verification of huge statements with high confidence while using limited computational resources. See [Figure 0.1](#).

Theorem 0.4. PCP theorem (PCP characterization theorem)

Any decision problem in NP has a PCP verifier that uses logarithmic randomness $O(\log n)$ and a constant number of queries $O(1)$, independent of n .

$$\text{NP} = \text{PCP}(O(\log n), O(1))$$

However, despite the fact that PCP is a very powerful tool, it is not used directly in zk-SNARKs. We need to extend it a bit to make it more suitable for our purposes.

Three main extensions of PCPs that are frequently used in SNARKs are:

- **IPCP (Interactive PCP):** The prover commits to the PCP oracle and then, based on the interaction between the prover and verifier, the verifier queries the oracle and decides whether to accept the proof.
- **IOP (Interactive Oracle Proof):** The prover and verifier interact and on each round, the prover commits to a new oracle. The verifier queries the oracle and decides whether to accept the proof.
- **LPCP (Linear PCP):** The prover commits to a linear function and the verifier queries the function at specific points.

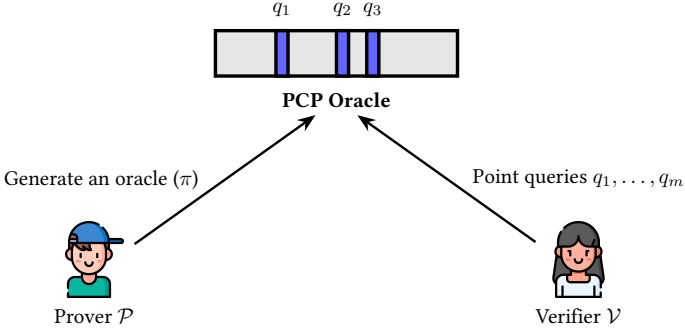


Figure 0.1: Illustration of a Probabilistically Checkable Proof (PCP) system. The prover $\mathcal{P}$ generates a PCP oracle π that is queried by the verifier $\mathcal{V}$ at specific points $q_1, \dots, q_m$.

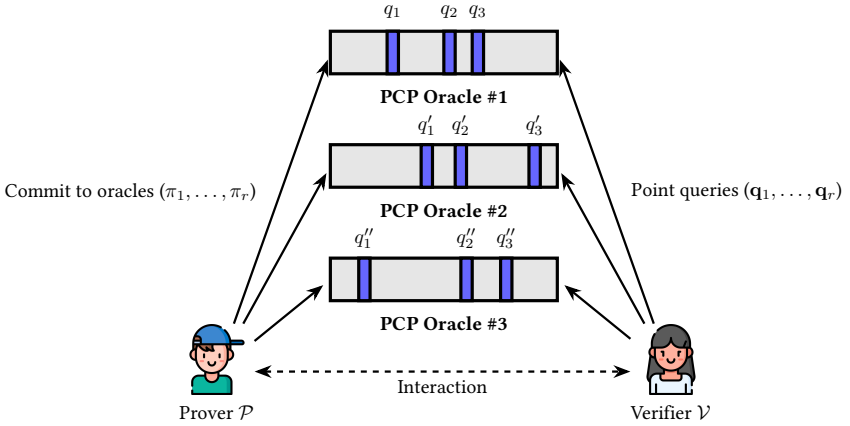


Figure 0.2: Illustration of an Interactive Oracle Proof (IOP). On each round i ($1 \leq i \leq r$), $\mathcal{V}$ sends a message m_i , and $\mathcal{P}$ commits to a new oracle π_i , which $\mathcal{V}$ can query at $\mathbf{q}_i = (q_{i,1}, \dots, q_{i,m})$.

While IOPs will be later used for PLONK and zk-STARKs, we will focus on Linear PCPs in the context of Groth16 zk-SNARK. Let us define it below.

Definition 0.5 (Linear PCP). L **Linear PCP** is a PCP where the prover commits to a linear function $\pi = (\pi_1, \dots, \pi_k)$ and the verifier queries the function at specific points $\mathbf{q}_1, \dots, \mathbf{q}_r$. Then, the prover responds with the values of the function at these points:

$$\langle \pi_1, \mathbf{q}_1 \rangle, \langle \pi_2, \mathbf{q}_2 \rangle, \dots, \langle \pi_r, \mathbf{q}_r \rangle.$$

Example 0.4 (QAP as a Linear PCP). Recall that key QAP equation is:

$$\sum_{i \in [n]} z_i \ell_i(X) \cdot \sum_{i \in [n]} z_i r_i(X) - \sum_{i \in [n]} z_i o_i(X) = z(X) h(X).$$

Now, the notation might be confusing, but firstly, we denote vectors of polynomials:

$$\begin{aligned}\ell(X) &= (\ell_1(X), \dots, \ell_n(X)), \\ \mathbf{r}(X) &= (r_1(X), \dots, r_n(X)), \\ \mathbf{o}(X) &= (o_1(X), \dots, o_n(X)).\end{aligned}$$

Now, consider the following **linear PCP for QAP**:

1. $\mathcal{P}$ commits to an extended witness $\mathbf{z}$ and coefficients $\mathbf{h} = (h_1, \dots, h_n)$ of $h(X)$.
2. $\mathcal{V}$ samples $\gamma \leftarrow \mathbb{F}$ and sends query $\gamma = (\gamma, \gamma^2, \dots, \gamma^n)$ to $\mathcal{P}$.
3. $\mathcal{P}$ reveals the following values:

$$\begin{aligned}\pi_1 &\leftarrow \langle \mathbf{z}, \ell(\gamma) \rangle, & \pi_2 &\leftarrow \langle \mathbf{z}, \mathbf{r}(\gamma) \rangle, \\ \pi_3 &\leftarrow \langle \mathbf{z}, \mathbf{o}(\gamma) \rangle, & \pi_4 &\leftarrow z(\gamma) \cdot \langle \mathbf{h}, \gamma \rangle.\end{aligned}$$

4. $\mathcal{V}$ checks whether $\pi_1 \pi_2 - \pi_3 = \pi_4$.

Of course, the above example cannot be used as it is: at the very least, we have not specified how the prover commits to the extended witness $\mathbf{z}$ and coefficients $\mathbf{h}$ and then ensures consistency of $\pi_1, \dots, \pi_4$ with these commitments. For that reason, we need some more tools to make it work which we learned in the previous lectures.

0.5 QAP as a Linear PCP

When constructing a Quadratic Arithmetic Program (QAP) for a circuit $\mathcal{C}$, we represented the whole circuit's computation using the following relation: $\ell(X)r(X) - o(X) = z(X)h(X)$, where by $\ell(X)$, $r(X)$, $o(X)$ we denote the polynomials that represent the left, right and output wires of the circuit, respectively. $z(X)$ is the target polynomial, while $h(X) := m(X)/z(X)$ for master polynomial $m(X) = \ell(X)r(X) - o(X)$ is the quotient polynomial.

We effectively managed to transform all the circuit's constraints, and computations in the short form. It still allows one to verify that each computational step is preserved by verifying the polynomial evaluation in specific (random) points, instead of recomputing everything. However, it is not quite clear why such a check is safe and how it can be used in a PCP. In other words, why checking that $\ell(s)r(s) - o(s) = z(s)h(s)$ for randomly selected s is enough to verify the circuit $\mathcal{C}$?

Informal Soundness Justification. Why is it safe to use such a check? As it was said early, we perform all the computations in some finite field $\mathbb{F}$. The polynomials $\ell(X)$, $r(X)$ and $o(X)$ are interpolated polynomials using $|\mathcal{C}|$ (number of gates) points, so $\deg(\ell), \deg(r), \deg(o) \leq |\mathcal{C}|$. Thus, using properties of polynomials' degrees, we can estimate the degree of polynomial $m(X) = \ell(X)r(X) - o(X)$: $\deg(m) \leq \max\{\deg(\ell) + \deg(r), \deg(o)\} \leq 2|\mathcal{C}|$. For that reason, when checking the equality $\ell(s)r(s) - o(s) = z(s)h(s)$ for randomly selected s , we can be sure that the left-hand side and right-hand side polynomials are the same with probability at least $1 - 2|\mathcal{C}|/|\mathbb{F}|$.