

**MAHARISHI UNIVERSITY of MANAGEMENT**

*Engaging the Managing Intelligence of Nature*

**Computer Science Department**

**CS390 Foundamental Programming  
Practices (FPP)  
Xiaoming Yang**

© 2016 Maharishi University of Management, Fairfield, Iowa

All rights reserved. No part of this slide presentation may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying or recording, or by any information storage and retrieval system, without permission in writing from Maharishi University of Management.

# Lecture 2: Fundamental Programming Structures In Java

# Wholeness of the Lesson

Java is an object-oriented programming language that supports both primitive and object data types. These data types make it possible to store data in memory and modify it or perform computations on it to produce useful output. Execution of a program is an example of the “flow of knowledge”—the intelligence that has been coded into the program has a chance to be expressed when the program executes.


Maharishi’s Science of Consciousness locates three components to any kind of knowledge: the knower, the object of knowledge, and the process of knowing. These can be found in the structure of a Java program: the “knower” aspect of the program is the intelligence underlying the creation of Java objects—a Java *class*. The *data* that a program works on, which is stored in program variables of either primitive or object type, is the “object of knowledge.” And the Java methods, which act on the data, are the “process of knowing.”

# Outline of Topics

- Data Types:
  - The Primitive Types
  - Other data types at the basis of object creation
- Operators In Java
  - Arithmetic Operators
  - Increment and Decrement Operators
  - Relational And Boolean Operators
  - Bitwise Operators
- Java Strings
- Control Flow:
  - Conditional Logic
  - While Loops
  - For loops
  - The switch Statement
- Arrays

# Comments In Java

- commenting out a line with //
- commenting out a block with `/* ... */`
- commenting using javadoc format `/** ... */`
- some javadoc keywords: `@author`,  
`@since`, `@param` `@return`
- **Style:** Every significant method you write should be documented with comments, javadoc style. (This is also true of every Java class you create.)
- Javadocs demo for reference application  
Right-click package > Export > Java > Javadoc

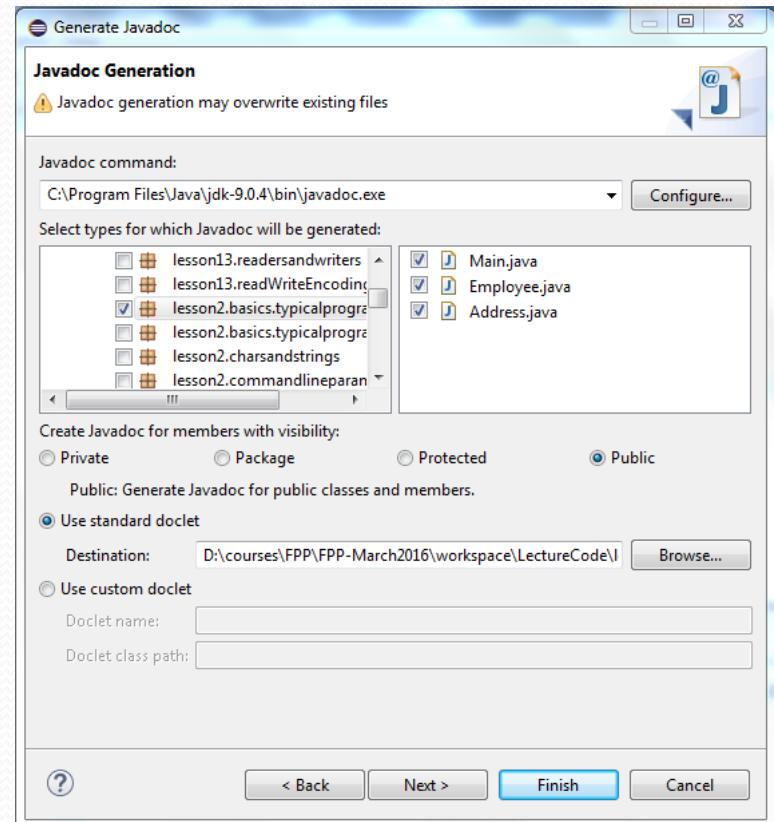

# Variables In Java

- Variables in Java store values, like strings, numbers, and other data
- A variable in Java always has a type; a variable is *declared* by displaying the type, followed by the variable name.
- Examples of declaring variables (see also the *reference example*)

```
double salary;  
int amount;  
boolean found;
```
- Variable names consist of digits, letters and underscores, but may not begin with a digit. (More precise criteria are available in the documentation on the `isJavaIdentifierStart` and `isJavaIdentifierPart` methods of the `Character` class.)

# Variables In Java

- *Variable Initialization.* A variable is initialized by using the *assignment operator* ( = ) to specify a value for a declared variable.

Example:

```
int sum;  
sum = 0;
```

OR

```
int sum = 0;
```

- *Coding Style:*

- variable names begin with lower case letter
- variable names composed of multiple words written so that each new word (except the first) begins with a capital letter, but all other letters are lower case

Example:

```
myExamScore
```

- underscores should *not* be used typically in variable names
- for *constants*, capitals and underscores are used (discussed later)

```
CONSTANTS_LIKE_THIS
```

# Data Types: The Primitive Types

- Every variable must have a declared type
- Eight primitive types: int, short, long, byte, float, double, char, boolean

Type	Storage Requirement	Range (Inclusive)
int	4 bytes	- $2^{31}$ to $2^{31} - 1$
short	2 bytes	- $2^{15}$ to $2^{15} - 1$
long	8 bytes	- $2^{63}$ to $2^{63} - 1$
byte	1 byte	- $2^7$ to $2^7 - 1$ (-128 to 127)
float	4 bytes	6 - 7 significant (decimal) digits
double	8 bytes	15 significant (decimal) digits

- boolean has just 2 values: *true* and *false*. (Unlike C, not the same as 1 and 0.)

# In-Class Exercise: Floats and Doubles in Java

1. Open JShell and at the prompt, type in the following 4 lines (hit enter after each line):

```
float x = 2.3456F  
float y = 5.4193F  
double x1 = 2.3456  
double y1 = 5.4193
```

Then type the lines:

```
x * y  
x1 * y1
```

Are the answers the same?

2. Continue working in JShell. First type

```
2 + 3 == 5
```

Note the return value of "true".

Then type in these lines:

```
double a = 0.7  
double b = 0.9  
double x = a + 0.1  
double y = b - 0.1
```

Then type

```
x == y
```

Do you get a return value of "true"?

# Floating Point Numbers in Java

- The `float` type in Java does not accurately represent numbers with more than 7 digits. See demo example in which the number `12.71151008` is represented as a `float` by `12.71151`.
- Floating point numbers (`floats` and `doubles`) are represented internally in Java in *binary*. The result is that many (base-10) decimals are not precisely represented as a float or double. For this reason, it is never safe to test whether two floating point numbers are equal, as in a test:

```
if (x == y) return true;
```
- [https://en.wikipedia.org/wiki/Floating-point\\_arithmetic](https://en.wikipedia.org/wiki/Floating-point_arithmetic)

# The char Type

- Java allots **16 bits(2 bytes)** for its `char` type.
- To represent a character literal in Java, for commonly used characters, simply place the character between single quotes: 'A' represents the letter A.
- Characters can also be represented using the *unicode* character map – this is useful for characters that cannot be typed directly from a keyboard.
- Unicode chart can be found at:
  - <https://unicode-table.com/en/#cjk-unified-ideographs>
  - <http://www.ssec.wisc.edu/~tomw/java/unicode.html>

## Examples:

- the ordinary letter 'A' is represented in this Java notation (a *code unit*) by '\u0041'
- the Chinese character 纳 by '\u7ec8' (Zhōng)
- Examples show how the most commonly used characters are represented in unicode with just 16 bits. Each of these characters can be represented by a Java code unit (as in the examples)

# The Char Type (continued)

- Occasionally, a character can be represented only if two of Java's code units are concatenated together. Characters that require two code units are called *supplementary characters*, and typically show up only in very specialized applications.

*Example:*

The symbol for the set  $\mathbb{Z}$  of integers in mathematics is represented by the pair "\ud835\udd6b"

In the unicode character map, z is mapped to the in hex format(Code unit): 1d56b. In unicode notation, this is written: U+ 1d56b. Refer the link <https://unicode-table.com/en/#cjk-unified-ideographs>

# The char Type (continued)

- To compute the unicode value of a basic Java character, cast it to an int (and convert to hex notation)

```
char c = 'A';
int unicodeVal = (int)c; // this is in base 10
String hexVal = Integer.toHexString(unicodeVal); //value = 41
```

```
char c = '终';
int unicodeVal = (int)c; // this is in base 10
String hexVal = Integer.toHexString(unicodeVal); //value = 7ec8
```

- To render a code as a character in output, pass in the Java unicode to System.out.println.

```
System.out.println('\u7ec8'); //output is 终
System.out.println("\ud835\udd6b"); //output is z
```

- See demo code: lesson2.charsandstrings.Main

# Escape Characters

- \u is an example of an *escape character*. Other common escape characters are used to represent special characters:
  - \b – backspace
  - \t – tab
  - \n – newline
  - \r – carriage return
  - \" – double quote
  - \' – single quote
  - \\" – backslash

```
System.out.println("After waving, he said \"hello\\\"");  
//output: After waving, he said "hello"
```

# Introducing Other Data Types: Reading Console Input

- We have examined primitive data types (int, char, boolean, etc) and how variables are declared using these types. Most of the data types used in Java, however, are not built into the language, but are created through *class definitions*. This will be the topic of Lesson 3 – see the ***reference example***.
- To introduce working with console input, we give another example of a class definition: the Scanner class.

# Samples

- Scanner (as of j2se5.0)

//can think of Scanner as a special data type

```
Scanner sc = new Scanner(System.in);
System.out.print("Type your name: ");
System.out.println("you wrote: " + sc.nextLine());
System.out.print("Type your age: ");
System.out.println("your age: " + sc.nextInt());
sc.close(); //don't forget to close
```

//output

```
Type your name: Jim Stevens
you wrote: Jim Stevens
Type your age: 36
your age: 36
```

- System.in and Readers (jdk1.1) (behaves like Scanner approach)

```
BufferedReader in = null;
String input = null;
in = new BufferedReader(new
    InputStreamReader(System.in));
System.out.print("Type your name: ");
input = in.readLine();
System.out.println("You wrote " + input);
in.close();
```

- JOptionPane (jdk1.2) (creates a GUI window for input)

```
String input =
JOptionPane.showInputDialog("Type
your name");
```

See package  
lesson2.userinput

# Main Point

Variables in Java are *declared* and *initialized* to provide room in RAM for the data that is to be stored. Specifying a name makes it possible to work concretely with "space" that is otherwise without structure or boundary. Likewise, individual life gives structure to its abstract unbounded source, pure consciousness, making it possible to give expression to unboundedness in endless ways.

# Operators In Java: Arithmetic Operators

- Standard arithmetic operations represented in Java by `+`, `-`, `*`, `/`. Also the modulus operator `%`. Note: In Java, to compute  $-5/2$  (integer division) and  $-5 \% 2$ , remove the minus sign, compute, and then insert the minus sign again:

$$-5/2 = - (5/2) = -2$$

$$-5 \% 2 = - (5 \% 2) = -1$$

*Warning!* This way of calculating modulus is an old mistake that is found in most procedural languages – the computation differs from the usual mathematical definition of modulus – in math, the modulus is always a nonnegative number.

=> **Java 8** corrects this with `Math.floorMod`:

$$\text{Math.floorMod}(-5, 2) = -5 \pmod{2} = 1$$

See the `lesson2.modulus` package for this lesson.

- Division by 0: for `ints`, an exception is thrown; for floating point numbers, the value is `NaN` (Not a Number)
- The operators `+=`, `*=`, `/=`, `-=`, `%=`

# Operators In Java: Increment and Decrement Operators

- Variables having primitive numeric type can be incremented and decremented using “++” and “--” respectively (char types can be incremented like this too, but it is not a good practice to do this)

- Example:

```
int k = 1;  
k++; //new value of k is 2 (postfix form)  
++k; //new value of k is 3 (prefix form)
```

- Difference between postfix and prefix forms arises when used in expressions – prefix form is evaluated *before* evaluation, postfix form *after* evaluation

# Operators (continued)

- Example:

```
int k = 0;
```

```
int m = 3 * k++; //m equals 0, k equals 1
```

```
int q = 0;
```

```
int n = 3 * ++q; //n equals 3, q equals 1
```

- Commonly used in for loops (coming up soon) but also in traversing arrays (also coming up soon). These are standard uses; mostly this style should be avoided for the sake of readability.

# Operators In Java: Relational And Boolean Operators

- **Relational:** == (equals), != (not equals), < (less than), <= (less than or equal to), >, >= (greater than, greater than or equal to)
- **Logical:** &&, ||, ! . Short-circuit evaluation.

<b>&amp;&amp;</b>	<b>T</b>	<b>F</b>
<b>T</b>	T	F
<b>F</b>	F	F

<b>  </b>	<b>T</b>	<b>F</b>
<b>T</b>	T	T
<b>F</b>	T	F

- **Ternary:** *condition* ? *expression1* : *expression2* – evaluates to *expression1* if condition is true, *expression2* otherwise
- Example:

```
CustomerStatus =  
    (income > 100000) ?  
        PLATINUM : SILVER;
```

is equivalent to this logic:

```
IF( income > 100000 )  
    customerStatus = PLATINUM  
ELSE  
    customerStatus = SILVER
```

# Operators In Java: Bitwise Operators

- & (and), | (or), ^ (xor), ~ (not), << (left shift), >> (right shift)

&	1	0
1	1	0
0	0	0

$$\sim \mathbf{1} = \mathbf{0}$$

	1	0
1	1	1
0	1	0

$$\sim \mathbf{0} = \mathbf{1}$$

^	1	0
1	0	1
0	1	0

- Examples of << and >>

0000 1111 >> 2 = 0000 0011 (right shift by 2 is same as dividing by 4)  
[15 >> 2 = 15/4 = 3]

0000 1111 << 2 = 0011 1100 (left shift by 2 is same as multiplying by 4)  
[15 << 2 = 15 \* 4 = 60]

Ref : For more information read Pages 134-137. Beginning Java 8 Fundamentals by Kishori Sharan from Apress. Read this thru Sakai Resources → Textbooks.

# Mathematical Constants And Functions

- Special math functions and constants are available in Java by using the syntax  
Math.<constant> and Math.<function>
- Examples:

Math.PI (the number pi - approximately 3.14159)

Math.pow(a, x) (the number a raised to the power x)


Math.sqrt(x) (the square root of x)

- For this course, we have a RandomNumbers class (which uses the Java Random class). Its methods can be accessed in the same way the methods of Math class can.
- Examples: (see demo lesson2.random.RandomNumbers)

```
//produces a randomly generated int  
int n = RandomNumbers.getRandomInt();
```

```
//produces a randomly generated int in the range 3..11, inclusive.  
int m = RandomNumbers.getRandomInt(3, 11);
```

# Conversions Between Numeric Types

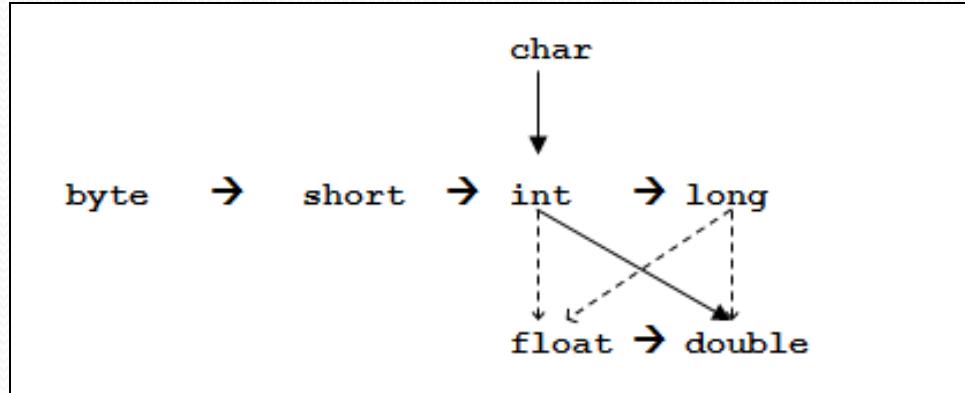

- Solid arrows indicate automatic type conversions that do not entail information loss
- **int** to **float**, **long** to **float**, and **long** to **double** are automatic, preserve number of digits to left of decimal, but may lose precision:

Example:

```
int n = 123456789;  
float f = n; //f is 123456792.000000,
```

See `lesson2.datatypeconversion.DataConversion`

- When values of different type are combined (via addition, multiplication or other operations), a type conversion occurs to arrive at just one common type.

*Most important cases:*

- a double combined with another primitive numeric type results in a double
- an int combined with a smaller type (byte, short) results in an int.
- (A complete list of rules is given on p. 60 of Core Java, Vol 1, 10<sup>th</sup> ed.)
- Other conversions can be “forced” by casting (Explicit)

Example:

```
double x = 9.997;  
int y = (int) x; //y has value 9
```

- “Rounding” is usually preferable to casting and is done by using the round function of the Math class:

Example:

```
double x = 9.997;  
int nx = (int)Math.round(x); //round returns a long,  
//so cast is necessary
```

- It is possible to cast a long to an int, an int to a byte, and so forth. In such cases, casting is accomplished by removing as many high-order bits as necessary to produce a number of the narrower type.

Example:

```
int x = 130;  
byte b = (byte)x;
```

- *Automatic promotion of integral types.* When a binary operation (like +, \*, or any shift operator) is applied to values of type `byte` or `short`, the types are promoted to `int` before the computation is carried out.

Example: The following produces a compiler error. Why?

```
byte x = 5;  
byte y = 7;  
byte z = x + y;
```

# Operator Precedence and Association Conventions

## Examples:

`a && b || c` means `(a && b) || c` (operator precedence)

`a += b += c` means `a += (b += c)` (association to the right)

- See page 64 of Core Java, Vol 1, 10<sup>th</sup> ed. for a list of all the rules
- Important precedence rules to know:
  - `*, /, %` precede `+` and `-`
  - `++` and `--` have almost the highest precedence
  - `=` (assignment) associates to the right: `a = b = c` means `a = (b = c)`
  - *Tip:* be able to use the chart on p. 64 to read syntax

# Precedence and Association Table

Table 3-4. Operator precedence

Operators	Associativity
[ ] . () (method call)	left to right
! ~ ++ + (unary) - (unary) () (cast) new	right to left
* / %	left to right
+ -	left to right
<< >> >>>	left to right
< <= > >= instanceof	left to right
== !=	left to right
&	left to right
^	left to right
	left to right
&&	left to right
	left to right
? : (ternary operator)	right to left
= += -= *= /= %= &=  = ^= <<= >>= >>>=	right to left

# Main Point

Variables of primitive type can be combined to form expressions through the use of *operators* (like +, \*, &&, ||). The Java syntax requires one to observe rules for forming expressions – precedence rules, type conversion rules, and others. Pure consciousness, likewise, also has laws that govern its self-combining. The self-combining dynamics of pure consciousness – like the self-interacting dynamics of the unified field – give rise to "everything": All thoughts, all knowledge, and, if the unified field is really the same as pure consciousness, all manifest existence.

# Java Strings

- A String is a sequence (technically, an array) of characters – therefore, formally, “String” is not a built-in data type (unlike int and float)
- A String can be created using a string literal.

Example:

```
String name = "Jennifer";  
String empty = "";
```

- Java Strings are *immutable*. This means that it is not possible to change the values of the characters within a String.

# Java Strings: charAt () Method

- Thinking of a Java String as a sequence of characters, the charAt method extracts the character (code unit) at a specified position in this sequence:

- "Hello".charAt(1) //value is 'e'
- For special characters, care is needed. For example: Suppose a String expr is defined like this:

```
expr = "Z is the set of integers"
```

In this case, the expression

```
expr.charAt(1)
```

has value '\u0336' since it is the second character of the pair \ud835\udc6b of code units that represents the character z.

# Java Strings: length () Method

- The `length()` method returns the number of Java characters in a `String`. When only basic characters are present, the length is just the number of characters. But care is needed with *special* characters.
  - The value of

`"Hello".length()`

is 5

However, the value of

`"Z_Z".length()`

is 5, not 3.

# String methods: substring, indexOf, startsWith, +, equals

- **substring (m, n)** returns the subsequence of characters starting at position m up to position n-1
- **indexOf (char c)** returns position of (first occurrence of) char c in the String if present, -1 otherwise
- **indexOf (String s)** returns position of (first occurrence of) o<sup>th</sup> character in s in the String if present, -1 otherwise
- **startsWith (String s)** returns true if String begins with the String s, false otherwise
- + concatenates two strings
- **equals (String s)** returns true if the character sequence that composes the string is identical to the character sequence that composes s.

# In-Class Exercise: String Functions

- Type the following lines into JShell and record the answers that you get

- `substring`

```
String name = "Robert";
name.substring(0,3);
name.substring(0,name.length());
name.substring(0,1);
name.substring(0,0);
```

- `indexOf`

```
String name = "Robert";
name.indexOf('t');
name.indexOf("bert");
```

# (continued)

- `startsWith`

```
String name = "Robert";
name.startsWith("Rob");
name.startsWith("R");
name.startsWith("bert");
```

- `+` (concatenation) – creates a new `String`

```
String name = "Robert";
String space = " ";
String lastName = "Stevens";
name + space + lastName;
```

- `equals`

```
String name = "Robert";
name.equals("Robert");
name == "Robert";
String newName = new String("Robert");
newName == "Robert";
newName.equals("Robert");
```

# String Functions: substring, indexOf, startsWith, +, equals, StringJoiner

- Examples of how the String functions are used:

- substring

```
String name = "Robert";
String nickname = name.substring(0,3); // "Rob"
String whole = name.substring(0,name.length()); // "Robert"
String first = name.substring(0,1); // "R"
String empty = name.substring(0,0); // ""
```

- indexOf

```
String name = "Robert";
int posOfT = name.indexOf('t'); // 5
int posOfSubstr = name.indexOf("bert"); // 2
```

- `startsWith`

```
String name = "Robert";
boolean result = name.startsWith("Rob");//true
boolean result2 = name.startsWith("R"); //true
boolean result3 = name.startsWith("bert"); //false
```

- `+ (concatenation)` – creates a new `String`

```
String name = "Robert";
String space = " ";
String lastName = "Stevens";
String fullname = name + space + lastName;// "Robert Stevens"
```

- `equals`

```
String name = "Robert";
boolean equal = name.equals("Robert"); //true
boolean refEqual = (name == "Robert"); //true, but be careful
String newName = new String("Robert");
refEqual = (newName == "Robert"); //false!
refEqual = (newName.equals("Robert")); //true
```

# String object vs String Literal

- Both are an object of `java.lang.String` class.
- `new` operator stores a string objects in a heap memory.
- Literals are stored in a String pool(Runtime constant pool in method area) to minimize the memory usage and for better performance.
- Use

Eg:


- `String str1 = "Hello";`
- `String str2 = "He" + "llo";`
- `String str3 = new String("Hello");`
- `String str4 = new String("Hello");`
- `String str5 = str4;`
- `String str6 = "He";`
- `String str7 = str6 + "llo";`
- `String str8 = str7.intern()`

What is the output?

1. `str1==str2 ? _____`
2. `str2==str3 ? _____ ( )`
3. `str3==str4 ? _____`
4. `str4==str5? _____ ( )`
5. `str1==str7 ? _____`
6. `str1==str8 ?_____ ( )`

# String Pool

```
String str1 = "Hello";
String str2 = "He" + "llo";
String str3 = new String("Hello");
String str4 = new String("Hello");
String str5 = str4;
String str6 = "He";
String str7 = str6 + "llo";
String str8 = str7.intern();
```

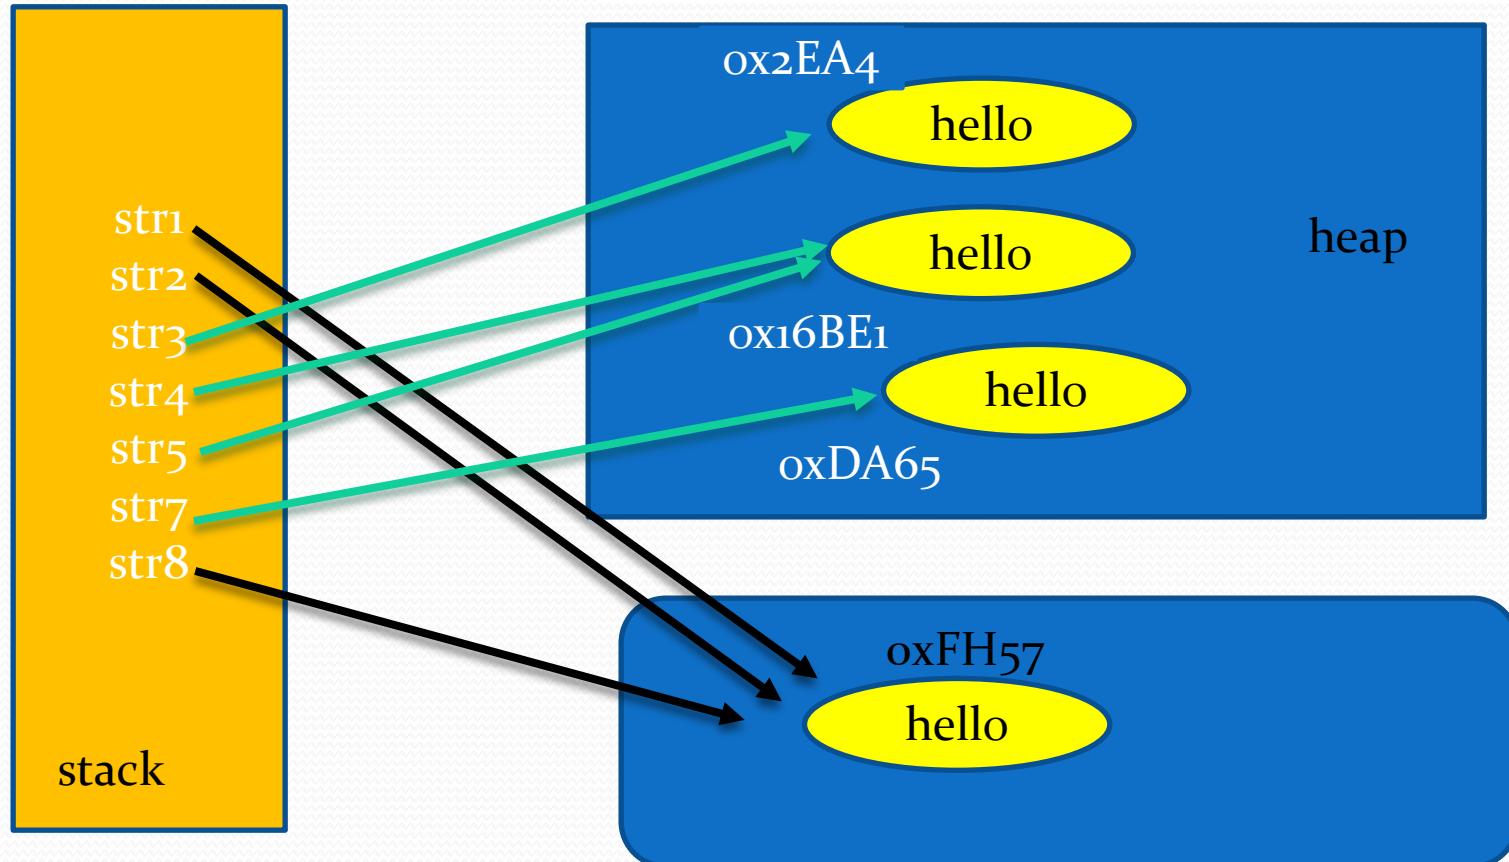

# Avoiding Costly Concatenation of Strings with StringBuilder

- **Example:** You are writing an application that will receive an unknown number of Strings as command-line arguments. These Strings, when pieced together, will form a sentence. Your job is to concatenate all these Strings and output to console the final sentence, with the correct sentence structure. (Since we are assuming just one sentence is formed, the only adjustments we need to make to the input are to put spaces between the words and a period at the end.)

# First Try

```
public static void main(String[] args) {  
    if(args == null || args.length == 0) {  
        System.out.println("<no input>");  
    }  
    String finalSentence = "";  
    len = args.length;  
    for(int i = 0; i < len-1; ++i) {  
        finalSentence += (args[i] + " "); //inefficient  
    }  
    finalSentence += (args[len-1] + ".");  
    System.out.println(finalSentence);  
}  
//NOTE: couldn't do this with a "for each" loop
```

**Problem:** Concatenation becomes very slow with many arguments because each concatenation creates a new `String` (which requires allocating new memory for the new object), and compared to other steps, this is a costly operation.

**Solution:** `StringBuilder`

`StringBuilder` represents a “growable `String`” – can append characters and `Strings` without significant cost.

**Note:** `StringBuilder` is designed to be used for single-threaded applications – it is not thread-safe. This means that a single `StringBuilder` instance must not be shared between two or more competing threads. If multithreaded access is needed, a class with the same method names, `StringBuffer`, can be used, but it is less efficient in the single-threaded case.

**StringBuilder and StringBuffer are Mutable.**

# Better Solution

```
public static void main(String[] args) {  
    if(args == null || args.length == 0) {  
        System.out.println("<no input>");  
    }  
    StringBuilder finalSentence = new StringBuilder();  
    len = args.length;  
    for(int i = 0; i < length-1; ++i) {  
        finalSentence.append(args[i]);  
        finalSentence.append(" "); //much more efficient  
    }  
    finalSentence.append(args[len-1]);  
    finalSentence.append(".");  
  
    // Convert the StringBuilder to a String at the end.  
    String finalSentenceAsString = finalSentence.toString();  
    System.out.println(finalSentenceAsString);  
}
```

# StringBuilder and StringBuffer

- StringBuilder and Stringbuilder are similar, both can use append() to concat string. And use toStirng() convert StringBuilder and StringBuffer to String

## StringBuffer vs StringBuilder

- |                   |                     |
|-------------------|---------------------|
| 1. Thread-Safe    | 1. Not Thread-Safe  |
| 2. Synchronized   | 2. Not Synchronized |
| 3. Since Java 1.0 | 3. Since Java 1.5   |
| 4. Slower         | 4. Faster           |

# StringJoiner

- This relative of the String class can be used to produce a formatted sequence of Strings.
- Constructor for StringJoiner is StringJoiner(*delimiter, prefix, suffix*). The delimiter separates the Strings that are added to the joiner; the prefix is the initial part of the output String, the suffix is the final part of the output String.

*Example.* The String

"[George:Sally:Fred]"

may be constructed as follows:

```
StringJoiner sj = new StringJoiner(":", "[", "]");  
sj.add("George").add("Sally").add("Fred");  
String desiredString = sj.toString();
```

# String Functions: compareTo

- The natural ordering on Strings is *alphabetical order*. In that ordering, for example, "Bob" comes before "Charles". The `compareTo` method on `Strings` specifies this ordering on `Strings`:

```
int compareTo(String t)
```

`s.compareTo(t)` returns

- a positive integer if `s` is "greater than" `t`
- a negative integer if `s` is "less than" `t`
- zero, if `s` and `t` are equal as `Strings`

- Examples

```
public static void main(String[] args) {  
    System.out.println("a".compareTo("b"));  
    System.out.println("b".compareTo("a"));  
    System.out.println("a".compareTo("a"));  
}
```

//output:

```
-1  
1  
0
```

- The `compareTo` method is used to sort `Strings` (see the section on `Arrays`)

# Formatted Console Output

- j2se5.0 introduced C-like formatting features with `System.out.printf` and `String.format`
- Use `System.out.printf` to print formatted output directly to the console
- Use `String.format`, with the same formatting options, to store formatted String in memory, perhaps to be sent to the console or a file (for example) later
- Can be combined with Date formatting
- For jdk1.4 and before, the `MessageFormat` class is used for formatting Strings – see sample code below
- A complete list of conversion characters (like s, d) can be found on p. 83, Core Java, 10<sup>th</sup> edition.

# Samples

```
System.out.printf("You owe me $%f \n", 195.50f);
System.out.printf("You owe me $%.2f \n", 195.50f);
System.out.printf("You owe me $%7.2f \n", 195.50f);
You owe me $195.500000
You owe me $195.50
You owe me $ 195.50
```

```
String name = "Bob";
int age = 30;
System.out.printf("Happy birthday %s. I can't believe you're
%d.", name, age);
Happy birthday Bob. I can't believe you're 30.
```

```
String oweMe = String.format("You owe me %.2f dollars", 196f);
String oweMe2 = String.format("You owe me %d dollars", 196);
System.out.println(oweMe);
System.out.println(oweMe2);
You owe me 196.00 dollars
You owe me 196 dollars
```

# Samples

```
String date = String.format("Today's date: %tD", new Date());
```

```
System.out.println(date); // Today's date:09/02/19
```

```
//formatting in jdk1.4 - uses arrays, explained soon
```

```
Object [] params = {"animal", "dog"};
```

```
String stringWithParameter =
```

```
    "Look at that {0} -- it looks like a {1}.";
```

```
System.out.println("original string: " +  
stringWithParameter);
```

```
System.out.println("formatted string: " +
```

```
MessageFormat.format(stringWithParameter,params));
```

**original string: "Look at that {0} -- it looks like  
a {1}."**

**formatted string: Look at that animal -- it looks  
like a dog.**

For more info :

<https://docs.oracle.com/javase/7/docs/api/java/text/MessageFormat.htm>

# Control Flow: Conditional Logic

- The conditional statement in Java has the following form:

```
if (condition) statement
```

Here, condition is any boolean statement (statement that evaluates to true or false)

- The *statement* may in fact be an entire block of code, in this form:

```
if (condition) {  
    statement1;  
    statement2;  
    ...  
}
```

Example:

```
if (sales >= target) {  
    performance = "Satisfactory";  
    bonus = 100;  
}
```

# Control Flow: Conditional Logic

- Another form of conditionals is the “*if..else*” form:

```
if (condition) statement1  
else statement2
```

Example:

```
if(sales >= target) {  
    performance = "Satisfactory";  
    bonus = 100;  
}  
else {  
    performance = "Unsatisfactory";  
    bonus = 0;  
}
```

- Can have repeated “else if”’s .

Example:

```
if(sales >= 2 * target) {
    performance = "Excellent";
    bonus = 100;
}
else if (sales >= target {
    performance = "Satisfactory";
    bonus = 50;
}
else { //sales < target
    performance = "Unsatisfactory";
    bonus = 0;
}
```

An “else” is associated with nearest previous “if”. Therefore, these statements are read by the compiler as:

```
if(sales >= 2 * target) {
    performance = "Excellent";
    bonus = 100;
}
else {
    if (sales >= target) {
        performance = "Satisfactory";
        bonus = 500;
    }
    else { //sales < target
        performance = "Unsatisfactory";
        bonus = 0;
    }
}
```

# Control Flow: The switch Statement

- The `switch` statement is a convenient shorthand for writing “`if..else`” statements, when the values being tested are `ints`, `chars`, `Strings`, or `enums`. (Note: `enums` will be discussed in Lesson 3.)
- General form of the `switch` statement:

```
switch(val) {  
    case x:  
        statement_x;  
        break;  
    case y:  
        statement_y;  
        break;  
    ...  
    default:  
        default_statement;  
}
```

- The `break` in each `case` ensures that only one `case` is executed. If you forget to insert the `break`, later cases will continue to be tested and executed.
- A `default` case should typically be provided, to handle all cases not specified in the `case` statements.

# “Fall-through” Behavior

- “Fallthrough behavior” occurs when break statements are omitted: Cases are examined and, as soon as a match is found, the corresponding statement is executed, and all subsequent case statements are also executed, until a break is encountered. If no matches are found, then the default statement is executed if there is one.
- Example of “fallthrough behavior”:

```
Scanner sc = new Scanner(System.in);
System.out.print("Pick an integer in the range 1..9");
int val = sc.nextInt();
System.out.println();
switch(val) {
    case 2:
    case 4:
    case 6:
    case 8:
        System.out.println("You chose an even number.");
        break;
    default:
        System.out.println("You chose an odd number.");
}
```

# Control Flow: while Loops

- The general form of a `while` loop is  
`while (condition) statement`  
where *condition* is a boolean expression.
- The general form of a `do...while` loop is  
`do statement while (condition)`
- Typically, `do...while` is used in place of `while` when it is necessary for statement to execute at least once (even if condition is always false).

# Control Flow: while Loops

code

```
1 a = 1
2 while a < 10:
3     print(a)
4     a += 2
```

output

variables

# Examples

```
//while loop
while(balance < goal) {
    balance += payment;
    double interest
        = balance * interestRate/100;
    balance += interest;
    years++;
}
System.out.println(years + " years");
```

```
//do..while loop
Scanner sc = new Scanner(System.in);
do{
    System.out.print("Payment amount? ");
    payment = sc.nextDouble();
    balance += payment;
    double interest = balance * interestRate / 100;
    balance += interest;
    years++;
    System.out.println("Your balance: " +
        balance);
    System.out.println(
        "Make another payment? (Y/N)");
    input = sc.next();
} while(input.equals("Y"));
```

# Examples – the while(true) Construct

- Use the `while(true)` form when the statement requires processing before a condition can be evaluated. To exit the loop, use a `break` statement.

Example:

```
Scanner sc = new Scanner(System.in);
while(true) {
    System.out.print ("Enter a positive number: ");
    int value = sc.nextInt();
    if(value <= 0) {
        break;
    }
}
System.out.println("The value you enter must be
positive.");
```

# while(true) - continued

- Also used sometimes in creating a server (for a client/server system); in this case, the while loop never stops (until the server itself stops):
- *Using break in while loops.* When a break statement occurs, the while loop is exited and execution resumes as it would if the condition in the while loop had just failed. When possible, use while *without* a break statement (by selecting the condition for the while loop carefully) – sometimes though break statements are necessary.

# break vs others.

<b>return</b>	<b>system.exit</b>	<b>break</b>	<b>continue</b>
It is the language statement.	It is system call and not the language statement.	It is the language statement.	It is the language statement.
It terminates function and control goes out of the function to the caller.	It terminates the program and exits out of process.	It terminates the loop.	It continues to the next iteration in loop.
Syntax: return;	Syntax: system.exit(0);	Syntax: break;	Syntax: continue;

# Control Flow: for Loops

- General form of the `for` loop:  
 $\text{for}(\textit{initialization}; \textit{condition}; \textit{increment}) \textit{statement}$
- Sample code: see the *reference example*, Main class.
- All three parts of the `for` expression are optional. The expression

`for( ; ; ) statement`

means the same as

`while (true) statement`

# for loop

```
for (int i = 0; i < 3; i++) {  
    System.out.println("i is now " + i);  
}
```

# Techniques of for loop

Note: Since `i` is declared in the for expression, it cannot be referenced outside of the for block. If you need to use it outside the block, this code should be used:

```
int i;  
for(i = 0; i < max; ++i) {  
    //do something  
}  
//now i can be referenced here
```

or, equivalently,

```
int i=0;  
for( ; i < max; ++i) {  
    //do something  
}  
//now i can be referenced here
```

# Techniques of for loop

More than one variable can be initialized, and more than one increment statement can be used; commas separate such statements.

```
for(int i = 1, j = max; i * j <= balance; i++, j--) {  
    //do something  
}
```

Complex conditions are allowed in the condition slot:

```
for(int i = 0; (i+1) * value > min && i * value <  
max; i = i +2) {  
    //do something  
}
```

# Nested for loops – example

```
for(int i = 0; i < n; ++i) {  
    for(int j = 0; j < n; ++j) {  
        System.out.printf("%-3s", "*");  
    }  
    System.out.println();  
}  
// '-' flag means "left justify" within field  
  
//output for n = 5
```

# Examples - continued

```
for(int i = 0; i < n; ++i) {  
    for(int j = 0; j <= i; ++j) {  
        System.out.printf("%-3s", "*");  
    }  
    System.out.println();  
  
}  
  
//output for n = 5  
  
*  
* *  
* * *  
* * * *  
* * * * *
```

# Main Point

*Control flow* is supported in Java via the *if..else*, *for*, *while*, *do..while*, *switch* [and also *for each*] language elements. Loops are a CS analogue to the self-referral performance at the basis of all creation, whereas branching logic mirrors the tree-like hierarchy of natural laws that guide the activity in each layer of creation.

# Arrays

Java array is an **object** which contains elements of a similar data type. Additionally, The elements of an array are stored in a contiguous memory location. It is a data structure where we store similar elements. We can store only a fixed set of elements in a Java array.

- *Declaration of arrays*


int[] arr;                  or                  int arr[]

- *Initialization of arrays*

int[] arr = new int[10];

100 cells, numbered 0 to 9, are created and by default, each cell contains the value 0. All numeric arrays (for primitive types) are filled with their own version of 0 when initialized. String arrays (and arrays of objects of other kinds) are filled with the value null (more on this later).

# Arrays

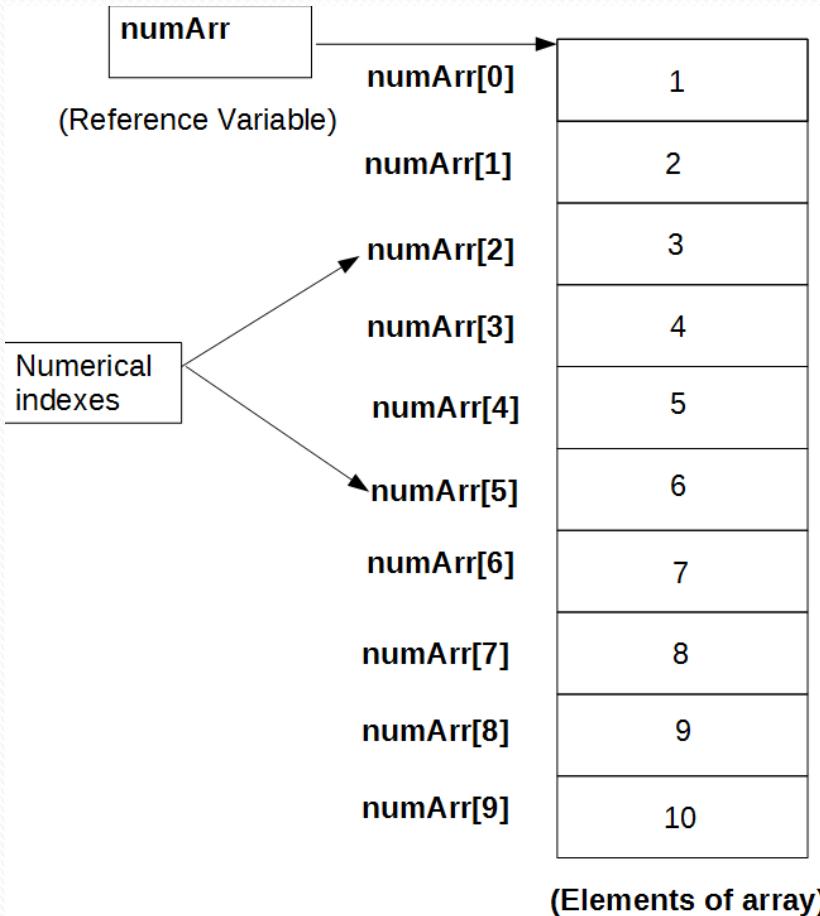

- `Int[] numArr = new int[10];`
- It supports *random access* of its elements (the element at position  $i$  in an array  $\text{numArr}$  is retrieved using the syntax  $\text{numArr}[i]$ ).

# Arrays

- *Setting values in an array*

```
arr[5] = 30;
```

- *Retrieving values in an array*

```
int positionFour = arr[4];
```

- *Length of an array.* This is the size determined at initialization and may not be changed.

```
int len = arr.length; // len is 4
```

# Application of Arrays-the split function of the String class

- Use `split` to break up a `String` into tokens based on a set of *delimiters*.
- The statement

```
String[] parsedVals = s.split(",");
```

will split the `String s` into tokens, using `,` as delimiter, and will place the tokens in the array `parsedVals`

*Example:*

```
String s = "hello,how,are,you,today";  
String[] parsedVals = s.split(",");
```

The elements of `parsedVals` are:

hello  
how  
are  
you  
today

# In-Class Exercise

- If you want to use more than one separator in a split, separate them with a pipe ('|'), as in

```
"hello there,Bob".split(" |,")
```

To indicate a dot, use \\. instead of just .

Working in JShell, think of the right separators to use in a split to extract the array

```
["Hello", "strings", "can", "be", "fun", "They", "have", "many", "uses"]
```

from the String

```
"Hello,strings can be fun. They have many uses."
```

```
String t = "Hello, strings can be fun. They have many uses"  
String[] result = t.split(",|\\.\\.| ");
```

Here, result stores the array: ["Hello", "strings", "can", "be", "fun", " ", "They", "have", "many", "uses"]

- In general, the argument passed to split can be any *regular expression* – see the JavaDocs discussion of String.split for an explanation of the many options.
- See demo code in package lesson2.arraydemo.ArraySplit.java
- NOTE: As of jdk1.4, the split method replaces the use of the class StringTokenizer
- `

# The *for each* Loop

```
int [] arr = {4, 5, 12, 25};  
for(int x: arr) {  
    System.out.println(x);  
}
```

- Syntax:

*for(variable : collection) statement*

The *collection* must either be an array or an instance of a class that implements the `Iterable` interface (more on this later)

- **Best Practice:** Whenever there is a choice, use a *for each* loop in place of an ordinary *for* loop. The syntax is easier to read and doesn't rely on irrelevant information. (For instance, in this example, the *index* of each element in the array is not relevant for the task of printing the array elements)

# Array Initializers and Anonymous Arrays

- When first created, can initialize an array like this (called an *array initializer*):

```
int[] somePrimes = {2, 3, 5, 7, 9, 11};  
  
String[] names = {"Bob", "Harry", "Sue"};
```

But, the following is not legal:

```
String[] favoriteTeams = new String[2];  
favoriteTeams = {"Sonics", "Mets"}; //compiler error
```

- Anonymous arrays

```
new int[] { 17, 19, 23, 29 };
```



One application: permits initialization like an array initializer even after an array has been declared:

```
String[] favoriteTeams = new String[2];  
favoriteTeams = new String[]{"Sonics", "Mets", "Bulls"}; // you're not changing the size!
```

Refer : lesson2.arraydemo.ArrayInitial.java

# Array size cannot be changed!

```
String[] favoriteTeams = new String[2];
String[] arr = favoriteTeams;
favoriteTeams = new String[]{"Sonics", "Mets", "Bulls"};
```

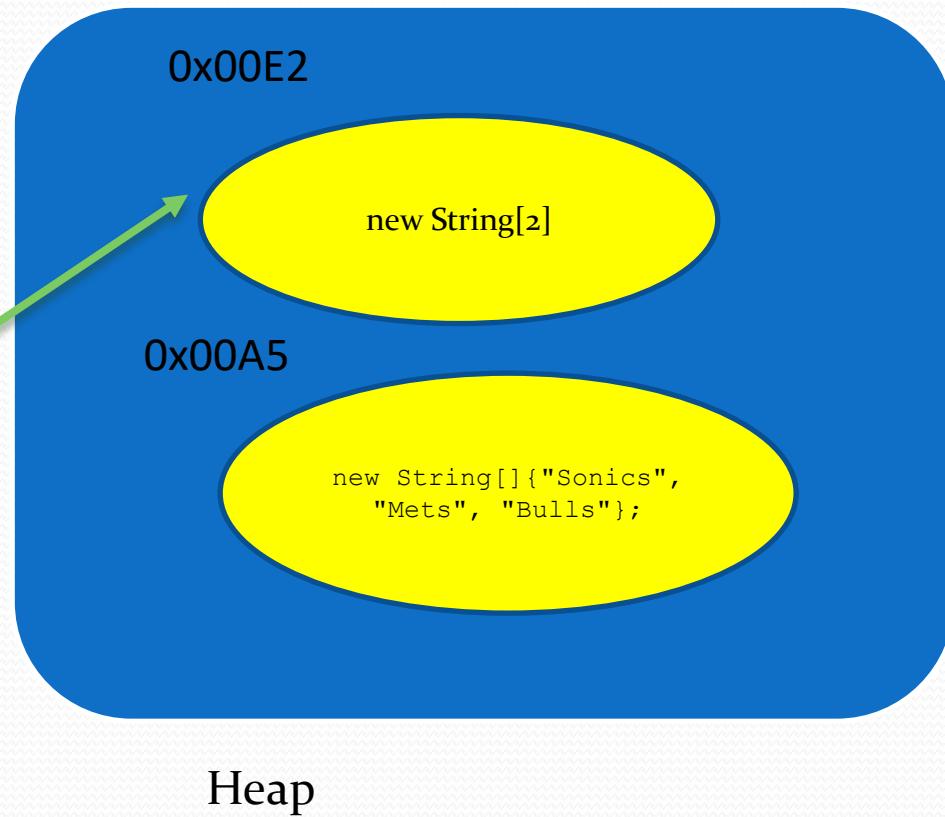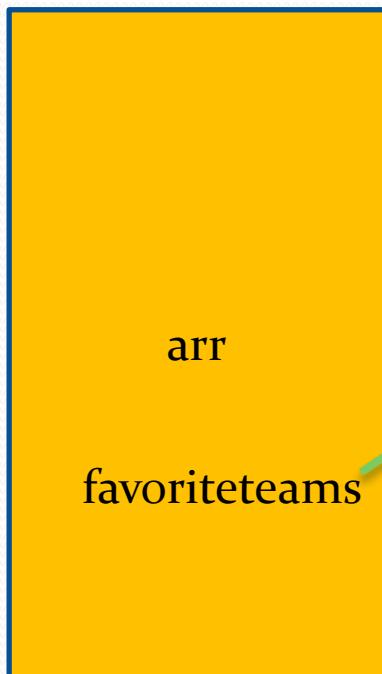

# Array Copying and Sorting

To copy the cells from one array to another array, create a new (empty) array of the same size (or larger), and use `System.arraycopy`. To sort, use the `Arrays.sort` function.

Signatures:

```
System.arraycopy(from, fromIndex, to, toIndex, count)  
Arrays.sort(arr)
```

Examples:

```
int[] smallPrimes = { 2, 3, 5, 7, 11};  
int[] copy = new int[5];  
System.arraycopy(smallPrimes, 0, copy, 0, 5);  
  
int[] smallPrimes = { 2, 3, 5, 7, 11};  
int[] luckyNums = {350, 400, 150, 200, 250};  
System.arraycopy(smallPrimes, 1, luckyNums, 3, 2);  
  
//luckyNums is now [350, 400, 150, 3, 5]  
//now sort  
Arrays.sort(luckyNums);  
//luckyNums is now [3, 5, 150, 350, 400]
```

# Sorting Strings

When you used `Arrays.sort` on an array of `Strings`, the JVM automatically uses the `compareTo` method to compare `Strings` and to put them in alphabetical order.

- Example:

```
public static void main(String[] args) {  
    String[] names = {"Steve", "Joe", "Alice", "Tom"};  
    //sorts the array in place  
    Arrays.sort(names);  
    System.out.println(Arrays.toString(names));  
}
```

//output

[Alice, Joe, Steve, Tom]

Refer `lesson2.arraydemo.ArrayCopySort.java`

# Commandline Parameters

The `main` method is designed to read input from the user when the program is executed.

```
class ParameterExample {  
    public static void main(String[] args) {  
        int len = 0;  
        if(args != null) len = args.length;  
        for(int i = 0; i < len; ++i) {  
            System.out.println("position " + i + ": " + args[i]);  
        }  
    }  
}
```

Sample run of this code:


```
java ParameterExample Hello Goodbye  
//output  
position 0: Hello  
position 1: Goodbye
```

Commandline parameters can be inserted into a Run Configuration in Eclipse.  
Right click class > Run As > Run Configurations, set name of configuration, add Program Arguments in Arguments tab. See demo in package: `lesson2.arraydemo.CommandLineArg`

# Introduction to Static Methods


- We have seen that the `main` method in a Java class is static and have discussed briefly what this means.
- In Java, static methods can call other static methods. Static methods are *utility methods* – designed to do some computation or processing, accepting inputs returning outputs, which support the main flow of the application. They can be used whether or not an instance of their enclosing class has been created. We will discuss static methods, and methods generally, in Lesson 3.

# Static members

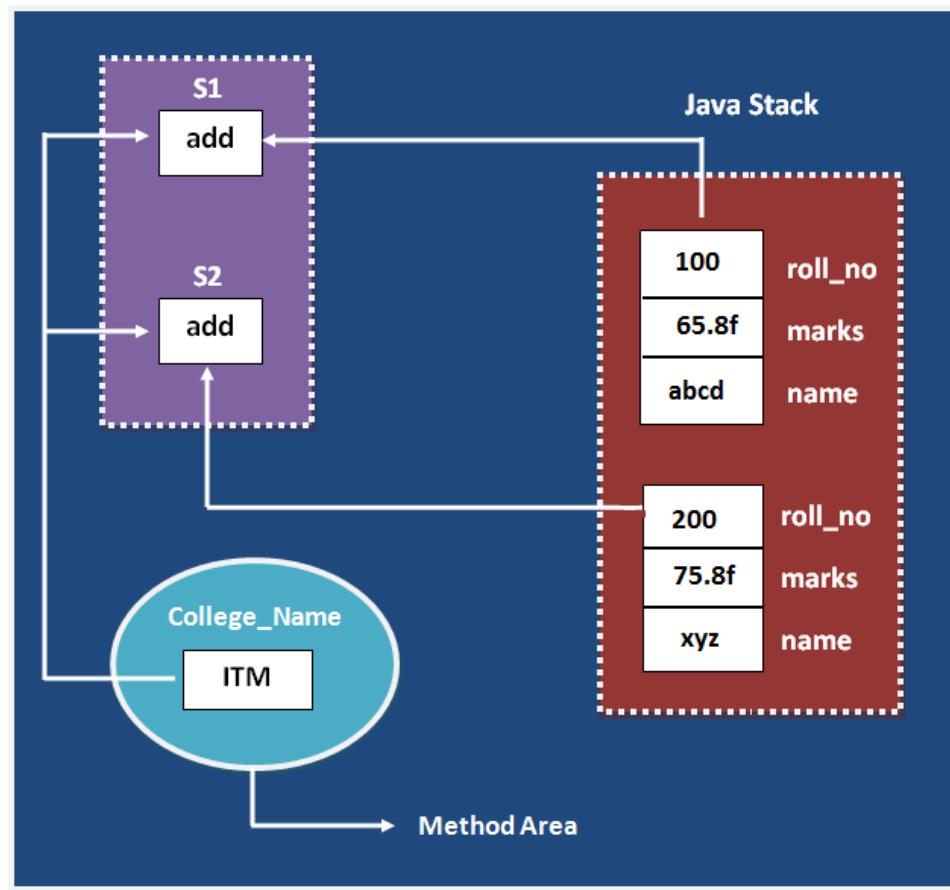

# Jagged Array

- A two-dimensional array has a rectangular size(Ex: 3X3).
- A jagged array is more flexible in sizing the array, With jagged array every row can have different

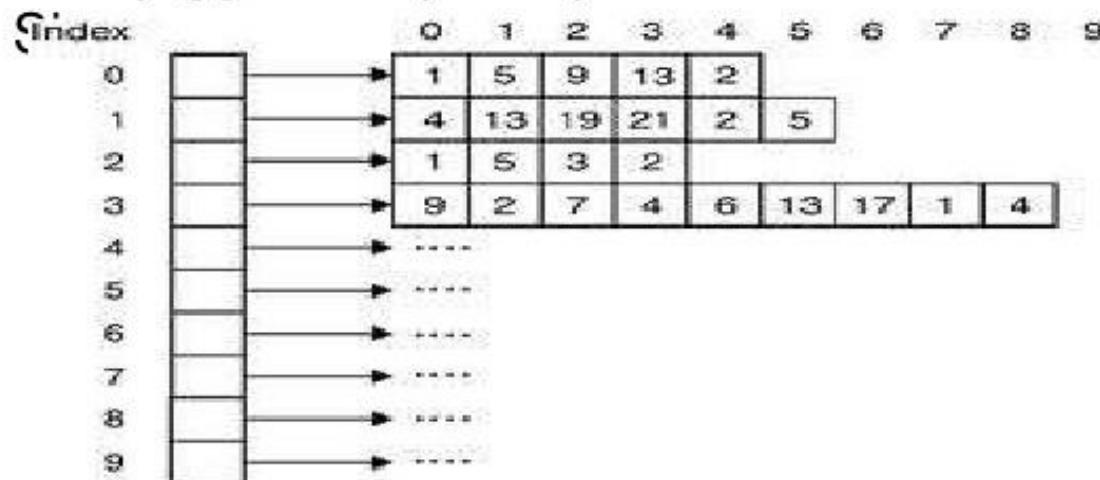

# Multidimensional Arrays

- Declaration:

```
int[][] twoD;
```

- Initialization:

```
int[][] twoDsspecified = new int[3][5]; //3 int[] arrays  
// each with 5 elements
```

```
int[][] twoDunspecified = new int[3][]; //3 int[] arrays  
//each of unspecified length
```

Each row in a two-dimensional array is itself an array. Thus, the rows can have different lengths. An array of this kind is known as a *ragged array*.

```
twoDunspecified[0] = new int[2];  
twoDunspecified[1] = new int[3];  
twoDunspecified[2] = new int[5];
```

- **Array initializers**

```
String[][] teams = {  
    {"Joe", "Bob", "Frank", "Steve"},  
    {"Jon", "Tom", "David", "Ralph"},  
    {"Tim", "Bev", "Susan", "Dennis"}  
};
```

```
//specifies a 3 x 4 array  
//teams.length is 3  
//teams[i].length is 4 (whenever 0<= i <= 2)  
//teams[1][2] has value "David" (row 1,  
//column 2, start counting from 0)
```

# Main Point

Arrays in Java support storage of multiple objects of the same type. Java supports multi-dimensional and ragged arrays; array copy and sort functions (accessible through the System and Arrays classes); and supports convenient forms of declaration and initialization. All CS data structures mirror the "existence" aspect of consciousness – the nervous system – whereas the *contents* of these structures mirrors the "intelligence" aspect; the pure potentiality of a data structure is as if brought to life by filling it with real data.

# Summary

- We introduced the *Reference Example*, which shows how a Java program is composed of objects interacting with each other. More explanation of syntax will be given in Lesson 3.
- Java uses variables to store data, and all variables are given a *type*. The built-in types in Java are the primitive types (char, boolean, int, byte, short, double, float) together with more complex *object* types, to be discussed more in Lesson 3. Data Types:
- Data having primitive type can be manipulated using Java's operators, like +, \* (arithmetic), &&, || (logical), and &, | (bitwise)
- An important data type in Java is a String, which provides many string manipulation operations, like substring, +, indexOf, startsWith, charAt.
- Procedural flow in a Java program is controlled by conditional logic (if..then..else, switch, and the ternary operator) and loops (for, forEach, while, do..while)
- Data in a Java program is stored in memory using *arrays*, which can be one- or multi-dimensional

# Connecting the Parts of Knowledge With the Wholeness of Knowledge

1. In Java, variables of primitive type can be combined using operators to form expressions, which may be evaluated to produce well-defined output values.
  2. On a broader scale, objects in Java are "combined" by way of "messages" between objects, which collectively result in the behavior of a Java application.
- 
3. **Transcendental Consciousness:** Pure consciousness is the field beyond type and interaction; it is the field of *unbounded awareness* and *infinite silence*.
  4. **Wholeness moving within itself:** In Unity Consciousness, one observes that this unbounded silent quality of awareness is spontaneously present at all levels of action in the world, and not just relegated to the transcendental field.
- 