

W4995 Applied Machine Learning

# Word Embeddings; Neural Networks

04/10/17

Andreas Müller

# Beyond Bags of Words

Limitations of bag of words:

- Semantics of words not captured
- Synonymous words not represented
- Very distributed representation of documents

# Last Time

- Latent Semantic Analysis
- Non-negative Matrix Factorization
- Latent Dirichlet Allocation
- All embed documents into a continuous, corpus-specific space.
- Today: Embed words in a “general” space.

# Idea

- Unsupervised extraction of semantics using large corpus (wikipedia etc)
- Input: one-hot representation of word (as in BoW).
- Use auxiliary task to learn continuous representation.

# Skip-Gram models


- Given a word, predict surrounding word
- Supervised task, each document yields many examples
- Not interested in performance for this task, just want to learn representations.

[“What is my purpose?”  
“You pass the butter.”]

Using context windows of size 1 (in practice 5 or 10):

| word   | context            |
|--------|--------------------|
| “is”   | [“what”, “my”]     |
| “my”   | [“is”, “purpose”]  |
| “pass” | [“you”, “the”]     |
| “the”  | [“pass”, “butter”] |

# CBOW vs Skip-gram

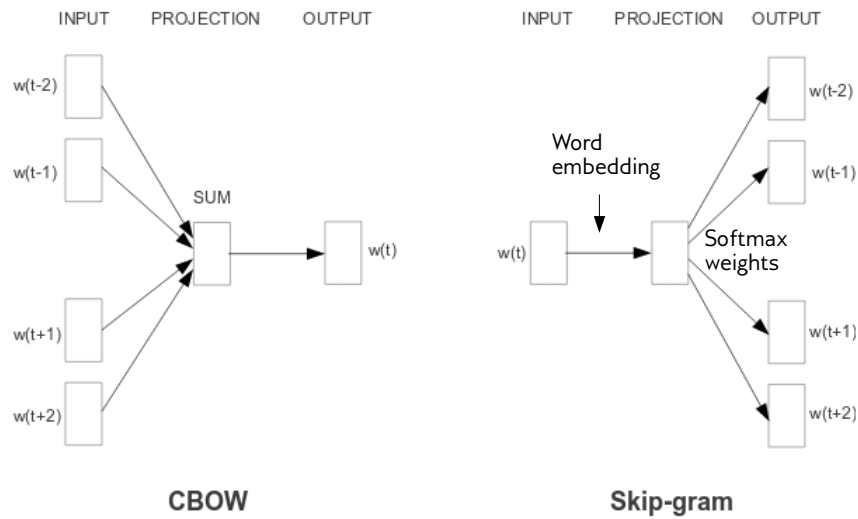

Efficient Estimation of Word Representations in Vector Space <https://arxiv.org/pdf/1301.3781.pdf>

# Softmax Training

$$\frac{1}{T} \sum_{t=1}^T \sum_{-c \leq j \leq c, j \neq 0} \log p(w_{t+j} | w_t)$$

$$p(w_O | w_I) = \frac{\exp \left( \overset{\text{Output weights}}{v'_{w_O}} \top \overset{\text{Word embedding}}{v_{w_I}} \right)}{\sum_{w=1}^W \exp \left( v'_w \top v_{w_I} \right)}$$

Normalize over whole vocabulary!  
[We want to do stochastic gradient descent / minibatch learning]  
Monte-Carlo estimate: use some "noise words"

<http://papers.nips.cc/paper/5021-distributed-representations-of-words-and-phrases-and-their-compositionality.pdf>



# Implementations

- Gensim
- Word2vec
- Tensorflow
- don't train yourself,

# Gensim – topic models for humans

- Multiple LDA implementations
- Wrappers for Mallet and vopal wabbit
- Tools for analyzing topic models
- No supervised learning
- Uses list-of-tuples instead of sparse matrices to store documents.

# Introduction to gensim

```
docs = ["What is my purpose", "You bring butter"]
texts = [[token for token in doc.lower().split()] for doc in docs]
print(texts)
```

```
[['what', 'is', 'my', 'purpose'], ['you', 'bring', 'butter']]
```

```
from gensim import corpora
dictionary = corpora.Dictionary(texts)
print(dictionary)
```

```
Dictionary(7 unique tokens: ['you', 'bring', 'butter', 'what', 'is']...)
```

```
new_doc = "what butter"
dictionary.doc2bow(new_doc.lower().split())
```

```
[(0, 1), (4, 1)]
```

```
corpus = [dictionary.doc2bow(text) for text in texts]
corpus
```

```
[[{(0, 1), (1, 1), (2, 1), (3, 1)}, {(4, 1), (5, 1), (6, 1)}]
```

Use NLTK or spacy or a regexp for tokenization in real applications. This method here doesn't even handle punctuation.

In gensim, a document is represented as list of tuples (index, frequency), corpus is a list of these.

# Converting to/from sparse matrix

```
import gensim
corpus
```

```
[[ (0, 1), (1, 1), (2, 1), (3, 1)], [(4, 1), (5, 1), (6, 1)]]
```

```
gensim.matutils.corpus2csc(corpus)
```

```
<7x2 sparse matrix of type '<class 'numpy.float64'>'
  with 7 stored elements in Compressed Sparse Column format>
```

Transposed!

```
X = CountVectorizer().fit_transform(docs)
X
```

```
<2x7 sparse matrix of type '<class 'numpy.int64'>'
  with 7 stored elements in Compressed Sparse Row format>
```

```
sparse_corpus = gensim.matutils.Sparse2Corpus(X.T)
print(sparse_corpus)
print(list(sparse_corpus))
```

```
<gensim.matutils.Sparse2Corpus object at 0x7faf015e3e48>
[[ (4, 1), (3, 1), (2, 1), (5, 1)], [(1, 1), (0, 1), (6, 1)]]
```

most transformations in gensim are lazy:  
They yield a generator (like `Sparse2Corpus`) which can  
be converted to a list.

# Corpus Transformations

```
tfidf = gensim.models.TfidfModel(corpus)
tfidf[corpus[0]]
```

```
[(0, 0.5), (1, 0.5), (2, 0.5), (3, 0.5)]
```

```
print(tfidf[corpus])
print(list(tfidf[corpus]))
```

```
<gensim.interfaces.TransformedCorpus object at 0x7faf015e3ef0>
[[ (0, 0.5), (1, 0.5), (2, 0.5), (3, 0.5) ], [ (4, 0.5773502691896258),
(5, 0.5773502691896258), (6, 0.5773502691896258) ]]
```

# Word2Vec in Gensim

```
from gensim import models  
w = models.KeyedVectors.load_word2vec_format(  
    '../GoogleNews-vectors-negative300.bin', binary=True)
```

```
w['queen'].shape
```

```
(300,)
```

```
w.syn0.shape
```

```
(3000000, 300)
```

# Prepare document

```
vect_w2v = CountVectorizer(vocabulary=w.index2word)
vect_w2v.fit(text_train_sub)
docs = vect_w2v.inverse_transform(vect_w2v.transform(text_train_sub))
docs[0]
```

```
array(['in', 'for', 'that', 'is', 'the', 'at', 'not', 'as', 'it', 'by',
      'are', 'have', 'an', 'this', 'they', 'but', 'one', 'which', 'do',
      'than', 'over', 'just', 'some', 'like', 'only', 'did', 'because',
      'off', 'being', 'my', 'very', 'much', 'go', 'under', 'does', 'got',
      'top', 'come', 'really', 'lot', 'find', 'thing', 'once', 'offer',
      'feel', 'film', 'medical', 'terms', 'rather', 'certain', 'felt',
      'consider', 'watch', 'parts', 'heavy', 'towards', 'enjoy',
      'feeling', 'maybe', 'piece', 'fear', 'myself', 'stuff', 'handed',
      'brings', 'movies', 'hospitals', 'rare', 'lots', 'skin', 'eating',
      'intense', 'somewhat', 'liked', 'afraid', 'tribute', 'horror',
      'revenge', 'brave', 'whilst', 'sympathy', 'assaulted', 'satisfying',
      'hatred', 'viewer', 'awhile', 'pardon', 'delightful', 'disgust',
      'imitation', 'pudding', 'cringe', 'jaded', 'pun', 'pangs', 'doesn',
      'junctures', 'hellraiser', 'appologize'],
      dtype='<U98')
```

This is a silly way to tokenize the input and using only words that appear in the vocabulary used in the pre-trained model.

# Represent doc by average

```
X_train = np.vstack([np.mean(w[doc], axis=0) for doc in docs])
```

```
X_train.shape
```

```
(18750, 300)
```

```
docs_val = vect_w2v.inverse_transform(vect_w2v.transform(text_val))  
X_val = np.vstack([np.mean(w[doc], axis=0) for doc in docs_val])
```

```
lr = LogisticRegression(C=100).fit(X_train, y_train_sub)  
lr.score(X_train, y_train_sub)
```


```
0.8676266666666666
```

```
lr.score(X_val, y_val)
```



```
0.8571199999999999
```



# Analogue and Relationships

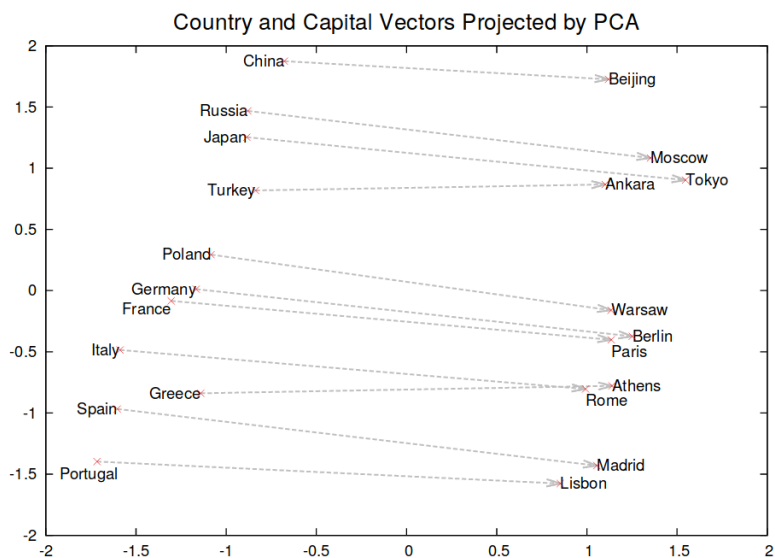

<http://papers.nips.cc/paper/5021-distributed-representations-of-words-and-phrases-and-their-compositionality.pdf>

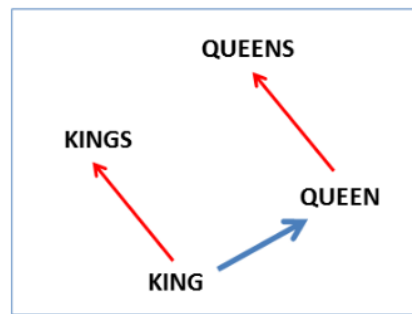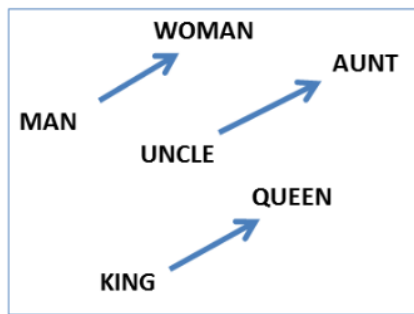

Answer "King is to Kings as Queen is to ?":  
Find closest vector to  $\text{vec}(\text{"Queen"}) + (\text{vect}(\text{"Kings"}) - \text{vec}(\text{"King"}))$

<http://www.aclweb.org/anthology/N13-1090>

# Examples with Gensim

```
w.most_similar(positive=['woman', 'king'], negative=['man'], topn=3)
```

```
[('queen', 0.7118192911148071),  
 ('monarch', 0.6189674139022827),  
 ('princess', 0.5902431607246399)]
```

```
w.most_similar(positive=['woman', 'he'], negative=['man'], topn=3)
```

```
[('she', 0.8492251634597778),  
 ('She', 0.6329933404922485),  
 ('her', 0.6029669046401978)]
```

```
w.most_similar(positive=['Germany', 'pizza'], negative=['Italy'], topn=3)
```

```
[('bratwurst', 0.5436394810676575),  
 ('Domino_pizza', 0.5133179426193237),  
 ('donuts', 0.5121968984603882)]
```

# Man is to Computer Programmer as Woman is to Homemaker? Debiasing Word Embeddings

Tolga Bolukbasi<sup>1</sup>, Kai-Wei Chang<sup>2</sup>, James Zou<sup>2</sup>, Venkatesh Saligrama<sup>1,2</sup>, Adam Kalai<sup>2</sup>

<sup>1</sup>Boston University, 8 Saint Mary's Street, Boston, MA

<sup>2</sup>Microsoft Research New England, 1 Memorial Drive, Cambridge, MA

tolgab@bu.edu, kw@kwchang.net, jamesyzou@gmail.com, srv@bu.edu, adam.kalai@microsoft.com

$$\overrightarrow{\text{man}} - \overrightarrow{\text{woman}} \approx \overrightarrow{\text{king}} - \overrightarrow{\text{queen}}$$

$$\overrightarrow{\text{man}} - \overrightarrow{\text{woman}} \approx \overrightarrow{\text{computer programmer}} - \overrightarrow{\text{homemaker}}.$$

# Going along he-she direction:


## Gender stereotype *she-he* analogies.

|                     |                             |                           |
|---------------------|-----------------------------|---------------------------|
| sewing-carpentry    | register-nurse-physician    | housewife-shopkeeper      |
| nurse-surgeon       | interior designer-architect | softball-baseball         |
| blond-burly         | feminism-conservatism       | cosmetics-pharmaceuticals |
| giggle-chuckle      | vocalist-guitarist          | petite-lanky              |
| sassy-snappy        | diva-superstar              | charming-affable          |
| volleyball-football | cupcakes-pizzas             | hairstylist-barber        |

## Gender appropriate *she-he* analogies.

|                 |                                |                   |
|-----------------|--------------------------------|-------------------|
| queen-king      | sister-brother                 | mother-father     |
| waitress-waiter | ovarian cancer-prostate cancer | convent-monastery |

# Paragraph Vectors - Doc2Vec

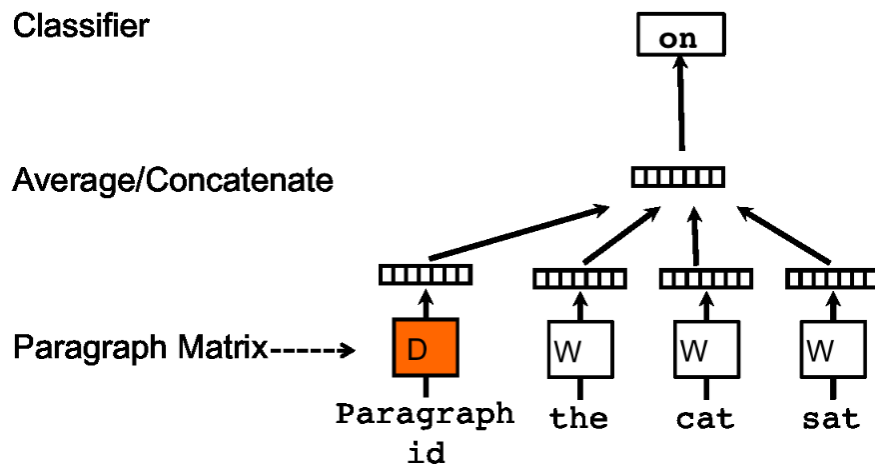

<https://arxiv.org/pdf/1405.4053v2.pdf>

Add a vector for each paragraph / document, also randomly initialized.

To infer for new paragraph: keep weights fixed, do stochastic gradient descent on the representation  $D$ , sampling context examples from this paragraph.

# Doc2Vec with gensim

```
def read_corpus(text, tokens_only=False):
    for i, line in enumerate(text):
        if tokens_only:
            yield gensim.utils.simple_preprocess(line)
        else:
            # For training data, add tags
            yield gensim.models.doc2vec.TaggedDocument(gensim.utils.simple_preprocess(line), [i])
```

```
train_corpus = list(read_corpus(text_train_sub))
test_corpus = list(read_corpus(text_val, tokens_only=True))
```

```
model = gensim.models.doc2vec.Doc2Vec(size=50, min_count=2, iter=55)
model.build_vocab(train_corpus)
```

```
model.train(train_corpus, total_examples=model.corpus_count)
```

<https://github.com/RaRe-Technologies/gensim/blob/develop/docs/notebooks/doc2vec-lee.ipynb>

# Encoding using doc2vec

```
vectors = [model.infer_vector(train_corpus[doc_id].words)
            for doc_id in range(len(train_corpus))]
```

```
X_train = np.vstack(vectors)
```

```
X_train.shape
```

```
(18750, 50)
```

```
test_vectors = [model.infer_vector(test_corpus[doc_id])
                 for doc_id in range(len(test_corpus))]
```

```
X_test = np.vstack(test_vectors)
```



```
from sklearn.linear_model import LogisticRegression  
lr = LogisticRegression(C=100).fit(X_train, y_train_sub)
```

```
lr.score(X_train, y_train_sub)
```

```
0.81738666666666671
```

```
lr.score(X_val, y_val)
```

```
0.80320000000000003
```